MA'ADEN معادن
Saudi Arabian Mining Company شركة التعدين العربية السعودية

Outotec
LARSEN & TOUBRO

Project: **Mansourah Massarah Gold Project**

Customer: **MA'ADEN GOLD AND BASE METALS (MA'ADEN)**

Title: **CALCULATION**

3350 CONCENTRATE FILTRATION

DESIGN CALCULATION FOR BUILDING FOUNDATION

AS BUILT

MD-216-3350-EG-CV-CAL-1226

Rev	Date	Revision Text	Prepared By	Reviewed By	Approved By	Employer
D01	17-11-2023	AS BUILT	SHD	SGC	PRI	
C01	30-04-2020	ISSUED FOR CONSTRUCTION	SHD	SGC	PRI	
A02	02-04-2020	REVISED AS PER EMPLOYER COMMENTS ON 27.03.20 AND REVISED AS MARKED	SHD	SGC	PRI	
A01	10-03-2020	FIRST ISSUE	SHD	SGC	PRI	

PROPRIETARY & CONFIDENTIAL This document and the information contained herein is Ma'aden proprietary know-how. This document or any part thereof should not be reproduced, stored in a retrieval system or transmitted by any means, electronic or otherwise, or divulged without prior written permission of Ma'aden.

Ma'aden Document Number:

MD-216-3350-EG-CV-CAL-1226 D01

Outotec Document Number:

900707 GAU01 SF01 CED01 33530 OU100666569 3

L&T Document Number:

O19045 450 C K 24097 001 3

PROPRIETARY & CONFIDENTIAL : The contents of this document are the sole property of Outotec Oyj. Any rights not expressly granted herein are reserved. Reproduction, transfer or distribution of part or all of the contents in any form without the prior written permission of Outotec is prohibited.

PROPRIETARY & CONFIDENTIAL : This document is the property of LARSEN & TOUBRO and must not be passed on to any person or body not authorized by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

Global Project ID	**900707**
Delivery Type	**ENGINEERING PROCUREMENT CONSTRUCTION**
Project Name	**MANSOURAH MASSARAH GOLD PROJECT**
Customer	**MA'ADEN GOLD AND BASE METALS (MA'ADEN)**
Project Country	**KINGDOM OF SAUDI ARABIA**

Ma'aden Revision No:	A01	A02	C01	D01
Date	10-03-2020	02-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 27.03.20 AND REVISED AS MARKED	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Outotec / L&T Revi:	0	1	2	3
Date	10-03-2020	02-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 27.03.20 AND REVISED AS MARKED	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

REFERENCE DOCUMENTS

DOCUMENT NUMBER	DOCUMENT DESCRIPTION
MD-216-1000-EG-ST-CRT-1001	Civil Structural Design Criteria
MD-216-3000-EG-CV-RPT-1008	Geotechnical Report
SBC 301 :2007	Saudi Structural - Loading & Forces Code
SBC 304 :2018	Saudi Concrete Structures Code
ACI 318 :2014	Building Code Requirement of Structural Concrete

TABLE OF CONTENTS

		PAGE NO
DEFINITIONS and ABBREVIATIONS		3
1	INTENT	4
2	SCOPE	4
3	Design of Concentrate Filtration Building Foundation	5
3.1	Design of Foundation mkd. F1	5
3.2	Design of Foundation mkd. F2	10
3.3	Design of Foundation mkd. F3	15
3.4	Design of Foundation mkd. F5	20
3.5	Design of Foundation mkd. F1A and F1B	25
3.6	Design of Foundation mkd. F4	29
3.7	Design of Foundation mkd. F4A	33
3.8	Design of One-Way Slab on Filter Press Equipment Supporting Floor	37
REFERENCES		38
ATTACHMENT 1	Staad Input & Output File of Concentrate Filtration Building	39
ATTACHMENT 2	STAAD Input & Output File of Foundation Mkd. F1A & F1B	119
ATTACHMENT 3	STAAD Input & Output File of Foundation Mkd. F4	198
ATTACHMENT 4	STAAD Input & Output File of Foundation Mkd. F4A	332

Global Project ID	900707
Delivery Type	ENGINEERING PROCUREMENT CONSTRUCTION
Project Name	MANSOURAH MASSARAH GOLD PROJECT
Customer	MA'ADEN GOLD AND BASE METALS (MA'ADEN)
Project Country	KINGDOM OF SAUDI ARABIA

Ma'aden Revision No:	A01	A02	C01	D01
Date	10-03-2020	02-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 27.03.20 AND REVISED AS MARKED	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Outotec / L&T Revi	0	1	2	3
Date	10-03-2020	02-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 27.03.20 AND REVISED AS MARKED	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

DEFINITIONS AND ABBREVIATIONS

Employer	MA'ADEN GOLD AND BASE METALS or their representa
EPC Contractor	Consortium of Outotec (OT) and Larsen & Toubro (L&T)
Project management Company (PMC)	BECHTEL appointed by EMPLOYER
Supplier	An entity (supplier, consultant, contractor) under the direct project management of EPC Contractor
Sub- supplier	A sub entity (supplier, consultant, contractor) under the direct project management of EPC Contractor
Shall	Is to be understood as mandatory in relation to the requirements of this Document
Should	Is to be understood as a strong recommendation to comply with the requirements of this Document
LRFD	Load and Resistance Factor Design
F.O.S	Factor of Safety

Global Project ID	900707
Delivery Type	ENGINEERING PROCUREMENT CONSTRUCTION
Project Name	MANSOURAH MASSARAH GOLD PROJECT
Customer	MA'ADEN GOLD AND BASE METALS (MA'ADEN)
Project Country	KINGDOM OF SAUDI ARABIA

Ma'aden Revision No:	A01	A02	C01	D01
Date	10-03-2020	02-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 27.03.20 AND REVISED AS MARKED	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Outotec / L&T Revi	0	1	2	3
Date	10-03-2020	02-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 27.03.20 AND REVISED AS MARKED	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

1. INTENT

The document is prepared for Design Calculation of Column Foundation for Concentrate Filtration Building.

2. SCOPE

The document is prepared for Design Calculation of Column Foundation for Concentrate Filtration Building.
All the loads applied to the structure for analysis & design followed Civil -Structural Design Criteria and SBC 301:2007
Foundations mkd. F1A, F1B, F4 & F4A are modelled in & analysed in Staad-Pro. . Support Reactions from Superstructure have been applied as loads to Foundations.
Design of Reinforced Concrete Foundations followed Strength Design as per SBC 304:2018 & ACI 318:2008 (as supported by STAAD-Pro).

Global Project ID	900707
Delivery Type	ENGINEERING PROCUREMENT CONSTRUCTION
Project Name	MANSOURAH MASSARAH GOLD PROJECT
Customer	MA'ADEN GOLD AND BASE METALS (MA'ADEN)
Project Country	KINGDOM OF SAUDI ARABIA

Ma'aden Revision No:	A01	A02	C01	D01
Date	10-03-2020	02-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 27.03.20 AND REVISED AS MARKED	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Outotec / L&T Revi	0	1	2	3
Date	10-03-2020	02-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 27.03.20 AND REVISED AS MARKED	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

3. Design of Concentrate Filtration Building Foundation

3.1 Design of Foundation mkd. F1

Reactions for Support mkd. 3350/1 to 3350/5 on grid 3360/C from Staad File (Refer Attachment 1 for Support Reactions)

	3350/1			3350/2			3350/3			3350/4		
Load Combinations	FX (T)	FY (T)	FZ (T)	FX (T)	FY (T)	FZ (T)	FX (T)	FY (T)	FZ (T)	FX (T)	FY (T)	FZ (T)
DEAD LOAD	0	28	8	0	25	6.84	0	26	6	0	26	1
LIVE LOAD	0	21	6	0	17	4.26	0	19	4	0	28	1
ROOF LIVE LOAD	0	0	0	0	0	0.22	0	0	0	0	-1	0
CRANE LOAD CR1	0	0	0	0	0	0.00	0	0	0	0	0	0
CRANE LOAD CR2	0	0	0	0	0	0.00	0	0	0	0	0	0
CRANE LOAD CR3	0	0	0	0	0	0.00	0	0	0	0	0	0
WIND X(+0.55)	0	-2	-3	0	-4	-4.50	0	-6	-4	0	-7	-4
WIND X(-0.55)	0	0	0	0	-1	-0.73	0	-2	-1	0	-2	-1
WIND Z(+0.55)	0	3	1	0	3	0.49	0	4	2	0	5	2
WIND Z(-0.55)	0	6	4	0	7	4.15	0	9	5	0	11	5
DL EQUIPMENT	0	17	6	0	20	6.70	0	9	3	0	7	1
LL EQUIPMENT	0	37	14	0	46	15.99	0	28	8	0	6	1
SEISMIC DEAD X	0	0	0	0	0	-0.09	0	0	0	0	0	0
SEISMIC (DEAD+LIVE)X	0	0	0	0	0	-0.10	0	0	0	0	0	0
SEISMIC DEAD Z	0	-1	-1	0	-2	-1.23	0	-2	-1	0	-2	-1
SEISMIC (DEAD+LIVE)Z	0	-3	-3	0	-3	-2.74	0	-4	-3	0	-4	-2
CRANE LOAD CR4	0	0	0	0	0	-0.19	0	-1	0	0	-1	0
CRANE LOAD CR5	0	0	0	0	0	0.81	0	-1	0	0	-1	0
CRANE LOAD CR6	0	0	0	0	0	0.25	0	-1	0	0	-1	0

	3350/5		
Load Combinations	FX (T)	FY (T)	FZ (T)
DEAD LOAD (D)	0	28	8
LIVE LOAD (L)	0	21	6
ROOF LIVE LOAD (Lr)	0	0	0
CRANE LOAD CR1	0	0	0
CRANE LOAD CR2	0	0	0
CRANE LOAD CR3	0	0	0
WIND X(+0.55)	0	-2	-3
WIND X(-0.55)	0	0	0
WIND Z(+0.55)	0	3	1
WIND Z(-0.55)	0	6	4
DL EQUIPMENT	0	17	6
LL EQUIPMENT	0	37	14
SEISMIC DEAD X	0	0	0
SEISMIC (DEAD+LIVE)X	0	0	0
SEISMIC DEAD Z	0	-1	-1
SEISMIC (DEAD+LIVE)Z	0	-3	-3
CRANE LOAD CR4	0	0	0
CRANE LOAD CR5	0	0	0
CRANE LOAD CR6	0	0	0

Support Reactions for Strength Design Load Combinations

	3350/1			3350/2			3350/3			3350/4		
Load Combinations	FX (T)	FY (T)	FZ (T)	FX (T)	FY (T)	FZ (T)	FX (T)	FY (T)	FZ (T)	FX (T)	FY (T)	FZ (T)
1.4D	0	63	20	0	63	18.96	0	50	13	0	46	3
1.4D+1.7L+0.5Lr	0	161	53	0	167	54.97	0	125	33	0	100	6
1.2D+1.6Lr+1.0L	0	111	37	0	115	37.72	0	86	23	0	71	4
1.2D + 1.6Wx+1.0L+0.5Lr	0	108	32	0	109	30.28	0	77	17	0	59	-2
1.2D + 1.6Wx+1.0L+0.5Lr	0	111	36	0	114	36.31	0	84	22	0	67	3
1.2D + 1.6Wz+1.0L+0.5Lr	0	115	39	0	120	38.26	0	94	26	0	80	8
1.2D + 1.6Wz+1.0L+0.5Lr	0	120	43	0	126	44.12	0	102	31	0	89	13
1.2D+1.0Ex+1.0L	0	112	37	0	115	37.27	0	87	23	0	71	4
1.2D+1.0Ez+1.0L	0	109	34	0	112	34.63	0	83	20	0	67	2
0.9D+1.6Wx	0	37	8	0	34	4.99	0	23	2	0	18	-5
0.9D+1.6Wx	0	40	13	0	39	11.02	0	30	7	0	26	0
0.9D+1.6Wz	0	45	15	0	45	12.97	0	39	11	0	39	5
0.9D+1.6Wz	0	49	19	0	51	18.83	0	47	16	0	48	11
0.9D+1.0Ex	0	40	13	0	40	12.10	0	32	8	0	30	2
0.9D+1.0Ez	0	39	12	0	39	10.96	0	30	7	0	28	1

	3350/5		
Load Combinations	FX (T)	FY (T)	FZ (T)
1.4D	0	64	14
1.4D+1.7L+0.5Lr	0	126	16
1.2D+1.6Lr+1.0L	0	90	13
1.2D + 1.6Wx+1.0L+0.5Lr	0	78	7
1.2D + 1.6Wx+1.0L+0.5Lr	0	86	10
1.2D + 1.6Wz+1.0L+0.5Lr	0	103	21
1.2D + 1.6Wz+1.0L+0.5Lr	0	112	24
1.2D+1.0Ex+1.0L	0	92	14
1.2D+1.0Ez+1.0L	0	86	9
0.9D+1.6Wx	0	28	3
0.9D+1.6Wx	0	36	6
0.9D+1.6Wz	0	53	17
0.9D+1.6Wz	0	62	20
0.9D+1.0Ex	0	41	9
0.9D+1.0Ez	0	38	7

From the above Support Reactions it is evident that Support on Grid 3350/2 being the most critical, its support reactions have been considered for Design of Foundation mkd. F1

Global Project ID	900707
Delivery Type	ENGINEERING PROCUREMENT CONSTRUCTION
Project Name	MANSOURAH MASSARAH GOLD PROJECT
Customer	MA'ADEN GOLD AND BASE METALS (MA'ADEN)
Project Country	KINGDOM OF SAUDI ARABIA

Ma'aden Revision No:	A01	A02	C01	D01
Date	10-03-2020	02-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 27.03.20 AND REVISED AS MARKED	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Outotec / L&T Revi	0	1	2	3
Date	10-03-2020	02-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 27.03.20 AND REVISED AS MARKED	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

DESIGN OF FOUNDATION MKD. F1 3350/2-3360/C

	Along-X	Along-Z
Size of column :	0.85m	0.85m
Size of fdn. raft :	3.50m	3.50m
Thickness of raft :	0.60 m	
Original ground level:	0.00 m	
Finished floor level :	0.00 m	
U/S level of foundation :	-2.50 m	
U/S level Base Plate :	0.55 m	
Unit weight of conc :	2.5 T/m^3	
Unit weight of soil :	1.8 T/m^3	

SYMBOLS AND NOTATIONS


Dead Load	D
live load	LL
Roof live load	Lr
Wind Load	W
Earthquake Load	E
Crane Load	CR

Calculation of Weight of Foundation :

Weight of raft & Col.= (3.5*3.5*0.6*2.5)+(0.85*0.85*2.45*2.5) = 22.80T

Weight of soil = ((3.5*3.5)-(0.85*0.85))*1.9*1.8 = 39.42T

U/S Base Pl Total = 62.22T

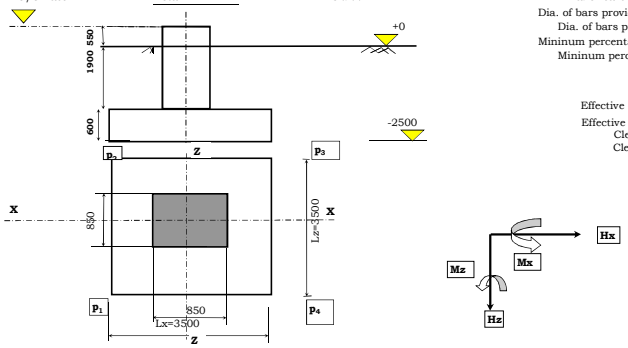

Design Input:

Characteristic strength of concrete, f '$_c$=	35 MPa
Yield stress of steel reinforcement, f$_y$=	420 MPa
Clear cover for main reinforcement bars =	75mm
Dia. of bars provd. along X direction at bottom =	20mm
Dia. of bars provd. along X direction at top =	12mm
Dia. of bars provided along Z direction at bottom=	20mm
Dia. of bars provided along Z direction at top=	12mm
Mininum percentage of reinforcement at bottom=	0.12%
Mininum percentage of reinforcement at top=	0.06%

Effective depth of slab along X direction = 515mm = 0.515m

Effective depth of slab along Z direction = 495mm = 0.495m

Clear projection along Z direction = 1.325m

Clear projection along X direction = 1.325m

WORKING STRESS DESIGN

	Load at U/S Of Base Plt					Load at bottom of foundation				
Load Case	FX (T)	FY(T)	FZ(T)	M_x	M_z	V (T)	Hx (T)	MX (T-m)	Hz (T)	MZ (T-m)
DL+LL	-0.02	107.57	33.79	0.0	0.00	169.79	-0.02	103.06	33.79	0.06
DL+LR	-0.02	44.54	13.76	0.0	0.00	106.76	-0.02	41.97	13.76	0.06
DL+0.75*LL+0.75*LR	-0.02	57.23	16.90	0.0	0.00	119.45	-0.02	51.55	16.90	0.06
DL+0.75*(LL+LR+W(+X))	-0.06	88.80	25.52	0.0	0.00	151.02	-0.06	77.83	25.52	0.18
DL+0.75*(LL+LR+W(-X))	0.00	91.12	28.35	0.0	0.00	153.34	0.00	86.45	28.35	0.01
DL+0.75*(LL+LR+W(+Z))	-0.13	93.99	29.26	0.0	0.00	156.21	-0.13	89.24	29.26	0.38
DL+0.75*(LL+LR+W(-Z))	-0.06	96.84	32.01	0.0	0.00	159.06	-0.06	97.62	32.01	0.18
0.6*D+WL (X)	-0.01	26.45	8.37	0.0	0.00	88.67	-0.01	25.54	8.37	0.04
0.6*D+WL (-X)	0.02	26.05	7.39	0.0	0.00	88.27	0.02	22.55	7.39	0.05
0.6*D+WL (Z)	-0.15	29.87	8.61	0.0	0.00	92.09	-0.15	26.27	8.61	0.46
0.6*D+WL (-Z)	-0.06	33.68	12.27	0.0	0.00	95.90	-0.06	37.44	12.27	0.19
DL+0.75*(LL+LR+0.75L(+X))	-0.05	98.28	31.16	0.0	0.00	160.50	-0.05	95.05	31.16	0.16
DL+0.75*(LL+LR+0.75L(+Z))	0.00	96.54	29.78	0.0	0.00	158.76	0.00	90.82	29.78	0.01
0.6*D +0.7 SD (X)	-0.04	26.85	8.03	0.0	0.00	89.07	-0.04	24.50	8.03	0.13
0.6*D +0.7 SD (Z)	0.00	25.25	6.89	0.0	0.00	87.47	0.00	21.03	6.89	0.01
DL+LL+LR+CR1	-0.02	107.35	34.01	0.0	0.00	169.57	-0.02	103.73	34.01	0.06
DL+LL+LR+CR2	-0.02	107.35	34.01	0.0	0.00	169.57	-0.02	103.73	34.01	0.06
DL+LL+LR+CR3	-0.02	107.35	34.01	0.0	0.00	169.57	-0.02	103.73	34.01	0.06
DL+LL+LR+CR4	-0.02	106.90	33.82	0.0	0.00	169.12	-0.02	103.15	33.82	0.06
DL+LL+LR+CR5	-0.02	107.15	34.82	0.0	0.00	169.37	-0.02	106.20	34.82	0.06
DL+LL+LR+CR6	-0.02	106.98	34.26	0.0	0.00	169.20	-0.02	104.49	34.26	0.06

Check for overturning and sliding:

	Load at Foundation Base					Sliding Coeffecient, μ = 0.4			
Load Case	V (T)	Hx (T)	Mz (Tm)	Hz (T)	Mx (Tm)	F.O.S. Mz	F.O.S. Mx	F.O.S. Hx	F.O.S. Hz
DL+LL	169.79	-0.02	0.06	33.79	103.06	4871.02	2.88	3395.80	2.01
DL+LR	106.76	-0.02	0.06	13.76	41.97	3062.79	4.45	2135.20	3.10
DL+0.75*LL+0.75*LR	119.45	-0.02	0.06	16.90	51.55	3426.77	4.06	2388.95	2.83
DL+0.75*(LL+LR+W(+X))	151.02	-0.06	0.18	25.52	77.83	1506.92	3.40	1050.54	2.37
DL+0.75*(LL+LR+W(-X))	153.34	0.00	0.01	28.35	86.45	35192.79	3.10	24534.40	2.16
DL+0.75*(LL+LR+W(+Z))	156.21	-0.13	0.38	29.26	89.24	717.01	3.06	499.86	2.14
DL+0.75*(LL+LR+W(-Z))	159.06	-0.06	0.18	32.01	97.62	1587.22	2.85	1106.52	1.99
0.6*D+WL (X)	88.67	-0.01	0.04	8.37	25.54	4239.88	6.08	2955.80	4.24
0.6*D+WL (-X)	88.27	0.02	0.05	7.39	22.55	2813.83	6.85	1961.64	4.78
0.6*D+WL (Z)	92.09	-0.15	0.46	8.61	26.27	347.64	6.13	242.35	4.28
0.6*D+WL (-Z)	95.90	-0.06	0.19	12.27	37.44	887.53	4.48	618.74	3.13
DL+0.75*(LL+LR+0.75L(+X))	160.50	-0.05	0.16	31.16	95.05	1779.48	2.96	1240.55	2.06
DL+0.75*(LL+LR+0.75L(+Z))	158.76	0.00	0.01	29.78	90.82	20242.40	3.06	14111.84	2.13
0.6*D +0.7 SD (X)	89.07	-0.04	0.13	8.03	24.50	1216.86	6.36	848.32	4.43
0.6*D +0.7 SD (Z)	87.47	0.00	0.01	6.89	21.03	25095.00	7.28	17494.80	5.08
DL+LL+LR+CR1	169.57	-0.02	0.06	34.01	103.73	4864.71	2.86	3391.40	1.99
DL+LL+LR+CR2	169.57	-0.02	0.06	34.01	103.73	4864.71	2.86	3391.40	1.99
DL+LL+LR+CR3	169.57	-0.02	0.06	34.01	103.73	4864.71	2.86	3391.40	1.99
DL+LL+LR+CR4	169.12	-0.02	0.06	33.82	103.15	4851.80	2.87	3382.40	2.00
DL+LL+LR+CR5	169.37	-0.02	0.06	34.82	106.20	4858.98	2.79	3387.40	1.95
DL+LL+LR+CR6	169.20	-0.02	0.06	34.26	104.49	4854.10	2.83	3384.00	1.98

Global Project ID	900707
Delivery Type	ENGINEERING PROCUREMENT CONSTRUCTION
Project Name	MANSOURAH MASSARAH GOLD PROJECT
Customer	MA'ADEN GOLD AND BASE METALS (MA'ADEN)
Project Country	KINGDOM OF SAUDI ARABIA

Ma'aden Revision No:	A01	A02	C01	D01
Date	10-03-2020	02-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 27.03.20 AND REVISED AS MARKED	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Outotec / L&T Revi	0	1	2	3
Date	10-03-2020	02-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 27.03.20 AND REVISED AS MARKED	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

ULTIMATE STRESS DESIGN

Load Case		Load at U/S Of Base Plt					Load at bottom of foundation		
		FX (T)	FY(T)	FZ(T)	M_x	M_z	V (T)	Mx (T-m)	Mz (T-m)
1.4D		-0.03	62.64	18.96	0.0	0.00	124.856	57.82	0.09
1.4D+1.7L+0.5Lr		-0.03	167.41	54.97	0.0	0.00	229.629	167.66	0.09
1.2D+1.6Lr+1.0L		-0.02	115.06	37.72	0.0	0.00	177.278	115.05	0.07
1.2D + 1.6Wx+1.0L+0.5Lr		-0.10	109.05	30.28	0.0	0.00	171.274	92.35	0.32
1.2D + 1.6Wx+1.0L+0.5Lr		0.02	114.01	36.31	0.0	0.00	176.234	110.75	0.07
1.2D + 1.6Wz+1.0L+0.5Lr		-0.25	120.13	38.26	0.0	0.00	182.346	116.70	0.76
1.2D + 1.6Wz+1.0L+0.5Lr		-0.10	126.22	44.12	0.0	0.00	188.442	134.56	0.32
1.2D+1.0Ex+1.0L		-0.09	115.42	37.27	0.0	0.00	177.638	113.67	0.29
1.2D+1.0Ez+1.0L		0.00	112.11	34.63	0.0	0.00	174.328	105.62	0.01
0.9D+1.6Wx		-0.10	34.04	4.99	0.0	0.00	96.262	15.21	0.30
0.9D+1.6Wx		0.03	39.00	11.02	0.0	0.00	101.222	33.60	0.09
0.9D+1.6Wz		-0.24	45.11	12.97	0.0	0.00	107.334	39.56	0.74
0.9D+1.6Wz		-0.10	51.21	18.83	0.0	0.00	113.430	57.42	0.30
0.9D+1.0Ex		-0.05	40.28	12.10	0.0	0.00	102.496	36.89	0.15
0.9D+1.0Ez		-0.01	38.68	10.96	0.0	0.00	100.896	33.42	0.02

Check for Bearing Pressure

Load Combination & Calculation of Base pressure


Max. Base pressure = $p_{max} = (V/(Lx.Lz)) + (6.My/((Lx)^2.Lz) + (6.Mx/(Lx.(Lz)^2)$

Min. Base pressure = $p_{min} = (V/(Lx.Lz)) - (6.My/((Lx)^2.Lz) - (6.Mx/(Lx.(Lz)^2)$

Appox. Surcharge load = 2 T/m^2

Net SBC of soil for DL, LL= 45 T/m^2 For WL/SL case = 56.25 T/m^2

Gross SBC of soil for DL, LL= 50.49 T/m^2 For WL/SL case = 61.74 T/m^2



Load Case	Design Load/moments			Base Pressure (T/m^2)								
	V (T)	Mz (T-m)	Mx (T-m)	V/ (Lx.Lz)	6.Mz/ $(Lx)^2.Lz$	6.Mx/ $Lx.(Lz)^2$	p_1 (p_{max})	p_2	p_4	p_3 (p_{min})	(p_{max}-γh)	Remarks
DL+LL	169.79	0.06	103.06	13.86	0.01	14.42	30.29	1.45	30.27	1.43	26.87	O.K
DL+LR	106.76	0.06	41.97	8.72	0.01	5.87	16.60	4.85	16.58	4.83	13.18	O.K
DL+0.75*LL+0.75*LR	119.45	0.06	51.55	9.75	0.01	7.21	18.97	4.55	18.96	4.53	15.55	O.K
DL+0.75*(LL+LR+W(+X))	151.02	0.18	77.83	12.33	0.02	10.89	25.24	3.46	25.19	3.41	21.82	O.K
DL+0.75*(LL+LR+W(-X))	153.34	0.01	86.45	12.52	0.00	12.10	26.62	2.42	26.61	2.42	23.20	O.K
DL+0.75*(LL+LR+W(+Z))	156.21	0.38	89.24	12.75	0.05	12.49	27.29	2.32	27.19	2.21	23.87	O.K
DL+0.75*(LL+LR+W(-Z))	159.06	0.18	97.62	12.98	0.02	13.66	28.67	1.35	28.62	1.30	25.25	O.K
0.6*D+WL (X)	88.67	0.04	25.54	7.24	0.01	3.57	12.82	5.67	12.81	5.66	9.40	O.K
0.6*D+WL (-X)	88.27	0.05	22.55	7.21	0.01	3.16	12.37	6.06	12.35	6.04	8.95	O.K
0.6*D+WL (Z)	92.09	0.46	26.27	7.52	0.06	3.68	13.26	5.91	13.13	5.78	9.84	O.K
0.6*D+WL (-Z)	95.90	0.19	37.44	7.83	0.03	5.24	15.09	4.62	15.04	4.56	11.67	O.K
DL+0.75*(LL+LR+0.75L(+X))	160.50	0.16	95.05	13.10	0.02	13.30	28.42	1.82	28.38	1.78	25.00	O.K
DL+0.75*(LL+LR+0.75L(+Z))	158.76	0.01	90.82	12.96	0.00	12.71	27.67	2.25	27.67	2.25	24.25	O.K
0.6*D +0.7 SD (X)	89.07	0.13	24.50	7.27	0.02	3.43	12.72	5.86	12.68	5.82	9.30	O.K
0.6*D +0.7 SD (Z)	87.47	0.01	21.03	7.14	0.00	2.94	12.08	6.20	12.08	6.20	8.66	O.K
DL+LL+LR+CR1	169.57	0.06	103.73	13.84	0.01	14.52	30.37	1.33	30.35	1.32	26.95	O.K
DL+LL+LR+CR2	169.57	0.06	103.73	13.84	0.01	14.52	30.37	1.33	30.35	1.32	26.95	O.K
DL+LL+LR+CR3	169.57	0.06	103.73	13.84	0.01	14.52	30.37	1.33	30.35	1.32	26.95	O.K
DL+LL+LR+CR4	169.12	0.06	103.15	13.81	0.01	14.44	30.25	1.38	30.23	1.36	26.83	O.K
DL+LL+LR+CR5	169.37	0.06	106.20	13.83	0.01	14.86	30.70	0.97	30.68	0.96	27.28	O.K
DL+LL+LR+CR6	169.20	0.06	104.49	13.81	0.01	14.62	30.44	1.20	30.43	1.18	27.02	O.K

Calculation of Design Pressure

Load Combination & Calculation of Base pressure


Max. Base pressure = $p_{max} = (V/(Lx.Lz)) + (6.My/((Lx)^2.Lz) + (6.Mx/(Lx.(Lz)^2)$

Min. Base pressure = $p_{min} = (V/(Lx.Lz)) - (6.My/((Lx)^2.Lz) - (6.Mx/(Lx.(Lz)^2)$

Surcharge load = 2 T/m^2

Net SBC of soil for DL, LL= 45 T/m^2 For WL/SL case = 56.25 T/m^2

Gross SBC of soil for DL, LL= 50.49 T/m^2 For WL/SL case = 61.74 T/m^2



Load Case	Design Load/moments			Base Pressure (T/m^2)							
	V (T)	Mz (T-m)	Mx (T-m)	V/ (Lx.Lz)	6.Mz/ $(Lx)^2.Lz$	6.Mx/ $Lx.(Lz)^2$	p_1 (p_{max})	p_2	p_4	p_3 (p_{min})	(p_{max}-γh)
1.4D	124.9	0.09	57.82	10.19	0.01	8.09	20.30	4.11	20.27	4.09	16.88
1.4D+1.7L+0.5Lr	229.6	0.09	167.66	18.75	0.01	23.46	42.22	-4.71	42.20	-4.73	38.80
1.2D+1.6Lr+1.0L	177.3	0.07	115.05	14.47	0.01	16.10	30.58	-1.62	30.56	-1.64	27.16
1.2D + 1.6Wx+1.0L+0.5Lr	171.3	0.32	92.35	13.98	0.04	12.92	26.95	1.10	26.86	1.01	23.53
1.2D + 1.6Wx+1.0L+0.5Lr	176.2	0.07	110.75	14.39	0.01	15.50	29.89	-1.10	29.87	-1.12	26.47
1.2D + 1.6Wz+1.0L+0.5Lr	182.3	0.76	116.70	14.89	0.11	16.33	31.32	-1.34	31.11	-1.55	27.90
1.2D + 1.6Wz+1.0L+0.5Lr	188.4	0.32	134.56	15.38	0.04	18.83	34.26	-3.40	34.17	-3.49	30.84
1.2D+1.0Ex+1.0L	177.6	0.29	113.67	14.50	0.04	15.91	30.45	-1.37	30.37	-1.45	27.03
1.2D+1.0Ez+1.0L	174.3	0.01	105.62	14.23	0.00	14.78	29.01	-0.55	29.01	-0.55	25.59
0.9D+1.6Wx	96.3	0.30	15.21	7.86	0.04	2.13	10.03	5.77	9.94	5.69	6.61
0.9D+1.6Wx	101.2	0.09	33.60	8.26	0.01	4.70	12.98	3.57	12.95	3.55	9.56
0.9D+1.6Wz	107.3	0.74	39.56	8.76	0.10	5.54	14.40	3.33	14.19	3.12	10.98
0.9D+1.6Wz	113.4	0.30	57.42	9.26	0.04	8.04	17.34	1.27	17.25	1.18	13.92
0.9D+1.0Ex	102.5	0.15	36.89	8.37	0.02	5.16	13.55	3.22	13.51	3.18	10.13
0.9D+1.0Ez	100.9	0.02	33.42	8.24	0.00	4.68	12.92	3.56	12.91	3.56	9.50

Global Project ID	900707
Delivery Type	ENGINEERING PROCUREMENT CONSTRUCTION
Project Name	MANSOURAH MASSARAH GOLD PROJECT
Customer	MA'ADEN GOLD AND BASE METALS (MA'ADEN)
Project Country	KINGDOM OF SAUDI ARABIA


Ma'aden Revision No:	A01	A02	C01	D01
Date	10-03-2020	02-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 27.03.20 AND REVISED AS MARKED	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Outotec / L&T Revi	0	1	2	3
Date	10-03-2020	02-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 27.03.20 AND REVISED AS MARKED	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Calculation of Bending Moment and Shear Force in X direction :

p_{1x} =pressure at the face of column at section 1x-1x in kN/m^2.
p_{2x} =pressure at the face of column at section 2x-2x in kN/m^2.
p_{3x} =pressure at a distance 'd' from the face of column at section 3x-3x in kN/m^2.
BM_{1x} =Moment at the face of column at section 1x-1x in kN-m/m.
BM_{2x} =Moment at the face of column 2x-2x in kN-m/m.
SF_{3x} = Oneway shear force at a distance 'd' from the face of column at section 3x-3x in kN/m.
SF (punching) = Punching Shear Force at a distance 0.5d from the face of column in kN/m.

Punching perimeter= ((0.85+2*0.5*0.495)+(0.85+2*0.5*0.495))*2
= 5.38 m
Punching Area= ((0.85+2*0.5*0.495)*(0.85+2*0.5*0.495))
= 1.81 m^2 Punching shear stress to be checked



Downward pressure due to self weight of raft and soil = (0.6*2.5+1.9*1.8)
= 4.92 kN/m^2
Area of footing, A_f= 12.25 m^2

Check against Two-way shear force at a distance d/2 from face of column:

Design punching shear at a distance d/2 from face of column, Vu= 152.11 T
Strength of Concrete in shear Vc1 = 569.56 T **Table 22.6.5.2_ (a)**
Strength of Concrete in shear Vc2 = 745.78 T **Table 22.6.5.2_ (b)**
Strength of Concrete in shear Vc3 = 525.17 kN **Table 22.6.5.2_ (c)**

Design Vc= 525.17 kN
Allowable shear stress, (ϕ Vc)/bd = 1.48 N/mm^2

Design punching shear stress, τ = (152.11*10000)/(5380*0.495)
= 0.57 N/mm^2 **No shear reinforcement reqd.**

Load Case	p_{1x}	B.M$_{1x}$	S.F$_{3x}$	B.M$_{1z}$	S.F$_{3z}$	S.F$_{(punching)}$	V_u/b_0d	Punching check (Remarks)	Allowable shear ($0.75*\sqrt{(fc)}/6$ (N/mm^2)	Actual Shear	Remarks	Mu/bd2
Ultimate Conditions												
1.4D	16.88	14.82	13.67	14.82	14.01	66.17	0.25	OK	0.74	0.283	OK	0.60
1.4D+1.7L+0.5Lr	38.80	34.06	31.43	34.06	32.20	152.11	0.57	OK	0.74	0.651	OK	1.39
1.2D+1.6Lr+1.0L	27.16	23.84	22.00	23.84	22.54	106.47	0.4	OK	0.74	0.455	OK	0.97
1.2D + 1.6Wx+1.0L+0.5Lr	23.53	20.65	19.06	20.65	19.53	92.24	0.35	OK	0.74	0.395	OK	0.84
1.2D + 1.6Wx+1.0L+0.5Lr	26.47	23.24	21.44	23.24	21.97	103.77	0.39	OK	0.74	0.444	OK	0.95
1.2D + 1.6Wz+1.0L+0.5Lr	27.90	24.49	22.60	24.49	23.16	109.37	0.41	OK	0.74	0.468	OK	1.00
1.2D + 1.6Wz+1.0L+0.5Lr	30.84	27.07	24.98	27.07	25.60	120.90	0.45	OK	0.74	0.517	OK	1.10
1.2D+1.0Ex+1.0L	27.03	23.73	21.89	23.73	22.43	105.96	0.4	OK	0.74	0.453	OK	0.97
1.2D+1.0Ez+1.0L	25.59	22.46	20.73	22.46	21.24	100.32	0.38	OK	0.74	0.429	OK	0.92
0.9D+1.6Wx	6.61	5.80	5.35	5.80	5.49	25.91	0.1	OK	0.74	0.111	OK	0.24
0.9D+1.6Wx	9.56	8.39	7.74	8.39	7.93	37.48	0.14	OK	0.74	0.16	OK	0.34
0.9D+1.6Wz	10.98	9.64	8.89	9.64	9.11	43.04	0.16	OK	0.74	0.184	OK	0.39
0.9D+1.6Wz	13.92	12.22	11.28	12.22	11.55	54.57	0.2	OK	0.74	0.233	OK	0.50
0.9D+1.0Ex	10.13	8.89	8.21	8.89	8.41	39.71	0.15	OK	0.74	0.17	OK	0.36
0.9D+1.0Ez	9.50	8.34	7.70	8.34	7.89	37.24	0.14	OK	0.74	0.159	OK	0.34

Load Case	kn (ϕ=0.75)	p =	A_{st}
Ultimate Conditions			
1.4D	0.81	0.002	990
1.4D+1.7L+0.5Lr	1.85	0.005	2475
1.2D+1.6Lr+1.0L	1.3	0.003	1485
1.2D + 1.6Wx+1.0L+0.5Lr	1.12	0.003	1485
1.2D + 1.6Wx+1.0L+0.5Lr	1.26	0.003	1485
1.2D + 1.6Wz+1.0L+0.5Lr	1.33	0.003	1485
1.2D + 1.6Wz+1.0L+0.5Lr	1.47	0.004	1980
1.2D+1.0Ex+1.0L	1.29	0.003	1485
1.2D+1.0Ez+1.0L	1.22	0.003	1485
0.9D+1.6Wx	0.32	0.001	495
0.9D+1.6Wx	0.46	0.001	495
0.9D+1.6Wz	0.52	0.001	495
0.9D+1.6Wz	0.66	0.002	990
0.9D+1.0Ex	0.48	0.001	495
0.9D+1.0Ez	0.45	0.001	495

Location	Mux	ϕ Kn =	Kn	ρ=	Ast	Minm. Ast	Bar Dia	Spacing	Maxm	Spacing
At bottom	34.06	1.39	1.85	0.005	2475.00	927.00	25ϕT	198.33	300	150
At top	0.00	0.00	0.00	0.0018	891.00	891.00	16ϕT	225.66	300	150

SUMMARY OF REINFORCEMENT IN RAFT:

Along X Direction :								
	At Bottom	**25ϕT**	**150**	c/c	At Top	**16ϕT**	**150**	c/c
Along Z Direction :								
	At Bottom	**25ϕT**	**150**	c/c	At Top	**16ϕT**	**150**	c/c

Global Project ID	900707
Delivery Type	ENGINEERING PROCUREMENT CONSTRUCTION
Project Name	MANSOURAH MASSARAH GOLD PROJECT
Customer	MA'ADEN GOLD AND BASE METALS (MA'ADEN)
Project Country	KINGDOM OF SAUDI ARABIA

Ma'aden Revision No:	A01	A02	C01	D01
Date	10-03-2020	02-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 27.03.20 AND REVISED AS MARKED	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI


Outotec / L&T Revi	0	1	2	3
Date	10-03-2020	02-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 27.03.20 AND REVISED AS MARKED	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

DESIGN OF COLUMN MKD C1 **(Middle Column)**

Input:

Clear cover to reinf.=	75mm
Dia. of main reinf.=	25mm
Dia. of link=	10mm
Effective cover =	97.5mm
Grade of Concrete (f_c') =	M35
Grade of Steel (f_y) =	Fy420
Grade of Reinf(links).=	Fy420
Min. Steel Ratio	0.50%
Max. Steel Ratio	4.00%
Pedestal Height	2450

Table 20.6.1.3.1



For Compression-controlled sections
Strength reduction factor ϕ= 0.65 Table 21.2.2

Unsupported length of column about X (l_{ux}) = 2450.00
Unsupported length of column about Z (l_{uz}) = 2450.00

For Columns not braced against sidesway,

Where, Effective length factor K= 2

Slenderness ratio,
$K\,l_{ux} / r_x$ = 19.97 < 22 SECTION 6.2.5a — Radius of gyration r_x= 245
$K\,l_{uz} / r_z$ = 19.97 < 22 SECTION 6.2.5a — Radius of gyration r_z= 245

γ_y = 0.79
γ_z = 0.79

Load Case	Load Combination	Factored Load/Moment (T)			Nominal Load/Moment			Kn = Pn/f'cbD (N/mm²)
		Hx	V	Hz	Mz (Tm)	V (T)	Mx (Tm)	
100	1.4D	-0.03	62.6	18.96	0.1	96.4	71.4	0.04
101	1.4D+1.7L+0.5Lr	0.0	167.4	54.97	0.1	257.6	207.2	0.10
102	1.2D+1.6Lr+1.0L	0.0	115.1	37.72	0.1	177.0	142.2	0.07
103	1.2D + 1.6Wx+1.0L+0.5Lr	-0.1	109.1	30.28	0.4	167.8	114.1	0.07
104	1.2D + 1.6Wx+1.0L+0.5Lr	0.0	114.0	36.31	0.1	175.4	136.9	0.07
105	1.2D + 1.6Wz+1.0L+0.5Lr	-0.2	120.1	38.26	0.9	184.8	144.2	0.07
106	1.2D + 1.6Wz+1.0L+0.5Lr	-0.1	126.2	44.12	0.4	194.2	166.3	0.08
107	1.2D+1.0Ex+1.0L	-0.1	115.4	37.27	0.4	177.6	140.5	0.07
108	1.2D+1.0Ez+1.0L	0.0	112.1	34.63	0.0	172.5	130.5	0.07
109	0.9D+1.6Wx	-0.1	34.0	4.99	0.4	52.4	18.8	0.02
110	0.9D+1.6Wx	0.0	39.0	11.02	0.1	60.0	41.5	0.02
111	0.9D+1.6Wz	-0.2	45.1	12.97	0.9	69.4	48.9	0.03
112	0.9D+1.6Wz	-0.1	51.2	18.83	0.4	78.8	71.0	0.03
113	0.9D+1.0Ex	0.0	40.3	12.10	0.2	62.0	45.6	0.02
114	0.9D+1.0Ez	0.0	38.7	10.96	0.0	59.5	41.3	0.02

Reinforcement: Provide,

4-Nos	25 mm Dia	1964.29 Sq mm	(At Corner)
4-Nos	25 mm Dia	1964.29 Sq mm	(At middle)
8-Nos	25 mm Dia	3928.57 Sq mm	(All round)

A_{sc} pvd. = 7857.142857

Total A_{sc} = 1.1 %

β = P_n / P_0 (range is 0.55 to 0.70) Where, P_0 = 0.85 f'c (A_g - A_{sc}) + f_y A_{sc} = 2456.0625 T SECTION 22.4.2.2

Load Case	From Chart of SP17(M)-R35-420.8		M_{nox}	M_{noz}	β	$\alpha_n = \log(0.5)/\log(\beta)$	Interaction ratio	Remarks
	$R_{nx}=M_{nox}/f'_cb^2D$	$R_{nz}=M_{noz}/f'_cbD^2$						
100	0.07	0.07	150.5	150.46	0.55	1.16	0.42	O.K
101	0.10	0.10	214.9	214.94	0.55	1.16	0.96	O.K
102	0.09	0.09	193.4	193.45	0.55	1.16	0.70	O.K
103	0.09	0.09	193.4	193.45	0.55	1.16	0.54	O.K
104	0.09	0.09	193.4	193.45	0.55	1.16	0.67	O.K
105	0.09	0.09	193.4	193.45	0.55	1.16	0.71	O.K
106	0.09	0.09	193.4	193.45	0.55	1.16	0.84	O.K
107	0.09	0.09	193.4	193.45	0.55	1.16	0.69	O.K
108	0.09	0.09	193.4	193.45	0.55	1.16	0.63	O.K
109	0.06	0.06	129.0	128.97	0.55	1.16	0.11	O.K
110	0.06	0.06	129.0	128.97	0.55	1.16	0.27	O.K
111	0.06	0.06	129.0	128.97	0.55	1.16	0.33	O.K
112	0.06	0.06	129.0	128.97	0.55	1.16	0.50	O.K
113	0.06	0.06	129.0	128.97	0.55	1.16	0.30	O.K
114	0.06	0.06	129.0	128.97	0.55	1.16	0.27	O.K

Links, 10mm dia @ 300 C/C

Global Project ID	900707
Delivery Type	ENGINEERING PROCUREMENT CONSTRUCTION
Project Name	MANSOURAH MASSARAH GOLD PROJECT
Customer	MA'ADEN GOLD AND BASE METALS (MA'ADEN)
Project Country	KINGDOM OF SAUDI ARABIA

Ma'aden Revision No:	A01	A02	C01	D01
Date	10-03-2020	02-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 27.03.20 AND REVISED AS MARKED	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Outotec / L&T Revi	0	1	2	3
Date	10-03-2020	02-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 27.03.20 AND REVISED AS MARKED	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

3.2 Design of Foundation mkd. F2

Reactions for Support mkd. 3350/1 to 3350/5 on grid 3360/A from Staad File (Refer Attachment 1 for Support Reactions)

	3350/1			3350/2			3350/3			3350/4		
Load Combinations	FX (T)	FY (T)	FZ (T)	FX (T)	FY (T)	FZ (T)	FX (T)	FY (T)	FZ (T)	FX (T)	FY (T)	FZ (T)
DEAD LOAD	0	31	-8	2	40	-6.99	0	29	-6	-2	42	-1
LIVE LOAD	0	22	-6	1	20	-4.35	0	18	-4	-1	30	-2
ROOF LIVE LOAD	0	0	0	0	4	-0.28	0	1	0	0	5	0
CRANE LOAD CR1	0	0	0	0	0	0.00	0	0	0	0	0	0
CRANE LOAD CR2	0	0	0	0	0	0.00	0	0	0	0	0	0
CRANE LOAD CR3	0	0	0	0	0	0.00	0	0	0	0	0	0
WIND X(+0.55)	0	2	-4	-10	-30	-2.99	0	5	-6	-9	14	-6
WIND X(-0.55)	0	0	0	-9	-16	-0.26	0	1	-1	-8	27	-1
WIND Z(+0.55)	0	-3	1	-2	-19	2.44	0	-5	2	-1	-21	3
WIND Z(-0.55)	0	-6	5	0	-11	5.75	0	-10	7	-1	-15	8
DL EQUIPMENT	0	17	-6	0	19	-6.17	0	9	-3	-1	6	0
LL EQUIPMENT	0	38	-14	-4	31	-12.39	0	35	-12	-5	15	-2
SEISMIC DEAD X	0	0	0	-7	-11	0.13	0	0	0	-7	11	0
SEISMIC (DEAD+LIVE)X	0	0	0	-14	-20	0.18	0	-1	0	-14	21	0
SEISMIC DEAD Z	0	1	-1	0	2	-1.22	0	2	-1	0	2	-1
SEISMIC (DEAD+LIVE)Z	0	3	-3	0	3	-2.70	0	5	-3	0	4	-2
CRANE LOAD CR4	0	0	0	0	1	-0.15	0	2	0	0	17	-1
CRANE LOAD CR5	0	0	0	0	17	-1.00	0	2	0	0	3	0
CRANE LOAD CR6	0	0	0	0	8	-0.54	0	2	0	0	12	0

	3350/5		
Load Combinations	FX (T)	FY (T)	FZ (T)
DEAD LOAD (D)	0	30	-5
LIVE LOAD (L)	0	34	-5
ROOF LIVE LOAD (Lr)	0	1	0
CRANE LOAD CR1	0	0	0
CRANE LOAD CR2	0	0	0
CRANE LOAD CR3	0	0	0
WIND X(+0.55)	0	8	-5
WIND X(-0.55)	0	3	-2
WIND Z(+0.55)	0	-8	5
WIND Z(-0.55)	0	-14	9
DL EQUIPMENT	0	3	3
LL EQUIPMENT	0	8	-3
SEISMIC DEAD X	0	0	1
SEISMIC (DEAD+LIVE)X	0	0	1
SEISMIC DEAD Z	0	3	-2
SEISMIC (DEAD+LIVE)Z	0	6	-4
CRANE LOAD CR4	0	1	0
CRANE LOAD CR5	0	1	0
CRANE LOAD CR6	0	1	0

Support Reactions for Strength Design Load Combinations

	3350/1			3350/2			3350/3			3350/4		
Load Combinations	FX (T)	FY (T)	FZ (T)	FX (T)	FY (T)	FZ (T)	FX (T)	FY (T)	FZ (T)	FX (T)	FY (T)	FZ (T)
1.4D	0	67	-20	2	82	-18.42	0	53	-12	-3	67	-3
1.4D+1.7L+0.5Lr	0	171	-55	-1	213	-49.90	0	154	-42	-13	199	-10
1.2D+1.6Lr+1.0L	0	119	-38	0	153	-34.67	0	106	-28	-9	142	-7
1.2D + 1.6Wx+1.0L+0.5Lr	0	122	-44	-16	100	-39.15	0	112	-37	-24	159	-17
1.2D + 1.6Wx+1.0L+0.5Lr	0	118	-39	-14	123	-34.78	0	106	-30	-22	179	-9
1.2D + 1.6Wz+1.0L+0.5Lr	0	114	-36	-3	118	-30.46	0	97	-24	-11	103	-2
1.2D + 1.6Wz+1.0L+0.5Lr	0	109	-30	-1	131	-25.16	0	89	-17	-10	113	6
1.2D+1.0Ex+1.0L	0	118	-38	-14	126	-34.04	0	104	-28	-22	155	-7
1.2D+1.0Ez+1.0L	0	121	-41	0	149	-36.92	0	109	-31	-8	138	-9
0.9D+1.6Wx	0	46	-19	-15	4	-16.63	0	42	-17	-17	66	-12
0.9D+1.6Wx	0	43	-13	-13	27	-12.26	0	36	-10	-16	86	-4
0.9D+1.6Wz	0	39	-11	-1	23	-7.94	0	27	-5	-4	10	3
0.9D+1.6Wz	0	34	-5	0	35	-2.64	0	18	3	-3	20	11
0.9D+1.0Ex	0	43	-13	-6	42	-11.71	0	34	-8	-9	54	-2
0.9D+1.0Ez	0	45	-14	1	54	-13.06	0	36	-9	-2	45	-3

	3350/5		
Load Combinations	FX (T)	FY (T)	FZ (T)
1.4D	0	46	-3
1.4D+1.7L+0.5Lr	0	121	-18
1.2D+1.6Lr+1.0L	0	84	-12
1.2D + 1.6Wx+1.0L+0.5Lr	0	97	-20
1.2D + 1.6Wx+1.0L+0.5Lr	0	89	-15
1.2D + 1.6Wz+1.0L+0.5Lr	0	71	-3
1.2D + 1.6Wz+1.0L+0.5Lr	0	61	2
1.2D+1.0Ex+1.0L	0	83	-10
1.2D+1.0Ez+1.0L	0	89	-15
0.9D+1.6Wx	0	43	-10
0.9D+1.6Wx	0	35	-5
0.9D+1.6Wz	0	17	7
0.9D+1.6Wz	0	7	12
0.9D+1.0Ex	0	29	-1
0.9D+1.0Ez	0	32	-4

From the above Support Reactions it is evident that Support on Grid 3350/2 being the most critical, its support reactions have been considered for Design of Foundation mkd. F2

MA'ADEN معادن Saudi Arabian Mining Company	Outotec	LARSEN & TOUBRO	DESIGN DOCUMENT Ma'aden Docum MD-216-3350-EG-CV-CAL-1226 Outotec Documer 900707_ GAU01_SF01_CED01_33530_OU100666569 L&T Document N O19045_450_C_K_24097_001

Global Project ID	900707
Delivery Type	ENGINEERING PROCUREMENT CONSTRUCTION
Project Name	MANSOURAH MASSARAH GOLD PROJECT
Customer	MA'ADEN GOLD AND BASE METALS (MA'ADEN)
Project Country	KINGDOM OF SAUDI ARABIA

Ma'aden Revision No:	A01	A02	C01	D01
Date	10-03-2020	02-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 27.03.20 AND REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Outotec / L&T Revi	0	1	2	3
Date	10-03-2020	02-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 27.03.20 AND REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

DESIGN OF FOUNDATION MKD. F2 3350/2-3360/A

	Along-X	Along-Z
Size of column :	0.85m	0.85m
Size of fdn. raft :	3.25m	3.75m
Thickness of raft :	0.65 m	
Original ground level:	0.00 m	
Finished floor level :	0.00 m	
U/S level of foundation :	-2.50 m	
U/S level Base Plate :	0.55 m	
Unit weight of conc :	2.5 T/m^3	
Unit weight of soil :	1.8 T/m^3	

SYMBOLS AND NOTATIONS


Dead Load	D
live load	LL
Roof live load	Lr
Wind Load	W
Earthquake Load	E
Crane Load	CR


Calculation of Weight of Foundation :

Weight of raft & Col.= (3.25*3.75*0.65*2.5)+(0.85*0.85*2.4*2.5) = 24.14T

Weight of soil = ((3.25*3.75)-(0.85*0.85))*1.85*1.8 = 38.18T

U/S Base Pl Total = 62.32T

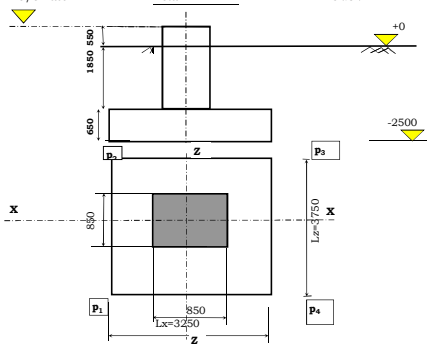



Design Input:

Characteristic strength of concrete, f '$_c$=	35 MPa
Yield stress of steel reinforcement, f$_y$=	420 MPa
Clear cover for main reinforcement bars =	75mm
Dia. of bars provd. along X direction at bottom =	20mm
Dia. of bars provd. along X direction at top =	12mm
Dia. of bars provided along Z direction at bottom=	20mm
Dia. of bars provided along Z direction at top=	12mm
Mininum percentage of reinforcement at bottom=	0.12%
Mininum percentage of reinforcement at top=	0.06%

Effective depth of slab along X direction = 565mm = 0.565m

Effective depth of slab along Z direction = 545mm = 0.545m

Clear projection along Z direction = 1.45m

Clear projection along X direction = 1.2m

WORKING STRESS DESIGN

	Load at U/S Of Base Plt					Load at bottom of foundation				
Load Case	FX (T)	FY(T)	FZ(T)	M_x	M_z	V (T)	Hx (T)	MX (T-m)	Hz (T)	MZ (T-m)
DL+LL	-1.15	109.32	-29.90	0.0	0.00	171.64	-1.15	91.20	-29.90	3.51
DL+LR	1.47	62.70	-13.44	0.0	0.00	125.02	1.47	40.99	-13.44	4.48
DL+0.75*LL+0.75*LR	2.20	76.27	-16.63	0.0	0.00	138.59	2.20	50.73	-16.63	6.70
DL+0.75*(LL+LR+W(+X))	-8.05	77.35	-28.17	0.0	0.00	139.67	-8.05	85.91	-28.17	24.54
DL+0.75*(LL+LR+W(-X))	-7.10	87.79	-26.12	0.0	0.00	150.11	-7.10	79.67	-26.12	21.66
DL+0.75*(LL+LR+W(+Z))	-1.69	85.85	-24.10	0.0	0.00	148.17	-1.69	73.49	-24.10	5.15
DL+0.75*(LL+LR+W(-Z))	-0.83	91.56	-21.61	0.0	0.00	153.88	-0.83	65.92	-21.61	2.54
0.6*D+WL (X)	1.13	42.81	-8.44	0.0	0.00	105.13	1.13	25.73	-8.44	3.43
0.6*D+WL (-X)	-8.00	18.84	-8.16	0.0	0.00	81.16	-8.00	24.88	-8.16	24.41
0.6*D+WL (Z)	-0.78	16.25	-5.46	0.0	0.00	78.57	-0.78	16.64	-5.46	2.39
0.6*D+WL (-Z)	0.36	23.86	-2.15	0.0	0.00	86.18	0.36	6.55	-2.15	1.09
DL+0.75*(LL+LR+0.75L(+X))	-8.77	92.63	-27.39	0.0	0.00	154.95	-8.77	83.53	-27.39	26.75
DL+0.75*(LL+LR+0.75L(+Z))	-1.34	104.70	-28.90	0.0	0.00	167.02	-1.34	88.14	-28.90	4.07
0.6*D +0.7 SD (X)	-6.02	24.41	-7.77	0.0	0.00	86.73	-6.02	23.69	-7.77	18.37
0.6*D +0.7 SD (Z)	0.87	36.53	-9.12	0.0	0.00	98.85	0.87	27.80	-9.12	2.64
DL+LL+LR+CR1	-1.11	113.72	-30.18	0.0	0.00	176.04	-1.11	92.05	-30.18	3.39
DL+LL+LR+CR2	-1.06	113.78	-30.18	0.0	0.00	176.10	-1.06	92.05	-30.18	3.23
DL+LL+LR+CR3	-1.11	113.64	-30.18	0.0	0.00	175.96	-1.11	92.05	-30.18	3.39
DL+LL+LR+CR4	-0.70	114.35	-30.33	0.0	0.00	176.67	-0.70	92.51	-30.33	2.14
DL+LL+LR+CR5	-1.08	130.53	-31.18	0.0	0.00	192.85	-1.08	95.10	-31.18	3.29
DL+LL+LR+CR6	-0.81	121.60	-30.72	0.0	0.00	183.92	-0.81	93.70	-30.72	2.47

Check for overturning and sliding:

	Load at Foundation Base					Sliding Coeffecient, μ = 0.4			
Load Case	V (T)	Hx (T)	Mz (Tm)	Hz (T)	Mx (Tm)	F.O.S. Mz	F.O.S. Mx	F.O.S. Hx	F.O.S. Hz
DL+LL	171.64	-1.15	3.51	-29.90	91.20	91.75	3.06	59.70	2.30
DL+LR	125.02	1.47	4.48	-13.44	40.99	52.28	4.96	34.02	3.72
DL+0.75*LL+0.75*LR	138.59	2.20	6.70	-16.63	50.73	38.77	4.44	25.23	3.33
DL+0.75*(LL+LR+W(+X))	139.67	-8.05	24.54	-28.17	85.91	10.67	2.64	6.94	1.98
DL+0.75*(LL+LR+W(-X))	150.11	-7.10	21.66	-26.12	79.67	12.99	3.06	8.45	2.30
DL+0.75*(LL+LR+W(+Z))	148.17	-1.69	5.15	-24.10	73.49	53.98	3.28	35.12	2.46
DL+0.75*(LL+LR+W(-Z))	153.88	-0.83	2.54	-21.61	65.92	113.63	3.79	73.93	2.85
0.6*D+WL (X)	105.13	1.13	3.43	-8.44	25.73	57.40	6.64	37.35	4.98
0.6*D+WL (-X)	81.16	-8.00	24.41	-8.16	24.88	6.23	5.30	4.06	3.98
0.6*D+WL (Z)	78.57	-0.78	2.39	-5.46	16.64	61.61	7.67	40.09	5.76
0.6*D+WL (-Z)	86.18	0.36	1.09	-2.15	6.55	148.82	21.40	96.83	16.06
DL+0.75*(LL+LR+0.75L(+X))	154.95	-8.77	26.75	-27.39	83.53	10.86	3.01	7.07	2.26
DL+0.75*(LL+LR+0.75L(+Z))	167.02	-1.34	4.07	-28.90	88.14	76.88	3.08	50.02	2.31
0.6*D +0.7 SD (X)	86.73	-6.02	18.37	-7.77	23.69	8.85	5.95	5.76	4.47
0.6*D +0.7 SD (Z)	98.85	0.87	2.64	-9.12	27.80	70.17	5.78	45.66	4.34
DL+LL+LR+CR1	176.04	-1.11	3.39	-30.18	92.05	97.50	3.11	63.44	2.33
DL+LL+LR+CR2	176.10	-1.06	3.23	-30.18	92.05	102.13	3.11	66.45	2.33
DL+LL+LR+CR3	175.96	-1.11	3.39	-30.18	92.05	97.45	3.11	63.41	2.33
DL+LL+LR+CR4	176.67	-0.70	2.14	-30.33	92.51	155.16	3.10	100.95	2.33
DL+LL+LR+CR5	192.85	-1.08	3.29	-31.18	95.10	109.77	3.30	71.43	2.47
DL+LL+LR+CR6	183.92	-0.81	2.47	-30.72	93.70	139.59	3.19	90.82	2.39

Global Project ID	900707
Delivery Type	ENGINEERING PROCUREMENT CONSTRUCTION
Project Name	MANSOURAH MASSARAH GOLD PROJECT
Customer	MA'ADEN GOLD AND BASE METALS (MA'ADEN)
Project Country	KINGDOM OF SAUDI ARABIA

Ma'aden Revision No:	A01	A02	C01	D01
Date	10-03-2020	02-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 27.03.20 AND REVISED AS MARKUP A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Outotec / L&T Revi	0	1	2	3
Date	10-03-2020	02-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 27.03.20 AND REVISED AS MARKUP A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

ULTIMATE STRESS DESIGN

Load Case		Load at U/S Of Base Plt					Load at bottom of foundation		
		FX (T)	FY(T)	FZ(T)	M_x	M_z	V (T)	Mx (T-m)	Mz (T-m)
1.4D		1.97	81.58	-18.42	0.0	0.00	143.898	56.19	6.02
1.4D+1.7L+0.5Lr		-1.21	213.28	-49.90	0.0	0.00	275.602	152.18	3.69
1.2D+1.6Lr+1.0L		-0.10	153.18	-34.67	0.0	0.00	215.502	105.74	0.31
1.2D + 1.6Wx+1.0L+0.5Lr		-16.34	100.25	-39.15	0.0	0.00	162.565	119.40	49.85
1.2D + 1.6Wx+1.0L+0.5Lr		-14.33	122.52	-34.78	0.0	0.00	184.837	106.07	43.70
1.2D + 1.6Wz+1.0L+0.5Lr		-2.78	118.37	-30.46	0.0	0.00	180.693	92.90	8.47
1.2D + 1.6Wz+1.0L+0.5Lr		-0.95	130.55	-25.16	0.0	0.00	192.869	76.74	2.90
1.2D+1.0Ex+1.0L		-14.38	126.19	-34.04	0.0	0.00	188.514	103.83	43.85
1.2D+1.0Ez+1.0L		-0.22	149.17	-36.92	0.0	0.00	211.494	112.61	0.66
0.9D+1.6Wx		-14.91	4.38	-16.63	0.0	0.00	66.699	50.72	45.47
0.9D+1.6Wx		-12.89	26.65	-12.26	0.0	0.00	88.971	37.39	39.32
0.9D+1.6Wz		-1.34	22.51	-7.94	0.0	0.00	84.827	24.22	4.08
0.9D+1.6Wz		0.49	34.68	-2.64	0.0	0.00	97.003	8.06	1.48
0.9D+1.0Ex		-5.60	41.89	-11.71	0.0	0.00	104.213	35.73	17.08
0.9D+1.0Ez		1.29	54.01	-13.06	0.0	0.00	116.333	39.85	3.93

Check for Bearing Pressure

Load Combination & Calculation of Base pressure

Max. Base pressure = $p_{max} = (V/(Lx.Lz)) + (6.My/((Lx)^2.Lz) + (6.Mx/(Lx.(Lz)^2)$

Min. Base pressure = $p_{min} = (V/(Lx.Lz)) - (6.My/((Lx)^2.Lz) - (6.Mx/(Lx.(Lz)^2)$


Appox. Surcharge load = 2 T/m^2

Net SBC of soil for DL, LL= 45 T/m^2

Gross SBC of soil for DL, LL= 50.49 T/m^2

For WL/SL case = 56.25 T/m^2

For WL/SL case = 61.74 T/m^2



Load Case	Design Load/moments			Base Pressure (T/m^2)								
	V (T)	Mz (T-m)	Mx (T-m)	V/ (Lx.Lz)	6.Mz/ $(Lx)^2.Lz$	6.Mx/ $Lx.(Lz)^2$	p_1 (p_{max})	p_2	p_4	p_3 (p_{min})	(p_{max}-γh)	Remarks
DL+LL	171.64	3.51	91.20	14.08	0.53	11.97	28.59	4.64	27.52	3.58	25.26	O.K
DL+LR	125.02	4.48	40.99	10.26	0.68	5.38	18.32	7.56	16.96	6.20	14.99	O.K
DL+0.75*LL+0.75*LR	138.59	6.70	50.73	11.37	1.02	6.66	21.05	7.73	19.02	5.70	17.72	O.K
DL+0.75*(LL+LR+W(+X))	139.67	24.54	85.91	11.46	3.72	11.28	28.46	5.90	21.02	-1.54	25.13	-
DL+0.75*(LL+LR+W(-X))	150.11	21.66	79.67	12.32	3.28	10.46	28.06	7.14	21.49	0.58	24.73	O.K
DL+0.75*(LL+LR+W(+Z))	148.17	5.15	73.49	12.16	0.78	9.65	24.58	5.29	23.03	3.73	21.25	O.K
DL+0.75*(LL+LR+W(-Z))	153.88	2.54	65.92	12.63	0.38	8.65	23.66	6.36	22.89	5.59	20.33	O.K
0.6*D+WL (X)	105.13	3.43	25.73	8.63	0.52	3.38	14.52	7.77	13.48	6.73	11.19	O.K
0.6*D+WL (-X)	81.16	24.41	24.88	6.66	3.70	3.27	15.62	9.09	8.23	1.70	12.29	O.K
0.6*D+WL (Z)	78.57	2.39	16.64	6.45	0.36	2.18	10.99	6.62	10.27	5.90	7.66	O.K
0.6*D+WL (-Z)	86.18	1.09	6.55	7.07	0.16	0.86	10.10	8.38	9.77	8.05	6.77	O.K
DL+0.75*(LL+LR+0.75L(+X))	154.95	26.75	83.53	12.71	4.05	10.97	29.73	7.80	21.63	-0.30	26.40	-
DL+0.75*(LL+LR+0.75L(+Z))	167.02	4.07	88.14	13.70	0.62	11.57	27.89	4.75	26.66	3.52	24.56	O.K
0.6*D +0.7 SD (X)	86.73	18.37	23.69	7.12	2.78	3.11	15.01	8.79	9.44	3.22	11.68	O.K
0.6*D +0.7 SD (Z)	98.85	2.64	27.80	8.11	0.40	3.65	14.16	6.86	13.36	6.06	10.83	O.K
DL+LL+LR+CR1	176.04	3.39	92.05	14.44	0.51	12.08	29.04	4.87	28.02	3.85	25.71	O.K
DL+LL+LR+CR2	176.10	3.23	92.05	14.45	0.49	12.08	29.02	4.85	28.04	3.88	25.69	O.K
DL+LL+LR+CR3	175.96	3.39	92.05	14.44	0.51	12.08	29.03	4.87	28.01	3.84	25.70	O.K
DL+LL+LR+CR4	176.67	2.14	92.51	14.50	0.32	12.14	28.96	4.67	28.32	4.03	25.63	O.K
DL+LL+LR+CR5	192.85	3.29	95.10	15.82	0.50	12.48	30.81	5.84	29.81	4.84	27.48	O.K
DL+LL+LR+CR6	183.92	2.47	93.70	15.09	0.37	12.30	29.77	5.16	29.02	4.42	26.44	O.K

Calculation of Design Pressure

Load Combination & Calculation of Base pressure

Max. Base pressure = $p_{max} = (V/(Lx.Lz)) + (6.My/((Lx)^2.Lz) + (6.Mx/(Lx.(Lz)^2)$

Min. Base pressure = $p_{min} = (V/(Lx.Lz)) - (6.My/((Lx)^2.Lz) - (6.Mx/(Lx.(Lz)^2)$


Surcharge load = 2 T/m^2

Net SBC of soil for DL, LL= 45 T/m^2

Gross SBC of soil for DL, LL= 50.49 T/m^2

For WL/SL case = 56.25 T/m^2

For WL/SL case = 61.74 T/m^2



Load Case	Design Load/moments			Base Pressure (T/m^2)							
	V (T)	Mz (T-m)	Mx (T-m)	V/ (Lx.Lz)	6.Mz/ $(Lx)^2.Lz$	6.Mx/ $Lx.(Lz)^2$	p_1 (p_{max})	p_2	p_4	p_3 (p_{min})	(p_{max}-γh)
1.4D	143.9	6.02	56.19	11.81	0.91	7.38	22.10	7.34	20.27	5.52	18.77
1.4D+1.7L+0.5Lr	275.6	3.69	152.18	22.61	0.56	19.98	45.15	5.19	44.03	4.08	41.82
1.2D+1.6Lr+1.0L	215.5	0.31	105.74	17.68	0.05	13.88	33.61	5.85	33.52	5.75	30.28
1.2D + 1.6Wx+1.0L+0.5Lr	162.6	49.85	119.40	13.34	7.55	15.67	38.56	7.22	23.46	-7.89	35.23
1.2D + 1.6Wx+1.0L+0.5Lr	184.8	43.70	106.07	15.17	6.62	13.93	37.71	9.86	24.47	-3.38	34.38
1.2D + 1.6Wz+1.0L+0.5Lr	180.7	8.47	92.90	14.83	1.28	12.20	30.30	5.91	27.74	3.35	26.97
1.2D + 1.6Wz+1.0L+0.5Lr	192.9	2.90	76.74	15.83	0.44	10.08	28.34	8.19	27.46	7.31	25.01
1.2D+1.0Ex+1.0L	188.5	43.85	103.83	15.47	6.64	13.63	37.74	10.48	24.46	-2.81	34.41
1.2D+1.0Ez+1.0L	211.5	0.66	112.61	17.35	0.10	14.78	34.24	4.67	34.04	4.47	30.91
0.9D+1.6Wx	66.7	45.47	50.72	5.47	6.89	6.66	21.02	7.70	7.24	-6.07	17.69
0.9D+1.6Wx	89.0	39.32	37.39	7.30	5.96	4.91	20.17	10.35	8.25	-1.56	16.84
0.9D+1.6Wz	84.8	4.08	24.22	6.96	0.62	3.18	12.76	6.40	11.52	5.16	9.43
0.9D+1.6Wz	97.0	1.48	8.06	7.96	0.22	1.06	11.24	9.12	10.79	8.68	7.91
0.9D+1.0Ex	104.2	17.08	35.73	8.55	2.59	4.69	17.83	8.45	12.65	3.27	14.50
0.9D+1.0Ez	116.3	3.93	39.85	9.55	0.60	5.23	17.37	6.91	16.18	5.72	14.04

Global Project ID	900707
Delivery Type	ENGINEERING PROCUREMENT CONSTRUCTION
Project Name	MANSOURAH MASSARAH GOLD PROJECT
Customer	MA'ADEN GOLD AND BASE METALS (MA'ADEN)
Project Country	KINGDOM OF SAUDI ARABIA


Ma'aden Revision No:	A01	A02	C01	D01
Date	10-03-2020	02-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 27.03.20 AND REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Outotec / L&T Revi	0	1	2	3
Date	10-03-2020	02-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 27.03.20 AND REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Calculation of Bending Moment and Shear Force in X direction :

p_{1x} =pressure at the face of column at section 1x-1x in kN/m^2.
p_{2x} =pressure at the face of column at section 2x-2x in kN/m^2.
p_{3x} =pressure at a distance 'd' from the face of column at section 3x-3x in kN/m^2.
BM_{1x} =Moment at the face of column at section 1x-1x in kN-m/m.
BM_{2x} =Moment at the face of column 2x-2x in kN-m/m.
SF_{3x} = Oneway shear force at a distance 'd' from the face of column at section 3x-3x in kN/m.
SF (punching) = Punching Shear Force at a distance 0.5d from the face of column in kN/m.

Punching perimeter= ((0.85+2*0.5*0.495)+(0.85+2*0.5*0.495))*2
= 5.58 m
Punching Area= ((0.85+2*0.5*0.545)*(0.85+2*0.5*0.545))
= 1.95 m^2 Punching shear stress to be checked



Downward pressure due to self weight of raft and soil = (0.65*2.5+1.85*1.8)
= 4.96 kN/m^2
Area of footing, A_f= 12.19 m^2

Check against Two-way shear force at a distance d/2 from face of column:

Design punching shear at a distance d/2 from face of column, Vu= 140.78 T
Strength of Concrete in shear Vc1 = 650.40 T **Table 22.6.5.2_ (a)**
Strength of Concrete in shear Vc2 = 885.60 T **Table 22.6.5.2_ (b)**
Strength of Concrete in shear Vc3 = 599.71 kN **Table 22.6.5.2_ (c)**

Design Vc= 599.71 kN
Allowable shear stress, (ϕ Vc)/bd = 1.48 N/mm^2

Design punching shear stress, τ = (140.78*10000)/(5580*0.545)
= 0.46 N/mm^2 **No shear reinforcement reqd.**

Load Case	p_{1x}	B.M$_{1x}$	S.F$_{3x}$	B.M$_{1z}$	S.F$_{3z}$	S.F$_{(punching)}$	V_u/b_od	Punching check (Remarks)	Allowable shear $(0.75*\sqrt{(fc)}/6$ (N/mm^2)	Actual Shear	Remarks	Mu/bd2
Ultimate Conditions												
1.4D	18.77	19.73	16.61	13.51	12.29	63.19	0.21	OK	0.74	0.305	OK	0.66
1.4D+1.7L+0.5Lr	41.82	43.96	37.01	30.11	27.39	140.78	0.46	OK	0.74	0.679	OK	1.48
1.2D+1.6Lr+1.0L	30.28	31.83	26.80	21.80	19.83	101.93	0.34	OK	0.74	0.492	OK	1.07
1.2D + 1.6Wx+1.0L+0.5Lr	35.23	37.04	31.18	25.37	23.08	118.60	0.39	OK	0.74	0.572	OK	1.25
1.2D + 1.6Wx+1.0L+0.5Lr	34.38	36.14	30.43	24.75	22.52	115.74	0.38	OK	0.74	0.558	OK	1.22
1.2D + 1.6Wz+1.0L+0.5Lr	26.97	28.35	23.87	19.42	17.67	90.79	0.3	OK	0.74	0.438	OK	0.95
1.2D + 1.6Wz+1.0L+0.5Lr	25.01	26.29	22.13	18.01	16.38	84.19	0.28	OK	0.74	0.406	OK	0.89
1.2D+1.0Ex+1.0L	34.41	36.17	30.45	24.78	22.54	115.84	0.38	OK	0.74	0.559	OK	1.22
1.2D+1.0Ez+1.0L	30.91	32.49	27.36	22.26	20.25	104.05	0.34	OK	0.74	0.502	OK	1.09
0.9D+1.6Wx	17.69	18.60	15.66	12.74	11.59	59.55	0.2	OK	0.74	0.287	OK	0.63
0.9D+1.6Wx	16.84	17.70	14.90	12.12	11.03	56.69	0.19	OK	0.74	0.273	OK	0.60
0.9D+1.6Wz	9.43	9.91	8.35	6.79	6.18	31.74	0.1	OK	0.74	0.153	OK	0.33
0.9D+1.6Wz	7.91	8.32	7.00	5.70	5.18	26.63	0.09	OK	0.74	0.128	OK	0.28
0.9D+1.0Ex	14.50	15.24	12.83	10.44	9.50	48.81	0.16	OK	0.74	0.235	OK	0.51
0.9D+1.0Ez	14.04	14.76	12.43	10.11	9.20	47.26	0.16	OK	0.74	0.228	OK	0.50

Load Case	kn (ϕ=0.75)	p =	A_{st}
Ultimate Conditions			
1.4D	0.89	0.002	1090
1.4D+1.7L+0.5Lr	1.97	0.005	2725
1.2D+1.6Lr+1.0L	1.43	0.003	1635
1.2D + 1.6Wx+1.0L+0.5Lr	1.66	0.004	2180
1.2D + 1.6Wx+1.0L+0.5Lr	1.62	0.004	2180
1.2D + 1.6Wz+1.0L+0.5Lr	1.27	0.003	1635
1.2D + 1.6Wz+1.0L+0.5Lr	1.18	0.003	1635
1.2D+1.0Ex+1.0L	1.62	0.004	2180
1.2D+1.0Ez+1.0L	1.46	0.004	2180
0.9D+1.6Wx	0.83	0.002	1090
0.9D+1.6Wx	0.79	0.002	1090
0.9D+1.6Wz	0.45	0.001	545
0.9D+1.6Wz	0.37	0.001	545
0.9D+1.0Ex	0.68	0.002	1090
0.9D+1.0Ez	0.66	0.002	1090

Location	Mux	ϕ Kn =	Kn	ρ=	Ast	Minm. Ast	Bar Dia	Spacing	Maxm	Spacing
At bottom	43.96	1.48	1.97	0.005	2725.00	1017.00	25ϕT	180.14	300	150
At top	0.00	0.00	0.00	0.0018	981.00	981.00	16ϕT	204.96	300	150

SUMMARY OF REINFORCEMENT IN RAFT:

Along X Direction :
At Bottom **25ϕT** **150** c/c At Top **16ϕT** **150** c/c

Along Z Direction :
At Bottom **25ϕT** **150** c/c At Top **16ϕT** **150** c/c

Global Project ID	900707
Delivery Type	ENGINEERING PROCUREMENT CONSTRUCTION
Project Name	MANSOURAH MASSARAH GOLD PROJECT
Customer	MA'ADEN GOLD AND BASE METALS (MA'ADEN)
Project Country	KINGDOM OF SAUDI ARABIA

Ma'aden Revision No:	A01	A02	C01	D01
Date	10-03-2020	02-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 27.03.20 AND REVISED AS MARKUP A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI


Outotec / L&T Revi	0	1	2	3
Date	10-03-2020	02-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 27.03.20 AND REVISED AS MARKUP A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

DESIGN OF COLUMN MKD C1 **(Middle Column)**

Input:

Clear cover to reinf.=	75mm
Dia. of main reinf.=	25mm
Dia. of link=	10mm
Effective cover =	97.5mm
Grade of Concrete (f_c') =	M35
Grade of Steel (f_y) =	Fy420
Grade of Reinf(links).=	Fy420
Min. Steel Ratio	0.50%
Max. Steel Ratio	4.00%
Pedestal Height	2400

Table 20.6.1.3.1



For Compression-controlled sections
Strength reduction factor ϕ= 0.65 Table 21.2.2

Unsupported length of column about X (l_{ux}) = 2400.00
Unsupported length of column about Z (l_{uz}) = 2400.00

For Columns not braced against sidesway,
Slenderness ratio, $K\,l_{ux} / r_x$ = 19.57 < 22 SECTION 6.2.5a
$K\,l_{uz} / r_z$ = 19.57 < 22 SECTION 6.2.5a

Where, Effective length factor K= 2
Radius of gyration r_x= 245
Radius of gyration r_z= 245

γ_y = 0.79
γ_z = 0.79

Load Case	Load Combination	Factored Load/Moment (T) Hx	V	Hz	Nominal Load/Moment Mz (Tm)	V (T)	Mx (Tm)	Kn = Pn/f_c'bD (N/mm^2)
100	1.4D	1.97	81.6	-18.42	7.3	125.5	68.0	0.05
101	1.4D+1.7L+0.5Lr	-1.2	213.3	-49.90	4.5	328.1	184.2	0.13
102	1.2D+1.6Lr+1.0L	-0.1	153.2	-34.67	0.4	235.7	128.0	0.09
103	1.2D + 1.6Wx+1.0L+0.5Lr	-16.3	100.2	-39.15	60.3	154.2	144.5	0.06
104	1.2D + 1.6Wx+1.0L+0.5Lr	-14.3	122.5	-34.78	52.9	188.5	128.4	0.07
105	1.2D + 1.6Wz+1.0L+0.5Lr	-2.8	118.4	-30.46	10.2	182.1	112.5	0.07
106	1.2D + 1.6Wz+1.0L+0.5Lr	-1.0	130.5	-25.16	3.5	200.8	92.9	0.08
107	1.2D+1.0Ex+1.0L	-14.4	126.2	-34.04	53.1	194.1	125.7	0.08
108	1.2D+1.0Ez+1.0L	-0.2	149.2	-36.92	0.8	229.5	136.3	0.09
109	0.9D+1.6Wx	-14.9	4.4	-16.63	55.0	6.7	61.4	0.00
110	0.9D+1.6Wx	-12.9	26.7	-12.26	47.6	41.0	45.3	0.02
111	0.9D+1.6Wz	-1.3	22.5	-7.94	4.9	34.6	29.3	0.01
112	0.9D+1.6Wz	0.5	34.7	-2.64	1.8	53.4	9.8	0.02
113	0.9D+1.0Ex	-5.6	41.9	-11.71	20.7	64.5	43.3	0.03
114	0.9D+1.0Ez	1.3	54.0	-13.06	4.8	83.1	48.2	0.03

Reinforcement: Provide,

4-Nos	25 mm Dia
4-Nos	25 mm Dia
8-Nos	25 mm Dia

1964.29 Sq mm (At Corner)
1964.29 Sq mm (At middle)
3928.57 Sq mm (All round)

A_{sc} pvd. = 7857.14 Sq mm
Total A_{sc} = 1.1 %

β = P_n / P_0 (range is 0.55 to 0.70) Where, P_0 = 0.85 f'_c (A_g - A_{sc}) + f_y A_{sc} = 2456.0625 T SECTION 22.4.2.2

Load Case	From Chart of SP17(M)-R35-420.8 $R_{nx}=M_{nox}/f'_cb^2D$	$R_{nx}=M_{nox}/f'_cbD^2$	M_{noz}	M_{nox}	β	$\alpha_n = \log(0.5)/\log(\beta)$	Interaction ratio	Remarks
100	0.07	0.07	150.5	150.46	0.55	1.16	0.43	O.K
101	0.09	0.09	193.4	193.45	0.55	1.16	0.96	O.K
102	0.09	0.09	193.4	193.45	0.55	1.16	0.62	O.K
103	0.09	0.09	193.4	193.45	0.55	1.16	0.97	O.K
104	0.09	0.09	193.4	193.45	0.55	1.16	0.84	O.K
105	0.09	0.09	193.4	193.45	0.55	1.16	0.57	O.K
106	0.09	0.09	193.4	193.45	0.55	1.16	0.44	O.K
107	0.09	0.09	193.4	193.45	0.55	1.16	0.83	O.K
108	0.09	0.09	193.4	193.45	0.55	1.16	0.67	O.K
109	0.06	0.06	129.0	128.97	0.55	1.16	0.80	O.K
110	0.06	0.06	129.0	128.97	0.55	1.16	0.61	O.K
111	0.06	0.06	129.0	128.97	0.55	1.16	0.20	O.K
112	0.06	0.06	129.0	128.97	0.55	1.16	0.06	O.K
113	0.06	0.06	129.0	128.97	0.55	1.16	0.40	O.K
114	0.06	0.06	129.0	128.97	0.55	1.16	0.34	O.K

Links, 10mm dia @ 300 C/C

Global Project ID	900707
Delivery Type	ENGINEERING PROCUREMENT CONSTRUCTION
Project Name	MANSOURAH MASSARAH GOLD PROJECT
Customer	MA'ADEN GOLD AND BASE METALS (MA'ADEN)
Project Country	KINGDOM OF SAUDI ARABIA

Ma'aden Revision No:	A01	A02	C01	D01
Date	10-03-2020	02-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 27.03.20 AND REVISED AS MARKED	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Outotec / L&T Revi	0	1	2	3
Date	10-03-2020	02-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 27.03.20 AND REVISED AS MARKED	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

3.3 Design of Foundation mkd. F3

Reactions for Support mkd. 3360/A, 3350/A, 3350/D on grid 3360/1, 3360/1' & 3360/6 from Staad File

	3350/D-3360/1			3350/A-3360/1			3360/A-3360/1			3350/D-3360/1'		
Load Combinations	FX (T)	FY (T)	FZ (T)	FX (T)	FY (T)	FZ (T)	FX (T)	FY (T)	FZ (T)	FX (T)	FY (T)	FZ (T)
DEAD LOAD	0	16	0	0	21	-0.32	0	17	0	0	4	0
LIVE LOAD	0	16	0	-1	20	-0.02	0	11	0	1	9	0
ROOF LIVE LOAD	0	1	0	0	2	-0.07	0	1	0	0	0	0
CRANE LOAD CR1	0	0	0	0	0	0.01	0	0	0	0	0	0
CRANE LOAD CR2	0	-1	0	0	1	0.04	0	0	0	0	0	0
CRANE LOAD CR3	0	-1	0	0	1	0.02	0	0	0	0	0	0
WIND X(+0.55)	-3	10	-1	-3	4	-0.99	0	-4	-1	-3	-12	0
WIND X(-0.55)	-6	22	1	-5	10	0.58	-1	1	0	-5	-20	0
WIND Z(+0.55)	5	-6	1	3	-19	1.34	1	-5	0	4	11	-1
WIND Z(-0.55)	1	9	4	1	-18	3.68	0	-2	1	1	3	-1
DL EQUIPMENT	0	0	0	0	3	-0.34	0	1	0	0	0	0
LL EQUIPMENT	0	3	0	-1	6	0.12	0	1	0	-1	-2	0
SEISMIC DEAD X	-1	3	0	-1	5	0.18	0	0	0	-1	-4	0
SEISMIC (DEAD+LIVE)X	-2	6	0	-2	10	0.43	0	0	0	-2	-8	0
SEISMIC DEAD Z	0	-3	-1	0	4	-1.06	0	0	0	0	-1	0
SEISMIC (DEAD+LIVE)Z	0	-5	-2	0	7	-2.09	0	0	0	0	-3	0
CRANE LOAD CR4	0	0	0	0	1	-0.03	0	0	0	0	-1	0
CRANE LOAD CR5	0	-1	0	0	1	-0.26	0	0	0	0	0	0
CRANE LOAD CR6	0	0	0	0	1	-0.13	0	0	0	0	0	0

	3350/A-3360/1'			3350/A-3360/6			3350/D-3360/6		
Load Combinations	FX (T)	FY (T)	FZ (T)	FX (T)	FY (T)	FZ (T)	FX (T)	FY (T)	FZ (T)
DEAD LOAD (D)	0	5	0	0	13	-1.38	0	13	1
LIVE LOAD (L)	1	8	0	0	9	-1.71	0	9	2
ROOF LIVE LOAD (Lr)	0	0	0	0	2	0.01	0	1	0
CRANE LOAD CR1	0	0	0	0	1	0.07	0	-1	0
CRANE LOAD CR2	0	0	0	0	0	0.03	0	0	0
CRANE LOAD CR3	0	0	0	0	1	0.07	0	-1	0
WIND X(+0.55)	-3	-10	0	-1	-5	-2.20	-1	-3	-2
WIND X(-0.55)	-4	-11	0	0	2	0.01	0	0	0
WIND Z(+0.55)	2	5	-1	-2	-14	-1.14	-2	5	-1
WIND Z(-0.55)	0	4	-1	0	-15	2.28	0	12	2
DL EQUIPMENT	0	1	0	0	3	0.36	0	1	1
LL EQUIPMENT	-1	-2	0	0	1	-1.36	0	0	-1
SEISMIC DEAD X	-1	-4	0	0	0	-0.76	0	0	-1
SEISMIC (DEAD+LIVE)X	-3	-9	0	0	0	-1.72	-1	0	-2
SEISMIC DEAD Z	0	0	0	0	3	-0.70	0	-3	-1
SEISMIC (DEAD+LIVE)Z	0	1	0	0	5	-1.27	0	-5	-1
CRANE LOAD CR4	0	0	0	0	0	-0.11	0	0	0
CRANE LOAD CR5	0	0	0	0	0	-0.07	0	0	0
CRANE LOAD CR6	0	0	0	0	0	-0.07	0	0	0

Support Reactions for Strength Design Load Combinations

	3350/D-3360/1			3350/A-3360/1			3360/A-3360/1			3350/D-3360/1'		
Load Combinations	FX (T)	FY (T)	FZ (T)	FX (T)	FY (T)	FZ (T)	FX (T)	FY (T)	FZ (T)	FX (T)	FY (T)	FZ (T)
1.4D	0	21	0	0	33	-0.92	0	25	0	0	6	0
1.4D+1.7L+0.5Lr	-2	50	1	-2	84	-1.38	0	46	0	0	15	0
1.2D+1.6Lr+1.0L	-1	37	0	-1	61	-1.15	0	36	0	0	11	0
1.2D + 1.6Wx+1.0L+0.5Lr	-6	51	-1	-5	66	-2.66	0	28	-1	-4	-9	0
1.2D + 1.6Wx+1.0L+0.5Lr	-12	71	2	-9	75	-0.15	-1	36	0	-8	-22	0
1.2D + 1.6Wz+1.0L+0.5Lr	7	26	2	3	29	1.07	1	26	0	6	28	-2
1.2D + 1.6Wz+1.0L+0.5Lr	1	49	6	0	29	4.81	0	31	1	2	15	-2
1.2D+1.0Ex+1.0L	-3	41	1	-3	68	-0.61	0	34	0	-2	3	0
1.2D+1.0Ez+1.0L	-2	30	-2	-1	65	-3.13	0	34	0	0	8	0
0.9D+1.6Wx	-4	29	-1	-4	28	-2.18	0	10	-1	-4	-16	0
0.9D+1.6Wx	-10	50	1	-8	37	0.33	-1	18	0	-8	-29	0
0.9D+1.6Wz	8	4	2	4	-9	1.55	1	8	0	6	21	-2
0.9D+1.6Wz	2	27	6	1	-8	5.29	0	13	1	2	9	-2
0.9D+1.0Ex	-1	17	0	-1	26	-0.41	0	16	0	-1	0	0
0.9D+1.0Ez	0	11	-1	0	25	-1.65	0	16	0	0	3	0

	3350/A-3360/1'			3350/A-3360/6			3350/D-3360/6		
Load Combinations	FX (T)	FY (T)	FZ (T)	FX (T)	FY (T)	FZ (T)	FX (T)	FY (T)	FZ (T)
1.4D	1	8	0	0	19	3.26	0	23	-1
1.4D+1.7L+0.5Lr	1	17	0	0	30	4.10	0	45	-7
1.2D+1.6Lr+1.0L	1	12	0	0	24	3.36	0	35	-4
1.2D + 1.6Wx+1.0L+0.5Lr	-4	-4	0	-2	18	-0.38	-2	26	-8
1.2D + 1.6Wx+1.0L+0.5Lr	-5	-5	0	0	23	3.37	0	37	-4
1.2D + 1.6Wz+1.0L+0.5Lr	3	20	-2	-4	31	1.27	-3	11	-6
1.2D + 1.6Wz+1.0L+0.5Lr	1	19	-2	-1	42	6.89	-1	10	-1
1.2D+1.0Ex+1.0L	-2	3	0	-1	23	1.56	0	32	-6
1.2D+1.0Ez+1.0L	0	13	0	0	18	2.01	0	37	-6
0.9D+1.6Wx	-4	-11	0	-2	7	-1.58	-2	8	-4
0.9D+1.6Wx	-5	-12	0	1	12	2.16	0	18	-1
0.9D+1.6Wz	3	13	-2	-4	20	0.06	-2	-7	-3
0.9D+1.6Wz	1	12	-2	-1	31	5.68	0	-9	3
0.9D+1.0Ex	-1	1	0	-1	12	1.34	0	15	-2
0.9D+1.0Ez	0	5	0	0	9	1.41	0	18	-2

From the above Support Reactions it is evident that Support on Grid 3350/A-3360/1 being the most critical, its support reactions have been considered for Design of Foundation mkd. F3

Global Project ID	900707
Delivery Type	ENGINEERING PROCUREMENT CONSTRUCTION
Project Name	MANSOURAH MASSARAH GOLD PROJECT
Customer	MA'ADEN GOLD AND BASE METALS (MA'ADEN)
Project Country	KINGDOM OF SAUDI ARABIA

Ma'aden Revision No:	A01	A02	C01	D01
Date	10-03-2020	02-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 27.03.20 AND REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Outotec / L&T Revi	0	1	2	3
Date	10-03-2020	02-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 27.03.20 AND REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

DESIGN OF FOUNDATION MKD. F3 3350/A-3360/1


	Along-X	Along-Z
Size of column :	0.85m	0.85m
Size of fdn. raft :	2.75m	2.75m
Thickness of raft :	0.50 m	
Original ground level:	0.00 m	
Finished floor level :	0.00 m	
U/S level of foundation :	-2.50 m	
U/S level Base Plate :	0.55 m	
Unit weight of conc :	2.5 T/m^3	
Unit weight of soil :	1.8 T/m^3	


SYMBOLS AND NOTATIONS

Dead Load	D
live load	LL
Roof live load	Lr
Wind Load	W
Earthquake Load	E
Crane Load	CR

Calculation of Weight of Foundation :

Weight of raft & Col.=	(2.75*2.75*0.5*2.5)+(0.85*0.85*2.55*2.5) =	14.06T
Weight of soil =	((2.75*2.75)-(0.85*0.85))*2*1.8 =	24.62T
U/S Base Pl	Total =	38.68T

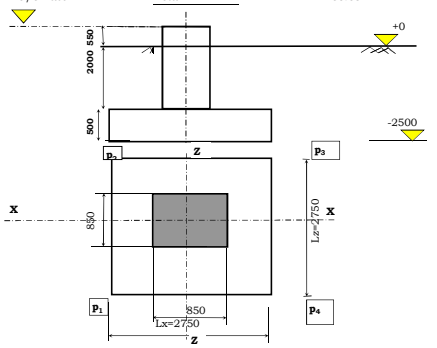



Design Input:

Characteristic strength of concrete, f '$_c$=	35 MPa
Yield stress of steel reinforcement, f$_y$=	420 MPa
Clear cover for main reinforcement bars =	75mm
Dia. of bars provd. along X direction at bottom =	20mm
Dia. of bars provd. along X direction at top =	12mm
Dia. of bars provided along Z direction at bottom=	20mm
Dia. of bars provided along Z direction at top=	12mm
Mininum percentage of reinforcement at bottom=	0.12%
Mininum percentage of reinforcement at top=	0.06%

Effective depth of slab along X direction = 415mm = 0.415m
Effective depth of slab along Z direction = 395mm = 0.395m
Clear projection along Z direction = 0.95m
Clear projection along X direction = 0.95m

WORKING STRESS DESIGN

	Load at U/S Of Base Plt					Load at bottom of foundation				
Load Case	FX (T)	FY(T)	FZ(T)	M_x	M_z	V (T)	Hx (T)	MX (T-m)	Hz (T)	MZ (T-m)
DL+LL	-1.08	49.77	-0.56	0.0	0.00	88.45	-1.08	1.71	-0.56	3.29
DL+LR	0.03	25.52	-0.73	0.0	0.00	64.20	0.03	2.23	-0.73	0.09
DL+0.75*LL+0.75*LR	-0.35	40.40	-0.73	0.0	0.00	79.08	-0.35	2.22	-0.73	1.08
DL+0.75*(LL+LR+W(+X))	-2.78	47.80	-1.38	0.0	0.00	86.48	-2.78	4.21	-1.38	8.49
DL+0.75*(LL+LR+W(-X))	-4.40	52.16	-0.20	0.0	0.00	90.84	-4.40	0.62	-0.20	13.43
DL+0.75*(LL+LR+W(+Z))	1.25	30.54	0.37	0.0	0.00	69.22	1.25	1.12	0.37	3.80
DL+0.75*(LL+LR+W(-Z))	-0.38	30.82	2.12	0.0	0.00	69.50	-0.38	6.47	2.12	1.17
0.6*D+WL (X)	-0.01	14.73	-0.53	0.0	0.00	53.41	-0.01	1.60	-0.53	0.04
0.6*D+WL (-X)	-4.78	24.20	0.18	0.0	0.00	62.88	-4.78	0.56	0.18	14.59
0.6*D+WL (Z)	2.75	-4.63	0.94	0.0	0.00	34.05	2.75	2.88	0.94	8.38
0.6*D+WL (-Z)	0.58	-4.26	3.28	0.0	0.00	34.42	0.58	10.02	3.28	1.76
DL+0.75*(LL+LR+0.75L(+X))	-2.20	50.41	-0.30	0.0	0.00	89.09	-2.20	0.91	-0.30	6.70
DL+0.75*(LL+LR+0.75L(+Z))	-1.05	49.14	-1.62	0.0	0.00	87.82	-1.05	4.94	-1.62	3.20
0.6*D +0.7 SD (X)	-1.09	19.03	-0.22	0.0	0.00	57.71	-1.09	0.66	-0.22	3.33
0.6*D +0.7 SD (Z)	-0.03	18.15	-1.46	0.0	0.00	56.83	-0.03	4.44	-1.46	0.10
DL+LL+LR+CR1	-1.08	51.96	-0.62	0.0	0.00	90.64	-1.08	1.89	-0.62	3.29
DL+LL+LR+CR2	-1.07	52.48	-0.59	0.0	0.00	91.16	-1.07	1.80	-0.59	3.26
DL+LL+LR+CR3	-1.08	52.24	-0.61	0.0	0.00	90.92	-1.08	1.86	-0.61	3.29
DL+LL+LR+CR4	-1.13	52.30	-0.66	0.0	0.00	90.98	-1.13	2.01	-0.66	3.45
DL+LL+LR+CR5	-1.09	52.17	-0.89	0.0	0.00	90.85	-1.09	2.71	-0.89	3.32
DL+LL+LR+CR6	-1.11	52.20	-0.76	0.0	0.00	90.88	-1.11	2.32	-0.76	3.39

Check for overturning and sliding:

	Load at Foundation Base					Sliding Coeffecient, μ = 0.4			
	V (T)	Hx (T)	Mz (Tm)	Hz (T)	Mx (Tm)	F.O.S. Mz	F.O.S. Mx	F.O.S. Hx	F.O.S. Hz
Load Case									
DL+LL	88.45	-1.08	3.29	-0.56	1.71	36.92	71.21	32.76	63.18
DL+LR	64.20	0.03	0.09	-0.73	2.23	964.75	39.65	856.00	35.18
DL+0.75*LL+0.75*LR	79.08	-0.35	1.08	-0.73	2.22	101.13	49.00	89.73	43.48
DL+0.75*(LL+LR+W(+X))	86.48	-2.78	8.49	-1.38	4.21	14.01	28.25	12.43	25.07
DL+0.75*(LL+LR+W(-X))	90.84	-4.40	13.43	-0.20	0.62	9.30	202.24	8.25	179.44
DL+0.75*(LL+LR+W(+Z))	69.22	1.25	3.80	0.37	1.12	25.06	84.91	22.24	75.34
DL+0.75*(LL+LR+W(-Z))	69.50	-0.38	1.17	2.12	6.47	81.91	14.76	72.68	13.10
0.6*D+WL (X)	53.41	-0.01	0.04	-0.53	1.60	2006.67	45.78	1780.47	40.62
0.6*D+WL (-X)	62.88	-4.78	14.59	0.18	0.56	5.93	154.07	5.26	136.70
0.6*D+WL (Z)	34.05	2.75	8.38	0.94	2.88	5.59	16.26	4.96	14.43
0.6*D+WL (-Z)	34.42	0.58	1.76	3.28	10.02	26.85	4.73	23.82	4.19
DL+0.75*(LL+LR+0.75L(+X))	89.09	-2.20	6.70	-0.30	0.91	18.27	135.35	16.21	120.09
DL+0.75*(LL+LR+0.75L(+Z))	87.82	-1.05	3.20	-1.62	4.94	37.77	24.44	33.51	21.69
0.6*D +0.7 SD (X)	57.71	-1.09	3.33	-0.22	0.66	23.83	120.46	21.14	106.88
0.6*D +0.7 SD (Z)	56.83	-0.03	0.10	-1.46	4.44	800.68	17.60	710.43	15.61
DL+LL+LR+CR1	90.64	-1.08	3.29	-0.62	1.89	37.84	65.91	33.57	58.48
DL+LL+LR+CR2	91.16	-1.07	3.26	-0.59	1.80	38.41	69.66	34.08	61.80
DL+LL+LR+CR3	90.92	-1.08	3.29	-0.61	1.86	37.95	67.19	33.67	59.62
DL+LL+LR+CR4	90.98	-1.13	3.45	-0.66	2.01	36.30	62.14	32.21	55.14
DL+LL+LR+CR5	90.85	-1.09	3.32	-0.89	2.71	37.58	46.02	33.34	40.83
DL+LL+LR+CR6	90.88	-1.11	3.39	-0.76	2.32	36.91	53.91	32.75	47.83

MA'ADEN معادن Saudi Arabian Mining Company	Outotec	LARSEN & TOUBRO	DESIGN DOCUMENT Ma'aden Docum MD-216-3350-EG-CV-CAL-1226 Outotec Documer 900707_ GAU01_SF01_CED01_33530_OU100666569 L&T Document N O19045_450_C_K_24097_001

Global Project ID	900707
Delivery Type	ENGINEERING PROCUREMENT CONSTRUCTION
Project Name	MANSOURAH MASSARAH GOLD PROJECT
Customer	MA'ADEN GOLD AND BASE METALS (MA'ADEN)
Project Country	KINGDOM OF SAUDI ARABIA

Ma'aden Revision No:	A01	A02	C01	D01
Date	10-03-2020	02-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 27.03.20 AND REVISED AS MARKUP A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Outotec / L&T Revi	0	1	2	3
Date	10-03-2020	02-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 27.03.20 AND REVISED AS MARKUP A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

ULTIMATE STRESS DESIGN

Load Case		Load at U/S Of Base Plt					Load at bottom of foundation		
		FX (T)	FY(T)	FZ(T)	M_x	M_z	V (T)	Mx (T-m)	Mz (T-m)
1.4D		0.04	33.10	-0.92	0.0	0.00	71.776	2.82	0.13
1.4D+1.7L+0.5Lr		-1.98	84.32	-1.38	0.0	0.00	123.002	4.22	6.04
1.2D+1.6Lr+1.0L		-1.15	60.96	-1.15	0.0	0.00	99.636	3.52	3.52
1.2D + 1.6Wx+1.0L+0.5Lr		-5.38	65.61	-2.66	0.0	0.00	104.288	8.12	16.40
1.2D + 1.6Wx+1.0L+0.5Lr		-8.83	74.92	-0.15	0.0	0.00	113.600	0.45	26.94
1.2D + 1.6Wz+1.0L+0.5Lr		3.21	28.79	1.07	0.0	0.00	67.472	3.25	9.80
1.2D + 1.6Wz+1.0L+0.5Lr		-0.26	29.38	4.81	0.0	0.00	68.064	14.67	0.79
1.2D+1.0Ex+1.0L		-3.47	67.59	-0.61	0.0	0.00	106.268	1.87	10.60
1.2D+1.0Ez+1.0L		-1.28	65.16	-3.13	0.0	0.00	103.838	9.55	3.92
0.9D+1.6Wx		-4.20	28.00	-2.18	0.0	0.00	66.676	6.64	12.80
0.9D+1.6Wx		-7.65	37.31	0.33	0.0	0.00	75.988	1.02	23.34
0.9D+1.6Wz		4.40	-8.82	1.55	0.0	0.00	29.860	4.73	13.40
0.9D+1.6Wz		0.92	-8.23	5.29	0.0	0.00	30.452	16.15	2.82
0.9D+1.0Ex		-1.08	26.13	-0.41	0.0	0.00	64.806	1.26	3.30
0.9D+1.0Ez		-0.02	25.25	-1.65	0.0	0.00	63.926	5.04	0.07

Check for Bearing Pressure

Load Combination & Calculation of Base pressure


Max. Base pressure = $p_{max} = (V/(Lx.Lz)) + (6.My/((Lx)^2.Lz) + (6.Mx/(Lx.(Lz)^2)$

Min. Base pressure = $p_{min} = (V/(Lx.Lz)) - (6.My/((Lx)^2.Lz) - (6.Mx/(Lx.(Lz)^2)$

Appox. Surcharge load = 2 T/m^2

Net SBC of soil for DL, LL= 45 T/m^2 For WL/SL case = 56.25 T/m^2

Gross SBC of soil for DL, LL= 50.49 T/m^2 For WL/SL case = 61.74 T/m^2



Load Case	Design Load/moments			Base Pressure (T/m^2)								
	V (T)	Mz (T-m)	Mx (T-m)	V/ (Lx.Lz)	6.Mz/ $(Lx)^2.Lz$	6.Mx/ $Lx.(Lz)^2$	p_1 (p_{max})	p_2	p_4	p_3 (p_{min})	(p_{max}-γh)	Remarks
DL+LL	88.45	3.29	1.71	11.70	0.95	0.49	15.14	14.15	13.24	12.25	11.54	O.K
DL+LR	64.20	0.09	2.23	8.49	0.03	0.64	11.16	9.87	11.11	9.82	7.56	O.K
DL+0.75*LL+0.75*LR	79.08	1.08	2.22	10.46	0.31	0.64	13.41	12.13	12.79	11.51	9.81	O.K
DL+0.75*(LL+LR+W(+X))	86.48	8.49	4.21	11.44	2.45	1.21	17.10	14.67	12.20	9.77	13.50	O.K
DL+0.75*(LL+LR+W(-X))	90.84	13.43	0.62	12.01	3.87	0.18	18.06	17.71	10.32	9.96	14.46	O.K
DL+0.75*(LL+LR+W(+Z))	69.22	3.80	1.12	9.15	1.10	0.32	12.57	11.93	10.38	9.73	8.97	O.K
DL+0.75*(LL+LR+W(-Z))	69.50	1.17	6.47	9.19	0.34	1.87	13.39	9.66	12.72	8.99	9.79	O.K
0.6*D+WL (X)	53.41	0.04	1.60	7.06	0.01	0.46	9.54	8.61	9.52	8.59	5.94	O.K
0.6*D+WL (-X)	62.88	14.59	0.56	8.32	4.21	0.16	14.69	14.36	6.27	5.95	11.09	O.K
0.6*D+WL (Z)	34.05	8.38	2.88	4.50	2.42	0.83	9.75	8.09	4.92	3.25	6.15	O.K
0.6*D+WL (-Z)	34.42	1.76	10.02	4.55	0.51	2.89	9.95	4.17	8.93	3.15	6.35	O.K
DL+0.75*(LL+LR+0.7SL(+X))	89.09	6.70	0.91	11.78	1.93	0.26	15.98	15.45	12.11	11.59	12.38	O.K
DL+0.75*(LL+LR+0.7SL(+Z))	87.82	3.20	4.94	11.61	0.92	1.43	15.96	13.11	14.11	11.26	12.36	O.K
0.6*D +0.7 SD (X)	57.71	3.33	0.66	7.63	0.96	0.19	10.78	10.40	8.86	8.48	7.18	O.K
0.6*D +0.7 SD (Z)	56.83	0.10	4.44	7.52	0.03	1.28	10.82	8.26	10.77	8.21	7.22	O.K
DL+LL+LR+CR1	90.64	3.29	1.89	11.99	0.95	0.55	15.48	14.39	13.58	12.49	11.88	O.K
DL+LL+LR+CR2	91.16	3.26	1.80	12.05	0.94	0.52	15.51	14.48	13.63	12.59	11.91	O.K
DL+LL+LR+CR3	90.92	3.29	1.86	12.02	0.95	0.54	15.51	14.44	13.61	12.54	11.91	O.K
DL+LL+LR+CR4	90.98	3.45	2.01	12.03	0.99	0.58	15.61	14.44	13.62	12.46	12.01	O.K
DL+LL+LR+CR5	90.85	3.32	2.71	12.01	0.96	0.78	15.76	14.19	13.84	12.27	12.16	O.K
DL+LL+LR+CR6	90.88	3.39	2.32	12.02	0.98	0.67	15.66	14.33	13.71	12.37	12.06	O.K

Calculation of Design Pressure

Load Combination & Calculation of Base pressure


Max. Base pressure = $p_{max} = (V/(Lx.Lz)) + (6.My/((Lx)^2.Lz) + (6.Mx/(Lx.(Lz)^2)$

Min. Base pressure = $p_{min} = (V/(Lx.Lz)) - (6.My/((Lx)^2.Lz) - (6.Mx/(Lx.(Lz)^2)$

Surcharge load = 2 T/m^2

Net SBC of soil for DL, LL= 45 T/m^2 For WL/SL case = 56.25 T/m^2

Gross SBC of soil for DL, LL= 50.49 T/m^2 For WL/SL case = 61.74 T/m^2



Load Case	Design Load/moments			Base Pressure (T/m^2)							
	V (T)	Mz (T-m)	Mx (T-m)	V/ (Lx.Lz)	6.Mz/ $(Lx)^2.Lz$	6.Mx/ $Lx.(Lz)^2$	p_1 (p_{max})	p_2	p_4	p_3 (p_{min})	(p_{max}-γh)
1.4D	71.8	0.13	2.82	9.49	0.04	0.81	12.34	10.71	12.27	10.64	8.74
1.4D+1.7L+0.5Lr	123.0	6.04	4.22	16.26	1.74	1.22	21.23	18.79	17.74	15.30	17.63
1.2D+1.6Lr+1.0L	99.6	3.52	3.52	13.18	1.02	1.02	17.21	15.18	15.18	13.14	13.61
1.2D + 1.6Wx+1.0L+0.5Lr	104.3	16.40	8.12	13.79	4.73	2.34	22.86	18.18	13.40	8.72	19.26
1.2D + 1.6Wx+1.0L+0.5Lr	113.6	26.94	0.45	15.02	7.77	0.13	24.93	24.66	9.38	9.12	21.33
1.2D + 1.6Wz+1.0L+0.5Lr	67.5	9.80	3.25	8.92	2.83	0.94	14.69	12.81	9.03	7.15	11.09
1.2D + 1.6Wz+1.0L+0.5Lr	68.1	0.79	14.67	9.00	0.23	4.23	15.46	6.99	15.01	6.54	11.86
1.2D+1.0Ex+1.0L	106.3	10.60	1.87	14.05	3.06	0.54	19.65	18.57	13.53	12.46	16.05
1.2D+1.0Ez+1.0L	103.8	3.92	9.55	13.73	1.13	2.76	19.62	14.10	17.36	11.84	16.02
0.9D+1.6Wx	66.7	12.80	6.64	8.82	3.69	1.92	16.43	12.59	9.04	5.21	12.83
0.9D+1.6Wx	76.0	23.34	1.02	10.05	6.73	0.29	19.08	18.49	5.61	5.02	15.48
0.9D+1.6Wz	29.9	13.40	4.73	3.95	3.87	1.36	11.18	8.45	3.45	0.72	7.58
0.9D+1.6Wz	30.5	2.82	16.15	4.03	0.81	4.66	11.50	2.18	9.87	0.56	7.90
0.9D+1.0Ex	64.8	3.30	1.26	8.57	0.95	0.36	11.89	11.16	9.98	9.25	8.29
0.9D+1.0Ez	63.9	0.07	5.04	8.45	0.02	1.46	11.93	9.02	11.89	8.98	8.33

Global Project ID	900707
Delivery Type	ENGINEERING PROCUREMENT CONSTRUCTION
Project Name	MANSOURAH MASSARAH GOLD PROJECT
Customer	MA'ADEN GOLD AND BASE METALS (MA'ADEN)
Project Country	KINGDOM OF SAUDI ARABIA

Ma'aden Revision No:	A01	A02	C01	D01
Date	10-03-2020	02-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 27.03.20 AND REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Outotec / L&T Revi	0	1	2	3
Date	10-03-2020	02-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 27.03.20 AND REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Calculation of Bending Moment and Shear Force in X direction :

p_{1x} =pressure at the face of column at section 1x-1x in kN/m^2.

p_{2x} =pressure at the face of column at section 2x-2x in kN/m^2.

p_{3x} =pressure at a distance 'd' from the face of column at section 3x-3x in kN/m^2.

BM_{1x} =Moment at the face of column at section 1x-1x in kN-m/m.

BM_{2x} =Moment at the face of column 2x-2x in kN-m/m.

SF_{3x} = Oneway shear force at a distance 'd' from the face of column at section 3x-3x in kN/m.


SF (punching) = Punching Shear Force at a distance 0.5d from the face of column in kN/m.

Punching perimeter= ((0.85+2*0.5*0.495)+(0.85+2*0.5*0.495))*2

= 4.98 m

Punching Area= ((0.85+2*0.5*0.395)*(0.85+2*0.5*0.395))

= 1.55 m^2 Punching shear stress to be checked



Downward pressure due to self weight of raft and soil = (0.5*2.5+2*1.8)

= 4.85 kN/m^2

Area of footing, A_f= 7.56 m^2

Check against Two-way shear force at a distance d/2 from face of column:

Design punching shear at a distance d/2 from face of column, Vu= 65.20 T

Strength of Concrete in shear Vc1 = 420.70 T **Table 22.6.5.2_ (a)**

Strength of Concrete in shear Vc2 = 501.64 T **Table 22.6.5.2_ (b)**

Strength of Concrete in shear Vc3 = 387.92 kN **Table 22.6.5.2_ (c)**

Design Vc= 387.92 kN

Allowable shear stress, (ϕ Vc)/bd = 1.48 N/mm^2

Design punching shear stress, τ = (65.2*10000)/(4980*0.395)

= 0.33 N/mm^2 **No shear reinforcement reqd.**

Load Case	p_{1x}	B.M$_{1x}$	S.F$_{3x}$	B.M$_{1z}$	S.F$_{3z}$	S.F$_{(punching)}$	V_u/b_od	Punching check (Remarks)	Allowable shear ($0.75*\sqrt{(fc)}/6$ (N/mm^2))	Actual Shear	Remarks	Mu/bd2
Ultimate Conditions												
1.4D	8.74	3.94	4.68	3.94	4.85	26.71	0.14	OK	0.74	0.123	OK	0.25
1.4D+1.7L+0.5Lr	17.63	7.96	9.43	7.96	9.78	53.89	0.27	OK	0.74	0.248	OK	0.51
1.2D+1.6Lr+1.0L	13.61	6.14	7.28	6.14	7.55	41.60	0.21	OK	0.74	0.191	OK	0.39
1.2D + 1.6Wx+1.0L+0.5Lr	19.26	8.69	10.30	8.69	10.69	58.87	0.3	OK	0.74	0.271	OK	0.56
1.2D + 1.6Wx+1.0L+0.5Lr	21.33	9.63	11.41	9.63	11.84	65.20	0.33	OK	0.74	0.3	OK	0.62
1.2D + 1.6Wz+1.0L+0.5Lr	11.09	5.00	5.93	5.00	6.15	33.90	0.17	OK	0.74	0.156	OK	0.32
1.2D + 1.6Wz+1.0L+0.5Lr	11.86	5.35	6.35	5.35	6.58	36.25	0.18	OK	0.74	0.167	OK	0.34
1.2D+1.0Ex+1.0L	16.05	7.24	8.59	7.24	8.91	49.06	0.25	OK	0.74	0.226	OK	0.46
1.2D+1.0Ez+1.0L	16.02	7.23	8.57	7.23	8.89	48.97	0.25	OK	0.74	0.225	OK	0.46
0.9D+1.6Wx	12.83	5.79	6.86	5.79	7.12	39.22	0.2	OK	0.74	0.18	OK	0.37
0.9D+1.6Wx	15.48	6.99	8.28	6.99	8.59	47.32	0.24	OK	0.74	0.218	OK	0.45
0.9D+1.6Wz	7.58	3.42	4.06	3.42	4.21	23.17	0.12	OK	0.74	0.107	OK	0.22
0.9D+1.6Wz	7.90	3.56	4.23	3.56	4.38	24.15	0.12	OK	0.74	0.111	OK	0.23
0.9D+1.0Ex	8.29	3.74	4.44	3.74	4.60	25.34	0.13	OK	0.74	0.116	OK	0.24
0.9D+1.0Ez	8.33	3.76	4.46	3.76	4.62	25.46	0.13	OK	0.74	0.117	OK	0.24

Load Case	kn (ϕ=0.75)	p =	A_{st}
Ultimate Conditions			
1.4D	0.34	0.001	395
1.4D+1.7L+0.5Lr	0.68	0.002	790
1.2D+1.6Lr+1.0L	0.52	0.001	395
1.2D + 1.6Wx+1.0L+0.5Lr	0.74	0.002	790
1.2D + 1.6Wx+1.0L+0.5Lr	0.82	0.002	790
1.2D + 1.6Wz+1.0L+0.5Lr	0.43	0.001	395
1.2D + 1.6Wz+1.0L+0.5Lr	0.46	0.001	395
1.2D+1.0Ex+1.0L	0.62	0.001	395
1.2D+1.0Ez+1.0L	0.62	0.001	395
0.9D+1.6Wx	0.49	0.001	395
0.9D+1.6Wx	0.6	0.001	395
0.9D+1.6Wz	0.29	0.001	395
0.9D+1.6Wz	0.3	0.001	395
0.9D+1.0Ex	0.32	0.001	395
0.9D+1.0Ez	0.32	0.001	395

Location	Mux	ϕ Kn =	Kn	ρ=	Ast	Minm. Ast	Bar Dia	Spacing	Maxm	Spacing
At bottom	9.63	0.62	0.82	0.002	790.00	747.00	16ϕT	254.51	300	200
At top	0.00	0.00	0.00	0.0018	711.00	711.00	16ϕT	282.79	300	200

SUMMARY OF REINFORCEMENT IN RAFT:

Along X Direction :

At Bottom **16ϕT** **200** c/c At Top **16ϕT** **200** c/c

Along Z Direction :

At Bottom **16ϕT** **200** c/c At Top **16ϕT** **200** c/c

Global Project ID	900707
Delivery Type	ENGINEERING PROCUREMENT CONSTRUCTION
Project Name	MANSOURAH MASSARAH GOLD PROJECT
Customer	MA'ADEN GOLD AND BASE METALS (MA'ADEN)
Project Country	KINGDOM OF SAUDI ARABIA

Ma'aden Revision No:	A01	A02	C01	D01
Date	10-03-2020	02-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 27.03.20 AND REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI


Outotec / L&T Revi	0	1	2	3
Date	10-03-2020	02-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 27.03.20 AND REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

DESIGN OF COLUMN MKD **C1** **(Middle Column)**

Input:

Clear cover to reinf.=	75mm
Dia. of main reinf.=	25mm
Dia. of link=	10mm
Effective cover =	97.5mm
Grade of Concrete (f_c') =	M35
Grade of Steel (f_y) =	Fy420
Grade of Reinf(links).=	Fy420
Min. Steel Ratio	0.50%
Max. Steel Ratio	4.00%
Pedestal Height	2650

Table 20.6.1.3.1



For Compression-controlled sections
Strength reduction factor ϕ= 0.65 Table 21.2.2

Unsupported length of column about X (l_{ux}) =	2550mm
Unsupported length of column about Z (l_{uz}) =	2550mm

For Columns not braced against sidesway,

Where, Effective length factor K= 2

Slenderness ratio,	$K\,l_{ux} / r_x$ =	20.79	< 22 SECTION 6.2.5a	Radius of gyration r_x=	245 mm
	$K\,l_{uz} / r_z$ =	20.79	< 22 SECTION 6.2.5a	Radius of gyration r_z=	245 mm

γ_y =	0.79
γ_z =	0.79

Load Case	Load Combination	Factored Load/Moment (T)			Nominal Load/Moment			Kn = Pn/f'cbD (N/mm²)
		Hx	V	Hz	Mz (Tm)	V (T)	Mx (Tm)	
100	1.4D	0.04	33.1	-0.92	0.2	50.9	3.8	0.02
101	1.4D+1.7L+0.5Lr	-2.0	84.3	-1.38	8.1	129.7	5.6	0.05
102	1.2D+1.6Lr+1.0L	-1.2	61.0	-1.15	4.7	93.8	4.7	0.04
103	1.2D + 1.6Wx+1.0L+0.5Lr	-5.4	65.6	-2.66	21.9	100.9	10.8	0.04
104	1.2D + 1.6Wx+1.0L+0.5Lr	-8.8	74.9	-0.15	36.0	115.3	0.6	0.05
105	1.2D + 1.6Wz+1.0L+0.5Lr	3.2	28.8	1.07	13.1	44.3	4.4	0.02
106	1.2D + 1.6Wz+1.0L+0.5Lr	-0.3	29.4	4.81	1.1	45.2	19.6	0.02
107	1.2D+1.0Ex+1.0L	-3.5	67.6	-0.61	14.2	104.0	2.5	0.04
108	1.2D+1.0Ez+1.0L	-1.3	65.2	-3.13	5.2	100.2	12.8	0.04
109	0.9D+1.6Wx	-4.2	28.0	-2.18	17.1	43.1	8.9	0.02
110	0.9D+1.6Wx	-7.7	37.3	0.33	31.2	57.4	1.4	0.02
111	0.9D+1.6Wz	4.4	-8.8	1.55	17.9	-13.6	6.3	-0.01
112	0.9D+1.6Wz	0.9	-8.2	5.29	3.8	-12.7	21.6	-0.01
113	0.9D+1.0Ex	-1.1	26.1	-0.41	4.4	40.2	1.7	0.02
114	0.9D+1.0Ez	0.0	25.2	-1.65	0.1	38.8	6.7	0.02

Reinforcement: Provide,

4-Nos	25 mm Dia	1964.29 Sq mm	(At Corner)
4-Nos	25 mm Dia	1964.29 Sq mm	(At middle)
8-Nos	25 mm Dia	3928.57 Sq mm	(All round)

A_{sc} pvd. = 7857.14 Sq mm

Total A_{sc} = 1.1 %

β = P_n / P_0 (range is 0.55 to 0.70) Where, $P_0 = 0.85\, f'_c\,(A_g - A_{sc}) + f_y\,A_{sc}$ = 2456.0625 T SECTION 22.4.2.2

Load Case	From Chart of SP17(M)-R35-420.8		M_{nox}	M_{noz}	β	$\alpha_n = \log(0.5)/\log(\beta)$	Interaction ratio	Remarks
	$R_{nx}=M_{nox}/f'_cb^2D$	$R_{nz}=M_{noz}/f'_cbD^2$						
100	0.07	0.07	150.5	150.46	0.55	1.16	0.01	O.K
101	0.09	0.09	193.4	193.45	0.55	1.16	0.04	O.K
102	0.09	0.09	193.4	193.45	0.55	1.16	0.03	O.K
103	0.09	0.09	193.4	193.45	0.55	1.16	0.12	O.K
104	0.09	0.09	193.4	193.45	0.55	1.16	0.14	O.K
105	0.09	0.09	193.4	193.45	0.55	1.16	0.06	O.K
106	0.09	0.09	193.4	193.45	0.55	1.16	0.07	O.K
107	0.09	0.09	193.4	193.45	0.55	1.16	0.05	O.K
108	0.09	0.09	193.4	193.45	0.55	1.16	0.06	O.K
109	0.06	0.06	129.0	128.97	0.55	1.16	0.14	O.K
110	0.06	0.06	129.0	128.97	0.55	1.16	0.20	O.K
111	0.06	0.06	129.0	128.97	0.55	1.16	0.13	O.K
112	0.06	0.06	129.0	128.97	0.55	1.16	0.14	O.K
113	0.06	0.06	129.0	128.97	0.55	1.16	0.03	O.K
114	0.06	0.06	129.0	128.97	0.55	1.16	0.03	O.K

Links, 10mm dia @ 300 C/C

Global Project ID	900707
Delivery Type	ENGINEERING PROCUREMENT CONSTRUCTION
Project Name	MANSOURAH MASSARAH GOLD PROJECT
Customer	MA'ADEN GOLD AND BASE METALS (MA'ADEN)
Project Country	KINGDOM OF SAUDI ARABIA

Ma'aden Revision No:	A01	A02	C01	D01
Date	10-03-2020	02-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 27.03.20 AND REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Outotec / L&T Revi	0	1	2	3
Date	10-03-2020	02-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 27.03.20 AND REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

3.4 Design of Foundation mkd. F5

Reactions for Support mkd. 3360/A, 3360/A' on grid 3350/5 & 3360/6 from Staad File

	3360/A-3360/6			3360/A'-3360/6			3360/A'-3350/5		
Load Combinations	FX (T)	FY (T)	FZ (T)	FX (T)	FY (T)	FZ (T)	FX (T)	FY (T)	FZ (T)
DEAD LOAD	0	12	0	0	4	0.00	0	5	0
LIVE LOAD	0	8	0	0	7	0.00	0	10	0
ROOF LIVE LOAD	0	1	0	0	0	0.00	0	0	0
CRANE LOAD CR1	0	0	0	0	0	0.00	0	0	0
CRANE LOAD CR2	0	0	0	0	0	0.00	0	0	0
CRANE LOAD CR3	0	0	0	0	0	0.00	0	0	0
WIND X(+0.55)	0	-4	-1	-1	2	-0.01	-1	-2	0
WIND X(-0.55)	0	1	0	-1	2	0.00	-1	-2	0
WIND Z(+0.55)	0	-5	0	0	0	-0.02	0	0	0
WIND Z(-0.55)	0	-2	1	0	0	-0.01	0	0	0
DL EQUIPMENT	0	0	0	0	0	0.00	0	0	0
LL EQUIPMENT	0	0	0	0	0	0.00	0	0	0
SEISMIC DEAD X	0	0	0	0	0	0.00	0	0	0
SEISMIC (DEAD+LIVE)X	0	0	0	-1	1	0.00	0	-1	0
SEISMIC DEAD Z	0	0	0	0	0	0.00	0	0	0
SEISMIC (DEAD+LIVE)Z	0	0	0	0	0	0.00	0	0	0
CRANE LOAD CR4	0	2	0	0	0	0.00	0	0	0
CRANE LOAD CR5	0	0	0	0	0	0.00	0	0	0
CRANE LOAD CR6	0	0	0	0	0	0.00	0	0	0

Support Reactions for Strength Design Load Combinations

	3360/A-3360/6			3360/A'-3360/6			3360/A'-3350/5		
Load Combinations	FX (T)	FY (T)	FZ (T)	FX (T)	FY (T)	FZ (T)	FX (T)	FY (T)	FZ (T)
1.4D	0	18	0	0	5	0.00	0	7	0
1.4D+1.7L+0.5Lr	0	37	0	0	17	0.00	0	24	0
1.2D+1.6Lr+1.0L	0	28	0	0	12	0.00	0	16	0
1.2D + 1.6Wx+1.0L+0.5Lr	0	21	-1	-1	15	-0.02	-1	12	0
1.2D + 1.6Wx+1.0L+0.5Lr	0	28	0	-1	15	0.00	-1	12	0
1.2D + 1.6Wz+1.0L+0.5Lr	-1	18	0	0	12	-0.03	0	16	0
1.2D + 1.6Wz+1.0L+0.5Lr	0	23	1	0	12	-0.02	0	16	0
1.2D+1.0Ex+1.0L	0	26	0	0	13	0.00	0	14	0
1.2D+1.0Ez+1.0L	0	26	0	0	12	0.00	0	16	0
0.9D+1.6Wx	0	5	-1	-1	7	-0.02	-1	1	0
0.9D+1.6Wx	0	13	0	-1	7	0.00	-1	1	0
0.9D+1.6Wz	-1	3	0	0	3	-0.03	0	4	0
0.9D+1.6Wz	0	8	1	0	3	-0.02	0	4	0
0.9D+1.0Ex	0	11	0	0	4	0.00	0	4	0
0.9D+1.0Ez	0	11	0	0	3	0.00	0	4	0

From the above Support Reactions it is evident that Support on Grid 3360/A-3360/6 being the most critical, its support reactions have been considered for Design of Foundation mkd. F5

Global Project ID	900707
Delivery Type	ENGINEERING PROCUREMENT CONSTRUCTION
Project Name	MANSOURAH MASSARAH GOLD PROJECT
Customer	MA'ADEN GOLD AND BASE METALS (MA'ADEN)
Project Country	KINGDOM OF SAUDI ARABIA

Ma'aden Revision No:	A01	A02	C01	D01
Date	10-03-2020	02-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 27.03.20 AND REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Outotec / L&T Revi	0	1	2	3
Date	10-03-2020	02-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 27.03.20 AND REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

DESIGN OF FOUNDATION MKD. F5 3360/A-3360/6

	Along-X	Along-Z
Size of column :	0.85m	0.85m
Size of fdn. raft :	2.25m	2.25m
Thickness of raft :	0.40 m	
Original ground level:	0.00 m	
Finished floor level :	0.00 m	
U/S level of foundation :	-2.50 m	
U/S level Base Plate :	0.55 m	
Unit weight of conc :	2.5 T/m^3	
Unit weight of soil :	1.8 T/m^3	

SYMBOLS AND NOTATIONS


Dead Load	D
live load	LL
Roof live load	Lr
Wind Load	W
Earthquake Load	E
Crane Load	CR


Calculation of Weight of Foundation :

Weight of raft & Col.= (2.25*2.25*0.4*2.5)+(0.85*0.85*2.65*2.5) = 9.85T

Weight of soil = ((2.25*2.25)-(0.85*0.85))*2.1*1.8 = 16.41T

U/S Base Pl Total = 26.25T

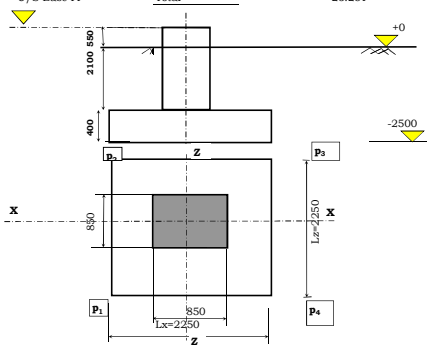



Design Input:

Characteristic strength of concrete, f'$_c$=	35 MPa
Yield stress of steel reinforcement, f$_y$=	420 MPa
Clear cover for main reinforcement bars =	75mm
Dia. of bars provd. along X direction at bottom =	20mm
Dia. of bars provd. along X direction at top =	12mm
Dia. of bars provided along Z direction at bottom=	20mm
Dia. of bars provided along Z direction at top=	12mm
Mininum percentage of reinforcement at bottom=	0.12%
Mininum percentage of reinforcement at top=	0.06%

Effective depth of slab along X direction = 315mm = 0.315m

Effective depth of slab along Z direction = 295mm = 0.295m

Clear projection along Z direction = 0.7m

Clear projection along X direction = 0.7m

WORKING STRESS DESIGN

	Load at U/S Of Base Pit					Load at bottom of foundation				
Load Case	FX (T)	FY(T)	FZ(T)	M_x	M_z	V (T)	Hx (T)	MX (T-m)	Hz (T)	MZ (T-m)
DL+LL	0.03	20.81	0.00	0.0	0.00	47.06	0.03	0.00	0.00	0.09
DL+LR	0.01	13.76	0.09	0.0	0.00	40.01	0.01	0.27	0.09	0.03
DL+0.75*LL+0.75*LR	0.01	19.72	0.09	0.0	0.00	45.97	0.01	0.27	0.09	0.03
DL+0.75*(LL+LR+W(+X))	-0.21	16.86	-0.60	0.0	0.00	43.11	-0.21	1.83	-0.60	0.63
DL+0.75*(LL+LR+W(-X))	0.08	20.45	-0.06	0.0	0.00	46.70	0.08	0.18	-0.06	0.24
DL+0.75*(LL+LR+W(+Z))	-0.29	15.70	0.11	0.0	0.00	41.95	-0.29	0.34	0.11	0.88
DL+0.75*(LL+LR+W(-Z))	-0.01	18.03	0.62	0.0	0.00	44.28	-0.01	1.90	0.62	0.04
0.6*D+WL (X)	0.01	7.48	0.04	0.0	0.00	33.73	0.01	0.13	0.04	0.02
0.6*D+WL (-X)	0.08	8.55	-0.06	0.0	0.00	34.80	0.08	0.17	-0.06	0.23
0.6*D+WL (Z)	-0.41	2.22	0.17	0.0	0.00	28.47	-0.41	0.53	0.17	1.26
0.6*D+WL (-Z)	-0.04	5.32	0.85	0.0	0.00	31.57	-0.04	2.60	0.85	0.13
DL+0.75*(LL+LR+0.75L(+X))	0.02	19.46	-0.07	0.0	0.00	45.71	0.02	0.20	-0.07	0.07
DL+0.75*(LL+LR+0.75L(+Z))	0.03	19.74	-0.07	0.0	0.00	45.99	0.03	0.20	-0.07	0.08
0.6*D +0.7 SD (X)	0.00	7.38	0.01	0.0	0.00	33.63	0.00	0.04	0.01	0.01
0.6*D +0.7 SD (Z)	0.01	7.69	0.02	0.0	0.00	33.94	0.01	0.07	0.02	0.02
DL+LL+LR+CR1	0.03	22.22	0.00	0.0	0.00	48.47	0.03	0.00	0.00	0.09
DL+LL+LR+CR2	0.03	22.12	0.00	0.0	0.00	48.37	0.03	0.00	0.00	0.09
DL+LL+LR+CR3	0.03	22.17	0.00	0.0	0.00	48.42	0.03	0.00	0.00	0.09
DL+LL+LR+CR4	0.03	24.32	-0.01	0.0	0.00	50.57	0.03	0.03	-0.01	0.09
DL+LL+LR+CR5	0.03	22.06	0.00	0.0	0.00	48.31	0.03	0.00	0.00	0.09
DL+LL+LR+CR6	0.03	22.02	-0.01	0.0	0.00	48.27	0.03	0.03	-0.01	0.09

Check for overturning and sliding:

	Load at Foundation Base					Sliding Coeffecient, μ = 0.4			
	V (T)	Hx (T)	Mz (Tm)	Hz (T)	Mx (Tm)	F.O.S. Mz	F.O.S. Mx	F.O.S. Hx	F.O.S. Hz
Load Case									
DL+LL	47.06	0.03	0.09	0.00	0.00	578.61	-	627.47	-
DL+LR	40.01	0.01	0.03	0.09	0.27	1475.78	163.98	1600.40	177.82
DL+0.75*LL+0.75*LR	45.97	0.01	0.03	0.09	0.27	1695.61	188.40	1838.80	204.31
DL+0.75*(LL+LR+W(+X))	43.11	-0.21	0.63	-0.60	1.83	76.64	26.50	83.11	28.74
DL+0.75*(LL+LR+W(-X))	46.70	0.08	0.24	-0.06	0.18	222.25	287.07	241.02	311.32
DL+0.75*(LL+LR+W(+Z))	41.95	-0.29	0.88	0.11	0.34	53.36	137.54	57.86	149.16
DL+0.75*(LL+LR+W(-Z))	44.28	-0.01	0.04	0.62	1.90	1306.48	26.23	1416.80	28.45
0.6*D+WL (X)	33.73	0.01	0.02	0.04	0.13	2073.69	282.78	2248.80	306.65
0.6*D+WL (-X)	34.80	0.08	0.23	-0.06	0.17	168.91	229.23	183.17	248.59
0.6*D+WL (Z)	28.47	-0.41	1.26	0.17	0.53	25.37	60.36	27.51	65.45
0.6*D+WL (-Z)	31.57	-0.04	0.13	0.85	2.60	264.67	13.64	287.02	14.79
DL+0.75*(LL+LR+0.75L(+X))	45.71	0.02	0.07	-0.07	0.20	757.77	251.65	821.76	272.90
DL+0.75*(LL+LR+0.75L(+Z))	45.99	0.03	0.08	-0.07	0.20	616.84	253.18	668.93	274.56
0.6*D +0.7 SD (X)	33.63	0.00	0.01	0.01	0.04	3101.31	-	3363.20	-
0.6*D +0.7 SD (Z)	33.94	0.01	0.02	0.02	0.07	2086.60	-	2262.80	-
DL+LL+LR+CR1	48.47	0.03	0.09	0.00	0.00	595.94	-	646.27	-
DL+LL+LR+CR2	48.37	0.03	0.09	0.00	0.00	594.71	-	644.93	-
DL+LL+LR+CR3	48.42	0.03	0.09	0.00	0.00	595.33	-	645.60	-
DL+LL+LR+CR4	50.57	0.03	0.09	-0.01	0.03	621.76	-	674.27	-
DL+LL+LR+CR5	48.31	0.03	0.09	0.00	0.00	593.98	-	644.13	-
DL+LL+LR+CR6	48.27	0.03	0.09	-0.01	0.03	593.48	-	643.60	-

Global Project ID	900707
Delivery Type	ENGINEERING PROCUREMENT CONSTRUCTION
Project Name	MANSOURAH MASSARAH GOLD PROJECT
Customer	MA'ADEN GOLD AND BASE METALS (MA'ADEN)
Project Country	KINGDOM OF SAUDI ARABIA

Ma'aden Revision No:	A01	A02	C01	D01
Date	10-03-2020	02-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 27.03.20 AND REVISED AS MARKUP A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Outotec / L&T Revi	0	1	2	3
Date	10-03-2020	02-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 27.03.20 AND REVISED AS MARKUP A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

ULTIMATE STRESS DESIGN

Load Case		Load at U/S Of Base Pit					Load at bottom of foundation		
		FX (T)	FY(T)	FZ(T)	M_x	M_z	V (T)	Mx (T-m)	Mz (T-m)
1.4D		0.01	17.53	0.13	0.0	0.00	43.778	0.38	0.04
1.4D+1.7L+0.5Lr		0.05	36.68	-0.06	0.0	0.00	62.928	0.19	0.15
1.2D+1.6Lr+1.0L		0.03	27.91	0.00	0.0	0.00	54.158	0.01	0.10
1.2D + 1.6Wx+1.0L+0.5Lr		-0.46	20.56	-1.33	0.0	0.00	46.810	4.06	1.42
1.2D + 1.6Wx+1.0L+0.5Lr		0.14	28.21	-0.18	0.0	0.00	54.458	0.54	0.44
1.2D + 1.6Wz+1.0L+0.5Lr		-0.64	18.08	0.19	0.0	0.00	44.330	0.58	1.95
1.2D + 1.6Wz+1.0L+0.5Lr		-0.05	23.04	1.28	0.0	0.00	49.290	3.90	0.15
1.2D+1.0Ex+1.0L		0.02	25.64	-0.08	0.0	0.00	51.894	0.25	0.07
1.2D+1.0Ez+1.0L		0.03	26.17	-0.08	0.0	0.00	52.424	0.25	0.10
0.9D+1.6Wx		-0.49	5.28	-1.25	0.0	0.00	31.534	3.80	1.49
0.9D+1.6Wx		0.12	12.93	-0.10	0.0	0.00	39.182	0.29	0.37
0.9D+1.6Wz		-0.66	2.80	0.27	0.0	0.00	29.054	0.83	2.02
0.9D+1.6Wz		-0.07	7.76	1.36	0.0	0.00	34.014	4.15	0.22
0.9D+1.0Ex		0.00	11.14	0.04	0.0	0.00	37.388	0.13	0.00
0.9D+1.0Ez		0.01	11.45	0.05	0.0	0.00	37.698	0.16	0.03

Check for Bearing Pressure

Load Combination & Calculation of Base pressure


Max. Base pressure = $p_{max} = (V/(Lx.Lz)) + (6.My/((Lx)^2.Lz) + (6.Mx/(Lx.(Lz)^2)$

Min. Base pressure = $p_{min} = (V/(Lx.Lz)) - (6.My/((Lx)^2.Lz) - (6.Mx/(Lx.(Lz)^2)$

Appox. Surcharge load = 2 T/m^2

Net SBC of soil for DL, LL= 45 T/m^2 For WL/SL case = 56.25 T/m^2

Gross SBC of soil for DL, LL= 50.49 T/m^2 For WL/SL case = 61.74 T/m^2



Load Case	Design Load/moments			Base Pressure (T/m^2)								
	V (T)	Mz (T-m)	Mx (T-m)	V/ (Lx.Lz)	6.Mz/ $(Lx)^2$.Lz	6.Mx/ Lx.$(Lz)^2$	p_1 (p_{max})	p_2	p_4	p_3 (p_{min})	(p_{max}-γh)	Remarks
DL+LL	47.06	0.09	0.00	9.30	0.05	0.00	11.34	11.34	11.25	11.25	7.56	O.K
DL+LR	40.01	0.03	0.27	7.90	0.02	0.14	10.06	9.77	10.03	9.74	6.28	O.K
DL+0.75*LL+0.75*LR	45.97	0.03	0.27	9.08	0.02	0.14	11.24	10.95	11.21	10.92	7.46	O.K
DL+0.75*(LL+LR+W(+X))	43.11	0.63	1.83	8.52	0.33	0.96	11.81	9.89	11.15	9.22	8.03	O.K
DL+0.75*(LL+LR+W(-X))	46.70	0.24	0.18	9.22	0.12	0.10	11.45	11.25	11.20	11.00	7.67	O.K
DL+0.75*(LL+LR+W(+Z))	41.95	0.88	0.34	8.29	0.47	0.18	10.93	10.57	10.00	9.64	7.15	O.K
DL+0.75*(LL+LR+W(-Z))	44.28	0.04	1.90	8.75	0.02	1.00	11.77	9.77	11.73	9.73	7.99	O.K
0.6*D+WL (X)	33.73	0.02	0.13	6.66	0.01	0.07	8.74	8.60	8.72	8.58	4.96	O.K
0.6*D+WL (-X)	34.80	0.23	0.17	6.87	0.12	0.09	9.09	8.91	8.84	8.66	5.31	O.K
0.6*D+WL (Z)	28.47	1.26	0.53	5.62	0.67	0.28	8.57	8.01	7.24	6.68	4.79	O.K
0.6*D+WL (-Z)	31.57	0.13	2.60	6.24	0.07	1.37	9.68	6.94	9.54	6.79	5.90	O.K
DL+0.75*(LL+LR+0.7SL(+X))	45.71	0.07	0.20	9.03	0.04	0.11	11.17	10.96	11.10	10.89	7.39	O.K
DL+0.75*(LL+LR+0.7SL(+Z))	45.99	0.08	0.20	9.08	0.04	0.11	11.24	11.02	11.15	10.93	7.46	O.K
0.6*D +0.7 SD (X)	33.63	0.01	0.04	6.64	0.01	0.02	8.67	8.63	8.66	8.61	4.89	O.K
0.6*D +0.7 SD (Z)	33.94	0.02	0.07	6.70	0.01	0.04	8.75	8.68	8.73	8.66	4.97	O.K
DL+LL+LR+CR1	48.47	0.09	0.00	9.57	0.05	0.00	11.62	11.62	11.53	11.53	7.84	O.K
DL+LL+LR+CR2	48.37	0.09	0.00	9.55	0.05	0.00	11.60	11.60	11.51	11.51	7.82	O.K
DL+LL+LR+CR3	48.42	0.09	0.00	9.56	0.05	0.00	11.61	11.61	11.52	11.52	7.83	O.K
DL+LL+LR+CR4	50.57	0.09	0.03	9.99	0.05	0.02	12.05	12.02	11.96	11.92	8.27	O.K
DL+LL+LR+CR5	48.31	0.09	0.00	9.54	0.05	0.00	11.59	11.59	11.49	11.49	7.81	O.K
DL+LL+LR+CR6	48.27	0.09	0.03	9.53	0.05	0.02	11.60	11.57	11.50	11.47	7.82	O.K

Calculation of Design Pressure

Load Combination & Calculation of Base pressure


Max. Base pressure = $p_{max} = (V/(Lx.Lz)) + (6.My/((Lx)^2.Lz) + (6.Mx/(Lx.(Lz)^2)$

Min. Base pressure = $p_{min} = (V/(Lx.Lz)) - (6.My/((Lx)^2.Lz) - (6.Mx/(Lx.(Lz)^2)$

Surcharge load = 2 T/m^2

Net SBC of soil for DL, LL= 45 T/m^2 For WL/SL case = 56.25 T/m^2

Gross SBC of soil for DL, LL= 50.49 T/m^2 For WL/SL case = 61.74 T/m^2



Load Case	Design Load/moments			Base Pressure (T/m^2)							
	V (T)	Mz (T-m)	Mx (T-m)	V/ (Lx.Lz)	6.Mz/ $(Lx)^2$.Lz	6.Mx/ Lx.$(Lz)^2$	p_1 (p_{max})	p_2	p_4	p_3 (p_{min})	(p_{max}-γh)
1.4D	43.8	0.04	0.38	8.65	0.02	0.20	10.87	10.47	10.83	10.42	7.09
1.4D+1.7L+0.5Lr	62.9	0.15	0.19	12.43	0.08	0.10	14.61	14.41	14.45	14.26	10.83
1.2D+1.6Lr+1.0L	54.2	0.10	0.01	10.70	0.05	0.00	12.75	12.75	12.65	12.64	8.97
1.2D + 1.6Wx+1.0L+0.5Lr	46.8	1.42	4.06	9.25	0.75	2.14	14.13	9.86	12.64	8.36	10.35
1.2D + 1.6Wx+1.0L+0.5Lr	54.5	0.44	0.54	10.76	0.23	0.29	13.27	12.70	12.81	12.24	9.49
1.2D + 1.6Wz+1.0L+0.5Lr	44.3	1.95	0.58	8.76	1.03	0.31	12.09	11.48	10.03	9.42	8.31
1.2D + 1.6Wz+1.0L+0.5Lr	49.3	0.15	3.90	9.74	0.08	2.05	13.87	9.76	13.71	9.61	10.09
1.2D+1.0Ex+1.0L	51.9	0.07	0.25	10.25	0.04	0.13	12.42	12.15	12.35	12.08	8.64
1.2D+1.0Ez+1.0L	52.4	0.10	0.25	10.36	0.05	0.13	12.54	12.28	12.44	12.17	8.76
0.9D+1.6Wx	31.5	1.49	3.80	6.23	0.78	2.00	11.01	7.01	9.45	5.44	7.23
0.9D+1.6Wx	39.2	0.37	0.29	7.74	0.19	0.15	10.09	9.78	9.70	9.39	6.31
0.9D+1.6Wz	29.1	2.02	0.83	5.74	1.07	0.44	9.24	8.37	7.11	6.24	5.46
0.9D+1.6Wz	34.0	0.22	4.15	6.72	0.11	2.19	11.02	6.65	10.79	6.42	7.24
0.9D+1.0Ex	37.4	0.00	0.13	7.39	0.00	0.07	9.45	9.32	9.45	9.32	5.67
0.9D+1.0Ez	37.7	0.03	0.16	7.45	0.01	0.08	9.54	9.38	9.51	9.35	5.76

Global Project ID	900707
Delivery Type	ENGINEERING PROCUREMENT CONSTRUCTION
Project Name	MANSOURAH MASSARAH GOLD PROJECT
Customer	MA'ADEN GOLD AND BASE METALS (MA'ADEN)
Project Country	KINGDOM OF SAUDI ARABIA


Ma'aden Revision No:	A01	A02	C01	D01
Date	10-03-2020	02-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 27.03.20 AND REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Outotec / L&T Revi	0	1	2	3
Date	10-03-2020	02-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 27.03.20 AND REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Calculation of Bending Moment and Shear Force in X direction :

p_{1x} =pressure at the face of column at section 1x-1x in kN/m^2.
p_{2x} =pressure at the face of column at section 2x-2x in kN/m^2.
p_{3x} =pressure at a distance 'd' from the face of column at section 3x-3x in kN/m^2.
BM_{1x} =Moment at the face of column at section 1x-1x in kN-m/m.
BM_{2x} =Moment at the face of column 2x-2x in kN-m/m.
SF_{3x} = Oneway shear force at a distance 'd' from the face of column at section 3x-3x in kN/m.
SF (punching) = Punching Shear Force at a distance 0.5d from the face of column in kN/m.

Punching perimeter= ((0.85+2*0.5*0.495)+(0.85+2*0.5*0.495))*2
= 4.58 m
Punching Area= ((0.85+2*0.5*0.295)*(0.85+2*0.5*0.295))
= 1.31 m^2 Punching shear stress to be checked



Downward pressure due to self weight of raft and soil = (0.4*2.5+2.1*1.8)
= 4.78 kN/m^2
Area of footing, A_f= 5.06 m^2

Check against Two-way shear force at a distance d/2 from face of column:

Design punching shear at a distance d/2 from face of column, Vu= 30.08 T
Strength of Concrete in shear Vc1 = 288.96 T **Table 22.6.5.2_ (a)**
Strength of Concrete in shear Vc2 = 304.84 T **Table 22.6.5.2_ (b)**
Strength of Concrete in shear Vc3 = 266.44 kN **Table 22.6.5.2_ (c)**

Design Vc= 266.44 kN
Allowable shear stress, (ϕ Vc)/bd = 1.48 N/mm^2

Design punching shear stress, τ = (30.08*10000)/(4580*0.295)
= 0.22 N/mm^2 **No shear reinforcement reqd.**

Load Case	p_{1x}	B.M$_{1x}$	S.F$_{3x}$	B.M$_{1z}$	S.F$_{3z}$	S.F$_{(punching)}$	V_u/b_od	Punching check (Remarks)	Allowable shear ($0.75*\sqrt{(fc)}/6$ (N/mm^2))	Actual Shear	Remarks	Mu/bd2
Ultimate Conditions												
1.4D	7.09	1.74	2.73	0.00	-2.09	19.69	0.15	OK	0.74	0.093	OK	0.20
1.4D+1.7L+0.5Lr	10.83	2.65	4.17	0.00	-3.19	30.08	0.22	OK	0.74	0.141	OK	0.30
1.2D+1.6Lr+1.0L	8.97	2.20	3.45	0.00	-2.65	24.91	0.18	OK	0.74	0.117	OK	0.25
1.2D + 1.6Wx+1.0L+0.5Lr	10.35	2.54	3.98	0.00	-3.05	28.75	0.21	OK	0.74	0.135	OK	0.29
1.2D + 1.6Wx+1.0L+0.5Lr	9.49	2.33	3.65	0.00	-2.80	26.36	0.2	OK	0.74	0.124	OK	0.27
1.2D + 1.6Wz+1.0L+0.5Lr	8.31	2.04	3.20	0.00	-2.45	23.08	0.17	OK	0.74	0.108	OK	0.23
1.2D + 1.6Wz+1.0L+0.5Lr	10.09	2.47	3.88	0.00	-2.98	28.02	0.21	OK	0.74	0.132	OK	0.28
1.2D+1.0Ex+1.0L	8.64	2.12	3.33	0.00	-2.55	24.00	0.18	OK	0.74	0.113	OK	0.24
1.2D+1.0Ez+1.0L	8.76	2.15	3.37	0.00	-2.58	24.33	0.18	OK	0.74	0.114	OK	0.25
0.9D+1.6Wx	7.23	1.77	2.78	0.00	-2.13	20.08	0.15	OK	0.74	0.094	OK	0.20
0.9D+1.6Wx	6.31	1.55	2.43	0.00	-1.86	17.53	0.13	OK	0.74	0.082	OK	0.18
0.9D+1.6Wz	5.46	1.34	2.10	0.00	-1.61	15.16	0.11	OK	0.74	0.071	OK	0.15
0.9D+1.6Wz	7.24	1.77	2.79	0.00	-2.14	20.11	0.15	OK	0.74	0.094	OK	0.20
0.9D+1.0Ex	5.67	1.39	2.18	0.00	-1.67	15.75	0.12	OK	0.74	0.074	OK	0.16
0.9D+1.0Ez	5.76	1.41	2.22	0.00	-1.70	16.00	0.12	OK	0.74	0.075	OK	0.16

Load Case	kn (ϕ=0.75)	p =	A_{st}
Ultimate Conditions			
1.4D	0.27	0.001	295
1.4D+1.7L+0.5Lr	0.41	0.001	295
1.2D+1.6Lr+1.0L	0.34	0.001	295
1.2D + 1.6Wx+1.0L+0.5Lr	0.39	0.001	295
1.2D + 1.6Wx+1.0L+0.5Lr	0.36	0.001	295
1.2D + 1.6Wz+1.0L+0.5Lr	0.31	0.001	295
1.2D + 1.6Wz+1.0L+0.5Lr	0.38	0.001	295
1.2D+1.0Ex+1.0L	0.32	0.001	295
1.2D+1.0Ez+1.0L	0.33	0.001	295
0.9D+1.6Wx	0.27	0.001	295
0.9D+1.6Wx	0.24	0.001	295
0.9D+1.6Wz	0.2	0	0
0.9D+1.6Wz	0.27	0.001	295
0.9D+1.0Ex	0.21	0.001	295
0.9D+1.0Ez	0.22	0.001	295

Location	Mux	ϕ Kn =	Kn	ρ=	Ast	Minm. Ast	Bar Dia	Spacing	Maxm	Spacing
At bottom	2.65	0.30	0.41	0.001	295.00	567.00	16ϕT	354.61	300	200
At top	-3.19	-0.02	0.02	0.0018	531.00	531.00	12ϕT	212.99	300	200

SUMMARY OF REINFORCEMENT IN RAFT:

Along X Direction :
At Bottom **16ϕT** **200** c/c At Top **12ϕT** **200** c/c

Along Z Direction :
At Bottom **16ϕT** **200** c/c At Top **12ϕT** **200** c/c

Global Project ID	900707
Delivery Type	ENGINEERING PROCUREMENT CONSTRUCTION
Project Name	MANSOURAH MASSARAH GOLD PROJECT
Customer	MA'ADEN GOLD AND BASE METALS (MA'ADEN)
Project Country	KINGDOM OF SAUDI ARABIA

Ma'aden Revision No:	A01	A02	C01	D01
Date	10-03-2020	02-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 27.03.20 AND REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI


Outotec / L&T Revi	0	1	2	3
Date	10-03-2020	02-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 27.03.20 AND REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

DESIGN OF COLUMN MKD C1 **(Middle Column)**

Input:

Clear cover to reinf.=	75mm
Dia. of main reinf.=	25mm
Dia. of link=	10mm
Effective cover =	97.5mm
Grade of Concrete (f_c') =	M35
Grade of Steel (f_y) =	Fy420
Grade of Reinf(links).=	Fy420
Min. Steel Ratio	0.50%
Max. Steel Ratio	4.00%
Pedestal Height	2650

Table 20.6.1.3.1



For Compression-controlled sections
Strength reduction factor ϕ= 0.65 Table 21.2.2

Unsupported length of column about X (l_{ux}) = 2650.00
Unsupported length of column about Z (l_{uz}) = 2650.00

For Columns not braced against sidesway,
Slenderness ratio, $K\,l_{ux} / r_x$ = 21.61 < 22 SECTION 6.2.5a
$K\,l_{uz} / r_z$ = 21.61 < 22 SECTION 6.2.5a

Where, Effective length factor K= 2
Radius of gyration r_x= 245
Radius of gyration r_z= 245

γ_f = 0.79
γ_f = 0.79

Load Case	Load Combination	Factored Load/Moment (T) Hx	V	Hz	Nominal Load/Moment Mz (Tm)	V (T)	Mx (Tm)	Kn = Pn/f'cbD (N/mm²)
100	1.4D	0.01	17.5	0.13	0.1	27.0	0.5	0.0107
101	1.4D+1.7L+0.5Lr	0.0	36.7	-0.06	0.2	56.4	0.2	0.0223
102	1.2D+1.6Lr+1.0L	0.0	27.9	0.00	0.1	42.9	0.0	0.0170
103	1.2D + 1.6Wx+1.0L+0.5Lr	-0.5	20.6	-1.33	1.9	31.6	5.4	0.0125
104	1.2D + 1.6Wx+1.0L+0.5Lr	0.1	28.2	-0.18	0.6	43.4	0.7	0.0172
105	1.2D + 1.6Wz+1.0L+0.5Lr	-0.6	18.1	0.19	2.6	27.8	0.8	0.0110
106	1.2D + 1.6Wz+1.0L+0.5Lr	0.0	23.0	1.28	0.2	35.4	5.2	0.0140
107	1.2D+1.0Ex+1.0L	0.0	25.6	-0.08	0.1	39.5	0.3	0.0156
108	1.2D+1.0Ez+1.0L	0.0	26.2	-0.08	0.1	40.3	0.3	0.0159
109	0.9D+1.6Wx	-0.5	5.3	-1.25	2.0	8.1	5.1	0.0032
110	0.9D+1.6Wx	0.1	12.9	-0.10	0.5	19.9	0.4	0.0079
111	0.9D+1.6Wz	-0.7	2.8	0.27	2.7	4.3	1.1	0.0017
112	0.9D+1.6Wz	-0.1	7.8	1.36	0.3	11.9	5.5	0.0047
113	0.9D+1.0Ex	0.0	11.1	0.04	0.0	17.1	0.2	0.0068
114	0.9D+1.0Ez	0.0	11.4	0.05	0.0	17.6	0.2	0.0070

Reinforcement:

Provide,

4-Nos	25 mm Dia
4-Nos	25 mm Dia
8-Nos	25 mm Dia

1964.29 Sq mm (At Corner)
1964.29 Sq mm (At middle)
3928.57 Sq mm (All round)

A_{sc} pvd. = 7857.14 Sq mm
Total A_{sc} = 1.1 %

β = P_n / P_0 (range is 0.55 to 0.70)

Where, P_0 = 0.85 f'_c (A_g - A_{sc}) + f_y A_{sc} = 2456.0625 T SECTION 22.4.2.2

Load Case	From Chart of SP17(M)-R35-420.8 $R_{nx}=M_{nox}/f'_cb^2D$	$R_{nz}=M_{noz}/f'_cbD^2$	M_{noz}	M_{nox}	β	α_n = log(0.5)/ log(β)	Interaction ratio	Remarks
100	0.07	0.07	150.5	150.46	0.55	1.16	0.00	O.K
101	0.09	0.09	193.4	193.45	0.55	1.16	0.00	O.K
102	0.09	0.09	193.4	193.45	0.55	1.16	0.00	O.K
103	0.09	0.09	193.4	193.45	0.55	1.16	0.02	O.K
104	0.09	0.09	193.4	193.45	0.55	1.16	0.00	O.K
105	0.09	0.09	193.4	193.45	0.55	1.16	0.01	O.K
106	0.09	0.09	193.4	193.45	0.55	1.16	0.02	O.K
107	0.09	0.09	193.4	193.45	0.55	1.16	0.00	O.K
108	0.09	0.09	193.4	193.45	0.55	1.16	0.00	O.K
109	0.06	0.06	129.0	128.97	0.55	1.16	0.03	O.K
110	0.06	0.06	129.0	128.97	0.55	1.16	0.00	O.K
111	0.06	0.06	129.0	128.97	0.55	1.16	0.02	O.K
112	0.06	0.06	129.0	128.97	0.55	1.16	0.03	O.K
113	0.06	0.06	129.0	128.97	0.55	1.16	0.00	O.K
114	0.06	0.06	129.0	128.97	0.55	1.16	0.00	O.K

Links, 10mm dia @ 300 C/C

Global Project ID	900707
Delivery Type	ENGINEERING PROCUREMENT CONSTRUCTION
Project Name	MANSOURAH MASSARAH GOLD PROJECT
Customer	MA'ADEN GOLD AND BASE METALS (MA'ADEN)
Project Country	KINGDOM OF SAUDI ARABIA

Ma'aden Revision No:	A01	A02	C01	D01
Date	10-03-2020	02-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 27.03.20 AND REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Outotec / L&T Revi	0	1	2	3
Date	10-03-2020	02-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 27.03.20 AND REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

3.5 Design Foundations mkd. F1A & F1B


Foundation has been modelled as plate element in STAAD-Pro. Loads applied on Pedestal are the most critical loads for support node no. 676 of Superstructure Staad Model
Please Refer Attachment No. 1 Staad Output File for Support Reactions.

INPUT FOR FOUNDATION:

	Along-X	Along-Z
Size of column :	0.85m	0.85m
Size of fdn. raft :	3.50m	5.00m
Thickness of raft :	0.65 m	
Original ground level:	0.00 m	
Finished floor level :	0.50 m	
U/S level of foundation :	-2.50 m	
U/S level Load Point :	6.85 m	
Unit weight of conc :	25 kN/m3	
Unit weight of soil :	18 kN/m3	

Calculation of Weight of Foundation :

Weight of raft & Col.= (3.5*5*0.65*25)+(0.85*0.85*8.7*25) = 441.52KN
Weight of soil = ((3.5*5)-(0.85*0.85))*2.35*18 = 709.69KN
Total = 1151.21KN

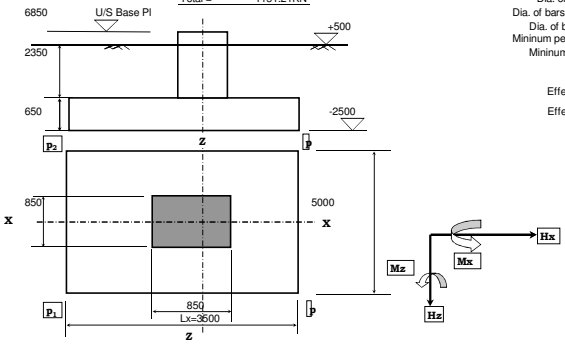

Design Input:

Characteristic strength of concrete, f '$_c$=	35 MPa
Yield stress of steel reinforcement, f_y=	420 MPa
Clear cover for main reinforcement bars =	75mm
Dia. of bars provd. along X direction at bottom =	16mm
Dia. of bars provd. along X direction at top =	12mm
Dia. of bars provided along Z direction at bottom=	16mm
Dia. of bars provided along Z direction at top=	12mm
Mininum percentage of reinforcement at bottom=	0.12%
Mininum percentage of reinforcement at top=	0.06%


Effective depth of slab along X direction = 567mm = 0.567m
Effective depth of slab along Z direction = 551mm = 0.551m
Clear projection along Z direction = 2.075m
Clear projection along X direction = 1.325m

H_x=Force along X-X direction
Hz=Force along Z-Z direction
M_x=Moment about X-X direction
Mz=Moment about Z-Z direction


Load calculation for Foundation Staad Model:

i) Surcharge on foundation raft due to 6m high material storage = 6 * 1.6 = 9.60 T/m^2
ii) Surcharge on foundation raft due to soil above raft = (2.5+0.5 -0.65) *1.8 = 4.23 T/m^2
iii) Load from Support Reaction from Superstructure Staad Model

MODEL OF MAT FOUNDATION WITH COLUMN FROM STAAD



SURCHARGE LOAD DUE TO SOIL ABOVE FOUNDATION FROM STAAD IN EACH LOAD CASE

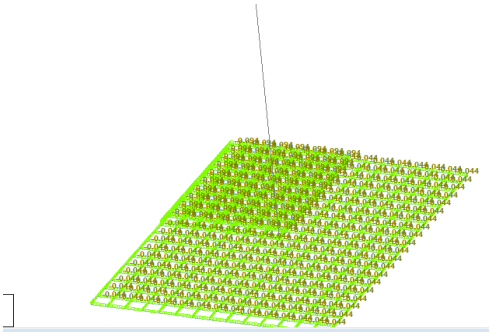

Global Project ID	900707
Delivery Type	ENGINEERING PROCUREMENT CONSTRUCTION
Project Name	MANSOURAH MASSARAH GOLD PROJECT
Customer	MA'ADEN GOLD AND BASE METALS (MA'ADEN)
Project Country	KINGDOM OF SAUDI ARABIA

Ma'aden Revision No:	A01	A02	C01	D01
Date	10-03-2020	02-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 27.03.20 AND REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Outotec / L&T Revi	0	1	2	3
Date	10-03-2020	02-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 27.03.20 AND REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Foundation Bearing pressure & Stability has been checked for the Allowable Stress Load Combinations as per Section 2.4.1, SBC 301:2007

	Load at top of foundation					Load at bottom of foundation				
LOAD COMBINATIONS	V (kN)	Hx (kN)	Mz (kN-m)	Hz (kN)	Mx (kN-m)	V (kN)	Hx (kN)	Mz (kN-m)	Hz (kN)	Mx (kN-m)
DL+LL	168.0	-0.1	0.0	-22.20	0.0	1319.2	-0.1	-0.9	-22.2	-207.6
DL+LR	143.0	-0.2	0.0	-23.60	0.0	1294.2	-0.2	-1.9	-23.6	-220.7
DL+0.75*LL+0.75*LR+0.75CR1	169.6	-0.1	0.0	-23.55	0.0	1320.8	-0.1	-0.9	-23.6	-220.2
DL+0.75*LL+0.75*LR+0.75CR2	166.3	-0.2	0.0	-21.98	0.0	1317.5	-0.2	-1.6	-22.0	-205.5
DL+0.75*LL+0.75*LR+0.75CR3	168.0	-0.2	0.0	-22.73	0.0	1319.2	-0.2	-1.6	-22.7	-212.5
DL+0.75*LL+0.75*LR+0.75CR4	173.1	-0.1	0.0	-25.35	0.0	1324.3	-0.1	-0.9	-25.4	-237.0
DL+0.75*LL+0.75*LR+0.75CR5	177.7	-0.2	0.0	-26.93	0.0	1328.9	-0.2	-1.6	-26.9	-251.7
DL+0.75*LL+0.75*LR+0.75CR6	174.5	-0.2	0.0	-25.73	0.0	1325.7	-0.2	-1.6	-25.7	-240.5
DL+0.75*(LL+LR+W(+X))	-44.8	-2.1	0.0	84.53	0.0	1106.4	-2.1	-19.2	84.5	790.3
DL+0.75*(LL+LR+W(-X))	91.2	-10.8	1.0	22.65	1.0	1242.4	-10.8	-100.2	22.7	212.8
DL+0.75*(LL+LR+W(+Z))	29.4	4.0	2.0	30.30	2.0	1180.6	4.0	38.9	30.3	285.3
DL+0.75*(LL+LR+W(-Z))	61.8	0.3	3.0	13.50	3.0	1213.0	0.3	5.6	13.5	129.2
0.6*D + 1.0W(+X)	-225.7	-2.6	4.0	140.26	4.0	925.5	-2.6	-19.9	140.3	1315.4
0.6*D + 1.0W(-X)	-44.4	-14.3	5.0	57.76	5.0	1106.8	-14.3	-128.3	57.8	545.1
0.6*D + 1.0W(+Z)	-126.8	5.4	6.0	67.96	6.0	1024.4	5.4	56.9	68.0	641.4
0.6*D + 1.0W(-Z)	-83.6	0.5	7.0	45.56	7.0	1067.6	0.5	12.0	45.6	433.0
DL+0.75*(LL+LR+0.7E(+X))	174.1	-0.2	8.0	-26.11	8.0	1325.3	-0.2	6.4	-26.1	-236.1
DL+0.75*(LL+LR+0.7E(-X))	168.7	-0.2	9.0	-23.69	9.0	1319.9	-0.2	7.4	-23.7	-212.5
DL+0.75*(LL+LR+0.7E(+Z))	215.4	-0.2	10.0	-42.44	10.0	1366.6	-0.2	8.4	-42.4	-386.8
DL+0.75*(LL+LR+0.7E(-Z))	127.4	-0.2	11.0	-7.37	11.0	1278.6	-0.2	9.4	-7.4	-57.9
0.6*D + 0.7E(+X)	65.1	-0.1	12.0	-6.76	12.0	1216.3	-0.1	11.4	-6.8	-51.2
0.6*D + 0.7E(-X)	60.1	-0.1	13.0	-4.52	13.0	1211.3	-0.1	12.4	-4.5	-29.3
0.6*D + 0.7E(+Z)	96.2	-0.1	14.0	-19.15	14.0	1247.4	-0.1	13.4	-19.2	-165.1
0.6*D + 0.7E(-Z)	29.0	-0.1	15.0	7.87	15.0	1180.2	-0.1	14.4	7.9	88.6

Check for Overturning and Sliding: (Allowable F.O.S against Sliding & Overturning both is 1.5)

	Load at bottom of foundation					OVERTURNING		SLIDING (μ = 0.4)	
LOAD COMBINATIONS	V (kN)	Hx (kN)	Mz (kNm)	Hz (kN)	Mx (kNm)	F.O.S. Mz	F.O.S. Mx	F.O.S. Hx	F.O.S. Hz
DL+LL	1319.21	-0.10	-0.94	-22.20	-207.57	2469.11	15.89	5276.84	23.77
DL+LR	1294.21	-0.20	-1.87	-23.60	-220.66	1211.16	14.66	2588.42	21.94
DL+0.75*LL+0.75*LR+0.75CR1	1320.81	-0.10	-0.94	-23.55	-220.19	2472.10	15.00	5283.24	22.43
DL+0.75*LL+0.75*LR+0.75CR2	1317.51	-0.18	-1.64	-21.98	-205.47	1409.10	16.03	3011.45	23.98
DL+0.75*LL+0.75*LR+0.75CR3	1319.16	-0.18	-1.64	-22.73	-212.48	1410.87	15.52	3015.22	23.22
DL+0.75*LL+0.75*LR+0.75CR4	1324.34	-0.10	-0.94	-25.35	-237.02	2478.70	13.97	4767.61	18.81
DL+0.75*LL+0.75*LR+0.75CR5	1328.91	-0.18	-1.64	-26.93	-251.75	1421.29	13.20	2733.76	17.77
DL+0.75*LL+0.75*LR+0.75CR6	1325.69	-0.18	-1.64	-25.73	-240.53	1417.84	13.78	2727.12	18.55
DL+0.75*(LL+LR+W(+X))	1106.39	-2.05	-19.17	84.53	790.31	101.01	3.50	194.29	4.71
DL+0.75*(LL+LR+W(-X))	1242.36	-10.83	-100.21	22.65	212.78	21.69	14.60	41.32	19.75
DL+0.75*(LL+LR+W(+Z))	1180.56	3.95	38.93	30.30	285.31	53.07	10.34	107.60	14.03
DL+0.75*(LL+LR+W(-Z))	1212.96	0.28	5.57	13.50	129.23	381.01	23.47	1587.87	32.35
0.6*D + 1.0W(+X)	925.49	-2.56	-19.94	140.26	1315.43	81.24	1.76	130.15	2.38
0.6*D + 1.0W(-X)	1106.79	-14.26	-128.33	57.76	545.06	15.09	5.08	27.94	6.90
0.6*D + 1.0W(+Z)	1024.39	5.44	56.86	67.96	641.43	31.53	3.99	67.79	5.43
0.6*D + 1.0W(-Z)	1067.59	0.54	12.05	45.56	432.99	155.06	6.16	711.73	8.44
DL+0.75*(LL+LR+0.7E(+X))	1325.34	-0.18	6.36	-26.11	-236.11	364.46	14.03	2726.41	18.28
DL+0.75*(LL+LR+0.7E(-X))	1319.88	-0.18	7.36	-23.69	-212.52	313.67	15.53	2715.18	20.06
DL+0.75*(LL+LR+0.7E(+Z))	1366.61	-0.18	8.36	-42.44	-386.77	285.94	8.83	2811.30	11.59
DL+0.75*(LL+LR+0.7E(-Z))	1278.62	-0.18	9.36	-7.37	-57.86	238.96	55.24	2630.29	62.50
0.6*D + 0.7E(+X)	1216.31	-0.06	11.44	-6.76	-51.21	186.08	59.38	7297.86	64.77
0.6*D + 0.7E(-X)	1211.27	-0.06	12.44	-4.52	-29.26	170.41	103.48	7267.62	96.47
0.6*D + 0.7E(+Z)	1247.39	-0.06	13.44	-19.15	-165.05	162.43	18.89	7484.34	23.45
0.6*D + 0.7E(-Z)	1180.19	-0.06	14.44	7.87	88.58	143.04	33.31	7081.14	53.99

Foundation is Safe against Overturning
Foundation is Safe against Sliding

Soil Bearing Pressure has been checked for above Unfactored Load Combinations.

Actual Maximum Bearing Pressure at Foundation base from Staad File = (LC - 19) 20.00 T/m^2
Actual Minimum Bearing Pressure at Foundation base from Staad File = (LC - 13) 0 T/m^2

Allowable Net Bearing Pressure of Soil = (from Geotechnical Report) 45.00 T/m^2
Allowable Gross Bearing Pressure of Soil = 45 + 2.5 * 18 = 49.50 T/m2
> 20 T/m2 - OK

Global Project ID	900707
Delivery Type	ENGINEERING PROCUREMENT CONSTRUCTION
Project Name	MANSOURAH MASSARAH GOLD PROJECT
Customer	MA'ADEN GOLD AND BASE METALS (MA'ADEN)
Project Country	KINGDOM OF SAUDI ARABIA

Ma'aden Revision No:	A01	A02	C01	D01
Date	10-03-2020	02-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 27.03.20 AND REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Outotec / L&T Revi	0	1	2	3
Date	10-03-2020	02-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 27.03.20 AND REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Foundation has been designed with the Design strength Load Combinations of Staad File (LC 101 - LC 127)

REINFORCEMENT CALCULATION OF FOUNDATION:


Foundation Thickness =	650	mm
Width =	1000	mm
Clear Cover =	75	mm
Compressive Strength of Concrete , fc' =	35	N/mm^2
Yield Strength of Main Reinforcement , fy =	420	N/mm^2
Yield Strength of Shear Reinforcement , fyt =	420	N/mm^2
Strength Reduction Factor of Main Reinforcement , Φ =	0.9	
Strength Reduction Factor of Shear Reinforcement , Φt =	0.75	

STAAD OUTPUT FROM FACTORED LOAD COMBINATION :

MOMENT	VALUE	UNIT	TORSIONAL MOMENT	VALUE	UNIT	
Max. Mx	12.723	T-M	Corresponding Mxy	-5.44	T-M	*(Plate No. - 93 , L/C No. - 116)*
Min. Mx	-16.576	T-M	Corresponding Mxy	-1.36	T-M	*(Plate No. - 20 , L/C No. - 116)*
Max. My	39.572	T-M	Corresponding Mxy	-1.05	T-M	*(Plate No. - 64 , L/C No. - 116)*
Min. My	-37.905	T-M	Corresponding Mxy	-1.36	T-M	*(Plate No. - 20 , L/C No. - 116)*

FOR OPPOSITE FACE REINFORCEMENT :

Mx1 =	Mx + abs(Mxy) =	12.723 + 5.444 =	18.167 T-M
My1 =	My + abs(Mxy) =	39.572 + 1.046 =	40.618 T-M
Mx2 =	Mx+abs(Mxy^2/My) =	12.723 + 0.749 =	13.472 T-M
My2 =	My+abs(Mxy^2/Mx) =	39.572 + 0.086 =	39.658 T-M



DESIGN MOMENT CALCULATION FOR OPPOSITE FACE REINFORCEMENT (Bottom) :

Mxd = 18.167 T-M
Myd = 40.618 T-M

ALONG X - DIRECTION :

Mu = 18.167 T-M
Φ*Kn = Mu/bd^2 deff. = 540 mm
Mu/bd^2 = 18.167X10^7/(1000X540^2) = 0.623 N/mm^2 < 6.9 N/mm^2
Pt = 0.0017 Reqd. Ast = 0.0017X1000X540/100 = 9.18 cm^2
Provided **20** mm @ **200** C/C (Provide Ast = 15.71 cm2) at Horizontal

Total Provide Ast = 15.71 cm2 at Horizontal **O.K.**
Total Provide Pt = 0.00

ALONG Y - DIRECTION :

Mu = 40.618 T-M
Φ*Kn = Mu/bd^2 deff. = 562.5 mm
Mu/bd^2 = 40.618X10^7/(1000X562.5^2) = 1.284 N/mm^2 < 6.9 N/mm^2
Pt = 0.0035 Reqd. Ast = 0.0035X1000X562.5/100 = 19.69 cm^2
Provided **25** mm @ **200** C/C (Provide Ast = 24.54 cm2) at Horizontal

Total Provide Ast = 24.54 cm2) at Horizontal **O.K.**
Total Provide Pt = 0.00

FOR RETAINED FACE REINFORCEMENT :

Mx1 =	Mx - abs(Mxy) =	-16.576 - 1.359 =	-17.935 T-M
My1 =	My - abs(Mxy) =	-37.905 - 1.359 =	-39.264 T-M
Mx2 =	Mx-abs(Mxy^2/My) =	-16.576 - 0.049 =	-16.625 T-M
My2 =	My-abs(Mxy^2/Mx) =	-37.905 - 0.111 =	-37.794 T-M

DESIGN MOMENT CALCULATION FOR RETAINED FACE REINFORCEMENT (Top) :

Mxd = -10.463 T-M
Myd = -39.264 T-M

ALONG X - DIRECTION :

Mu = 10.463 T-M
Φ*Kn = Mu/bd^2 deff. = 542 mm
Mu/bd^2 = 10.463X10^7/(1000X542^2) = 0.356 N/mm^2 < 6.9 N/mm^2
Pt = 0.0009 Reqd. Ast = 0.0009X1000X542/100 = 4.88 cm^2
Provided **16** mm @ **200** C/C (Provide Ast = 10.05 cm2) at Horizontal

Total Provide Ast = 10.05 cm2) at Horizontal **O.K.**
Total Provide Pt = 0.00

ALONG Y - DIRECTION :

Mu = 39.264 T-M
Φ*Kn = Mu/bd^2 deff. = 562.5 mm
Mu/bd^2 = 39.264X10^7/(1000X562.5^2) = 1.241 N/mm^2 < 6.9 N/mm^2
Pt = 0.0034 Reqd. Ast = 0.0034X1000X562.5/100 = 19.13 cm^2
Provided **25** mm @ **200** C/C (Provide Ast = 24.54 cm2) at Horizontal

Total Provide Ast = 24.54 cm2) at Horizontal **O.K.**
Total Provide Pt = 0.00

Global Project ID	900707
Delivery Type	ENGINEERING PROCUREMENT CONSTRUCTION
Project Name	MANSOURAH MASSARAH GOLD PROJECT
Customer	MA'ADEN GOLD AND BASE METALS (MA'ADEN)
Project Country	KINGDOM OF SAUDI ARABIA

Ma'aden Revision No:	A01	A02	C01	D01
Date	10-03-2020	02-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 27.03.20 AND REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Outotec / L&T Revi	0	1	2	3
Date	10-03-2020	02-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 27.03.20 AND REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

SHEAR CHECK
(FROM FACTORED LOAD COMBINATION)

ALONG X - DIRECTION :

SQx = 0.252 N/mm^2 *(At d-distance from face of the Wall)* *(Plate No. - 166 , L/C No. - 116)*
Vu = 13.658 T

Provided Pt = 0.0029
Nominal Shear Strength, Vc = Min [(a) , (b) , (c)] *[SBC:304-CR-18, Table 22.5.5.1, Page-174]*
[a] = (0.16*λ*fc^0.5 + 17*Pt*Vu*d.eff/Mu)*b*d.eff λ = 1
= (0.16X1X35^0.5+17X0.0029X13.658X10^4X542/10.463/10^7)X1000X542/10^4
= 53.195 T
[b] = (0.16*λ*fc^0.5 + 17*Pt)*b*d.eff
= (0.16X1X35^0.5+17X0.0029)X1000X542/10^4
= 53.976 T
[c] = 0.29*λ*fc^0.5*b*d.eff
= 0.29X1X5.92X1000X542/10^4
= 92.989 T
HENCE, Vc = 53.195 T
Φt*Vc = 0.75X53.195 *[SBC:304-CR-18, CL. No. 7.6.3.1, Page-42]*
= 39.896 T **> 13.658T , Hence O.K.**

ALONG Y - DIRECTION :

SQy = 0.462 N/mm^2 *(At d-distance from face of the Wall)* *(Plate No. - 164 , L/C No. - 116)*
Vu = 25.988 T

Pt provided = 0.0044
Nominal Shear Strength, Vc = Min [(a) , (b) , (c)] *[SBC:304-CR-18, Table 22.5.5.1, Page-174]*
[a] = (0.16*λ*fc^0.5 + 17*Pt*Vu*d.eff/Mu)*b*d.eff λ = 1
= (0.16X1X35^0.5+17X0.0044X25.988X10^4X562.5/39.264/10^7)X1000X562.5/10^4
= 54.811 T
[b] = (0.16*λ*fc^0.5 + 17*Pt)*b*d.eff
= (0.16X1X35^0.5+17X0.0044)X1000X562.5/10^4
= 57.452 KN
[c] = 0.29*λ*fc^0.5*b*d.eff
= 0.29X1X5.92X1000X562.5/10^4
= 96.506 T
HENCE, Vc = 54.811 T
Φt*Vc = 0.75X54.811 *[SBC:304-CR-18, CL. No. 7.6.3.1, Page-42]*
= 41.108 T **> 25.988T , Hence O.K.**

DESIGN OF PEDESTAL: REFER TO STAAD FILE OF FOUNDATION MKD. F1A

Size of Column = 850 X 850 mm^2

Reqired area of Reinforcement = 16100 mm^2

Reinforcement Provided = 24 no. 32 dia bars

Area of Reinforcement Provided = 19302 mm^2

Global Project ID	900707
Delivery Type	ENGINEERING PROCUREMENT CONSTRUCTION
Project Name	MANSOURAH MASSARAH GOLD PROJECT
Customer	MA'ADEN GOLD AND BASE METALS (MA'ADEN)
Project Country	KINGDOM OF SAUDI ARABIA

Ma'aden Revision No:	A01	A02	C01	D01
Date	10-03-2020	02-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 27.03.20 AND REVISED AS MARKUP A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Outotec / L&T Revi	0	1	2	3
Date	10-03-2020	02-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 27.03.20 AND REVISED AS MARKUP A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

3.6 Design Foundations mkd. F4


Foundation has been modelled as plate element in STAAD-Pro. Loads applied on Pedestal are the most critical loads for support node no. 1297 of Superstructure Staad Model
Please Refer Attachment No. 1 Staad Output File for Support Reactions.

INPUT FOR FOUNDATION:

	Along-X	Along-Z
Size of column :	1.00m	1.00m
Size of fdn. raft :	5.00m	4.50m
Thickness of raft :	0.75 m	
Original ground level:	0.00 m	
Finished floor level :	0.50 m	
U/S level of foundation :	-2.50 m	
U/S level Load Point :	6.85 m	
Unit weight of conc :	25 kN/m3	
Unit weight of soil :	18 kN/m3	

Calculation of Weight of Foundation :

Weight of raft & Col.= (5*4.5*0.75*25)+(1*1*8.6*25) = 636.88KN
Weight of soil = ((5*4.5)-(1*1))*2.25*18 = 870.75KN
Total = 1507.63KN

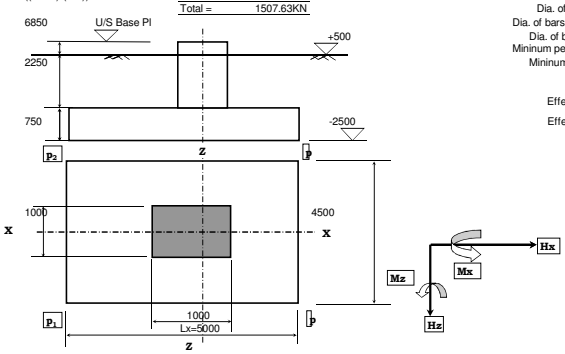

Design Input:

Characteristic strength of concrete, f '$_c$=	35 MPa
Yield stress of steel reinforcement, f_y=	420 MPa
Clear cover for main reinforcement bars =	75mm
Dia. of bars provd. along X direction at bottom =	16mm
Dia. of bars provd. along X direction at top =	12mm
Dia. of bars provided along Z direction at bottom=	16mm
Dia. of bars provided along Z direction at top=	12mm
Mininum percentage of reinforcement at bottom=	0.12%
Mininum percentage of reinforcement at top=	0.06%


Effective depth of slab along X direction = 667mm = 0.667m
Effective depth of slab along Z direction = 651mm = 0.651m
Clear projection along Z direction = 1.75m
Clear projection along X direction = 2m

H_x=Force along X-X direction
Hz=Force along Z-Z direction
M_x=Moment about X-X direction
Mz=Moment about Z-Z direction


Load calculation for Foundation Staad Model:

i) Surcharge on foundation raft due to 6m high material storage = 6 * 1.6 = 9.60 T/m^2
ii) Surcharge on foundation raft due to soil above raft = (2.5+0.5 -0.75) *1.8 = 4.05 T/m^2
iii) Load from Support Reaction from Superstructure Staad Model

MODEL OF MAT FOUNDATION WITH COLUMN FROM STAAD



SURCHARGE LOAD DUE TO SOIL ABOVE FOUNDATION FROM STAAD IN EACH LOAD CASE



Global Project ID	900707
Delivery Type	ENGINEERING PROCUREMENT CONSTRUCTION
Project Name	MANSOURAH MASSARAH GOLD PROJECT
Customer	MA'ADEN GOLD AND BASE METALS (MA'ADEN)
Project Country	KINGDOM OF SAUDI ARABIA

Ma'aden Revision No:	A01	A02	C01	D01
Date	10-03-2020	02-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 27.03.20 AND REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Outotec / L&T Revi	0	1	2	3
Date	10-03-2020	02-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 27.03.20 AND REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Foundation Bearing pressure & Stability has been checked for the Allowable Stress Load Combinations as per Section 2.4.1, SBC 301:2007

	Load at top of foundation					Load at bottom of foundation				
LOAD COMBINATIONS	V (kN)	Hx (kN)	Mz (kN-m)	Hz (kN)	Mx (kN-m)	V (kN)	Hx (kN)	Mz (kN-m)	Hz (kN)	Mx (kN-m)
DL+LL	126.9	-0.8	0.0	0.00	0.0	1634.5	-0.8	-7.5	0.0	0.0
DL+LR	190.8	10.8	0.0	-0.10	0.0	1698.4	10.8	101.0	-0.1	-0.9
DL+0.75*LL+0.75*LR+0.75CR1	169.4	7.5	0.0	0.15	0.0	1677.0	7.5	69.7	0.2	1.4
DL+0.75*LL+0.75*LR+0.75CR2	299.2	6.5	0.0	-0.53	0.0	1806.8	6.5	60.5	-0.5	-4.9
DL+0.75*LL+0.75*LR+0.75CR3	226.7	7.5	0.0	-0.15	0.0	1734.3	7.5	69.7	-0.2	-1.4
DL+0.75*LL+0.75*LR+0.75CR4	167.2	6.6	0.0	0.15	0.0	1674.8	6.6	61.2	0.2	1.4
DL+0.75*LL+0.75*LR+0.75CR5	319.7	7.4	0.0	-0.15	0.0	1827.3	7.4	69.0	-0.2	-1.4
DL+0.75*LL+0.75*LR+0.75CR6	241.4	4.5	0.0	-0.15	0.0	1749.0	4.5	41.6	-0.2	-1.4
DL+0.75*(LL+LR+W(+X))	-132.9	-130.0	0.0	19.73	0.0	1374.7	-130.0	-1215.0	19.7	184.4
DL+0.75*(LL+LR+W(-X))	-2.9	-120.1	1.0	1.05	1.0	1504.7	-120.1	-1121.5	1.1	10.8
DL+0.75*(LL+LR+W(+Z))	38.6	-20.5	2.0	14.33	2.0	1546.2	-20.5	-189.9	14.3	135.9
DL+0.75*(LL+LR+W(-Z))	129.1	-4.7	3.0	-3.98	3.0	1636.7	-4.7	-40.9	-4.0	-34.2
0.6*D + 1.0W(+X)	-323.8	-173.6	4.0	26.40	4.0	1183.8	-173.6	-1619.5	26.4	250.8
0.6*D + 1.0W(-X)	-150.5	-160.4	5.0	1.50	5.0	1357.1	-160.4	-1495.1	1.5	19.0
0.6*D + 1.0W(+Z)	-95.2	-27.7	6.0	19.20	6.0	1412.4	-27.7	-253.4	19.2	185.5
0.6*D + 1.0W(-Z)	25.5	-6.6	7.0	-5.20	7.0	1533.1	-6.6	-55.1	-5.2	-41.6
DL+0.75*(LL+LR+0.7E(+X))	114.4	-24.2	8.0	0.03	8.0	1622.0	-24.2	-217.8	0.0	8.3
DL+0.75*(LL+LR+0.7E(-X))	226.0	30.7	9.0	-0.18	9.0	1733.6	30.7	295.6	-0.2	7.3
DL+0.75*(LL+LR+0.7E(+Z))	173.4	4.4	10.0	-0.23	10.0	1681.1	4.4	51.2	-0.2	7.8
DL+0.75*(LL+LR+0.7E(-Z))	166.9	2.1	11.0	0.08	11.0	1674.6	2.1	30.6	0.1	11.8
0.6*D + 0.7E(+X)	34.0	-19.2	12.0	0.07	12.0	1541.6	-19.2	-167.6	0.1	12.7
0.6*D + 0.7E(-X)	126.6	27.1	13.0	-0.07	13.0	1634.2	27.1	266.7	-0.1	12.3
0.6*D + 0.7E(+Z)	82.5	4.7	14.0	-0.21	14.0	1590.2	4.7	58.2	-0.2	12.0
0.6*D + 0.7E(-Z)	78.0	3.2	15.0	0.21	15.0	1585.7	3.2	44.8	0.2	17.0

Check for Overturning and Sliding: (Allowable F.O.S against Sliding & Overturning both is 1.5)

	Load at bottom of foundation					OVERTURNING		SLIDING (μ = 0.4)	
LOAD COMBINATIONS	V (kN)	Hx (kN)	Mz (kNm)	Hz (kN)	Mx (kNm)	F.O.S. Mz	F.O.S. Mx	F.O.S. Hx	F.O.S. Hz
DL+LL	1634.53	-0.80	-7.48	0.00	0.00	546.30	-	817.27	-
DL+LR	1698.43	10.80	100.98	-0.10	-0.94	42.05	4087.13	62.90	6793.72
DL+0.75*LL+0.75*LR+0.75CR1	1676.98	7.45	69.66	0.15	1.40	60.19	2690.34	90.04	4471.95
DL+0.75*LL+0.75*LR+0.75CR2	1806.81	6.48	60.54	-0.53	-4.91	74.61	828.18	111.62	1376.61
DL+0.75*LL+0.75*LR+0.75CR3	1734.28	7.45	69.66	-0.15	-1.40	62.24	2782.27	93.12	4624.75
DL+0.75*LL+0.75*LR+0.75CR4	1674.81	6.55	61.24	0.15	1.40	68.37	2686.85	92.05	4019.53
DL+0.75*LL+0.75*LR+0.75CR5	1827.28	7.38	68.96	-0.15	-1.40	66.25	2931.47	89.20	4385.47
DL+0.75*LL+0.75*LR+0.75CR6	1748.98	4.45	41.61	-0.15	-1.40	105.09	2805.85	141.49	4197.55
DL+0.75*(LL+LR+W(+X))	1374.73	-129.95	-1215.03	19.73	184.43	2.83	16.77	3.81	25.09
DL+0.75*(LL+LR+W(-X))	1504.71	-120.05	-1121.47	1.05	10.82	3.35	312.97	4.51	515.90
DL+0.75*(LL+LR+W(+Z))	1546.18	-20.53	-189.91	14.33	135.94	20.35	25.59	27.12	38.86
DL+0.75*(LL+LR+W(-Z))	1636.71	-4.70	-40.95	-3.98	-34.17	99.93	107.78	125.36	148.23
0.6*D + 1.0W(+X)	1183.81	-173.64	-1619.53	26.40	250.84	1.83	10.62	2.45	16.14
0.6*D + 1.0W(-X)	1357.11	-160.44	-1495.11	1.50	19.03	2.27	160.50	3.05	325.71
0.6*D + 1.0W(+Z)	1412.41	-27.74	-253.37	19.20	185.52	13.94	17.13	18.33	26.48
0.6*D + 1.0W(-Z)	1533.11	-6.64	-55.08	-5.20	-41.62	69.58	82.88	83.12	106.14
DL+0.75*(LL+LR+0.7E(+X))	1622.00	-24.16	-217.85	0.03	8.28	18.61	440.73	24.17	19463.97
DL+0.75*(LL+LR+0.7E(-X))	1733.61	30.66	295.62	-0.18	7.32	14.66	533.09	20.36	3467.23
DL+0.75*(LL+LR+0.7E(+Z))	1681.06	4.41	51.19	-0.23	7.83	82.10	483.30	137.39	2602.93
DL+0.75*(LL+LR+0.7E(-Z))	1674.55	2.10	30.59	0.08	11.77	136.86	320.08	287.75	7307.13
0.6*D + 0.7E(+X)	1541.64	-19.21	-167.61	0.07	12.65	22.99	274.11	28.89	7928.43
0.6*D + 0.7E(-X)	1634.18	27.13	266.67	-0.07	12.35	15.32	297.83	21.68	8404.35
0.6*D + 0.7E(+Z)	1590.15	4.73	58.23	-0.21	12.04	68.28	297.25	121.03	2725.97
0.6*D + 0.7E(-Z)	1585.67	3.19	44.83	0.21	16.96	88.43	210.32	178.95	2718.29

Foundation is Safe against Overturning
Foundation is Safe against Sliding

Soil Bearing Pressure has been checked for above Unfactored Load Combinations.

Actual Maximum Bearing Pressure at Foundation base from Staad File =	(LC - 10)	23.00	T/m²
Actual Minimum Bearing Pressure at Foundation base from Staad File =	(LC - 9)	0	T/m²
Allowable Net Bearing Pressure of Soil =	(from Geotechnical Report)	45.00	T/m²
Allowable Gross Bearing Pressure of Soil =	45 + 2.5 * 18 =	49.50 T/m2	> 23 T/m2 - OK

Global Project ID	900707
Delivery Type	ENGINEERING PROCUREMENT CONSTRUCTION
Project Name	MANSOURAH MASSARAH GOLD PROJECT
Customer	MA'ADEN GOLD AND BASE METALS (MA'ADEN)
Project Country	KINGDOM OF SAUDI ARABIA

Ma'aden Revision No:	A01	A02	C01	D01
Date	10-03-2020	02-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 27.03.20 AND REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Outotec / L&T Revi	0	1	2	3
Date	10-03-2020	02-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 27.03.20 AND REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Foundation has been designed with the Design strength Load Combinations of Staad File (LC 101 - LC 127)

REINFORCEMENT CALCULATION OF FOUNDATION:


Foundation Thickness =	750	mm
Width =	1000	mm
Clear Cover =	75	mm
Compressive Strength of Concrete , fc' =	35	N/mm^2
Yield Strength of Main Reinforcement , fy =	420	N/mm^2
Yield Strength of Shear Reinforcement , fyt =	420	N/mm^2
Strength Reduction Factor of Main Reinforcement , Φ =	0.9	
Strength Reduction Factor of Shear Reinforcement , Φt =	0.75	

STAAD OUTPUT FROM FACTORED LOAD COMBINATION :

MOMENT	VALUE	UNIT	TORSIONAL MOMENT	VALUE	UNIT	
Max. Mx	50.993	T-M	Corresponding Mxy	-5.07	T-M	*(Plate No. - 23 , L/C No. - 116)*
Min. Mx	-53.245	T-M	Corresponding Mxy	6.40	T-M	*(Plate No. - 10 , L/C No. - 112)*
Max. My	16.845	T-M	Corresponding Mxy	3.93	T-M	*(Plate No. - 27 , L/C No. - 113)*
Min. My	-19.876	T-M	Corresponding Mxy	7.10	T-M	*(Plate No. - 10 , L/C No. - 116)*

FOR OPPOSITE FACE REINFORCEMENT :

Mx1 =	Mx + abs(Mxy) =	50.993 + 5.067 =	56.06	T-M
My1 =	My + abs(Mxy) =	16.845 + 3.925 =	20.77	T-M
Mx2 =	Mx+abs(Mxy^2/My) =	50.993 + 1.524 =	52.517	T-M
My2 =	My+abs(Mxy^2/Mx) =	16.845 + 0.302 =	17.147	T-M



DESIGN MOMENT CALCULATION FOR OPPOSITE FACE REINFORCEMENT (Bottom):

Mxd = 56.06 T-m
Myd = 20.77 T-m

ALONG X - DIRECTION :

Mu = 56.06 T-m
Φ*Kn = Mu/bd^2 deff. = 642.5 mm
Mu/bd^2 = 56.06X10^7/(1000X642.5^2) = 1.358 N/mm^2 < 6.9 N/mm^2
Pt = 0.0037 Reqd. Ast = 0.0037X1000X642.5/100 = 23.77 cm^2
Provided **25** mm @ **150** C/C (Provide Ast = 32.72 cm2) at Horizontal

Total Provide Ast = 32.72 cm2 at Horizontal **O.K.**
Total Provide Pt = 0.01

ALONG Y - DIRECTION :

Mu = 20.77 T-m
Φ*Kn = Mu/bd^2 deff. = 665 mm
Mu/bd^2 = 20.77X10^7/(1000X665^2) = 0.47 N/mm^2 < 6.9 N/mm^2
Pt = 0.0013 Reqd. Ast = 0.0013X1000X665/100 = 8.65 cm^2
Provided **20** mm @ **200** C/C (Provide Ast = 15.71 cm2) at Horizontal

Total Provide Ast = 15.71 cm2) at Horizontal **O.K.**
Total Provide Pt = 0.00

FOR RETAINED FACE REINFORCEMENT :

Mx1 =	Mx - abs(Mxy) =	-53.245 - 6.397 =	-59.642	T-M
My1 =	My - abs(Mxy) =	-19.876 - 7.103 =	-26.979	T-M
Mx2 =	Mx-abs(Mxy^2/My) =	-53.245 - 2.059 =	-55.304	T-M
My2 =	My-abs(Mxy^2/Mx) =	-19.876 - 0.948 =	-18.928	T-M

DESIGN MOMENT CALCULATION FOR RETAINED FACE REINFORCEMENT (Top) :

Mxd = -59.642 T-M
Myd = -26.979 T-M

ALONG X - DIRECTION :

Mu = 59.642 T-m
Φ*Kn = Mu/bd^2 deff. = 642.5 mm
Mu/bd^2 = 59.642X10^7/(1000X642.5^2) = 1.445 N/mm^2 < 6.9 N/mm^2
Pt = 0.0039 Reqd. Ast = 0.0039X1000X642.5/100 = 25.06 cm^2
Provided **25** mm @ **150** C/C (Provide Ast = 32.72 cm2) at Horizontal

Total Provide Ast = 32.72 cm2) at Horizontal **O.K.**
Total Provide Pt = 0.01

ALONG Y - DIRECTION :

Mu = 26.979 T-m
Φ*Kn = Mu/bd^2 deff. = 665 mm
Mu/bd^2 = 26.979X10^7/(1000X665^2) = 0.61 N/mm^2 < 6.9 N/mm^2
Pt = 0.0016 Reqd. Ast = 0.0016X1000X665/100 = 10.64 cm^2
Provided **20** mm @ **200** C/C (Provide Ast = 15.71 cm2) at Horizontal

Total Provide Ast = 15.71 cm2) at Horizontal **O.K.**
Total Provide Pt = 0.00

Global Project ID	900707
Delivery Type	ENGINEERING PROCUREMENT CONSTRUCTION
Project Name	MANSOURAH MASSARAH GOLD PROJECT
Customer	MA'ADEN GOLD AND BASE METALS (MA'ADEN)
Project Country	KINGDOM OF SAUDI ARABIA

Ma'aden Revision No:	A01	A02	C01	D01
Date	10-03-2020	02-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 27.03.20 AND REVISED AS MARKUP A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Outotec / L&T Revi	0	1	2	3
Date	10-03-2020	02-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 27.03.20 AND REVISED AS MARKUP A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

SHEAR CHECK

(FROM FACTORED LOAD COMBINATION)

ALONG X - DIRECTION :

SQx = -0.523 N/mm^2 *(At d-distance from face of the Wall)* *(Plate No. - 127 , L/C No. - 112)*

Vu = 33.603 T

Provided Pt = 0.0051

Nominal Shear Strength, Vc = Min [(a) , (b) , (c)] *[SBC:304-CR-18, Table 22.5.5.1, Page-174]*

[a] = (0.16*λ*fc^0.5 + 17*Pt*Vu*d.eff/Mu)*b*d.eff λ = 1

= (0.16X1X35^0.5+17X0.0051X33.603X10^4X642.5/59.642/10^7)X1000X642.5/10^4

= 62.834 T

[b] = (0.16*λ*fc^0.5 + 17*Pt)*b*d.eff

= (0.16X1X35^0.5+17X0.0051)X1000X642.5/10^4

= 66.388 T

[c] = 0.29*λ*fc^0.5*b*d.eff

= 0.29X1X5.92X1000X642.5/10^4

= 110.231 T

HENCE, Vc = 62.834 T

Φt*Vc = 0.75X62.834 *[SBC:304-CR-18, CL. No. 7.6.3.1, Page-42]*

= 47.126 T **> 33.603T , Hence O.K.**

ALONG Y - DIRECTION :

SQy = 0.296 N/mm^2 *(At d-distance from face of the Wall)* *(Plate No. - 111 , L/C No. - 116)*

Vu = 19.684 T

Pt provided = 0.0024

Nominal Shear Strength, Vc = Min [(a) , (b) , (c)] *[SBC:304-CR-18, Table 22.5.5.1, Page-174]*

[a] = (0.16*λ*fc^0.5 + 17*Pt*Vu*d.eff/Mu)*b*d.eff λ = 1

= (0.16X1X35^0.5+17X0.0024X19.684X10^4X665/26.979/10^7)X1000X665/10^4

= 64.263 T

[b] = (0.16*λ*fc^0.5 + 17*Pt)*b*d.eff

= (0.16X1X35^0.5+17X0.0024)X1000X665/10^4

= 65.66 KN

[c] = 0.29*λ*fc^0.5*b*d.eff

= 0.29X1X5.92X1000X665/10^4

= 114.092 T

HENCE, Vc = 64.263 T

Φt*Vc = 0.75X64.263 *[SBC:304-CR-18, CL. No. 7.6.3.1, Page-42]*

= 48.197 T **> 19.684T , Hence O.K.**

DESIGN OF PEDESTAL: REFER TO STAAD FILE OF FOUNDATION MKD. F4

Size of Column = 1000 x 1000 mm^2

Reqired area of Reinforcement = 20720 mm^2

Reinforcement Provided = 4 no. 25 dia bars + 24 no. 32 dia bars

Area of Reinforcement Provided = 21265 mm^2

Global Project ID	900707
Delivery Type	ENGINEERING PROCUREMENT CONSTRUCTION
Project Name	MANSOURAH MASSARAH GOLD PROJECT
Customer	MA'ADEN GOLD AND BASE METALS (MA'ADEN)
Project Country	KINGDOM OF SAUDI ARABIA

Ma'aden Revision No:	A01	A02	C01	D01
Date	10-03-2020	02-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 27.03.20 AND REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Outotec / L&T Revi	0	1	2	3
Date	10-03-2020	02-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 27.03.20 AND REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

3.7 Design Foundations mkd. F4A


Foundation has been modelled as plate element in STAAD-Pro. Loads applied on Pedestal are the most critical loads for support node no. 1247 of Superstructure Staad Model
Please Refer Attachment No. 1 Staad Output File for Support Reactions.

INPUT FOR FOUNDATION:

	Along-X	Along-Z
Size of column :	0.85m	0.85m
Size of fdn. raft :	2.25m	2.25m
Thickness of raft :	0.40 m	
Original ground level:	0.00 m	
Finished floor level :	0.50 m	
U/S level of foundation :	-2.50 m	
U/S level Load Point :	6.85 m	
Unit weight of conc :	25 kN/m3	
Unit weight of soil :	18 kN/m3	

Calculation of Weight of Foundation :


Weight of raft & Col.= (2.25*2.25*0.4*25)+(0.85*0.85*8.95*25) = 212.28KN
Weight of soil = ((2.25*2.25)-(0.85*0.85))*2.6*18 = 203.11KN
Total = 415.40KN

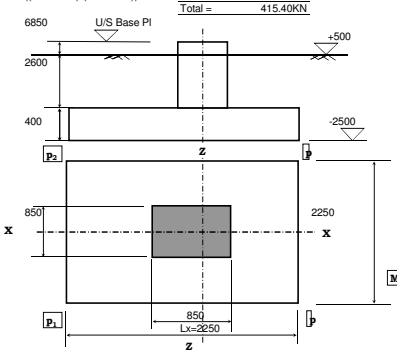

Design Input:

Characteristic strength of concrete, f '$_c$=	35 MPa
Yield stress of steel reinforcement, f_y=	420 MPa
Clear cover for main reinforcement bars =	75mm
Dia. of bars provd. along X direction at bottom =	16mm
Dia. of bars provd. along X direction at top =	12mm
Dia. of bars provided along Z direction at bottom=	16mm
Dia. of bars provided along Z direction at top=	12mm
Mininum percentage of reinforcement at bottom=	0.12%
Mininum percentage of reinforcement at top=	0.06%

Effective depth of slab along X direction = 317mm = 0.317m
Effective depth of slab along Z direction = 301mm = 0.301m
Clear projection along Z direction = 0.7m
Clear projection along X direction = 0.7m



H_x=Force along X-X direction
Hz=Force along Z-Z direction
M_x=Moment about X-X direction
Mz=Moment about Z-Z direction


Load calculation for Foundation Staad Model:

i) Surcharge on foundation raft due to 6m high material storage = 6 * 1.6 = 9.60 T/m^2
ii) Surcharge on foundation raft due to soil above raft = (2.5+0.5 -0.4) *1.8 = 4.68 T/m^2
iii) Load from Support Reaction from Superstructure Staad Model

MODEL OF MAT FOUNDATION WITH COLUMN FROM STAAD



SURCHARGE LOAD DUE TO SOIL ABOVE FOUNDATION FROM STAAD IN EACH LOAD CASE



Global Project ID	900707
Delivery Type	ENGINEERING PROCUREMENT CONSTRUCTION
Project Name	MANSOURAH MASSARAH GOLD PROJECT
Customer	MA'ADEN GOLD AND BASE METALS (MA'ADEN)
Project Country	KINGDOM OF SAUDI ARABIA

Ma'aden Revision No:	A01	A02	C01	D01
Date	10-03-2020	02-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 27.03.20 AND REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Outotec / L&T Revi	0	1	2	3
Date	10-03-2020	02-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 27.03.20 AND REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Foundation Bearing pressure & Stability has been checked for the Allowable Stress Load Combinations as per Section 2.4.1, SBC 301:2007

	Load at top of foundation					Load at bottom of foundation				
LOAD COMBINATIONS	V (kN)	Hx (kN)	Mz (kN-m)	Hz (kN)	Mx (kN-m)	V (kN)	Hx (kN)	Mz (kN-m)	Hz (kN)	Mx (kN-m)
DL+LL	168.0	-0.1	0.0	-22.20	0.0	1319.2	-0.1	-0.9	-22.2	-207.6
DL+LR	143.0	-0.2	0.0	-23.60	0.0	1294.2	-0.2	-1.9	-23.6	-220.7
DL+0.75*LL+0.75*LR+0.75CR1	169.6	-0.1	0.0	-23.55	0.0	1320.8	-0.1	-0.9	-23.6	-220.2
DL+0.75*LL+0.75*LR+0.75CR2	166.3	-0.2	0.0	-21.98	0.0	1317.5	-0.2	-1.6	-22.0	-205.5
DL+0.75*LL+0.75*LR+0.75CR3	168.0	-0.2	0.0	-22.73	0.0	1319.2	-0.2	-1.6	-22.7	-212.5
DL+0.75*LL+0.75*LR+0.75CR4	173.1	-0.1	0.0	-25.35	0.0	1324.3	-0.1	-0.9	-25.4	-237.0
DL+0.75*LL+0.75*LR+0.75CR5	177.7	-0.2	0.0	-26.93	0.0	1328.9	-0.2	-1.6	-26.9	-251.7
DL+0.75*LL+0.75*LR+0.75CR6	174.5	-0.2	0.0	-25.73	0.0	1325.7	-0.2	-1.6	-25.7	-240.5
DL+0.75*(LL+LR+W(+X))	-44.8	-2.1	0.0	84.53	0.0	1106.4	-2.1	-19.2	84.5	790.3
DL+0.75*(LL+LR+W(-X))	91.2	-10.8	1.0	22.65	1.0	1242.4	-10.8	-100.2	22.7	212.8
DL+0.75*(LL+LR+W(+Z))	29.4	4.0	2.0	30.30	2.0	1180.6	4.0	38.9	30.3	285.3
DL+0.75*(LL+LR+W(-Z))	61.8	0.3	3.0	13.50	3.0	1213.0	0.3	5.6	13.5	129.2
0.6*D + 1.0W(+X)	-225.7	-2.6	4.0	140.26	4.0	925.5	-2.6	-19.9	140.3	1315.4
0.6*D + 1.0W(-X)	-44.4	-14.3	5.0	57.76	5.0	1106.8	-14.3	-128.3	57.8	545.1
0.6*D + 1.0W(+Z)	-126.8	5.4	6.0	67.96	6.0	1024.4	5.4	56.9	68.0	641.4
0.6*D + 1.0W(-Z)	-83.6	0.5	7.0	45.56	7.0	1067.6	0.5	12.0	45.6	433.0
DL+0.75*(LL+LR+0.7E(+X))	174.1	-0.2	8.0	-26.11	8.0	1325.3	-0.2	6.4	-26.1	-236.1
DL+0.75*(LL+LR+0.7E(-X))	168.7	-0.2	9.0	-23.69	9.0	1319.9	-0.2	7.4	-23.7	-212.5
DL+0.75*(LL+LR+0.7E(+Z))	215.4	-0.2	10.0	-42.44	10.0	1366.6	-0.2	8.4	-42.4	-386.8
DL+0.75*(LL+LR+0.7E(-Z))	127.4	-0.2	11.0	-7.37	11.0	1278.6	-0.2	9.4	-7.4	-57.9
0.6*D + 0.7E(+X)	65.1	-0.1	12.0	-6.76	12.0	1216.3	-0.1	11.4	-6.8	-51.2
0.6*D + 0.7E(-X)	60.1	-0.1	13.0	-4.52	13.0	1211.3	-0.1	12.4	-4.5	-29.3
0.6*D + 0.7E(+Z)	96.2	-0.1	14.0	-19.15	14.0	1247.4	-0.1	13.4	-19.2	-165.1
0.6*D + 0.7E(-Z)	29.0	-0.1	15.0	7.87	15.0	1180.2	-0.1	14.4	7.9	88.6

Check for Overturning and Sliding: (Allowable F.O.S against Sliding & Overturning both is 1.5)

	Load at bottom of foundation					OVERTURNING		SLIDING (μ = 0.4)	
LOAD COMBINATIONS	V (kN)	Hx (kN)	Mz (kNm)	Hz (kN)	Mx (kNm)	F.O.S. Mz	F.O.S. Mx	F.O.S. Hx	F.O.S. Hz
DL+LL	1319.21	-0.10	-0.94	-22.20	-207.57	2469.11	15.89	5276.84	23.77
DL+LR	1294.21	-0.20	-1.87	-23.60	-220.66	1211.16	14.66	2588.42	21.94
DL+0.75*LL+0.75*LR+0.75CR1	1320.81	-0.10	-0.94	-23.55	-220.19	2472.10	15.00	5283.24	22.43
DL+0.75*LL+0.75*LR+0.75CR2	1317.51	-0.18	-1.64	-21.98	-205.47	1409.10	16.03	3011.45	23.98
DL+0.75*LL+0.75*LR+0.75CR3	1319.16	-0.18	-1.64	-22.73	-212.48	1410.87	15.52	3015.22	23.22
DL+0.75*LL+0.75*LR+0.75CR4	1324.34	-0.10	-0.94	-25.35	-237.02	2478.70	13.97	4767.61	18.81
DL+0.75*LL+0.75*LR+0.75CR5	1328.91	-0.18	-1.64	-26.93	-251.75	1421.29	13.20	2733.76	17.77
DL+0.75*LL+0.75*LR+0.75CR6	1325.69	-0.18	-1.64	-25.73	-240.53	1417.84	13.78	2727.12	18.55
DL+0.75*(LL+LR+W(+X))	1106.39	-2.05	-19.17	84.53	790.31	101.01	3.50	194.29	4.71
DL+0.75*(LL+LR+W(-X))	1242.36	-10.83	-100.21	22.65	212.78	21.69	14.60	41.32	19.75
DL+0.75*(LL+LR+W(+Z))	1180.56	3.95	38.93	30.30	285.31	53.07	10.34	107.60	14.03
DL+0.75*(LL+LR+W(-Z))	1212.96	0.28	5.57	13.50	129.23	381.01	23.47	1587.87	32.35
0.6*D + 1.0W(+X)	925.49	-2.56	-19.94	140.26	1315.43	81.24	1.76	130.15	2.38
0.6*D + 1.0W(-X)	1106.79	-14.26	-128.33	57.76	545.06	15.09	5.08	27.94	6.90
0.6*D + 1.0W(+Z)	1024.39	5.44	56.86	67.96	641.43	31.53	3.99	67.79	5.43
0.6*D + 1.0W(-Z)	1067.59	0.54	12.05	45.56	432.99	155.06	6.16	711.73	8.44
DL+0.75*(LL+LR+0.7E(+X))	1325.34	-0.18	6.36	-26.11	-236.11	364.46	14.03	2726.41	18.28
DL+0.75*(LL+LR+0.7E(-X))	1319.88	-0.18	7.36	-23.69	-212.52	313.67	15.53	2715.18	20.06
DL+0.75*(LL+LR+0.7E(+Z))	1366.61	-0.18	8.36	-42.44	-386.77	285.94	8.83	2811.30	11.59
DL+0.75*(LL+LR+0.7E(-Z))	1278.62	-0.18	9.36	-7.37	-57.86	238.96	55.24	2630.29	62.50
0.6*D + 0.7E(+X)	1216.31	-0.06	11.44	-6.76	-51.21	186.08	59.38	7297.86	64.77
0.6*D + 0.7E(-X)	1211.27	-0.06	12.44	-4.52	-29.26	170.41	103.48	7267.62	96.47
0.6*D + 0.7E(+Z)	1247.39	-0.06	13.44	-19.15	-165.05	162.43	18.89	7484.34	23.45
0.6*D + 0.7E(-Z)	1180.19	-0.06	14.44	7.87	88.58	143.04	33.31	7081.14	53.99
	1106.39	-2.05	-19.17	84.53	790.31	101.01	3.50	194.29	4.71

Foundation is Safe against Overturning
Foundation is Safe against Sliding

Soil Bearing Pressure has been checked for above Unfactored Load Combinations.

Actual Maximum Bearing Pressure at Foundation base from Staad File =	(LC - 12)	25.00 T/m^2
Actual Minimum Bearing Pressure at Foundation base from Staad File =	(LC - 13)	0 T/m^2
Allowable Net Bearing Pressure of Soil =	(from Geotechnical Report)	45.00 T/m^2
Allowable Gross Bearing Pressure of Soil =	45 + 2.5 * 18 =	49.50 T/m2
		> 25 T/m2 - OK

Global Project ID	900707
Delivery Type	ENGINEERING PROCUREMENT CONSTRUCTION
Project Name	MANSOURAH MASSARAH GOLD PROJECT
Customer	MA'ADEN GOLD AND BASE METALS (MA'ADEN)
Project Country	KINGDOM OF SAUDI ARABIA

Ma'aden Revision No:	A01	A02	C01	D01
Date	10-03-2020	02-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 27.03.20 AND REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Outotec / L&T Revi	0	1	2	3
Date	10-03-2020	02-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 27.03.20 AND REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Foundation has been designed with the Design strength Load Combinations of Staad File (LC 101 - LC 127)

REINFORCEMENT CALCULATION OF FOUNDATION:


Foundation Thickness =	400	mm
Width =	1000	mm
Clear Cover =	75	mm
Compressive Strength of Concrete , fc' =	35	N/mm^2
Yield Strength of Main Reinforcement , fy =	420	N/mm^2
Yield Strength of Shear Reinforcement , fyt =	420	N/mm^2
Strength Reduction Factor of Main Reinforcement , Φ =	0.9	
Strength Reduction Factor of Shear Reinforcement , Φt =	0.75	

STAAD OUTPUT FROM FACTORED LOAD COMBINATION :

MOMENT	VALUE	UNIT	TORSIONAL MOMENT	VALUE	UNIT	
Max. Mx	4.758	T-M	Corresponding Mxy	0.04	T-M	*(Plate No. - 64 , L/C No. - 112)*
Min. Mx	-2.193	T-M	Corresponding Mxy	0.38	T-M	*(Plate No. - 33 , L/C No. - 116)*
Max. My	5.162	T-M	Corresponding Mxy	0.60	T-M	*(Plate No. - 93 , L/C No. - 112)*
Min. My	-2.233	T-M	Corresponding Mxy	0.39	T-M	*(Plate No. - 33 , L/C No. - 112)*

FOR OPPOSITE FACE REINFORCEMENT :

Mx1 =	Mx + abs(Mxy) =	4.758 + 0.036 =	4.794	T-M
My1 =	My + abs(Mxy) =	5.162 + 0.598 =	5.76	T-M
Mx2 =	Mx+abs(Mxy^2/My) =	4.758 + 0 =	4.758	T-M
My2 =	My+abs(Mxy^2/Mx) =	5.162 + 0.075 =	5.237	T-M



DESIGN MOMENT CALCULATION FOR OPPOSITE FACE REINFORCEMENT (Bottom):

Mxd = 4.794 T-m
Myd = 5.76 T-m

ALONG X - DIRECTION :

Mu = 4.794 T-m
Φ*Kn = Mu/bd^2 deff. = 301 mm
Mu/bd^2 = 4.794X10^7/(1000X301^2) = 0.529 N/mm^2 < 6.9 N/mm^2
Pt = 0.0014 Reqd. Ast = 0.0014X1000X301/100 = 4.21 cm^2
Provided **16** mm @ **200** C/C (Provide Ast = 10.05 cm2) at Horizontal

Total Provide Ast = 10.05 cm2 at Horizontal **O.K.**
Total Provide Pt = 0.00

ALONG Y - DIRECTION :

Mu = 5.76 T-m
Φ*Kn = Mu/bd^2 deff. = 317 mm
Mu/bd^2 = 5.76X10^7/(1000X317^2) = 0.573 N/mm^2 < 6.9 N/mm^2
Pt = 0.0015 Reqd. Ast = 0.0015X1000X317/100 = 4.76 cm^2
Provided **16** mm @ **200** C/C (Provide Ast = 10.05 cm2) at Horizontal

Total Provide Ast = 10.05 cm2) at Horizontal **O.K.**
Total Provide Pt = 0.00

FOR RETAINED FACE REINFORCEMENT :

Mx1 =	Mx - abs(Mxy) =	-2.193 - 0.382 =	-2.575	T-M
My1 =	My - abs(Mxy) =	-2.233 - 0.387 =	-2.62	T-M
Mx2 =	Mx-abs(Mxy^2/My) =	-2.193 - 0.065 =	-2.258	T-M
My2 =	My-abs(Mxy^2/Mx) =	-2.233 - 0.068 =	-2.165	T-M

DESIGN MOMENT CALCULATION FOR RETAINED FACE REINFORCEMENT (Top) :

Mxd = -2.575 T-M
Myd = -2.62 T-M

ALONG X - DIRECTION :

Mu = 2.575 T-m
Φ*Kn = Mu/bd^2 deff. = 307 mm
Mu/bd^2 = 2.575X10^7/(1000X307^2) = 0.273 N/mm^2 < 6.9 N/mm^2
Pt = 0.0007 Reqd. Ast = 0.0007X1000X307/100 = 2.15 cm^2
Provided **12** mm @ **200** C/C (Provide Ast = 5.65 cm2) at Horizontal

Total Provide Ast = 5.65 cm2) at Horizontal **O.K.**
Total Provide Pt = 0.00

ALONG Y - DIRECTION :

Mu = 2.62 T-m
Φ*Kn = Mu/bd^2 deff. = 319 mm
Mu/bd^2 = 2.62X10^7/(1000X319^2) = 0.257 N/mm^2 < 6.9 N/mm^2
Pt = 0.0007 Reqd. Ast = 0.0007X1000X319/100 = 2.23 cm^2
Provided **12** mm @ **200** C/C (Provide Ast = 5.65 cm2) at Horizontal

Total Provide Ast = 5.65 cm2) at Horizontal **O.K.**
Total Provide Pt = 0.00

Global Project ID	900707
Delivery Type	ENGINEERING PROCUREMENT CONSTRUCTION
Project Name	MANSOURAH MASSARAH GOLD PROJECT
Customer	MA'ADEN GOLD AND BASE METALS (MA'ADEN)
Project Country	KINGDOM OF SAUDI ARABIA

Ma'aden Revision No:	A01	A02	C01	D01
Date	10-03-2020	02-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 27.03.20 AND REVISED AS MARKUP A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Outotec / L&T Revi	0	1	2	3
Date	10-03-2020	02-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 27.03.20 AND REVISED AS MARKUP A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

SHEAR CHECK
(FROM FACTORED LOAD COMBINATION)

ALONG X - DIRECTION :

SQx = -0.173 N/mm^2 *(At d-distance from face of the Wall)* *(Plate No. - 104 , L/C No. - 112)*
Vu = 5.311 T

Provided Pt = 0.0033
Nominal Shear Strength, Vc = Min [(a) , (b) , (c)] *[SBC:304-CR-18, Table 22.5.5.1, Page-174]*
[a] = (0.16*λ*fc^0.5 + 17*Pt*Vu*d.eff/Mu)*b*d.eff λ = 1
= (0.16X1X35^0.5+17X0.0033X5.311X10^4X307/2.575/10^7)X1000X307/10^4
= 30.15 T
[b] = (0.16*λ*fc^0.5 + 17*Pt)*b*d.eff
= (0.16X1X35^0.5+17X0.0033)X1000X307/10^4
= 30.782 T
[c] = 0.29*λ*fc^0.5*b*d.eff
= 0.29X1X5.92X1000X307/10^4
= 52.671 T
HENCE, Vc = 30.15 T
Φt*Vc = 0.75X30.15 *[SBC:304-CR-18, CL. No. 7.6.3.1, Page-42]*
= 22.613 T **> 5.311T , Hence O.K.**

ALONG Y - DIRECTION :

SQy = 0.27 N/mm^2 *(At d-distance from face of the Wall)* *(Plate No. - 89 , L/C No. - 112)*
Vu = 8.613 T

Pt provided = 0.0018
Nominal Shear Strength, Vc = Min [(a) , (b) , (c)] *[SBC:304-CR-18, Table 22.5.5.1, Page-174]*
[a] = (0.16*λ*fc^0.5 + 17*Pt*Vu*d.eff/Mu)*b*d.eff λ = 1
= (0.16X1X35^0.5+17X0.0018X8.613X10^4X319/2.62/10^7)X1000X319/10^4
= 31.219 T
[b] = (0.16*λ*fc^0.5 + 17*Pt)*b*d.eff
= (0.16X1X35^0.5+17X0.0018)X1000X319/10^4
= 31.172 KN
[c] = 0.29*λ*fc^0.5*b*d.eff
= 0.29X1X5.92X1000X319/10^4
= 54.73 T
HENCE, Vc = 31.172 T
Φt*Vc = 0.75X31.172 *[SBC:304-CR-18, CL. No. 7.6.3.1, Page-42]*
= 23.379 T **> 8.613T , Hence O.K.**

DESIGN OF PEDESTAL: REFER TO STAAD FILE OF FOUNDATION MKD. F4A

Size of Column = 850 mm X 850 mm

Reqired area of Reinforcement = 7225 mm^2

Reinforcement Provided = 16 no. 25 dia bars

Area of Reinforcement Provided = 7854 mm^2

Global Project ID	900707
Delivery Type	ENGINEERING PROCUREMENT CONSTRUCTION
Project Name	MANSOURAH MASSARAH GOLD PROJECT
Customer	MA'ADEN GOLD AND BASE METALS (MA'ADEN)
Project Country	KINGDOM OF SAUDI ARABIA

Ma'aden Revision No:	A01	A02	C01	D01
Date	10-03-2020	02-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 27.03.20 AND REVISED AS MARKUP A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Outotec / L&T Revi	0	1	2	3
Date	10-03-2020	02-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 27.03.20 AND REVISED AS MARKUP A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

3.8 Design of One-Way Slab on Filter Press Equipment Supporting Floor

DESIGN DATA:

Slab Thickness =	150	mm	
Span =	1500	mm	(approximate)
Width of slab =	1000	mm	
Unit Weight of Concrete =	25	KN/m^3	
Live load on Slab =	5	KN/m^2	
Clear Cover =	20	mm	(Table 20.6.1.3.1, SBC 304 : 2018)
Compressive Strength of Concrete , fc' =	35	N/mm^2	
Yield Strength of Main Reinforcement , fy =	420	N/mm^2	
Strength Reduction Factor of Main Reinforcement , Φ =	0.9		
Strength Reduction Factor of Shear Reinforcement , Φt =	0.75		

DESIGN MOMENT CALCULATION :

Self Weight of Slab = 150/1000*25 =	0.375	T/m^2
Live Load =	0.5	T/m^2
Total Load =	0.875	T/m^2

Maximum Span Moment = 0.875*1.5 ^2 /8 = 0.246 T-m
Design Moment, Mu = *0.24609375 = 0.345 T-m

ALONG SPAN (MAIN REINFORCEMENT) :

Mu = 0.345 T-m
Φ*Kn = Mu/bd^2 deff. = 115 mm
Mu/bd^2 = 0.34453125X10^7/(1000X115^2) = 0.261 N/mm^2 < 6.9 N/mm^2
Pt = 0.0007 Reqd. Ast = 0.0007X1000X115/100 = 0.81 cm^2
Provided **10** mm @ **200** C/C (Provide Ast = 3.93 cm2) at Horizontal **O.K.**
Total Provide Pt = 0.00

ACROSS SPAN (TRANSVERSE REINFORCEMENT) :

Minimum Reinforcement % = 0.0018 (Both faces each side - Table 7.6.1.1, SBC 304:2018) deff. = 115 mm
Reqd. Transverse Reinforcement = 0.0009 * 1000*150= 135 mm^2/m width 1.35 cm^2/m width
Provided **10** mm @ **200** C/C (Provide Ast = 3.93 cm2) at Horizontal **O.K.**
Total Provide Pt = 0.00

SHEAR CHECK

ALONG SPAN :

Maximum Shear Force, V = 0.875 * 1.5 /2 = 0.65625 T
Vu = 1.4 * V = 0.91875 T

Provided Pt = 0.0034
Nominal Shear Strength, Vc = Min [(a) , (b) , (c)] *[SBC:304-CR-18, Table 22.5.5.1, Page-174]*

[a] = (0.16*λ*fc^0.5 + 17*Pt*Vu*d.eff/Mu)*b*d.eff λ = 1
= (0.16X1X35^0.5+17X0.0034X0.91875X10^4X115/0.34453125/10^7)X1000X115/10^4
= 11.089 T

[b] = (0.16*λ*fc^0.5 + 17*Pt)*b*d.eff
= (0.16X1X35^0.5+17X0.0034)X1000X115/10^4
= 11.55 T

[c] = 0.29*λ*fc^0.5*b*d.eff
= 0.29X1X5.92X1000X115/10^4
= 19.73 T

HENCE, Vc = 11.089 T
Φt*Vc = 0.75X11.089 *[SBC:304-CR-18, CL. No. 7.6.3.1, Page-42]*
= 8.317 T **> 0.91875T , Hence O.K.**

Global Project ID	900707
Delivery Type	ENGINEERING PROCUREMENT CONSTRUCTION
Project Name	MANSOURAH MASSARAH GOLD PROJECT
Customer	MA'ADEN GOLD AND BASE METALS (MA'ADEN)
Project Country	KINGDOM OF SAUDI ARABIA

Ma'aden Revision No:	A01	A02	C01	D01
Date	10-03-2020	02-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 27.03.20 AND REVISED AS MARKUP A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Outotec / L&T Revi	0	1	2	3
Date	10-03-2020	02-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 27.03.20 AND REVISED AS MARKUP A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

REFERENCES

[1] Structural Loading and Forces ; SBC Code 301: 2007

[2] Saudi Concrete Structures Code ; SBC 304 : 2018

[3] Civil,Structural and Architectural Design Criteria ; MD-216-1000-EG-ST-CRT-1001

[4] ACI 318 : 2014 Building Code Requirement of Structural Concrete

[5] Geotechnical Report No. MD-216-3000-EG-CV-RPT-1008

Global Project ID	900707
Delivery Type	ENGINEERING PROCUREMENT CONSTRUCTION
Project Name	MANSOURAH MASSARAH GOLD PROJECT
Customer	MA'ADEN GOLD AND BASE METALS (MA'ADEN)
Project Country	KINGDOM OF SAUDI ARABIA

Ma'aden Revision No:	A01	A02	C01	D01
Date	10-03-2020	02-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 27.03.20 AND REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Outotec / L&T Revi:	0	1	2	3
Date	10-03-2020	02-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 27.03.20 AND REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

ATTACHMENT 1 STAAD INPUT & OUTPUT FILE OF CONCENTRATE FILTRATION BUILDING

```
**************************************************
*                                                *
*           STAAD.Pro V8i SELECTseries5          *
*           Version  20.07.10.64                 *
*           Proprietary Program of               *
*           Bentley Systems, Inc.                *
*           Date=    MAR  9, 2020                *
*           Time=    19:18:46                    *
*                                                *
*      USER ID: LNT ECC DIV                      *
**************************************************
```

```
     1. STAAD SPACE
INPUT FILE: MD-216-3350-EG-ST-CAL-1226-A01_FDN LOAD DATA.STD
     2. START JOB INFORMATION
     3. ENGINEER DATE 12-NOV-19
     4. END JOB INFORMATION
     5. INPUT WIDTH 79
     6. UNIT METER MTON
     7. JOINT COORDINATES
     8. 3 16.55 17.403 0; 6 0.3 0.5 0; 8 32.8 0.5 0; 10 0.3 15.7472 0
     9. 11 32.8 15.7472 0; 13 0.3 15.7472 13; 14 16.55 17.403 13; 15 32.8 15.7472 13
    10. 19 0.3 0.5 13; 22 0.3 15.7472 19.5; 23 16.55 17.403 19.5; 24 32.8 15.7472 19.5
    11. 31 0.3 15.7472 32.5; 32 16.55 17.403 32.5; 33 32.8 15.7472 32.5
    12. 40 0.3 15.7472 39; 41 16.55 17.403 39; 42 32.8 15.7472 39; 49 0.3 15.7472 52
    13. 50 16.55 17.403 52; 51 32.8 15.7472 52; 80 0.3 14.2 52; 96 32.8 14.2 52
    14. 119 0.3 14.2 39; 135 32.8 14.2 39; 151 0.3 14.2 32.5; 167 32.8 14.2 32.5
    15. 183 0.3 14.2 19.5; 199 32.8 14.2 19.5; 215 0.3 14.2 13; 231 32.8 14.2 13
    16. 247 0.3 14.2 0; 263 32.8 14.2 0; 266 16.549 14.2 52; 294 16.55 14.2 39
    17. 295 19.8006 14.2 39; 300 13.3004 14.2 39; 303 6.80004 14.2 39
    18. 304 10.0502 14.2 39; 310 23.0508 14.2 39; 323 16.55 14.2 32.5
    19. 324 19.8006 14.2 32.5; 329 13.3004 14.2 32.5; 332 6.80004 14.2 32.5
    20. 333 10.0502 14.2 32.5; 339 23.0508 14.2 32.5; 352 16.55 14.2 19.5
    21. 353 19.8006 14.2 19.5; 358 13.3004 14.2 19.5; 361 6.80004 14.2 19.5
    22. 362 10.0502 14.2 19.5; 368 23.0508 14.2 19.5; 381 16.55 14.2 13
    23. 382 19.8006 14.2 13; 387 13.3004 14.2 13; 390 6.80004 14.2 13
    24. 391 10.0502 14.2 13; 397 23.0508 14.2 13; 410 16.55 14.2 0; 411 19.8006 14.2 0
    25. 416 13.3004 14.2 0; 419 6.80004 14.2 0; 420 10.0502 14.2 0; 426 23.0508 14.2 0
    26. 442 16.55 17.403 6.5; 445 16.55 17.403 45.5; 447 16.55 17.403 26
    27. 463 16.55 14.2 45.5; 465 16.55 14.2 26; 467 16.55 14.2 6.5
    28. 471 10.0502 14.2 45.5; 472 10.0502 14.2 26; 473 10.0502 14.2 6.5
    29. 477 23.0508 14.2 45.5; 478 23.0508 14.2 6.5; 481 23.0508 14.2 26
    30. 491 0.300002 15.7472 45.5; 502 32.8 15.7472 45.5; 513 0.300002 14.2 45.5
    31. 527 32.8 14.2 45.5; 535 19.8006 14.2 45.5; 539 13.3004 14.2 45.5
    32. 540 6.80003 14.2 45.5; 547 0.300002 15.7472 26; 558 32.8 15.7472 26
    33. 572 0.300002 14.2 26; 586 32.8 14.2 26; 589 19.8006 14.2 26
    34. 592 13.3004 14.2 26; 593 6.80003 14.2 26; 601 0.300002 15.7472 6.5
    35. 607 0.3 0.5 6.5; 609 32.8 0.5 6.5; 612 32.8 15.7472 6.5; 628 0.300002 14.2 6.5
    36. 642 32.8 14.2 6.5; 645 19.8006 14.2 6.5; 648 13.3004 14.2 6.5
    37. 649 6.80003 14.2 6.5; 657 0.3 5.8 0; 658 0.3 5.8 6.5; 659 0.3 6.35 39
    38. 660 0.3 6.35 45.5; 661 0.3 6.35 32.5; 662 0.3 6.35 19.5; 663 0.3 6.35 26
```

39. 664 0.3 5.8 13; 676 0.3 6.35 52; 677 32.8 5.8 0; 678 32.8 5.8 6.5
40. 679 32.8 6.35 39; 680 32.8 6.35 45.5; 681 32.8 6.35 32.5; 682 32.8 6.35 19.5
41. 683 32.8 6.35 26; 684 32.8 6.35 13; 696 32.8 6.35 52
42. 699 0.300001 15.7472 48.75; 708 0.300001 15.7472 3.25; 715 32.8 15.7472 48.75
43. 723 32.8 15.7472 3.25; 729 6.80004 0.5003 0; 730 26.301 0.5003 0
44. 737 13.3004 0.499801 0; 739 19.8006 0.500101 0; 740 6.80004 5.8 0
45. 741 26.301 5.8 0; 742 13.3004 5.8 0; 743 19.8006 5.8 0; 749 13.3004 17.0719 0
46. 751 10.0502 16.7407 0; 752 6.80004 16.4095 0; 757 26.3 14.2 0
47. 759 19.7996 17.0719 0; 760 23.0498 16.7407 0; 761 26.3 16.4095 0
48. 764 13.3004 17.0719 6.5; 765 10.0502 16.7407 6.5; 766 6.80004 16.4095 6.5
49. 770 26.3 14.2 6.5; 772 19.7996 17.0719 6.5; 773 23.0498 16.7407 6.5
50. 774 26.3 16.4095 6.5; 777 13.3004 17.0719 13; 778 10.0502 16.7407 13
51. 779 6.80004 16.4095 13; 783 26.3 14.2 13; 785 19.7996 17.0719 13
52. 786 23.0498 16.7407 13; 787 26.3 16.4095 13; 790 13.3004 17.0719 19.5
53. 791 10.0502 16.7407 19.5; 792 6.80004 16.4095 19.5; 796 26.3 14.2 19.5
54. 798 19.7996 17.0719 19.5; 799 23.0498 16.7407 19.5; 800 26.3 16.4095 19.5
55. 803 13.3004 17.0719 26; 804 10.0502 16.7407 26; 805 6.80004 16.4095 26
56. 809 26.3 14.2 26; 811 19.7996 17.0719 26; 812 23.0498 16.7407 26
57. 813 26.3 16.4095 26; 816 13.3004 17.0719 32.5; 817 10.0502 16.7407 32.5
58. 818 6.80004 16.4095 32.5; 822 26.3 14.2 32.5; 824 19.7996 17.0719 32.5
59. 825 23.0498 16.7407 32.5; 826 26.3 16.4095 32.5; 829 13.3004 17.0719 39
60. 830 10.0502 16.7407 39; 831 6.80004 16.4095 39; 835 26.3 14.2 39
61. 837 19.7996 17.0719 39; 838 23.0498 16.7407 39; 839 26.3 16.4095 39
62. 842 13.3004 17.0719 45.5; 843 10.0502 16.7407 45.5; 844 6.80004 16.4095 45.5
63. 848 26.3 14.2 45.5; 850 19.7996 17.0719 45.5; 851 23.0498 16.7407 45.5
64. 852 26.3 16.4095 45.5; 906 18.1748 15.6358 0; 907 18.1748 17.2374 0
65. 908 21.4252 15.4704 0; 909 21.4247 16.9063 0; 910 24.6754 15.3048 0
66. 921 14.9252 15.6358 0; 922 14.9252 17.2374 0; 923 11.6748 15.4704 0
67. 924 11.6753 16.9063 0; 925 8.4246 15.3048 0; 927 3.5489 14.2 0
68. 928 3.54985 16.0783 0; 930 5.17492 16.2439 0; 932 1.92492 15.9128 0
69. 933 18.1748 15.6358 6.5; 934 21.4252 15.4704 6.5; 935 24.6754 15.3048 6.5
70. 941 14.9252 15.6358 6.5; 942 11.6748 15.4704 6.5; 943 8.4246 15.3048 6.5
71. 945 3.5489 14.2 6.5; 946 3.54985 16.0783 6.5; 948 5.17492 16.2439 6.5
72. 950 1.92492 15.9128 6.5; 951 18.1748 15.6358 13; 952 21.4252 15.4704 13
73. 953 24.6754 15.3048 13; 959 14.9252 15.6358 13; 960 11.6748 15.4704 13
74. 961 8.4246 15.3048 13; 963 3.5489 14.2 13; 964 3.54985 16.0783 13
75. 966 5.17492 16.2439 13; 968 1.92492 15.9128 13; 969 18.1748 15.6358 19.5
76. 970 21.4252 15.4704 19.5; 971 24.6754 15.3048 19.5; 977 14.9252 15.6358 19.5
77. 978 11.6748 15.4704 19.5; 979 8.4246 15.3048 19.5; 981 3.5489 14.2 19.5
78. 982 3.54985 16.0783 19.5; 984 5.17492 16.2439 19.5; 986 1.92492 15.9128 19.5
79. 987 18.1748 15.6358 26; 988 21.4252 15.4704 26; 989 24.6754 15.3048 26
80. 995 14.9252 15.6358 26; 996 11.6748 15.4704 26; 997 8.4246 15.3048 26
81. 999 3.5489 14.2 26; 1000 3.54985 16.0783 26; 1002 5.17492 16.2439 26
82. 1004 1.92492 15.9128 26; 1005 18.1748 15.6358 32.5; 1006 21.4252 15.4704 32.5
83. 1007 24.6754 15.3048 32.5; 1013 14.9252 15.6358 32.5
84. 1014 11.6748 15.4704 32.5; 1015 8.4246 15.3048 32.5; 1017 3.5489 14.2 32.5
85. 1018 3.54985 16.0783 32.5; 1020 5.17492 16.2439 32.5
86. 1022 1.92492 15.9128 32.5; 1023 18.1748 15.6358 39; 1024 21.4252 15.4704 39
87. 1025 24.6754 15.3048 39; 1031 14.9252 15.6358 39; 1032 11.6748 15.4704 39
88. 1033 8.4246 15.3048 39; 1035 3.5489 14.2 39; 1036 3.54985 16.0783 39
89. 1038 5.17492 16.2439 39; 1040 1.92492 15.9128 39; 1041 18.1748 15.6358 45.5
90. 1042 21.4252 15.4704 45.5; 1043 24.6754 15.3048 45.5
91. 1049 14.9252 15.6358 45.5; 1050 11.6748 15.4704 45.5; 1051 8.4246 15.3048 45.5
92. 1053 3.5489 14.2 45.5; 1054 3.54985 16.0783 45.5; 1056 5.17492 16.2439 45.5
93. 1058 1.92492 15.9128 45.5; 1077 18.1748 17.2374 6.5; 1078 21.4247 16.9063 6.5
94. 1081 14.9252 17.2374 6.5; 1082 11.6753 16.9063 6.5; 1083 18.1748 17.2374 13

95. 1084 21.4247 16.9063 13; 1087 14.9252 17.2374 13; 1088 11.6753 16.9063 13
96. 1089 18.1748 17.2374 19.5; 1090 21.4247 16.9063 19.5
97. 1093 14.9252 17.2374 19.5; 1094 11.6753 16.9063 19.5; 1095 18.1748 17.2374 26
98. 1096 21.4247 16.9063 26; 1099 14.9252 17.2374 26; 1100 11.6753 16.9063 26
99. 1101 18.1748 17.2374 32.5; 1102 21.4247 16.9063 32.5
100. 1105 14.9252 17.2374 32.5; 1106 11.6753 16.9063 32.5; 1107 18.1748 17.2374 39
101. 1108 21.4247 16.9063 39; 1111 14.9252 17.2374 39; 1112 11.6753 16.9063 39
102. 1113 18.1748 17.2374 45.5; 1114 21.4247 16.9063 45.5
103. 1117 14.9252 17.2374 45.5; 1118 11.6753 16.9063 45.5; 1145 16.55 17.403 3.25
104. 1167 26.3 14.2 3.489; 1194 0.3 -1.93715E-007 56.95
105. 1195 0.3 -1.93715E-007 63.45; 1196 0.3 -1.93715E-007 68.4
106. 1197 0.3 4.9199 56.95; 1198 0.3 4.9199 58.4; 1199 0.3 4.9199 60.2
107. 1200 0.3 4.9199 63.45; 1201 0.3 4.9199 68.4; 1203 0.3 10.05 56.95
108. 1204 0.3 10.05 58.4; 1205 0.3 10.05 60.2; 1206 0.3 10.05 61.125
109. 1207 0.3 10.05 63.45; 1208 0.3 10.05 65.675; 1209 0.3 10.05 68.4
110. 1212 0.3 13.478 56.95; 1213 0.3 13.478 58.4; 1214 0.3 13.478 60.2
111. 1215 0.3 13.478 61.125; 1216 0.3 13.478 63.45; 1217 0.3 13.478 65.675
112. 1218 0.3 13.478 68.4; 1220 0.3 18.15 52; 1221 0.3 18.15 53.2
113. 1222 0.3 18.15 56.95; 1223 0.3 18.15 60.2; 1224 0.3 18.15 63.45
114. 1225 0.3 18.15 67.2; 1226 0.3 18.15 68.4; 1227 0.3 22.2592 52
115. 1228 0.3 22.2592 68.4; 1229 0.3 22.7783 56.95; 1230 0.3 22.7783 63.45
116. 1231 0.3 23.1192 60.2; 1232 1.5996 18.15 53.2; 1233 1.5996 18.15 67.2
117. 1234 3.05 18.15 52; 1235 3.05 18.15 68.4; 1236 2.79974 10.05 65.6749
118. 1237 3.67474 13.478 65.6749; 1238 2.79987 10.05 61.1254
119. 1239 3.67487 13.478 61.1254; 1240 4.3496 18.15 53.2; 1241 4.3496 18.15 67.2
120. 1242 5.7246 23.1192 60.2; 1243 5.7246 22.7783 56.95; 1244 5.7246 22.7783 63.45
121. 1245 5.7246 0 68.4; 1246 5.7246 4.9199 68.4; 1247 5.7246 6.35 52
122. 1248 5.7246 8.65 68.4; 1249 5.7246 10.05 68.4; 1250 5.7246 14.2 52
123. 1251 5.7246 13.478 68.4; 1253 5.7246 16.675 68.4; 1254 5.7246 18.15 52
124. 1255 5.7246 18.15 53.2; 1256 5.7246 18.15 67.2; 1257 5.7246 18.15 68.4
125. 1258 5.7246 22.2592 52; 1259 5.7246 22.2592 68.4; 1260 5.7246 4.3499 65.675
126. 1261 5.7246 8.65 65.675; 1262 5.7246 10.05 65.675; 1263 5.7246 13.478 65.675
127. 1264 5.7246 4.3499 61.125; 1265 5.7246 8.65 61.125; 1266 5.7246 10.05 61.125
128. 1267 5.7246 13.478 61.125; 1268 5.7246 -1.93715E-007 58.4
129. 1269 5.7246 4.9199 58.4; 1270 5.7246 8.65 58.4; 1271 5.7246 10.05 58.4
130. 1272 5.7246 13.478 58.4; 1273 7.0806 18.15 53.2; 1274 7.0806 18.15 67.2
131. 1275 8.4346 18.15 52; 1276 8.4346 18.15 68.4; 1277 9.7906 18.15 53.2
132. 1278 9.7906 18.15 67.2; 1279 10.749 -1.93715E-007 58.4
133. 1280 10.749 4.9199 58.4; 1281 10.749 8.65 58.4; 1282 10.749 10.05 58.4
134. 1283 10.749 13.478 58.4; 1284 10.749 5.0999 61.125; 1285 10.749 8.65 61.125
135. 1286 10.749 10.05 61.125; 1287 10.749 13.478 61.125; 1288 10.749 5.0999 65.675
136. 1289 10.749 8.65 65.675; 1290 10.749 10.05 65.675; 1291 10.749 13.478 65.675
137. 1292 10.749 23.1192 60.2; 1293 10.749 22.7783 56.95; 1294 10.749 22.7783 63.45
138. 1295 10.749 0 68.4; 1296 10.749 4.9199 68.4; 1297 10.749 6.3499 52
139. 1298 10.749 8.65 68.4; 1299 10.749 10.05 68.4; 1301 10.749 14.2 52
140. 1302 10.749 13.478 68.4; 1303 10.749 15.7044 52; 1304 10.749 16.7044 52
141. 1305 10.749 16.7044 68.4; 1306 10.749 18.15 52; 1307 10.749 18.15 53.2
142. 1308 10.749 18.15 67.2; 1309 10.749 18.15 68.4; 1310 10.749 22.2592 52
143. 1311 10.749 22.2592 68.4; 1312 12.499 18.15 53.2; 1313 12.4992 18.15 67.2
144. 1314 13.8492 18.15 52; 1315 13.849 18.15 68.4; 1316 15.1992 18.15 53.2
145. 1317 15.1992 18.15 67.2; 1318 16.549 -1.93715E-007 58.4
146. 1319 16.549 4.9199 58.4; 1320 16.549 8.65 58.4; 1321 16.549 10.05 58.4
147. 1322 16.549 13.478 58.4; 1323 16.549 5.8599 61.125; 1324 16.549 8.65 61.125
148. 1325 16.549 10.05 61.125; 1326 16.549 13.478 61.125; 1327 16.549 5.8599 65.675
149. 1328 16.549 8.65 65.675; 1329 16.549 10.05 65.675; 1330 16.549 13.478 65.675
150. 1331 16.549 0 68.4; 1332 16.549 4.9199 68.4; 1333 16.549 6.35 52

151. 1334 16.549 8.65 68.4; 1335 16.549 10.05 68.4; 1337 16.549 13.478 68.4
152. 1339 16.549 16.675 68.4; 1340 16.549 18.15 52; 1341 16.549 18.15 53.2
153. 1342 16.549 18.15 67.2; 1343 16.549 18.15 68.4; 1344 16.549 22.2592 52
154. 1345 16.549 22.2592 68.4; 1346 16.549 22.7783 56.95; 1347 16.549 22.7783 63.45
155. 1348 16.549 23.1192 60.2; 1349 17.899 18.15 53.2; 1350 17.899 18.15 67.2
156. 1351 19.249 18.15 52; 1352 19.249 18.15 68.4; 1353 20.599 18.15 53.2
157. 1354 20.599 18.15 67.2; 1355 21.949 -1.93715E-007 58.4
158. 1356 21.949 4.9199 58.4; 1357 21.949 10.05 58.4; 1358 21.949 13.478 58.4
159. 1359 21.949 10.05 61.1249; 1360 21.949 13.478 61.1249
160. 1361 21.949 10.05 65.675; 1362 21.949 13.478 65.675; 1363 21.949 0 68.4
161. 1364 21.949 4.9199 68.4; 1365 21.949 6.3499 52; 1367 21.949 10.05 68.4
162. 1369 21.949 14.2 52; 1370 21.949 13.478 68.4; 1371 21.949 15.7044 52
163. 1372 21.949 16.7044 52; 1373 21.949 16.7044 68.4; 1374 21.949 18.15 52
164. 1375 21.949 18.15 53.2; 1376 21.949 18.15 67.2; 1377 21.949 18.15 68.4
165. 1378 21.949 22.2592 52; 1379 21.949 22.2592 68.4; 1380 21.949 22.7783 56.95
166. 1381 21.949 22.7783 63.45; 1382 21.949 23.1192 60.2; 1383 23.2988 18.15 53.2
167. 1384 23.2988 18.15 67.2; 1385 24.6488 18.15 52; 1386 24.6488 18.15 68.4
168. 1387 25.9988 18.15 53.2; 1388 25.9988 18.15 67.2; 1389 26.8 0 58.4
169. 1390 26.8 4.92 58.4; 1391 26.8 10.05 58.4; 1392 26.8 13.478 58.4
170. 1393 26.8 10.05 61.125; 1394 26.8 13.478 61.125; 1395 26.8 10.05 65.6649
171. 1396 26.8 13.478 65.6749; 1397 26.8 0 68.4; 1398 26.8 4.92 68.4
172. 1402 26.8 10.05 68.4; 1403 26.8 14.2 52; 1404 26.8 13.478 68.4
173. 1406 26.8 16.675 68.4; 1407 26.8 18.15 52; 1408 26.8 18.15 53.2
174. 1409 26.8 18.15 67.2; 1410 26.8 18.15 68.4; 1411 26.8 22.2592 52
175. 1412 26.8 22.2592 68.4; 1413 26.8 22.7783 56.95; 1414 26.8 22.7783 63.45
176. 1415 26.8 23.1192 60.2; 1416 28.0034 18.15 53.2; 1417 28.0034 18.15 67.2
177. 1418 29.1457 18.15 52; 1419 29.1457 18.15 68.4; 1420 30.4034 18.15 53.2
178. 1421 30.4034 18.15 67.2; 1422 32.8 -1.93715E-007 56.95
179. 1423 32.8 -1.93715E-007 63.45; 1424 32.8 -1.93715E-007 68.4
180. 1425 32.8 4.92 60.2; 1426 32.8 4.92 56.95; 1427 32.8 4.92 63.45
181. 1428 32.8 4.92 68.4; 1430 32.8 10.05 52; 1431 32.8 10.05 56.95
182. 1432 32.8 10.05 60.2; 1433 32.8 10.05 63.45; 1434 32.8 10.05 68.4
183. 1435 32.8 15.431 52; 1437 32.8 14.2 56.95; 1438 32.8 14.2 60.2
184. 1439 32.8 14.2 63.45; 1440 32.8 13.478 68.4; 1441 32.8 14.4472 52
185. 1442 32.8 18.15 52; 1443 32.8 18.15 53.2; 1444 32.8 18.15 56.95
186. 1445 32.8 18.15 60.2; 1446 32.8 18.15 63.45; 1447 32.8 18.15 67.2
187. 1448 32.8 18.15 68.4; 1449 32.8 22.2592 52; 1450 32.8 22.2592 68.4
188. 1451 32.8 22.7783 56.95; 1452 32.8 22.7783 63.45; 1453 32.8 23.1192 60.2
189. 1472 5.7246 4.3499 68.4; 1475 5.7246 4.3499 58.4; 1476 10.749 5.0999 58.4
190. 1479 10.749 5.0999 68.4; 1480 16.549 5.8599 58.4; 1483 16.549 5.8599 68.4
191. 1484 21.949 6.6199 58.4; 1485 21.949 6.6199 68.4; 1486 10.749 22.508 54.3726
192. 1487 21.949 22.5187 54.475; 1488 16.549 22.5134 54.4238
193. 1489 10.749 22.5187 65.925; 1490 21.949 22.5187 65.925
194. 1491 16.549 22.5187 65.925; 1494 19.2489 22.5187 65.925
195. 1495 13.8491 22.5187 65.925; 1500 13.8482 22.5107 54.3982
196. 1501 19.2486 22.5161 54.4494; 1504 13.849 23.1192 60.2
197. 1505 19.249 23.1192 60.2; 1519 32.8 13.478 52; 1520 0.3 13.478 52
198. 1521 1.5996 18.15 56.95; 1522 1.5996 18.15 63.45; 1523 0.3 18.15 55.95
199. 1524 0.3 18.15 58.575; 1525 1.5996 18.15 60.2; 1526 0.3 18.15 61.825
200. 1527 0.3 18.15 64.45; 1530 26.8 4.92 63.4502; 1531 26.8 4.92 56.95
201. 1538 28.045 4.92 68.4; 1540 29.495 4.92 68.4; 1542 30.6 4.92 68.4
202. 1544 31.7 4.92 68.4; 1545 28.045 4.92 63.4502; 1546 29.495 4.92 63.4501
203. 1547 30.6 4.92 63.4501; 1548 31.7 4.92 63.45; 1549 28.045 4.92 56.95
204. 1550 29.495 4.92 56.95; 1551 30.6 4.92 56.95; 1552 31.7 4.92 56.95
205. 1553 26.8 4.92 60.2003; 1554 28.045 4.92 60.2002; 1555 29.495 4.92 60.2001
206. 1556 30.6 4.92 60.2001; 1557 31.7 4.92 60.2001; 1558 25.25 4.91997 58.4

207. 1561 25.25 4.91998 55; 1562 26.8 4.92 55; 1563 32.8 4.92 52.75
208. 1564 25.25 4.91999 52.75; 1565 28.045 4.92 52.75; 1566 29.495 4.92 52.75
209. 1567 30.6 4.92 52.75; 1568 31.7 4.92 52.75; 1569 26.8 4.92 52.75
210. 1570 30.6 4.92 65.6501; 1571 30.6 4.92 61.3501; 1572 26.8 4.92 64.3852
211. 1573 26.8 4.92 62.6153; 1575 32.8 5.8 2.5; 1576 26.301 5.8 2.5
212. 1579 26.301 5.8 6.5; 1580 28.045 5.8 2.5; 1581 28.045 5.8 6.5
213. 1582 29.495 5.8 2.5; 1583 29.495 5.8 6.5; 1584 30.6 5.8 2.5; 1585 30.6 5.8 6.5
214. 1586 31.705 5.8 2.5; 1587 31.705 5.8 6.5; 1588 28.045 5.8 0; 1589 29.495 5.8 0
215. 1590 30.6 5.8 0; 1591 31.705 5.8 0; 1594 0.3 22.5187 54.475
216. 1595 32.8 22.5187 54.475; 1596 0.3 22.5187 65.925; 1597 32.8 22.5187 65.925
217. 1598 5.7246 22.5134 54.4238; 1599 5.7246 22.5187 65.925
218. 1600 26.8 22.5187 54.475; 1601 26.8 22.5187 65.925; 1609 26.3 14.2 7.872
219. 1614 29.55 14.2 7.872; 1616 5.7246 16.2999 52; 1617 10.749 17.0837 52
220. 1618 21.949 16.8529 52; 1619 26.8 16.3585 52; 1621 21.9508 17.0837 52
221. 1622 28.7711 14.2 0; 1624 28.7711 14.2 6.5; 1625 28.771 16.1583 6.5
222. 1626 28.7711 14.2 13; 1627 28.7702 16.1583 13; 1628 28.7711 14.2 19.5
223. 1629 28.771 16.1583 19.5; 1630 28.7711 14.2 26; 1631 28.771 16.1583 26
224. 1632 28.7711 14.2 32.5; 1633 28.771 16.1583 32.5; 1634 28.771 14.2 39
225. 1635 28.771 16.1583 39; 1636 28.7711 14.2 45.5; 1637 28.771 16.1583 45.5
226. 1638 28.771 16.1578 0; 1639 27.5355 15.179 0; 1640 8.42512 16.5751 0
227. 1641 24.6749 16.5751 0; 1643 30.7855 15.9525 0; 1644 27.5355 16.2836 0
228. 1645 27.5355 15.179 6.5; 1647 30.7855 15.9527 6.5; 1648 27.5355 16.2839 6.5
229. 1649 27.5355 15.179 13; 1651 30.7855 15.9527 13; 1652 27.5355 16.2839 13
230. 1653 27.5355 15.179 19.5; 1655 30.7855 15.9527 19.5; 1656 27.5355 16.2839 19.5
231. 1657 27.5355 15.179 26; 1659 30.7855 15.9527 26; 1660 27.5355 16.2839 26
232. 1661 27.5355 15.179 32.5; 1663 30.7855 15.9527 32.5; 1664 27.5355 16.2839 32.5
233. 1665 27.5355 15.179 39; 1667 30.7855 15.9527 39; 1668 27.5355 16.2839 39
234. 1669 27.5355 15.179 45.5; 1671 30.7855 15.9527 45.5; 1672 27.5355 16.2839 45.5
235. 1673 8.42512 16.5751 6.5; 1674 8.42512 16.5751 13; 1675 8.42512 16.5751 19.5
236. 1676 8.42512 16.5751 26; 1677 8.42512 16.5751 32.5; 1678 8.42512 16.5751 39
237. 1679 8.42512 16.5751 45.5; 1680 24.6749 16.5751 6.5; 1681 24.6749 16.5751 13
238. 1682 24.6749 16.5751 19.5; 1683 24.6749 16.5751 26; 1684 24.6749 16.5751 32.5
239. 1685 24.6749 16.5751 39; 1686 24.6749 16.5751 45.5; 1689 16.5505 14.2 3.5
240. 1690 23.0503 14.2 3.49; 1693 19.8006 14.2 3.49; 1695 28.7711 14.2 3.25
241. 1696 32.8 14.2 5.5; 1697 28.7711 14.2 5.5; 1698 31 14.2 5.5
242. 1699 26.3 14.2 11.572; 1701 32.8 14.2 11.572; 1702 28.7711 14.2 11.572
243. 1703 29.55 14.2 11.572; 1704 32.8 14.2 7.872; 1705 27.173 5.8 0
244. 1706 27.173 5.8 2.5; 1707 27.173 5.8 6.5; 1708 6.80004 10.0001 0
245. 1709 26.3005 10.0001 0; 1710 13.3004 10.0001 0; 1711 19.8006 10.0001 0
246. 1714 16.5505 10 0; 1715 13.9879 17.1419 48.5836; 1716 19.1121 17.1419 48.5836
247. 1717 10.749 14.2 45.5; 1718 21.949 14.2 45.5; 1719 13.8493 14.2 48.7503
248. 1720 19.2491 14.2 48.7497; 1721 30.7861 14.2 0; 1722 29.7783 15.0765 0
249. 1723 29.7782 16.0551 0; 1724 31.7927 15.0763 0; 1725 31.7927 15.8499 0
250. 1726 30.7861 14.2 6.5; 1727 29.7783 15.0765 6.5; 1728 29.7783 16.0555 6.5
251. 1729 31.7927 15.0763 6.5; 1730 31.7928 15.8499 6.5; 1731 30.7861 14.2 13
252. 1732 29.7783 15.0765 13; 1733 29.7783 16.0555 13; 1734 31.7927 15.0763 13
253. 1735 31.7928 15.8499 13; 1736 30.7861 14.2 19.5; 1737 29.7783 15.0765 19.5
254. 1738 29.7783 16.0555 19.5; 1739 31.7927 15.0763 19.5
255. 1740 31.7928 15.8499 19.5; 1741 30.7861 14.2 26; 1742 29.7783 15.0765 26
256. 1743 29.7783 16.0555 26; 1744 31.7927 15.0763 26; 1745 31.7928 15.8499 26
257. 1746 30.7861 14.2 32.5; 1747 29.7783 15.0765 32.5; 1748 29.7783 16.0555 32.5
258. 1749 31.7927 15.0763 32.5; 1750 31.7928 15.8499 32.5; 1751 30.7861 14.2 39
259. 1752 29.7783 15.0765 39; 1753 29.7783 16.0555 39; 1754 31.7927 15.0763 39
260. 1755 31.7928 15.8499 39; 1756 30.7861 14.2 45.5; 1757 29.7783 15.0765 45.5
261. 1758 29.7783 16.0555 45.5; 1759 31.7927 15.0763 45.5
262. 1760 31.7928 15.8499 45.5; 1761 4.3289 14.2 0; 1762 4.32901 16.1577 0

263. 1763 5.5645 15.179 0; 1764 2.3145 15.9525 0; 1765 5.5645 16.2836 0
264. 1766 2.3139 14.2 0; 1767 3.3217 15.0765 0; 1768 3.32176 16.0551 0
265. 1769 1.30725 15.0763 0; 1770 1.30725 15.8499 0; 1771 4.3289 14.2 6.5
266. 1772 4.32901 16.1577 6.5; 1773 5.5645 15.179 6.5; 1774 2.3145 15.9525 6.5
267. 1775 5.5645 16.2836 6.5; 1776 2.3139 14.2 6.5; 1777 3.3217 15.0765 6.5
268. 1778 3.32176 16.0551 6.5; 1779 1.30725 15.0763 6.5; 1780 1.30725 15.8499 6.5
269. 1781 4.3289 14.2 13; 1782 4.32901 16.1577 13; 1783 5.5645 15.179 13
270. 1784 2.3145 15.9525 13; 1785 5.5645 16.2836 13; 1786 2.3139 14.2 13
271. 1787 3.3217 15.0765 13; 1788 3.32176 16.0551 13; 1789 1.30725 15.0763 13
272. 1790 1.30725 15.8499 13; 1791 4.3289 14.2 19.5; 1792 4.32901 16.1577 19.5
273. 1793 5.5645 15.179 19.5; 1794 2.3145 15.9525 19.5; 1795 5.5645 16.2836 19.5
274. 1796 2.3139 14.2 19.5; 1797 3.3217 15.0765 19.5; 1798 3.32176 16.0551 19.5
275. 1799 1.30725 15.0763 19.5; 1800 1.30725 15.8499 19.5; 1801 4.3289 14.2 26
276. 1802 4.32901 16.1577 26; 1803 5.5645 15.179 26; 1804 2.3145 15.9525 26
277. 1805 5.5645 16.2836 26; 1806 2.3139 14.2 26; 1807 3.3217 15.0765 26
278. 1808 3.32176 16.0551 26; 1809 1.30725 15.0763 26; 1810 1.30725 15.8499 26
279. 1811 4.3289 14.2 32.5; 1812 4.32901 16.1577 32.5; 1813 5.5645 15.179 32.5
280. 1814 2.3145 15.9525 32.5; 1815 5.5645 16.2836 32.5; 1816 2.3139 14.2 32.5
281. 1817 3.3217 15.0765 32.5; 1818 3.32176 16.0551 32.5; 1819 1.30725 15.0763 32.5
282. 1820 1.30725 15.8499 32.5; 1821 4.3289 14.2 39; 1822 4.32901 16.1577 39
283. 1823 5.5645 15.179 39; 1824 2.3145 15.9525 39; 1825 5.5645 16.2836 39
284. 1826 2.3139 14.2 39; 1827 3.3217 15.0765 39; 1828 3.32176 16.0551 39
285. 1829 1.30725 15.0763 39; 1830 1.30725 15.8499 39; 1831 4.3289 14.2 45.5
286. 1832 4.32901 16.1577 45.5; 1833 5.5645 15.179 45.5; 1834 2.3145 15.9525 45.5
287. 1835 5.5645 16.2836 45.5; 1836 2.3139 14.2 45.5; 1837 3.3217 15.0765 45.5
288. 1838 3.32176 16.0551 45.5; 1839 1.30725 15.0763 45.5
289. 1840 1.30725 15.8499 45.5; 1841 32.8 0.5 -3; 1842 32.8 5.8 -3
290. 1843 26.301 5.8 -3; 1844 26.301 0.5003 -3; 1845 32.8 3.1875 -3
291. 1846 26.301 3.15015 -3; 1847 26.301 3.15015 0; 1848 26.301 5.8 -1.5
292. 1849 26.301 3.15015 -1.5; 1850 29.5505 5.8 -3; 1851 29.5505 3.16883 -3
293. 1852 32.8 3.1875 0; 1853 32.8 5.8 5.25; 1854 31.705 5.8 5.25
294. 1855 28.045 5.8 5.25; 1856 27.173 5.8 5.25; 1857 29.495 5.8 5.25
295. 1858 30.6 5.8 5.25; 1859 26.301 5.8 5.25; 1860 30.195 5.8 2.5
296. 1861 30.195 5.8 5.25; 1862 32.8 3.15015 -3; 1863 32.8 5.8 -1.5
297. 1864 32.8 3.15015 0; 1866 32.8 3.15015 -1.5; 1867 22.801 5.8 6.5
298. 1868 22.8 4.91999 52.75; 1869 26.8 10.05 72.05; 1870 26.8 4.92 72.05
299. 1871 26.8 13.478 72.05; 1872 32.8 -1.93715E-007 72.05; 1873 32.8 4.92 72.05
300. 1874 32.8 10.05 72.05; 1875 32.8 13.478 72.05; 1876 26.8 0 72.05
301. 1877 32.8 2.22 72.05; 1878 32.8 2.22 68.4; 1879 32.8 7.35 72.05
302. 1880 32.8 7.35 68.4; 1881 26.8 2.22 72.05; 1882 26.8 2.22 68.4
303. 1883 26.8 7.35 72.05; 1884 26.8 7.35 68.4; 1885 29.8 2.22 72.05
304. 1886 29.8 4.92 72.05; 1890 -3.8 -1.93715E-007 56.95; 1891 -3.8 4.9199 56.95
305. 1892 -3.8 -1.93715E-007 63.45; 1893 -3.8 4.9199 63.45; 1894 -3.8 10.05 56.95
306. 1895 -3.8 10.05 63.45; 1896 -3.8 13.478 56.95; 1897 -3.8 13.478 63.45
307. 1898 -3.8 18.15 56.95; 1899 -3.8 18.15 63.45; 1904 -3.8 6.1199 56.95
308. 1905 0.3 6.1199 56.95; 1906 -3.8 3.7 63.45; 1907 0.3 3.7 63.45
309. 1908 -3.8 15.048 63.45; 1909 0.3 15.048 63.45; 1910 -3.8 4.9199 60.2
310. 1911 -3.8 10.05 60.2; 1912 -3.8 13.478 60.2; 1913 -3.8 18.15 60.2
311. 1914 5.7246 8.65 62.65; 1915 10.749 8.65 62.65; 1916 16.549 8.65 62.65
312. 1917 5.7246 8.65 64.15; 1918 10.749 8.65 64.15; 1919 16.549 8.65 64.15
313. 1920 5.7246 7.125 61.125; 1921 5.7246 7.125 65.675; 1922 10.749 7.125 61.125
314. 1923 10.749 7.125 65.675; 1924 16.549 7.125 61.125; 1925 16.549 7.125 65.675
315. 1926 8.23689 22.5187 65.925; 1927 3.01228 22.5187 65.925
316. 1928 3.01225 23.1192 60.2; 1929 3.01228 22.516 54.4494
317. 1930 8.23689 22.5107 54.3982; 1931 24.3746 22.5187 54.475
318. 1932 29.8002 22.5187 54.475; 1933 29.8 23.1192 60.2

319. 1934 29.8002 22.5187 65.925; 1935 24.3746 22.5187 65.925; 1936 0.3 3.5799 68.4
320. 1937 0.3 3.5799 63.45; 1938 0.3 3.5799 64.4; 1939 5.7246 4.3499 64.4
321. 1940 10.749 5.0999 64.4; 1941 16.549 5.8599 64.4; 1942 21.949 6.6199 64.4
322. 1943 26.8 7.35 58.4; 1944 26.8 7.35 64.4; 1945 0.3 3.5799 62.4
323. 1946 5.7246 4.3499 62.4; 1947 10.749 5.0999 62.4; 1948 16.549 5.8599 62.4
324. 1949 21.949 6.6199 62.4; 1950 26.8 7.35 62.4; 1952 0.3 3.5799 56.95
325. 1953 5.7246 10.05 62.575; 1954 10.749 10.05 62.575; 1955 16.549 10.05 62.575
326. 1956 5.7246 8.65 62.575; 1957 10.749 8.65 62.575; 1958 16.549 8.65 62.575
327. 1959 5.7246 10.05 64.225; 1960 10.749 10.05 64.225; 1961 16.549 10.05 64.225
328. 1962 5.7246 8.65 64.225; 1963 10.749 8.65 64.225; 1964 16.549 8.65 64.225
329. 1966 21.949 10.05 62.5749; 1967 21.949 10.05 64.2249
330. 1968 2.79978 10.05 64.2249; 1969 2.79983 10.05 62.575
331. 1970 3.79974 10.05 64.225; 1971 3.79969 10.05 65.6749
332. 1972 5.89974 10.05 64.225; 1973 5.89969 10.05 65.675
333. 1974 9.39974 10.05 64.225; 1975 9.39969 10.05 65.675
334. 1976 19.8997 10.05 64.225; 1977 19.8997 10.05 65.675
335. 1978 3.79974 10.05 61.1253; 1979 3.79969 10.05 62.575
336. 1980 9.39974 10.05 61.125; 1981 9.39969 10.05 62.575
337. 1982 19.8997 10.05 61.1249; 1983 19.8997 10.05 62.5749
338. 1984 5.89974 10.05 61.125; 1985 5.89969 10.05 62.575; 1986 28 4.92 72.05
339. 1987 28 7.35 72.05; 1988 31.6 7.35 72.05; 1989 31.6 10.05 72.05
340. 1990 28 10.05 72.05; 1991 28 13.478 72.05; 1992 26.8 13.478 59.7625
341. 1993 0.3 13.478 59.7625; 1994 26.8 13.478 67.0374; 1995 0.3 13.478 67.0375
342. 1996 5.7246 13.478 67.0375; 1997 5.7246 13.478 59.7625
343. 1998 10.749 13.478 59.7625; 1999 10.749 13.478 67.0375
344. 2000 16.549 13.478 59.7625; 2001 16.549 13.478 67.0375
345. 2002 21.949 13.478 59.7625; 2003 21.949 13.478 67.0375
346. 2004 26.8 13.478 62.2625; 2005 26.8 13.478 63.3999; 2006 26.8 13.478 64.5374
347. 2007 21.949 13.478 62.2626; 2008 21.949 13.478 64.5375
348. 2009 21.949 13.478 63.4001; 2010 3.67484 13.478 62.2628
349. 2011 3.67481 13.478 63.4001; 2012 3.67477 13.478 64.5375
350. 2013 0.3 13.478 62.2628; 2014 0.3 13.478 63.4001; 2015 0.3 13.478 64.5375
351. 2016 26.8 10.05 59.7625; 2017 21.949 10.05 59.7625; 2018 5.7246 10.05 59.7625
352. 2019 0.3 10.05 59.7625; 2020 10.749 10.05 59.7625; 2021 16.549 10.05 59.7625
353. 2022 26.8 10.05 67.0374; 2023 21.949 10.05 67.0375; 2024 5.7246 10.05 67.0375
354. 2025 0.3 10.05 67.0375; 2026 10.749 10.05 67.0375; 2027 16.549 10.05 67.0375
355. 2028 26.8 10.05 62.2625; 2029 21.949 10.05 62.2626; 2030 26.8 10.05 64.5374
356. 2031 21.949 10.05 64.5375; 2032 26.8 10.05 63.3999; 2033 21.949 10.05 63.4001
357. 2035 0.3 10.05 62.2628; 2037 0.3 10.05 63.4001; 2039 0.3 10.05 64.5375
358. 2040 2.79984 10.05 62.2628; 2041 2.79977 10.05 64.5375
359. 2042 2.7998 10.05 63.4001; 2043 13.6491 7.48495 68.4
360. 2044 19.2489 7.48495 68.4; 2045 13.6491 2.4599 68.4; 2046 19.2489 2.4599 68.4
361. 2047 13.6491 15.814 68.4; 2048 19.2489 15.814 68.4; 2049 13.78 20.2973 68.4
362. 2050 19.1616 20.2711 68.4; 2051 13.6491 11.764 68.4; 2052 19.2489 11.764 68.4
363. 2053 13.6491 20.2046 52; 2054 19.2489 20.2046 52; 2055 13.6491 10.2749 52
364. 2056 19.2489 10.2749 52; 2057 10.749 10.275 52; 2058 21.949 10.275 52
365. 2059 16.549 10.2749 52; 2063 32.8 14.2 68.4; 2064 26.8 4.92 61.8253
366. 2065 26.8 4.92 64.7002; 2066 28.045 4.92 65.9502; 2067 26.8 4.92 66.9402
367. 2068 32.8 4.92 66.9402; 2069 29.495 4.92 66.9402; 2070 31.7 4.92 66.9402
368. 2071 30.6 4.92 66.9402; 2072 28.045 4.92 66.9402; 2073 26.8 4.92 55.55
369. 2074 28.045 4.92 54.15; 2075 32.8 4.92 54.15; 2076 26.8 4.92 54.15
370. 2077 29.495 4.92 54.15; 2078 30.6 4.92 54.15; 2079 31.7 4.92 54.15
371. 2080 30.6 4.92 55.55; 2081 30.6 4.92 58; 2082 29.495 4.92 59.05
372. 2083 29.495 4.92 61.2501; 2084 30.6 4.92 62.3001; 2085 30.6 4.92 64.5001
373. 2086 29.495 4.92 65.5501; 2087 31.5457 18.15 52; 2088 31.5457 18.15 68.4
374. 2089 0.3 16.9486 52; 2091 0.3 16.982 68.4; 2092 0.3 16.778 56.95

375. 2093 0.3 16.848 63.45; 2094 0.3 18.15 54.2; 2095 1.5996 18.15 55.075
376. 2096 0.3 18.15 66.1875; 2097 1.5996 18.15 65.325; 2098 32.8 16.9486 52
377. 2099 32.8 16.982 68.4; 2100 -3.8 10.05 64.65; 2101 -3.8 8.1199 63.45
378. 2102 0.3 10.05 64.65; 2103 -3.8 13.478 55.75; 2104 0.3 13.478 55.75
379. 2105 -3.8 12.05 56.95; 2106 -3.8 18.15 55.75; 2107 0.3 18.15 55.75
380. 2108 -3.8 16.722 56.95; 2109 -1.75 4.9199 56.95; 2110 -1.75 3.7 63.45
381. 2111 -1.75 15.048 63.45; 2112 -1.75 18.15 63.45; 2113 -1.75 13.478 56.95
382. 2114 -1.75 10.05 56.95; 2115 -1.75 10.05 63.45; 2116 1.5996 18.15 68.4
383. 2117 3.05 18.15 67.2; 2118 4.3496 18.15 68.4; 2119 7.0806 18.15 68.4
384. 2120 8.4346 18.15 67.2; 2121 9.7906 18.15 68.4; 2122 12.4992 18.15 68.4
385. 2123 13.849 18.15 67.2; 2124 15.1992 18.15 68.4; 2125 17.899 18.15 68.4
386. 2126 19.249 18.15 67.2; 2127 20.599 18.15 68.4; 2128 23.2988 18.15 68.4
387. 2129 24.6488 18.15 67.2; 2130 25.9988 18.15 68.4; 2131 28.0034 18.15 68.4
388. 2132 29.1457 18.15 67.2; 2133 30.4034 18.15 68.4; 2134 31.5457 18.15 67.2
389. 2135 1.5996 18.15 52; 2136 3.05 18.15 53.2; 2137 4.3496 18.15 52
390. 2138 7.0806 18.15 52; 2139 8.4346 18.15 53.2; 2140 9.7906 18.15 52
391. 2141 12.499 18.15 52; 2142 13.8492 18.15 53.2; 2143 15.1992 18.15 52
392. 2144 17.899 18.15 52; 2145 19.249 18.15 53.2; 2146 20.599 18.15 52
393. 2147 23.2988 18.15 52; 2148 24.6488 18.15 53.2; 2149 25.9988 18.15 52
394. 2150 28.0034 18.15 52; 2151 29.1457 18.15 53.2; 2152 30.4034 18.15 52
395. 2153 31.5457 18.15 53.2; 2154 31.5004 18.15 53.2; 2155 31.5004 18.15 67.2
396. 2156 31.5004 18.15 56.95; 2157 31.5004 18.15 63.45; 2158 32.8 18.15 55.95
397. 2159 32.8 18.15 58.575; 2160 31.5004 18.15 60.2; 2161 32.8 18.15 61.825
398. 2162 32.8 18.15 64.45; 2163 32.8 18.15 54.2; 2164 31.5004 18.15 55.075
399. 2165 32.8 18.15 66.1875; 2166 31.5004 18.15 65.325; 2167 32.8 16.778 56.95
400. 2168 32.8 16.848 63.45; 2169 0.3 10.275 52; 2170 5.7246 10.275 52
401. 2171 26.8 10.275 52; 2172 32.8 10.275 52; 2173 13.649 16.175 52
402. 2174 19.249 16.175 52; 2175 5.7246 5.0999 61.125; 2176 5.7246 5.0999 65.675
403. 2177 21.949 6.6199 61.15; 2178 21.949 6.6199 65.65; 2181 31.5004 10.05 53.2
404. 2182 31.5004 10.05 55.075; 2183 31.5004 10.05 56.95; 2184 31.5004 10.05 60.2
405. 2185 31.5004 10.05 63.45; 2186 31.5004 10.05 65.325; 2187 32.8 10.05 54.2
406. 2188 32.8 10.05 55.95; 2189 32.8 10.05 58.575; 2190 32.8 10.05 61.825
407. 2191 32.8 10.05 64.45; 2192 32.8 10.05 66.1875; 2193 31.5004 10.05 67.2
408. 2194 32.8 8.678 56.95; 2195 32.8 8.748 63.45; 2198 31.5004 10.05 52
409. 2199 32.8 8.678 52; 2200 31.5004 10.05 68.4; 2201 32.8 8.748 68.4
410. 2202 0.3 3.5799 59.3148; 2203 0.3 3.5799 61.0852
411. **********
412. MEMBER INCIDENCES
413. 5 6 657; 13 19 664; 97 80 1520; 130 96 1519; 175 119 659; 208 135 679
414. 241 151 661; 274 167 681; 307 183 662; 340 199 682; 373 215 664; 406 231 684
415. 439 247 657; 460 1864 8; 472 263 677; 551 294 295; 552 119 1826; 559 300 294
416. 564 303 1821; 565 303 304; 566 304 300; 583 295 310; 584 135 1751; 587 310 835
417. 612 323 324; 620 329 323; 624 1017 1816; 625 332 1811; 626 332 333
418. 627 333 329; 644 324 339; 645 167 1746; 648 339 822; 673 352 353; 674 183 1796
419. 681 358 352; 686 361 1791; 687 361 362; 688 362 358; 705 353 368; 706 199 1736
420. 709 368 796; 734 381 382; 735 215 1786; 742 387 381; 747 390 1781; 748 390 391
421. 749 391 387; 766 382 397; 767 231 1731; 770 397 783; 795 410 411; 796 247 1766
422. 800 3 410; 802 410 921; 803 416 410; 806 416 923; 808 419 1761; 809 419 420
423. 810 420 416; 818 420 925; 827 411 426; 828 263 1721; 831 426 757; 853 3 1145
424. 855 23 447; 856 32 41; 857 41 445; 858 14 23; 890 442 14; 898 445 50
425. 903 447 32; 1005 463 266; 1019 471 1717; 1020 540 1831; 1021 472 592
426. 1022 593 1801; 1023 473 648; 1024 649 1771; 1047 848 1636; 1049 770 1624
427. 1072 809 1630; 1126 513 660; 1128 513 1836; 1160 527 680; 1162 527 1756
428. 1202 539 463; 1206 540 471; 1275 572 663; 1283 572 1806; 1309 586 683
429. 1317 586 1741; 1337 592 465; 1341 593 472; 1388 607 658; 1414 628 658
430. 1422 628 1776; 1436 678 609; 1448 642 678; 1476 648 467; 1480 649 473

431. 1497 642 1726; 1523 657 658; 1537 80 513; 1540 119 151; 1544 183 215
432. 1546 215 628; 1547 513 119; 1549 572 183; 1551 628 247; 1556 658 664
433. 1573 96 527; 1576 135 167; 1577 167 586; 1580 199 231; 1582 231 1701
434. 1583 527 135; 1585 586 199; 1587 642 1696; 1596 49 699; 1597 40 31
435. 1598 31 547; 1599 22 13; 1600 13 601; 1601 491 40; 1602 547 22; 1604 51 715
436. 1605 42 33; 1606 33 558; 1607 24 15; 1608 15 612; 1609 502 42; 1610 558 24
437. 1611 612 723; 1629 80 699; 1633 699 491; 1637 699 513; 1644 572 151
438. 1652 708 10; 1661 708 628; 1670 96 715; 1673 715 502; 1677 715 527
439. 1689 263 1696; 1690 263 723; 1691 1704 1701; 1693 723 11; 1697 723 642
440. 1709 419 1708; 1747 247 10; 1748 263 11; 1823 416 1710; 1824 411 1711
441. 1837 677 1591; 1838 740 729; 1839 741 1847; 1840 742 737; 1841 743 739
442. 1842 740 657; 1843 742 740; 1844 743 742; 1845 741 743; 1940 419 649
443. 1941 416 648; 1942 411 1693; 1966 3 922; 1968 749 416; 1970 751 420
444. 1971 752 419; 1973 752 1765; 1974 752 1640; 1976 751 924; 1979 932 1764
445. 1981 928 1762; 1987 410 906; 1988 411 908; 1989 1622 1638; 1991 426 910
446. 1995 3 907; 1996 759 411; 1997 760 426; 1998 761 757; 1999 761 1644
447. 2000 761 1641; 2001 760 909; 2002 11 1725; 2004 645 467; 2005 770 478
448. 2006 478 645; 2015 628 601; 2016 642 612; 2019 442 1081; 2023 766 1775
449. 2024 766 1673; 2025 765 1082; 2026 950 1774; 2027 946 1772; 2036 442 1077
450. 2040 774 1648; 2041 774 1680; 2042 773 1078; 2043 612 1730; 2055 215 13
451. 2056 231 15; 2059 14 1087; 2063 779 1785; 2064 779 1674; 2065 778 1088
452. 2066 968 1784; 2067 964 1782; 2076 14 1083; 2080 787 1652; 2081 787 1681
453. 2082 786 1084; 2083 15 1735; 2095 183 22; 2096 199 24; 2099 23 1093
454. 2103 792 1795; 2104 792 1675; 2105 791 1094; 2106 986 1794; 2107 982 1792
455. 2116 23 1089; 2120 800 1656; 2121 800 1682; 2122 799 1090; 2123 24 1740
456. 2125 589 465; 2126 809 481; 2127 481 589; 2135 572 547; 2136 586 558
457. 2139 447 1099; 2143 805 1805; 2144 805 1676; 2145 804 1100; 2146 1004 1804
458. 2147 1000 1802; 2156 447 1095; 2160 813 1660; 2161 813 1683; 2162 812 1096
459. 2163 558 1745; 2175 151 31; 2176 167 33; 2179 32 1105; 2183 818 1815
460. 2184 818 1677; 2185 817 1106; 2186 1022 1814; 2187 1018 1812; 2196 32 1101
461. 2200 826 1664; 2201 826 1684; 2202 825 1102; 2203 33 1750; 2215 119 40
462. 2216 135 42; 2219 41 1111; 2223 831 1825; 2224 831 1678; 2225 830 1112
463. 2226 1040 1824; 2227 1036 1822; 2236 41 1107; 2240 839 1668; 2241 839 1685
464. 2242 838 1108; 2243 42 1755; 2245 535 463; 2246 848 477; 2247 477 1718
465. 2256 513 491; 2257 527 502; 2260 445 1117; 2264 844 1835; 2265 844 1679
466. 2266 843 1118; 2267 1058 1834; 2268 1054 1832; 2277 445 1113; 2281 852 1672
467. 2282 852 1686; 2283 851 1114; 2284 502 1760; 2298 96 1441; 2471 842 829
468. 2473 816 829; 2475 790 803; 2476 777 790; 2499 824 837; 2501 798 811
469. 2502 785 798; 2521 850 837; 2534 906 759; 2535 3 906; 2536 907 759
470. 2537 906 907; 2538 908 760; 2539 759 908; 2540 909 759; 2541 908 909
471. 2542 910 761; 2543 760 910; 2556 921 749; 2557 922 749; 2558 923 751
472. 2559 924 749; 2560 925 752; 2565 932 1770; 2567 3 921; 2568 921 922
473. 2569 749 923; 2570 923 924; 2571 751 925; 2588 950 1780; 2589 648 942
474. 2590 467 933; 2591 645 934; 2592 1624 1625; 2593 478 935; 2594 933 772
475. 2595 442 933; 2596 934 773; 2598 935 774; 2599 773 935; 2607 941 764
476. 2608 942 765; 2609 943 766; 2611 442 941; 2613 765 943; 2630 968 1790
477. 2631 387 960; 2632 381 951; 2633 382 952; 2634 1626 1627; 2635 397 953
478. 2636 951 785; 2637 14 951; 2638 952 786; 2639 785 952; 2640 953 787
479. 2641 786 953; 2649 959 777; 2650 960 778; 2651 961 779; 2653 14 959
480. 2654 777 960; 2655 778 961; 2672 986 1800; 2673 358 978; 2674 352 969
481. 2675 353 970; 2676 1628 1629; 2677 368 971; 2678 969 798; 2679 23 969
482. 2680 970 799; 2681 798 970; 2682 971 800; 2683 799 971; 2691 977 790
483. 2692 978 791; 2693 979 792; 2695 23 977; 2696 790 978; 2697 791 979
484. 2714 1004 1810; 2715 592 996; 2716 465 987; 2717 589 988; 2718 1630 1631
485. 2719 481 989; 2720 987 811; 2721 447 987; 2722 988 812; 2723 811 988
486. 2724 989 813; 2725 812 989; 2733 995 803; 2734 996 804; 2735 997 805

487. 2737 447 995; 2738 803 996; 2739 804 997; 2756 1022 1820; 2757 329 1014
488. 2758 323 1005; 2759 324 1006; 2760 1632 1633; 2761 339 1007; 2762 1005 824
489. 2763 32 1005; 2764 1006 825; 2765 824 1006; 2766 1007 826; 2767 825 1007
490. 2775 1013 816; 2776 1014 817; 2777 1015 818; 2779 32 1013; 2780 816 1014
491. 2781 817 1015; 2798 1040 1830; 2799 300 1032; 2800 294 1023; 2801 295 1024
492. 2802 1634 1635; 2803 310 1025; 2804 1023 837; 2805 41 1023; 2806 1024 838
493. 2807 837 1024; 2808 1025 839; 2809 838 1025; 2817 1031 829; 2818 1032 830
494. 2819 1033 831; 2821 41 1031; 2822 829 1032; 2823 830 1033; 2840 1058 1840
495. 2841 539 1050; 2842 463 1041; 2843 535 1042; 2844 1636 1637; 2845 477 1043
496. 2846 1041 850; 2847 445 1041; 2848 1042 851; 2849 850 1042; 2850 1043 852
497. 2851 851 1043; 2859 1049 842; 2860 1050 843; 2861 1051 844; 2863 445 1049
498. 2864 842 1050; 2865 843 1051; 2917 765 473; 2918 766 649; 2919 773 478
499. 2920 774 770; 2921 778 391; 2922 779 390; 2923 786 397; 2924 787 783
500. 2925 791 362; 2926 792 361; 2927 799 368; 2928 800 796; 2929 804 472
501. 2930 805 593; 2931 812 481; 2932 813 809; 2933 817 333; 2934 818 332
502. 2935 825 339; 2936 826 822; 2937 830 304; 2938 831 303; 2939 838 310
503. 2940 839 835; 2941 843 471; 2942 844 540; 2943 851 477; 2944 852 848
504. 2949 442 467; 2950 14 381; 2951 23 352; 2952 447 465; 2953 32 323; 2954 41 294
505. 2955 445 463; 2956 50 266; 2959 777 387; 2960 785 382; 2961 790 358
506. 2962 798 353; 2963 803 592; 2964 811 589; 2965 816 329; 2966 824 324
507. 2967 829 300; 2968 837 295; 2969 842 539; 2970 850 535; 2973 467 941
508. 2974 473 943; 2975 381 959; 2976 391 961; 2977 352 977; 2978 362 979
509. 2979 465 995; 2980 472 997; 2981 323 1013; 2982 333 1015; 2983 294 1031
510. 2984 304 1033; 2985 463 1049; 2986 471 1051; 2989 1077 772; 2990 1078 772
511. 2993 1081 764; 2994 1082 764; 2995 933 1077; 2996 934 1078; 2999 941 1081
512. 3000 942 1082; 3001 1083 785; 3002 1084 785; 3005 1087 777; 3006 1088 777
513. 3007 951 1083; 3008 952 1084; 3011 959 1087; 3012 960 1088; 3013 1089 798
514. 3014 1090 798; 3017 1093 790; 3018 1094 790; 3019 969 1089; 3020 970 1090
515. 3023 977 1093; 3024 978 1094; 3025 1095 811; 3026 1096 811; 3029 1099 803
516. 3030 1100 803; 3031 987 1095; 3032 988 1096; 3035 995 1099; 3036 996 1100
517. 3037 1101 824; 3038 1102 824; 3041 1105 816; 3042 1106 816; 3043 1005 1101
518. 3044 1006 1102; 3047 1013 1105; 3048 1014 1106; 3049 1107 837; 3050 1108 837
519. 3053 1111 829; 3054 1112 829; 3055 1023 1107; 3056 1024 1108; 3059 1031 1111
520. 3060 1032 1112; 3061 1113 850; 3062 1114 850; 3065 1117 842; 3066 1118 842
521. 3067 1041 1113; 3068 1042 1114; 3071 1049 1117; 3072 1050 1118; 3085 601 708
522. 3088 247 708; 3096 764 942; 3097 764 648; 3101 772 934; 3102 772 645
523. 3106 1145 442; 3166 764 777; 3170 772 785; 3215 749 764; 3217 759 772
524. 3269 757 1709; 3276 757 1167; 3277 1167 770; 3437 1194 1952; 3438 1194 2202
525. 3439 1195 2203; 3440 1195 1937; 3441 1196 1936; 3442 1198 1197; 3443 1199 1198
526. 3444 1200 1199; 3445 1201 1200; 3446 1197 1905; 3447 1197 1205; 3448 1200 1205
527. 3449 1200 1207; 3450 1201 1209; 3451 49 80; 3452 1204 1203; 3453 1205 2019
528. 3454 1206 1205; 3455 1207 2037; 3456 1208 2102; 3457 1209 2025; 3458 1203 1212
529. 3459 1203 1214; 3460 1207 1214; 3461 1207 1216; 3462 1209 1218; 3464 1213 1212
530. 3465 1214 1993; 3466 1215 1214; 3467 1216 2014; 3468 1217 2015; 3469 1218 1995
531. 3471 1212 2092; 3472 1212 1223; 3473 1216 1223; 3474 1216 1909; 3475 1218 2091
532. 3477 1221 1220; 3478 1222 1523; 3479 1223 1524; 3480 1224 1526; 3481 1226 1225
533. 3483 1220 1227; 3484 1226 1228; 3485 1222 1229; 3486 1224 1230; 3487 1222 1231
534. 3488 1224 1231; 3489 1227 1594; 3490 1228 1596; 3491 1229 1231; 3492 1230 1231
535. 3494 1232 1221; 3495 1233 1225; 3497 1220 2135; 3498 1226 2116; 3499 1236 1208
536. 3500 1237 1217; 3501 1238 1206; 3502 1239 1215; 3505 1240 2136; 3506 1241 2117
537. 3507 1231 1928; 3510 1229 1243; 3511 1230 1244; 3512 1201 1246; 3513 1209 1249
538. 3514 80 1250; 3515 1218 1251; 3516 1227 1258; 3517 1228 1259; 3520 1269 1198
539. 3521 1271 1204; 3522 1272 1213; 3523 1238 2040; 3524 1239 2010; 3527 1234 2137
540. 3528 1235 2118; 3529 1262 1971; 3530 1263 1237; 3531 1266 1978; 3532 1267 1239
541. 3534 1255 1240; 3535 1256 1241; 3537 1243 1242; 3538 1244 1242; 3539 1258 1598
542. 3540 1259 1599; 3541 1245 1472; 3542 1248 1246; 3543 1249 1248; 3544 1247 2170

543. 3545 1251 1249; 3546 1250 1616; 3547 1253 1251; 3548 1254 1616; 3551 1257 1253
544. 3552 1254 1255; 3553 1257 1256; 3554 1258 1254; 3555 1259 1257; 3556 1260 1472
545. 3557 1261 1472; 3558 1248 1260; 3559 1261 1248; 3560 1262 1248; 3561 1249 1261
546. 3562 1262 2024; 3563 1263 1996; 3564 1261 1921; 3565 1262 1261; 3566 1263 1262
547. 3567 1264 1946; 3568 1265 1920; 3569 1266 1265; 3570 1267 1266; 3571 1475 1264
548. 3572 1265 1475; 3573 1270 1264; 3574 1270 1265; 3575 1266 1270; 3576 1271 1265
549. 3577 1271 2018; 3578 1272 1997; 3579 1268 1475; 3580 1269 1270; 3581 1270 1271
550. 3582 1271 1272; 3584 1255 1273; 3585 1256 1274; 3587 1254 2138; 3588 1257 2119
551. 3591 1280 1269; 3592 1282 1271; 3593 1283 1272; 3594 1286 1980; 3595 1287 1267
552. 3596 1290 1975; 3597 1291 1263; 3598 1273 2139; 3599 1274 2120; 3600 1242 1292
553. 3601 1243 1293; 3602 1244 1294; 3607 1246 1296; 3608 1249 1299; 3609 1250 1301
554. 3610 1251 1302; 3611 1258 1310; 3612 1259 1311; 3615 1275 2140; 3616 1276 2121
555. 3618 1277 1307; 3619 1278 1308; 3621 1279 1280; 3622 1280 1476; 3623 1281 1282
556. 3624 1282 1283; 3625 1476 1284; 3626 1281 1284; 3627 1285 1476; 3628 1281 1285
557. 3629 1282 1285; 3630 1286 1281; 3631 1282 2020; 3632 1283 1998; 3633 1285 1922
558. 3634 1286 1285; 3635 1287 1286; 3636 1284 1947; 3637 1289 1923; 3638 1290 1289
559. 3639 1291 1290; 3640 1288 1479; 3641 1289 1479; 3642 1298 1288; 3643 1289 1298
560. 3644 1290 1298; 3645 1299 1289; 3646 1290 2026; 3647 1291 1999; 3648 1293 1292
561. 3649 1294 1292; 3650 1310 1486; 3651 1311 1489; 3652 1295 1296; 3653 1296 1479
562. 3654 1298 1299; 3655 1297 2057; 3656 1299 1302; 3658 1303 1301; 3659 1302 1305
563. 3660 1303 1304; 3661 1304 1617; 3662 1307 1304; 3663 1308 1305; 3664 1305 1309
564. 3665 1306 1307; 3666 1309 1308; 3667 1306 1310; 3668 1309 1311; 3670 1307 1312
565. 3671 1308 1313; 3673 1306 2141; 3674 1309 2122; 3677 1319 1280; 3678 1321 1282
566. 3679 1322 1283; 3680 1325 1286; 3681 1326 1287; 3682 1329 1290; 3683 1330 1291
567. 3686 1292 1504; 3689 1293 1346; 3690 1294 1347; 3693 1332 2045; 3694 1296 1332
568. 3695 1335 2043; 3696 1297 2055; 3697 1299 1335; 3698 1337 2051; 3699 1301 266
569. 3700 1302 1337; 3701 1340 2173; 3702 1343 2047; 3703 1344 2053; 3704 1345 2049
570. 3705 1310 1344; 3706 1311 1345; 3707 1310 1500; 3708 1311 1495; 3709 1312 2142
571. 3710 1313 2123; 3713 1314 2143; 3714 1315 2124; 3716 1316 1341; 3717 1317 1342
572. 3719 1318 1319; 3720 1319 1480; 3721 1320 1321; 3722 1321 1322; 3723 1480 1323
573. 3724 1320 1323; 3725 1324 1480; 3726 1320 1324; 3727 1321 1324; 3728 1325 1320
574. 3729 1321 2021; 3730 1322 2000; 3731 1324 1924; 3732 1325 1324; 3733 1326 1325
575. 3734 1323 1948; 3735 1328 1925; 3736 1329 1328; 3737 1330 1329; 3738 1327 1483
576. 3739 1328 1483; 3740 1334 1327; 3741 1328 1334; 3742 1329 1334; 3743 1335 1328
577. 3744 1329 2027; 3745 1330 2001; 3746 1331 1332; 3747 1334 1483; 3748 1335 1334
578. 3749 1333 2059; 3750 1337 1335; 3752 1339 1337; 3756 1343 1339; 3757 1340 1341
579. 3758 1343 1342; 3759 1344 1340; 3760 1345 1343; 3761 1344 1488; 3762 1345 1491
580. 3763 1346 1348; 3764 1347 1348; 3766 1341 1349; 3767 1342 1350; 3769 1340 2144
581. 3770 1343 2125; 3773 1356 1319; 3774 1357 1321; 3775 1358 1322; 3776 1359 1982
582. 3777 1360 1326; 3778 1361 1977; 3779 1362 1330; 3780 1332 2046; 3781 1332 1364
583. 3782 1335 2044; 3783 1365 2056; 3784 1335 1367; 3785 1337 2052; 3787 1337 1370
584. 3788 1340 2174; 3789 1343 2048; 3790 1344 2054; 3791 1345 2050; 3792 1344 1378
585. 3793 1345 1379; 3796 1344 1501; 3797 1345 1494; 3798 1346 1380; 3799 1347 1381
586. 3802 1349 2145; 3803 1350 2126; 3806 1348 1505; 3809 1351 2146; 3810 1352 2127
587. 3812 1353 1375; 3813 1354 1376; 3815 1355 1356; 3816 1356 1484; 3817 1357 1358
588. 3818 1357 2017; 3819 1358 2002; 3820 1359 2029; 3821 1360 2007; 3822 1484 2177
589. 3823 1361 2023; 3824 1362 2003; 3825 1363 1364; 3826 1364 1485; 3828 1365 2058
590. 3829 1367 1370; 3831 1371 1369; 3832 1370 1373; 3833 1371 1372; 3834 1372 1618
591. 3835 1375 1372; 3836 1376 1373; 3837 1373 1377; 3838 1374 1375; 3839 1377 1376
592. 3840 1374 1378; 3841 1377 1379; 3842 1378 1487; 3843 1379 1490; 3844 1380 1382
593. 3845 1381 1382; 3847 1375 1383; 3848 1376 1384; 3850 1374 2147; 3851 1377 2128
594. 3854 1390 1558; 3855 1391 1357; 3856 1392 1358; 3857 1393 1359; 3858 1394 1360
595. 3859 1395 1361; 3860 1396 1362; 3861 1383 2148; 3862 1384 2129; 3863 1364 1398
596. 3864 1367 1402; 3865 1369 1403; 3866 1370 1404; 3867 1378 1411; 3868 1379 1412
597. 3873 1380 1413; 3874 1381 1414; 3875 1382 1415; 3878 1385 2149; 3879 1386 2130
598. 3881 1387 1408; 3882 1388 1409; 3884 1389 1390; 3885 1390 1943; 3886 1391 1392

599. 3887 1391 2016; 3888 1392 1992; 3889 1393 2028; 3890 1394 2004; 3891 1390 1553
600. 3892 1395 2022; 3893 1396 1994; 3897 1402 1884; 3899 1404 1402; 3900 1619 1407
601. 3901 1406 1404; 3905 1410 1406; 3906 1407 1408; 3907 1410 1409; 3908 1411 1407
602. 3909 1412 1410; 3910 1411 1600; 3911 1412 1601; 3912 1413 1415; 3913 1414 1415
603. 3915 1408 1416; 3916 1409 1417; 3918 1407 2150; 3919 1410 2131; 3922 1416 2151
604. 3923 1417 2132; 3924 1398 1538; 3925 1402 2200; 3926 1403 96; 3927 1404 1440
605. 3928 1411 1449; 3929 1412 1450; 3934 1413 1451; 3935 1414 1452; 3936 1415 1933
606. 3939 1418 2152; 3940 1419 2133; 3942 1420 2154; 3943 1421 2155; 3945 1422 1425
607. 3946 1423 1425; 3947 1422 1426; 3948 1423 1427; 3949 1424 1878; 3950 1425 1426
608. 3951 1427 1425; 3952 1428 2068; 3953 1431 2194; 3954 1426 1432; 3955 1427 1432
609. 3956 1433 2195; 3957 1434 2201; 3958 1430 2199; 3959 1431 2188; 3960 1432 2189
610. 3961 1433 2190; 3962 1434 2192; 3964 1431 1437; 3965 1431 1438; 3966 1433 1438
611. 3967 1433 1439; 3968 1434 1440; 3971 1438 1437; 3972 1439 1438; 3973 2063 1439
612. 3976 1437 1445; 3977 1439 1445; 3979 1440 2063; 3980 1441 1435; 3981 1443 1442
613. 3982 1444 2158; 3983 1445 2159; 3984 1446 2161; 3985 1448 1447; 3987 1442 1449
614. 3988 1448 1450; 3989 1444 1451; 3990 1446 1452; 3991 1444 1453; 3992 1446 1453
615. 3993 1449 1595; 3994 1450 1597; 3995 1451 1453; 3996 1452 1453; 4033 266 1369
616. 4036 50 1617; 4037 1616 1617; 4040 49 1616; 4042 50 1618; 4043 1619 1618
617. 4046 51 1619; 4066 51 1435; 4092 1472 1246; 4093 1475 1269; 4096 1480 1320
618. 4099 1483 1332; 4100 1484 1357; 4102 1486 1293; 4103 1487 1380; 4104 1486 1500
619. 4105 1488 1346; 4106 1488 1501; 4107 1489 1294; 4108 1490 1381; 4109 1489 1495
620. 4110 1491 1347; 4111 1491 1494; 4117 1494 1490; 4118 1495 1345; 4120 1495 1491
621. 4122 1487 1501; 4124 1501 1378; 4126 1488 1500; 4128 1500 1344; 4129 1494 1379
622. 4131 1293 1500; 4132 1500 1346; 4134 1346 1501; 4135 1501 1380; 4136 1504 1348
623. 4137 1293 1504; 4138 1504 1346; 4139 1505 1382; 4140 1346 1505; 4141 1505 1380
624. 4142 1294 1495; 4143 1495 1347; 4144 1347 1494; 4145 1494 1381; 4146 1294 1504
625. 4147 1504 1347; 4148 1347 1505; 4149 1505 1381; 4347 1485 1367; 4348 49 2089
626. 4349 50 1340; 4350 51 2098; 4358 1519 2172; 4359 1437 96; 4360 1520 2169
627. 4361 1212 2104; 4366 540 1250; 4369 848 1403; 4370 513 1250; 4371 540 80
628. 4372 540 1301; 4373 1717 1250; 4374 1717 1719; 4375 463 1719; 4376 463 1720
629. 4377 266 1720; 4378 1369 848; 4379 1718 1403; 4380 848 96; 4381 527 1403
630. 4382 247 649; 4383 628 419; 4384 628 390; 4385 649 215; 4386 215 361
631. 4387 390 183; 4388 183 593; 4389 361 572; 4390 572 332; 4391 593 151
632. 4392 151 303; 4393 332 119; 4394 119 540; 4395 303 513; 4396 835 527
633. 4397 135 848; 4398 822 135; 4399 167 835; 4400 809 167; 4401 586 822
634. 4402 796 586; 4403 199 809; 4404 783 199; 4405 231 796; 4406 770 1614
635. 4407 642 1614; 4408 757 1695; 4409 263 1695; 4415 1232 2095; 4416 1521 1525
636. 4417 1222 1521; 4418 1522 2097; 4419 1224 1522; 4420 1523 2107; 4421 1232 2094
637. 4422 1523 1521; 4423 1524 1222; 4424 1521 1524; 4425 1525 1522; 4426 1524 1525
638. 4427 1526 1223; 4428 1525 1526; 4429 1526 1522; 4430 1527 1224; 4431 1522 1527
639. 4432 2096 1233; 4436 1398 1882; 4437 1476 1281; 4438 1479 1298; 4439 1426 2075
640. 4440 1390 1531; 4441 1530 1572; 4442 1427 1548; 4443 1531 2073; 4444 1426 1552
641. 4445 1538 1540; 4449 1540 1542; 4450 1542 1544; 4452 1544 1428; 4454 1545 1530
642. 4455 1546 1545; 4456 1547 1546; 4457 1548 1547; 4458 1549 1531; 4459 1550 1549
643. 4460 1551 1550; 4461 1552 1551; 4462 1545 2066; 4463 1549 1554; 4464 1546 2086
644. 4465 1550 2082; 4466 1547 2085; 4467 1551 2081; 4468 1548 2070; 4469 1552 1557
645. 4470 1553 2064; 4471 1425 1557; 4472 1554 1545; 4473 1555 2083; 4474 1556 1571
646. 4475 1557 1548; 4476 1554 1553; 4477 1555 1554; 4478 1556 1555; 4479 1557 1556
647. 4480 1558 1356; 4481 1558 1561; 4482 1561 1564; 4483 1562 2076; 4484 1561 1562
648. 4487 1563 1568; 4488 1565 2074; 4489 1566 2077; 4490 1567 2078; 4491 1568 2079
649. 4493 1569 1564; 4494 1565 1569; 4495 1566 1565; 4496 1567 1566; 4497 1568 1567
650. 4498 1570 2071; 4499 1571 2084; 4500 1572 2065; 4501 1573 1530; 4502 741 1576
651. 4503 677 1575; 4504 1575 1853; 4505 1576 1859; 4506 1575 1586; 4513 1580 1706
652. 4515 1580 1855; 4516 1582 1580; 4518 1582 1857; 4519 1584 1860; 4521 1584 1858
653. 4522 1586 1584; 4524 1586 1854; 4525 1588 1705; 4526 1580 1588; 4527 1589 1588
654. 4528 1582 1589; 4529 1590 1589; 4530 1584 1590; 4531 1591 1590; 4532 1586 1591

655. 4535 1594 1229; 4536 1594 1929; 4537 1595 1451; 4538 1487 1931; 4539 1596 1230
656. 4540 1596 1927; 4541 1597 1452; 4542 1490 1935; 4543 1598 1243; 4544 1599 1244
657. 4545 1600 1413; 4546 1601 1414; 4547 1598 1930; 4548 1600 1932; 4549 1599 1926
658. 4550 1601 1934; 4555 390 361; 4556 361 593; 4557 332 303; 4558 303 540
659. 4559 649 390; 4560 593 332; 4567 300 329; 4568 329 592; 4569 358 387
660. 4570 387 648; 4571 539 300; 4572 592 358; 4573 835 848; 4574 770 1609
661. 4575 783 796; 4576 796 809; 4577 822 835; 4578 809 822; 4579 1609 1699
662. 4585 382 645; 4586 535 295; 4587 295 324; 4588 324 589; 4589 353 382
663. 4590 589 353; 4591 419 648; 4592 649 416; 4593 416 1689; 4594 648 1689
664. 4595 411 1690; 4596 757 1690; 4597 1609 1614; 4598 1614 1701; 4599 1614 1699
665. 4602 1695 1698; 4603 1695 770; 4605 752 766; 4606 766 779; 4607 779 792
666. 4608 792 805; 4609 805 818; 4610 818 831; 4611 831 844; 4614 761 774
667. 4615 774 787; 4616 787 800; 4617 800 813; 4618 813 826; 4619 826 839
668. 4620 839 852; 4623 10 766; 4624 752 601; 4625 752 764; 4626 749 766
669. 4627 749 1145; 4628 1145 764; 4629 1145 759; 4630 1145 772; 4631 759 774
670. 4632 772 761; 4633 761 612; 4634 774 11; 4659 803 816; 4660 811 824
671. 4663 1617 1306; 4665 1618 1374; 4666 1619 1403; 4669 844 1616; 4670 1118 1617
672. 4671 1114 1618; 4672 852 1619; 4674 844 49; 4675 844 1617; 4676 1118 1616
673. 4677 491 1616; 4678 1118 1715; 4679 445 1715; 4681 1621 1618; 4682 852 51
674. 4683 852 1621; 4684 1114 1619; 4685 502 1619; 4686 1114 1716; 4687 445 1716
675. 4688 1622 757; 4690 1626 783; 4691 1628 796; 4693 1632 822; 4694 1634 835
676. 4705 757 1639; 4706 1622 1722; 4707 1639 1638; 4708 1639 761; 4709 1640 751
677. 4710 925 1640; 4711 1641 760; 4712 910 1641; 4713 1643 1724; 4714 1643 1723
678. 4715 1721 1643; 4717 1644 1638; 4718 1639 1644; 4719 1647 1728; 4720 1648 1625
679. 4721 770 1645; 4723 1645 1625; 4724 1645 774; 4728 1645 1648; 4729 1651 1733
680. 4730 1652 1627; 4731 783 1649; 4733 1649 1627; 4734 1649 787; 4738 1649 1652
681. 4739 1655 1738; 4740 1656 1629; 4741 796 1653; 4743 1653 1629; 4744 1653 800
682. 4748 1653 1656; 4749 1659 1743; 4750 1660 1631; 4751 809 1657; 4753 1657 1631
683. 4754 1657 813; 4758 1657 1660; 4759 1663 1748; 4760 1664 1633; 4761 822 1661
684. 4763 1661 1633; 4764 1661 826; 4768 1661 1664; 4769 1667 1753; 4770 1668 1635
685. 4771 835 1665; 4773 1665 1635; 4774 1665 839; 4778 1665 1668; 4779 1671 1758
686. 4780 1672 1637; 4781 848 1669; 4783 1669 1637; 4784 1669 852; 4788 1669 1672
687. 4789 1673 765; 4790 943 1673; 4791 1674 778; 4792 961 1674; 4793 1675 791
688. 4794 979 1675; 4795 1676 804; 4796 997 1676; 4797 1677 817; 4798 1015 1677
689. 4799 1678 830; 4800 1033 1678; 4801 1679 843; 4802 1051 1679; 4803 1680 773
690. 4804 935 1680; 4805 1681 786; 4806 953 1681; 4807 1682 799; 4808 971 1682
691. 4809 1683 812; 4810 989 1683; 4811 1684 825; 4812 1007 1684; 4813 1685 838
692. 4814 1025 1685; 4815 1686 851; 4816 1043 1686; 4817 1167 1690; 4822 1689 645
693. 4823 1689 411; 4824 1690 770; 4825 1690 645; 4829 1690 1693; 4832 1693 645
694. 4836 410 1689; 4837 1689 467; 4838 1622 1695; 4840 1695 1697; 4842 1697 1624
695. 4843 1696 1698; 4844 1698 1697; 4845 1698 642; 4846 1699 783; 4847 1699 1702
696. 4849 1702 1703; 4851 783 1702; 4852 231 1702; 4853 1703 1701; 4854 1614 1703
697. 4855 1704 642; 4856 1704 1614; 4857 1705 741; 4858 1706 1576; 4859 1705 1706
698. 4861 1706 1856; 4862 416 1714; 4863 743 737; 4864 742 739; 4865 411 1714
699. 4866 1708 740; 4867 1709 741; 4868 1708 1710; 4869 1710 742; 4870 1711 743
700. 4875 1714 743; 4876 1714 742; 4877 1709 1711; 4879 1714 1711; 4880 1710 1714
701. 4882 1715 50; 4883 1715 1617; 4884 1716 50; 4885 1716 1621; 4886 539 1715
702. 4887 535 1716; 4888 1717 539; 4889 1301 1717; 4890 1718 535; 4891 1369 1718
703. 4892 1719 266; 4893 1719 1301; 4894 1720 1369; 4895 1720 1718; 4896 539 1719
704. 4897 535 1720; 4898 1721 1622; 4899 1722 1643; 4900 1638 1722; 4901 1723 1638
705. 4902 1722 1723; 4903 1724 263; 4904 11 1724; 4905 1725 1643; 4906 1724 1725
706. 4907 1726 1624; 4908 1728 1625; 4909 1730 1647; 4910 1624 1727; 4911 1647 1729
707. 4912 1726 1647; 4913 1727 1647; 4914 1625 1727; 4915 1727 1728; 4916 1729 642
708. 4917 612 1729; 4918 1729 1730; 4919 1731 1626; 4920 1733 1627; 4921 1735 1651
709. 4922 1626 1732; 4923 1651 1734; 4924 1731 1651; 4925 1732 1651; 4926 1627 1732
710. 4927 1732 1733; 4928 1734 231; 4929 15 1734; 4930 1734 1735; 4931 1736 1628

711. 4932 1738 1629; 4933 1740 1655; 4934 1628 1737; 4935 1655 1739; 4936 1736 1655
712. 4937 1737 1655; 4938 1629 1737; 4939 1737 1738; 4940 1739 199; 4941 24 1739
713. 4942 1739 1740; 4943 1741 1630; 4944 1743 1631; 4945 1745 1659; 4946 1630 1742
714. 4947 1659 1744; 4948 1741 1659; 4949 1742 1659; 4950 1631 1742; 4951 1742 1743
715. 4952 1744 586; 4953 558 1744; 4954 1744 1745; 4955 1746 1632; 4956 1748 1633
716. 4957 1750 1663; 4958 1632 1747; 4959 1663 1749; 4960 1746 1663; 4961 1747 1663
717. 4962 1633 1747; 4963 1747 1748; 4964 1749 167; 4965 33 1749; 4966 1749 1750
718. 4967 1751 1634; 4968 1753 1635; 4969 1755 1667; 4970 1634 1752; 4971 1667 1754
719. 4972 1751 1667; 4973 1752 1667; 4974 1635 1752; 4975 1752 1753; 4976 1754 135
720. 4977 42 1754; 4978 1754 1755; 4979 1756 1636; 4980 1758 1637; 4981 1760 1671
721. 4982 1636 1757; 4983 1671 1759; 4984 1756 1671; 4985 1757 1671; 4986 1637 1757
722. 4987 1757 1758; 4988 1759 527; 4989 502 1759; 4990 1759 1760; 4991 1761 927
723. 4992 1762 930; 4993 1764 1768; 4994 1765 930; 4995 1766 927; 4996 1768 928
724. 4997 1770 10; 4998 1761 1762; 4999 419 1763; 5000 1761 1767; 5001 1763 1762
725. 5002 1763 752; 5003 1764 1769; 5004 1766 1764; 5005 1763 1765; 5006 1767 1764
726. 5007 1762 1767; 5008 1767 1768; 5009 1769 247; 5010 10 1769; 5011 1769 1770
727. 5012 1771 945; 5013 1772 948; 5014 1774 1778; 5015 1775 948; 5016 1776 945
728. 5017 1778 946; 5018 1780 601; 5019 1771 1772; 5020 649 1773; 5021 1771 1777
729. 5022 1773 1772; 5023 1773 766; 5024 1774 1779; 5025 1776 1774; 5026 1773 1775
730. 5027 1777 1774; 5028 1772 1777; 5029 1777 1778; 5030 1779 628; 5031 601 1779
731. 5032 1779 1780; 5033 1781 963; 5034 1782 966; 5035 1784 1788; 5036 1785 966
732. 5037 1786 963; 5038 1788 964; 5039 1790 13; 5040 1781 1782; 5041 390 1783
733. 5042 1781 1787; 5043 1783 1782; 5044 1783 779; 5045 1784 1789; 5046 1786 1784
734. 5047 1783 1785; 5048 1787 1784; 5049 1782 1787; 5050 1787 1788; 5051 1789 215
735. 5052 13 1789; 5053 1789 1790; 5054 1791 981; 5055 1792 984; 5056 1794 1798
736. 5057 1795 984; 5058 1796 981; 5059 1798 982; 5060 1800 22; 5061 1791 1792
737. 5062 361 1793; 5063 1791 1797; 5064 1793 1792; 5065 1793 792; 5066 1794 1799
738. 5067 1796 1794; 5068 1793 1795; 5069 1797 1794; 5070 1792 1797; 5071 1797 1798
739. 5072 1799 183; 5073 22 1799; 5074 1799 1800; 5075 1801 999; 5076 1802 1002
740. 5077 1804 1808; 5078 1805 1002; 5079 1806 999; 5080 1808 1000; 5081 1810 547
741. 5082 1801 1802; 5083 593 1803; 5084 1801 1807; 5085 1803 1802; 5086 1803 805
742. 5087 1804 1809; 5088 1806 1804; 5089 1803 1805; 5090 1807 1804; 5091 1802 1807
743. 5092 1807 1808; 5093 1809 572; 5094 547 1809; 5095 1809 1810; 5096 1811 1017
744. 5097 1812 1020; 5098 1814 1818; 5099 1815 1020; 5100 1816 151; 5101 1818 1018
745. 5102 1820 31; 5103 1811 1812; 5104 332 1813; 5105 1811 1817; 5106 1813 1812
746. 5107 1813 818; 5108 1814 1819; 5109 1816 1814; 5110 1813 1815; 5111 1817 1814
747. 5112 1812 1817; 5113 1817 1818; 5114 1819 151; 5115 31 1819; 5116 1819 1820
748. 5117 1821 1035; 5118 1822 1038; 5119 1824 1828; 5120 1825 1038; 5121 1826 1035
749. 5122 1828 1036; 5123 1830 40; 5124 1821 1822; 5125 303 1823; 5126 1821 1827
750. 5127 1823 1822; 5128 1823 831; 5129 1824 1829; 5130 1826 1824; 5131 1823 1825
751. 5132 1827 1824; 5133 1822 1827; 5134 1827 1828; 5135 1829 119; 5136 40 1829
752. 5137 1829 1830; 5138 1831 1053; 5139 1832 1056; 5140 1834 1838; 5141 1835 1056
753. 5142 1836 1053; 5143 1838 1054; 5144 1840 491; 5145 1831 1832; 5146 540 1833
754. 5147 1831 1837; 5148 1833 1832; 5149 1833 844; 5150 1834 1839; 5151 1836 1834
755. 5152 1833 1835; 5153 1837 1834; 5154 1832 1837; 5155 1837 1838; 5156 1839 513
756. 5157 491 1839; 5158 1839 1840; 5160 1843 1846; 5161 1842 1863; 5162 1843 1848
757. 5163 1843 1850; 5164 1845 1842; 5165 1846 1844; 5166 1845 1851; 5167 1847 730
758. 5168 1846 1849; 5169 1848 741; 5172 1849 1847; 5175 1850 1842; 5176 1845 1850
759. 5177 1846 1850; 5178 1851 1846; 5180 1844 1851; 5181 1852 677; 5182 1845 1852
760. 5183 1853 678; 5184 1854 1587; 5185 1853 1854; 5186 1855 1581; 5187 1856 1707
761. 5188 1855 1856; 5189 1857 1583; 5190 1857 1855; 5191 1858 1585; 5192 1858 1861
762. 5193 1854 1858; 5194 1859 1579; 5195 1856 1859; 5196 1860 1582; 5197 1861 1857
763. 5198 1860 1861; 5199 1862 1845; 5200 1863 677; 5201 1862 1863; 5202 1864 1852
764. 5203 1864 1863; 5204 1841 1866; 5205 8 1866; 5206 1841 1862; 5207 1841 1851
765. 5208 678 1587; 5209 1707 1579; 5210 1581 1707; 5211 1583 1581; 5212 1585 1583
766. 5213 1587 1585; 5214 1579 1867; 5215 1564 1868; 5216 1575 1591; 5217 1591 1584

767. 5218 1584 1589; 5219 1589 1580; 5220 1580 1705; 5221 1705 1576; 5230 1869 1883
768. 5231 1871 1869; 5232 1872 1877; 5233 1874 1879; 5234 1874 1875; 5235 1870 1881
769. 5236 1875 1440; 5237 1874 1434; 5238 1873 1428; 5239 1870 1398; 5240 1869 1402
770. 5241 1871 1404; 5242 1871 1991; 5243 1869 1990; 5244 1870 1986; 5245 1877 1873
771. 5246 1878 1428; 5247 1877 1878; 5248 1879 1873; 5249 1880 1428; 5250 1879 1880
772. 5251 1881 1876; 5252 1882 1397; 5253 1881 1882; 5254 1883 1870; 5255 1884 1398
773. 5256 1883 1884; 5257 1881 1885; 5258 1882 1878; 5259 1883 1987; 5260 1880 1884
774. 5261 1885 1877; 5264 1886 1873; 5267 1879 1988; 5273 1875 1991; 5276 1890 1891
775. 5277 1892 1906; 5278 1891 1904; 5279 1893 2101; 5280 1894 2105; 5281 1895 1897
776. 5282 1896 2108; 5283 1897 1908; 5284 1898 1222; 5285 1899 2112; 5286 1899 1913
777. 5288 1212 2113; 5289 1896 1912; 5290 1203 2114; 5291 1894 1911; 5292 1207 2115
778. 5294 1891 1910; 5302 1904 1894; 5303 1905 1203; 5304 1904 1905; 5305 1906 1893
779. 5306 1907 1200; 5307 1906 2110; 5308 1908 1899; 5309 1909 2093; 5310 1908 2111
780. 5311 1910 1893; 5312 1890 1910; 5313 1892 1910; 5314 1911 1895; 5315 1891 1911
781. 5316 1893 1911; 5317 1912 1897; 5318 1894 1912; 5319 1895 1912; 5320 1913 1898
782. 5321 1896 1913; 5322 1897 1913; 5323 1265 1956; 5324 1285 1957; 5325 1324 1958
783. 5326 1261 1962; 5327 1289 1963; 5328 1328 1964; 5329 1920 2175; 5330 1914 1920
784. 5331 1921 2176; 5332 1917 1921; 5333 1922 1284; 5334 1915 1922; 5335 1923 1288
785. 5336 1918 1923; 5337 1924 1323; 5338 1916 1924; 5339 1925 1327; 5340 1919 1925
786. 5341 1916 1915; 5342 1917 1918; 5343 1915 1914; 5344 1918 1919; 5345 1926 1489
787. 5346 1311 1926; 5347 1926 1259; 5348 1927 1599; 5349 1259 1927; 5350 1927 1228
788. 5351 1927 1230; 5352 1927 1244; 5353 1928 1242; 5354 1230 1928; 5355 1928 1244
789. 5356 1928 1229; 5357 1928 1243; 5358 1929 1598; 5359 1227 1929; 5360 1929 1258
790. 5361 1929 1229; 5362 1929 1243; 5363 1930 1486; 5364 1258 1930; 5365 1930 1310
791. 5366 1931 1600; 5367 1378 1931; 5368 1931 1411; 5369 1932 1595; 5370 1411 1932
792. 5371 1932 1449; 5372 1932 1413; 5373 1932 1451; 5374 1933 1453; 5375 1413 1933
793. 5376 1933 1451; 5377 1933 1414; 5378 1933 1452; 5379 1934 1597; 5380 1414 1934
794. 5381 1934 1452; 5382 1934 1412; 5383 1934 1450; 5384 1935 1601; 5385 1379 1935
795. 5386 1935 1412; 5387 1936 1201; 5388 1937 1907; 5389 1936 1938; 5390 1938 1937
796. 5391 1939 1260; 5392 1938 1939; 5393 1940 1288; 5394 1939 1940; 5395 1941 1327
797. 5396 1940 1941; 5397 1942 2178; 5398 1941 1942; 5399 1943 1391; 5400 1884 1944
798. 5401 1944 1950; 5402 1942 1944; 5403 1946 1939; 5404 1945 1946; 5405 1947 1940
799. 5406 1946 1947; 5407 1948 1941; 5408 1947 1948; 5409 1949 1942; 5410 1948 1949
800. 5411 1950 1943; 5412 1949 1950; 5414 1952 1197; 5415 1937 1945; 5416 1945 2203
801. 5417 1266 1953; 5418 1286 1954; 5419 1325 1955; 5420 1956 1914; 5421 1953 1956
802. 5422 1957 1915; 5423 1954 1957; 5424 1958 1916; 5425 1955 1958; 5426 1262 1959
803. 5427 1290 1960; 5428 1329 1961; 5429 1962 1917; 5430 1959 1962; 5431 1963 1918
804. 5432 1960 1963; 5433 1964 1919; 5434 1961 1964; 5436 1953 1979; 5437 1953 1985
805. 5438 1955 1954; 5439 1966 2033; 5440 1955 1983; 5441 1967 2031; 5442 1961 1976
806. 5443 1961 1960; 5444 1960 1974; 5445 1968 2041; 5446 1959 1970; 5447 1969 2042
807. 5448 1970 1968; 5449 1971 1236; 5450 1970 1971; 5451 1972 1959; 5452 1973 1262
808. 5453 1972 1973; 5454 1974 1972; 5455 1975 1973; 5456 1974 1975; 5457 1976 1967
809. 5458 1977 1329; 5459 1976 1977; 5460 1978 1238; 5461 1979 1969; 5462 1979 1978
810. 5463 1980 1984; 5464 1954 1981; 5465 1981 1980; 5466 1982 1325; 5467 1983 1966
811. 5468 1983 1982; 5469 1984 1266; 5470 1981 1985; 5471 1985 1984; 5472 1986 1886
812. 5474 1986 1987; 5475 1988 1987; 5476 1989 1874; 5477 1988 1989; 5478 1990 1989
813. 5480 1990 1991; 5481 6 658; 5482 607 657; 5483 657 628; 5484 658 247
814. 5485 677 642; 5486 678 263; 5487 660 80; 5488 676 513; 5489 680 96
815. 5490 696 527; 5491 1992 1394; 5492 1993 1213; 5493 1992 2002; 5494 1994 1404
816. 5495 1995 1217; 5496 1994 2003; 5497 1996 1251; 5498 1997 1267; 5499 1998 1287
817. 5500 1999 1302; 5501 2000 1326; 5502 2001 1337; 5503 2002 1360; 5504 2003 1370
818. 5505 1997 1993; 5506 1998 1997; 5507 2000 1998; 5508 2002 2000; 5509 1996 1995
819. 5510 1999 1996; 5511 2001 1999; 5512 2003 2001; 5513 2004 2005; 5514 2005 2006
820. 5515 2006 1396; 5516 2007 2009; 5517 2004 2007; 5518 2008 1362; 5519 2006 2008
821. 5520 2009 2008; 5521 2005 2009; 5522 2010 2011; 5523 2011 2012; 5524 2012 1237
822. 5525 2013 1215; 5526 2010 2013; 5527 2014 2013; 5528 2011 2014; 5529 2015 1216

823. 5530 2012 2015; 5531 2016 1393; 5532 2017 1359; 5533 2016 2017; 5534 2018 1266
824. 5535 2019 1204; 5536 2018 2019; 5537 2020 1286; 5538 2020 2018; 5539 2021 1325
825. 5540 2021 2020; 5541 2017 2021; 5542 2022 1402; 5543 2023 1367; 5544 2022 2023
826. 5545 2024 1249; 5546 2025 1208; 5547 2024 2025; 5548 2026 1299; 5549 2026 2024
827. 5550 2027 1335; 5551 2027 2026; 5552 2023 2027; 5553 2028 2032; 5554 2029 1966
828. 5555 2028 2029; 5556 2030 1395; 5557 2031 1361; 5558 2030 2031; 5559 2032 2030
829. 5560 2033 1967; 5561 2032 2033; 5562 2035 1206; 5564 2037 2035; 5566 2039 1207
830. 5568 2040 1969; 5569 2041 1236; 5570 2042 1968; 5571 2040 2035; 5572 2042 2037
831. 5573 2041 2039; 5582 2043 1296; 5583 1299 2043; 5584 2044 1364; 5585 1367 2044
832. 5586 2045 1295; 5587 1296 2045; 5588 2046 1363; 5589 1364 2046; 5590 2047 1302
833. 5591 1309 2047; 5592 2048 1370; 5593 1377 2048; 5594 2049 1309; 5595 1311 2049
834. 5596 2050 1377; 5597 1379 2050; 5598 2051 1299; 5599 1302 2051; 5600 2052 1367
835. 5601 1370 2052; 5602 2053 1306; 5603 1310 2053; 5604 2054 1374; 5605 1378 2054
836. 5606 2055 266; 5607 1301 2055; 5608 2056 266; 5609 1369 2056; 5610 2057 1301
837. 5611 2058 1369; 5612 2057 2055; 5613 2059 266; 5614 2059 2056; 5615 2055 2059
838. 5616 2056 2058; 5617 1437 2167; 5618 1439 2168; 5619 2063 2099; 5620 1549 1390
839. 5621 1390 1554; 5622 2064 1573; 5623 1554 2064; 5624 2064 1545; 5625 2065 2067
840. 5626 1545 2065; 5627 2066 2072; 5628 2065 2066; 5629 2067 1398; 5630 2066 2067
841. 5631 2067 1538; 5632 2068 1427; 5633 2067 2072; 5634 2069 1540; 5635 2070 1544
842. 5636 2071 1542; 5637 2072 1538; 5638 2070 2068; 5639 2071 2070; 5640 2069 2071
843. 5641 2072 2069; 5642 1538 2069; 5643 2069 1542; 5644 1542 2070; 5645 2070 1428
844. 5646 2073 1562; 5647 1549 2073; 5648 2074 1549; 5649 2073 2074; 5650 2074 1569
845. 5651 2075 1563; 5652 2074 2077; 5653 2076 1569; 5654 2074 2076; 5655 2077 1550
846. 5656 2077 2078; 5657 2078 2080; 5658 2079 1552; 5659 2079 2075; 5660 2078 2079
847. 5664 1563 2079; 5665 2079 1567; 5666 1567 2077; 5669 2080 1551; 5670 2077 2080
848. 5671 2080 1550; 5672 2081 1556; 5673 1550 2081; 5674 2082 1555; 5675 2081 2082
849. 5676 2082 1556; 5677 2083 1546; 5678 1556 2083; 5679 2084 1547; 5680 2083 2084
850. 5681 2084 1546; 5682 2085 1570; 5683 1546 2085; 5684 2086 2069; 5685 2085 2086
851. 5686 2086 2071; 5687 2071 1540; 5688 2074 1566; 5689 1566 2078; 5690 1891 2109
852. 5691 1893 1200; 5692 2087 1442; 5695 2088 1448; 5698 2089 1220; 5699 1221 2089
853. 5701 2091 1226; 5702 1225 2091; 5703 2092 1222; 5704 1521 2092; 5705 2093 1224
854. 5706 1522 2093; 5707 2094 1220; 5708 2095 1521; 5711 1523 2095; 5712 2094 2095
855. 5713 2096 1527; 5714 2097 1233; 5715 2096 2097; 5716 1527 2097; 5717 2098 1442
856. 5718 1443 2098; 5719 2099 1448; 5720 1447 2099; 5721 1895 2100; 5722 2101 1895
857. 5723 2100 2101; 5724 2102 2039; 5725 2100 2102; 5726 1896 2103; 5727 2104 1520
858. 5728 2103 2104; 5729 2105 1896; 5730 2103 2105; 5732 1226 2096; 5734 1448 2165
859. 5735 1898 2106; 5736 2107 2094; 5737 2106 2107; 5738 2108 1898; 5739 2106 2108
860. 5740 2109 1197; 5741 1890 2109; 5742 1194 2109; 5743 2110 1907; 5744 1892 2110
861. 5745 2110 1195; 5746 2111 1909; 5749 2112 1224; 5750 1908 2112; 5751 1909 2112
862. 5752 2113 1896; 5753 1894 2113; 5754 1203 2113; 5755 2114 1894; 5756 1904 2114
863. 5757 1905 2114; 5758 2115 1895; 5759 1893 2115; 5760 1200 2115; 5761 2116 1235
864. 5762 2117 1233; 5763 2118 1257; 5764 2119 1276; 5765 2120 1278; 5766 2121 1309
865. 5767 2122 1315; 5768 2123 1317; 5769 2124 1343; 5770 2125 1352; 5771 2126 1354
866. 5772 2127 1377; 5773 2128 1386; 5774 2129 1388; 5775 2130 1410; 5776 2131 1419
867. 5777 2132 1421; 5778 2133 2088; 5779 2134 1447; 5780 2116 1225; 5781 2117 2116
868. 5782 2118 2117; 5783 1256 2118; 5784 1256 2119; 5785 2119 2120; 5786 2120 2121
869. 5787 2121 1308; 5788 1308 2122; 5789 2122 2123; 5790 2123 2124; 5791 2124 1342
870. 5792 1342 2125; 5793 2125 2126; 5794 2126 2127; 5795 2127 1376; 5796 1376 2128
871. 5797 2128 2129; 5798 2129 2130; 5799 2130 1409; 5800 1409 2131; 5801 2131 2132
872. 5802 2132 2133; 5803 2133 2134; 5804 2134 1448; 5805 2135 1234; 5806 2136 1232
873. 5807 2137 1254; 5808 2138 1275; 5809 2139 1277; 5810 2140 1306; 5811 2141 1314
874. 5812 2142 1316; 5813 2143 1340; 5814 2144 1351; 5815 2145 1353; 5816 2146 1374
875. 5817 2147 1385; 5818 2148 1387; 5819 2149 1407; 5820 2150 1418; 5821 2151 1420
876. 5822 2152 2087; 5823 2153 1443; 5824 2135 1221; 5825 2136 2135; 5826 2137 2136
877. 5827 1255 2137; 5828 1255 2138; 5829 2138 2139; 5830 2139 2140; 5831 2140 1307
878. 5832 1307 2141; 5833 2141 2142; 5834 2142 2143; 5835 2143 1341; 5836 1341 2144

```
879. 5837 2144 2145; 5838 2145 2146; 5839 2146 1375; 5840 1375 2147; 5841 2147 2148
880. 5842 2148 2149; 5843 2149 1408; 5844 1408 2150; 5845 2150 2151; 5846 2151 2152
881. 5847 2152 2153; 5848 2153 1442; 5849 2154 2153; 5850 2155 2134; 5851 2158 2163
882. 5852 2159 1444; 5853 2161 1445; 5854 2162 1446; 5855 2163 1442; 5856 2165 2162
883. 5857 2154 2164; 5858 2156 2160; 5859 1444 2156; 5860 2157 2166; 5861 1446 2157
884. 5862 2154 2163; 5863 2158 2156; 5864 2156 2159; 5865 2160 2157; 5866 2159 2160
885. 5867 2160 2161; 5868 2161 2157; 5869 2157 2162; 5870 2165 2155; 5871 2164 2156
886. 5872 2158 2164; 5873 2163 2164; 5874 2166 2155; 5875 2165 2166; 5876 2162 2166
887. 5877 2167 1444; 5878 2168 1446; 5879 2156 2167; 5880 2157 2168; 5881 2169 676
888. 5882 2170 1250; 5883 2169 2170; 5884 2170 2057; 5885 2058 2171; 5886 2172 1430
889. 5887 2171 2172; 5888 1403 2171; 5889 2173 1301; 5890 1306 2173; 5891 2174 1369
890. 5892 1374 2174; 5893 1284 1279; 5894 1288 1295; 5895 2175 1264; 5897 2176 1260
891. 5899 1323 1318; 5900 1327 1331; 5901 1264 1268; 5902 1260 1245; 5903 2177 1949
892. 5904 2177 1355; 5905 2178 1485; 5906 2178 1363; 5907 2064 1389; 5908 2065 1397
893. 5909 2193 1434; 5910 2181 1430; 5911 2181 2182; 5912 2183 2184; 5913 1431 2183
894. 5914 2185 2186; 5915 1433 2185; 5916 2187 1430; 5917 2181 2187; 5918 2188 2187
895. 5919 2188 2183; 5920 2189 1431; 5921 2183 2189; 5922 2184 2185; 5923 2189 2184
896. 5924 2190 1432; 5925 2184 2190; 5926 2190 2185; 5927 2191 1433; 5928 2185 2191
897. 5929 2192 2191; 5930 2192 2193; 5931 2182 2183; 5932 2188 2182; 5933 2187 2182
898. 5934 2186 2193; 5935 2192 2186; 5936 2191 2186; 5937 2194 1426; 5938 2183 2194
899. 5939 2195 1427; 5940 2185 2195; 5942 1430 2198; 5943 2199 696; 5944 2198 2199
900. 5945 2200 1434; 5947 2201 1880; 5948 2200 2201; 5949 2181 2198; 5950 2193 2200
901. 5951 2202 1199; 5952 2203 1199; 5953 2202 1952; 5954 2203 2202
902. **************************************************************************
903. ELEMENT INCIDENCES SHELL
904. 4004 1204 1271 1266 1206; 4006 1271 1282 1286 1266; 4007 1272 1283 1287 1267
905. 4008 1262 1290 1299 1249; 4009 1263 1291 1302 1251; 4010 1282 1321 1325 1286
906. 4011 1283 1322 1326 1287; 4012 1290 1329 1335 1299; 4013 1291 1330 1337 1302
907. 4014 1321 1357 1359 1325; 4015 1322 1358 1360 1326; 4016 1329 1361 1367 1335
908. 4017 1330 1362 1370 1337; 4018 1357 1391 1393 1359; 4019 1358 1392 1394 1360
909. 4020 1359 1393 1395 1361; 4021 1360 1394 1396 1362; 4022 1395 1402 1367 1361
910. 4023 1396 1404 1370 1362; 4410 1215 1213 1272 1267; 4411 1217 1215 1239 1237
911. 4412 1218 1217 1263 1251; 4413 1208 1206 1238 1236; 4414 1209 1208 1262 1249
912. 5574 1238 1266 1953 1969; 5575 1968 1959 1262 1236; 5576 1266 1286 1954 1953
913. 5577 1959 1960 1290 1262; 5578 1286 1325 1955 1954; 5579 1960 1961 1329 1290
914. 5580 1325 1359 1966 1955; 5581 1961 1967 1361 1329
915. **************************************************************************
916. START USER TABLE
917. TABLE 1
918. UNIT METER MTON
919. CHANNEL
920. CHN_300
921. 0.0086 0.3 0.01 0.15 0.02 0.000132283 2.016E-005 8.86667E-007 0.0538372 -
922. 0.003 0.004
923. END
924. **************************************************************************
925. ELEMENT PROPERTY
926. 4004 4006 TO 4023 4410 TO 4414 5574 TO 5581 THICKNESS 0.2
927. DEFINE MATERIAL START
928. ISOTROPIC STEEL
929. E 2.09042E+007
930. POISSON 0.3
931. DENSITY 7.83341
932. ALPHA 1.2E-005
933. DAMP 0.03
934. TYPE STEEL
```

```
935. STRENGTH FY 25819.2 FU 41584 RY 1.5 RT 1.2
936. ISOTROPIC CONCRETE
937. E 2.21467E+006
938. POISSON 0.17
939. DENSITY 2.40262
940. ALPHA 1E-005
941. DAMP 0.05
942. TYPE CONCRETE
943. STRENGTH FCU 2812.28
944. END DEFINE MATERIAL
945. MEMBER PROPERTY INDIAN
946. 853 855 TO 858 890 898 903 1596 TO 1602 1604 TO 1611 1633 1652 1673 1693 3085 -
947. 3106 TABLE LD ISA75X75X8 SP 0.01
948. MEMBER PROPERTY INDIAN
949. 2537 2539 2541 2543 2568 TO 2571 2599 2613 2639 2641 2654 2655 2681 2683 2696 -
950. 2697 2723 2725 2738 2739 2765 2767 2780 2781 2807 2809 2822 2823 2849 2851 -
951. 2864 2865 2995 2996 2999 3000 3007 3008 3011 3012 3019 3020 3023 3024 3031 -
952. 3032 3035 3036 3043 3044 3047 3048 3055 3056 3059 3060 3067 3068 3071 3072 -
953. 3096 3101 4708 4710 4712 4718 4724 4728 4734 4738 4744 4748 4754 4758 4764 -
954. 4768 4774 4778 4784 4788 4790 4792 4794 4796 4798 4800 4802 4804 4806 4808 -
955. 4810 4812 4814 4816 4900 4902 4904 4906 4914 4915 4917 4918 4926 4927 4929 -
956. 4930 4938 4939 4941 4942 4950 4951 4953 4954 4962 4963 4965 4966 4974 4975 -
957. 4977 4978 4986 4987 4989 4990 5002 5005 5007 5008 5010 5011 5023 5026 5028 -
958. 5029 5031 5032 5044 5047 5049 5050 5052 5053 5065 5068 5070 5071 5073 5074 -
959. 5086 5089 5091 5092 5094 5095 5107 5110 5112 5113 5115 5116 5128 5131 5133 -
960. 5134 5136 5137 5149 5152 5154 5155 5157 5158 TABLE ST ISA50X50X6
961. 802 806 1987 1988 2534 2538 2556 2589 TO 2591 2594 2596 2607 2631 TO 2633 -
962. 2636 2638 2649 2673 TO 2675 2678 2680 2691 2715 TO 2717 2720 2722 2733 2757 -
963. 2758 TO 2759 2762 2764 2775 2799 TO 2801 2804 2806 2817 2841 TO 2843 2846 -
964. 2848 2859 2973 2975 2977 2979 2981 2983 2985 TABLE LD ISA65X65X6 SP 0.01
965. 1005 1941 4567 TO 4572 4585 TO 4590 4817 4829 4889 4891 5216 5221 5883 -
966. 5884 TABLE LD ISA90X90X8 SP 0.01
967. 1968 1970 1971 1997 2535 2567 2595 2611 2637 2653 2679 2695 2721 2737 2763 -
968. 2779 2805 2821 2847 2863 2917 TO 2919 2921 TO 2944 2959 TO 2970 3097 4421 -
969. 4422 4424 4426 4428 4429 4431 4432 4715 4912 4924 4936 4948 4960 4972 4984 -
970. 5004 5025 5046 5067 5088 5109 5130 5151 5704 5706 5711 5712 5715 5716 5723 -
971. 5730 5739 5750 5751 5753 5754 5780 TO 5804 5824 TO 5848 5862 TO 5864 5866 -
972. 5867 TO 5870 5872 5873 5875 5876 5879 5880 5909 5910 5917 5919 5921 5923 5925 -
973. 5926 5928 5930 5932 5933 5935 5936 5938 5940 5944 5948 TABLE ST ISA75X75X8
974. ********************************************************************************
975. MEMBER PROPERTY EUROPEAN
976. 5230 TO 5235 5242 TO 5245 5248 5251 5254 5257 5259 5261 5264 5267 5273 5472 -
977. 5474 TO 5478 5480 TABLE ST IPE300
978. 1837 1842 3500 3502 3513 3515 3521 3522 3530 3532 3552 3553 3592 3608 3610 -
979. 3665 3666 3678 3679 3681 3683 3697 3700 3757 3758 3774 3784 3787 3838 3839 -
980. 3855 TO 3860 3864 3866 3906 3907 3925 3927 4361 4417 4419 4439 4466 TO 4469 -
981. 4474 4475 4490 4491 4498 4499 4525 4527 4529 4531 4857 5260 5276 TO 5283 -
982. 5285 5302 5305 5308 5438 5443 5635 5636 5651 5657 5658 5669 5672 5679 5682 -
983. 5722 5727 5729 5738 5749 5859 5861 5913 5915 5942 5945 TABLE ST IPE300
984. 2558 2608 2650 2692 2734 2776 2818 2860 3559 3562 3574 3577 3593 3595 3597 -
985. 3628 3631 3643 3646 3726 3729 3741 3744 3775 3777 3779 5534 5537 5539 5545 -
986. 5548 5550 TABLE ST IPE200
987. MEMBER PROPERTY INDIAN
988. 3557 3558 3572 3573 3626 3627 3641 3642 3662 3663 3701 3724 3725 3739 3740 -
989. 3788 3835 3836 5330 5332 5334 5336 5338 5340 5612 5614 TO 5616 5699 5702 -
990. 5718 5720 5889 5891 TABLE LD ISA100X100X10 SP 0.01
```

```
 991. MEMBER PROPERTY EUROPEAN
 992. 97 130 2298 3441 3450 3451 3462 3475 3483 3484 3489 TO 3492 3949 3957 3958 -
 993. 3968 3979 3980 3987 3988 3993 TO 3996 4066 4348 4350 4358 4360 4535 4537 -
 994. 4539 4541 5246 5249 5387 5619 5698 5701 5717 5719 5881 5886 5943 -
 995. 5947 TABLE ST IPE500
 996. 2956 3544 3546 3548 3648 TO 3651 3655 3658 3660 3661 3667 3668 3749 3828 3831 -
 997. 3833 3834 3840 TO 3845 3900 4102 4103 4107 4108 4349 4663 4665 4666 4681 -
 998. 5610 5611 5613 5882 5888 TABLE ST IPE500
 999. MEMBER PROPERTY INDIAN
1000. 3459 3460 3472 3473 3487 3488 3698 3702 TO 3704 3785 3789 TO 3791 3965 3966 -
1001. 3976 3977 3991 3992 5318 5319 5321 5322 5590 5592 5594 5596 5598 5600 5602 -
1002. 5604 TABLE LD ISA75X75X8 SP 0.01
1003. 3693 TO 3695 3780 TO 3782 5582 5584 5586 5588 TABLE LD ISA110X110X10 SP 0.01
1004. MEMBER PROPERTY EUROPEAN
1005. 3563 TO 3566 3568 TO 3570 3578 TO 3582 3621 TO 3624 3632 TO 3635 3637 TO 3639 -
1006. 3647 3719 TO 3722 3730 TO 3733 3735 TO 3737 3745 3815 TO 3817 3819 3821 3824 -
1007. 3884 TO 3890 3892 3893 4093 4096 4100 4437 5329 5331 5333 5335 5337 5339 -
1008. 5399 5452 5491 5494 5497 TO 5504 5513 TO 5516 5518 5520 5531 5542 5553 5556 -
1009. 5559 5895 5897 TABLE ST IPE500
1010. 3455 3467 TABLE TB IPE500 WP 0.15 TH 0.016 BW 0.15 BT 0.016
1011. 3512 3591 3607 3677 3773 3863 4713 4903 4911 4916 4923 4928 4935 4940 4947 -
1012. 4952 4959 4964 4971 4976 4983 4988 5003 5009 5024 5030 5045 5051 5066 5072 -
1013. 5087 5093 5108 5114 5129 5135 5150 5156 TABLE LD L90X90X8 SP 0.01
1014. MEMBER PROPERTY EUROPEAN
1015. 3442 TO 3445 3520 TABLE LD L75X75X8 SP 0.01
1016. 3818 3820 3823 5439 5441 5532 5543 5554 5557 5560 TABLE ST IPE600
1017. 5469 TABLE TB IPE600 WP 0.2 TH 0.02 BW 0.2 BT 0.02
1018. 4440 4443 4463 4465 4481 TO 4483 4488 4489 4503 4504 4515 4518 5183 5186 5189 -
1019. 5198 5646 5648 5653 5655 5674 TABLE ST IPE400
1020. MEMBER PROPERTY INDIAN
1021. 2950 TO 2955 5237 5238 5256 TABLE ST ISA90X90X8
1022. MEMBER PROPERTY EUROPEAN
1023. 818 1991 2542 2560 2593 2598 2609 2635 2640 2651 2677 2682 2693 2719 2724 -
1024. 2735 2761 2766 2777 2803 2808 2819 2845 2850 2861 2974 2976 2978 2980 2982 -
1025. 2984 2986 4705 TO 4707 4721 4723 4731 4733 4741 4743 4751 4753 4761 4763 -
1026. 4771 4773 4781 4783 4899 4910 4913 4922 4925 4934 4937 4946 4949 4958 4961 -
1027. 4970 4973 4982 4985 4999 TO 5001 5006 5020 TO 5022 5027 5041 TO 5043 5048 -
1028. 5062 TO 5064 5069 5083 TO 5085 5090 5104 TO 5106 5111 5125 TO 5127 5132 5146 -
1029. 5147 TO 5148 5153 TABLE LD L75X75X8 SP 0.01
1030. 1966 1973 1974 1976 1979 1981 1995 1999 TO 2002 2019 2023 TO 2027 2036 2040 -
1031. 2041 TO 2043 2059 2063 TO 2067 2076 2080 TO 2083 2099 2103 TO 2107 2116 2120 -
1032. 2121 TO 2123 2139 2143 TO 2147 2156 2160 TO 2163 2179 2183 TO 2187 2196 2200 -
1033. 2201 TO 2203 2219 2223 TO 2227 2236 2240 TO 2243 2260 2264 TO 2268 2277 2281 -
1034. 2282 TO 2284 2536 2540 2557 2559 2565 2588 2630 2672 2714 2756 2798 2840 2989 -
1035. 2990 2993 2994 3001 3002 3005 3006 3013 3014 3017 3018 3025 3026 3029 3030 -
1036. 3037 3038 3041 3042 3049 3050 3053 3054 3061 3062 3065 3066 4372 4373 4378 -
1037. 4379 4558 4573 4709 4711 4714 4717 4719 4720 4729 4730 4739 4740 4749 4750 -
1038. 4759 4760 4769 4770 4779 4780 4789 4791 4793 4795 4797 4799 4801 4803 4805 -
1039. 4807 4809 4811 4813 4815 4901 4905 4908 4909 4920 4921 4932 4933 4944 4945 -
1040. 4956 4957 4968 4969 4980 4981 4992 TO 4994 4996 4997 5013 TO 5015 5017 5018 -
1041. 5034 TO 5036 5038 5039 5055 TO 5057 5059 5060 5076 TO 5078 5080 5081 5097 -
1042. 5098 TO 5099 5101 5102 5118 TO 5120 5122 5123 5139 TO 5141 5143 -
1043. 5144 TABLE LD L130X130X13 SP 0.01
1044. 1523 1556 1843 TO 1845 3507 3600 3686 3806 3875 3936 4136 4139 4862 TO 4865 -
1045. 4868 4875 TO 4877 4879 4880 5353 5374 TABLE LD L100X100X10 SP 0.01
1046. 1709 1823 1824 1838 TO 1841 3269 4866 4867 4869 4870 5167 TABLE ST HE500A
```

```
1047. MEMBER PROPERTY EUROPEAN
1048. 551 552 559 564 TO 566 583 584 587 612 620 624 TO 627 644 645 648 673 674 -
1049. 681 686 TO 688 705 706 709 734 735 742 747 TO 749 766 767 770 795 796 803 -
1050. 808 TO 810 827 828 831 1019 TO 1024 1047 1049 1072 1128 1162 1202 1206 1283 -
1051. 1317 1337 1341 1422 1476 1480 1497 2004 TO 2006 2125 TO 2127 2245 TO 2247 -
1052. 3276 3277 4688 4690 4691 4693 4694 4888 4890 4898 4907 4919 4931 4943 4955 -
1053. 4967 4979 4991 4995 5012 5016 5033 5037 5054 5058 5075 5079 5096 5100 5117 -
1054. 5121 5138 5142 TABLE LD L130X130X13 SP 0.01
1055. 4408 4409 4593 TO 4596 4598 4599 4602 4603 4822 TO 4825 -
1056. 4845 TABLE LD L75X75X8 SP 0.01
1057. 1629 1637 1661 1670 1677 1690 1697 3088 TABLE LD L90X90X8 SP 0.01
1058. 800 1996 1998 2920 2949 3102 3479 3480 3960 3961 3983 3984 4416 4423 4425 -
1059. 4427 5852 5853 5858 5865 5912 5920 5922 5924 TABLE ST UPN240
1060. 3477 3478 3481 3959 3962 3981 3982 3985 4415 4418 4420 4430 4521 4524 4526 -
1061. 4528 4530 4532 4859 4861 5184 5187 5191 5571 TO 5573 5707 5708 5713 5714 -
1062. 5732 5734 5736 5851 5854 TO 5857 5860 5871 5874 5911 5914 5916 5918 5927 -
1063. 5929 5931 5934 5949 5950 TABLE ST UPN200
1064. 4406 4407 4851 4852 TABLE ST L90X90X8
1065. 3696 3699 3783 4033 5481 TO 5490 5606 5608 TABLE LD L130X130X10 SP 0.01
1066. 4623 TO 4634 4674 TO 4679 4682 TO 4687 4882 TO 4885 TABLE ST L130X130X10
1067. 2471 2473 2475 2476 2499 2501 2502 2521 3166 3170 3215 3217 4605 TO 4611 4614 -
1068. 4615 TO 4620 4659 4660 4669 TO 4672 4886 4887 TABLE ST L130X130X10
1069. 4896 4897 TABLE ST L90X90X8
1070. 1989 2592 2634 2676 2718 2760 2802 2844 4998 5019 5040 5061 5082 5103 5124 -
1071. 5145 TABLE ST L75X75X8
1072. 5 13 175 208 241 274 307 340 373 406 439 460 472 1126 1160 1275 1309 1388 -
1073. 1414 1436 1448 1747 1748 2015 2016 2055 2056 2095 2096 2135 2136 2175 2176 -
1074. 2215 2216 2256 2257 5181 5202 TABLE ST HE500A
1075. MEMBER PROPERTY EUROPEAN
1076. 1940 4366 4369 4555 TO 4557 4559 4560 4575 TO 4578 TABLE LD L100X100X10 SP 0.01
1077. 1537 1540 1544 1546 1547 1549 1551 1573 1576 1577 1580 1583 1585 1644 4359 -
1078. 4370 4371 4374 TO 4377 4380 TO 4405 4591 4592 4892 TO 4894 -
1079. 4895 TABLE LD L100X100X10 SP 0.01
1080. 5160 5164 5165 5199 5206 TABLE ST IPE200
1081. 5161 5162 5168 5169 5172 5182 5200 TABLE ST UPN200
1082. 5176 5177 5180 5201 5203 TO 5205 5207 5583 5585 5587 5589 5591 5593 5595 5597 -
1083. 5599 5601 5603 5605 5890 5892 TABLE ST L65X65X6
1084. 5163 5166 5175 5178 TABLE LD L65X65X6 SP 0.01
1085. 4487 4493 TO 4497 5208 TO 5215 TABLE ST IPE500
1086. 5217 TO 5220 TABLE ST L90X90X8
1087. 1582 1587 1689 1691 4855 TABLE D UPN240 SP 0.01
1088. 4502 4505 4506 4513 4516 4519 4522 4858 5185 5188 5190 5192 TO 5196 -
1089. 5197 TABLE ST IPE450
1090. 5236 5239 TO 5241 5247 5250 5253 5258 5284 5288 5290 5292 5304 5307 5310 5690 -
1091. 5691 5721 5725 5726 5728 5735 5737 5740 5743 5746 5752 5755 -
1092. 5758 TABLE ST UPN240
1093. 5312 5313 5315 5316 TABLE ST L75X75X8
1094. 5286 5289 5291 5294 5311 5314 5317 5320 TABLE ST UPN140
1095. 5431 TABLE ST IPE300
1096. 5349 TO 5352 5354 TO 5357 5359 TO 5362 5370 TO 5373 5375 TO 5378 5380 TO 5383 -
1097. 5741 5742 TABLE ST L130X130X10
1098. 3437 3440 3446 3449 3458 3461 3471 3474 3485 3486 3947 3948 3953 3956 3964 -
1099. 3967 3989 3990 5303 5306 5309 5414 5617 5618 5703 5705 5877 5878 5937 -
1100. 5939 TABLE ST IPE400
1101. MEMBER PROPERTY EUROPEAN
1102. 3494 3495 3505 3506 3534 3535 3584 3585 3598 3599 3618 3619 3670 3671 3709 -
```

```
1103. 3710 3716 3717 3766 3767 3802 3803 3812 3813 3847 3848 3861 3862 3881 3882 -
1104. 3915 3916 3922 3923 3942 3943 5762 5765 5768 5771 5774 5777 5779 5806 5809 -
1105. 5812 5815 5818 5821 5823 5849 -
1106. 5850 TAPERED 0.75 0.012 0.75 0.375 0.025 0.375 0.025
1107. 3499 3501 3523 3529 3531 3680 3682 5388 TO 5390 5392 5394 5396 5398 5402 5404 -
1108. 5406 5408 5410 5412 5415 5416 5445 5447 5449 5460 5568 TO 5570 5953 -
1109. 5954 TABLE ST IPE400
1110. 3854 4480 5436 5446 5448 5450 5451 5453 5459 5461 5462 5468 -
1111. 5471 TABLE ST IPE300
1112. 3594 3596 3776 3778 5437 5440 5442 5444 5454 TO 5458 5463 TO 5467 -
1113. 5470 TABLE ST IPE500
1114. 3438 3439 3447 3448 3945 3946 3954 3955 3971 TO 3973 5951 -
1115. 5952 TABLE LD L90X90X8 SP 0.01
1116. 3452 TO 3454 3464 TO 3466 5492 5525 5527 5535 5562 5564 TABLE ST IPE500
1117. 3560 3561 3575 3576 3629 3630 3644 3645 3727 3728 3742 -
1118. 3743 TABLE ST L110X110X10
1119. 5506 5508 5510 5512 5517 5519 5521 5526 5528 5530 5538 5541 5549 5552 5555 -
1120. 5558 5561 TABLE ST UPN240
1121. 5493 5496 5505 5507 5509 5511 5533 5536 5540 5544 5547 5551 TABLE ST UPN300
1122. 3456 3457 3468 3469 3524 5323 TO 5328 5417 TO 5430 5432 TO 5434 5495 5522 -
1123. 5523 TO 5524 5529 5546 5566 5724 TABLE ST IPE400
1124. MEMBER PROPERTY EUROPEAN
1125. 3556 3567 3571 3625 3636 3640 3723 3734 3738 5391 5393 5395 5400 5401 5403 -
1126. 5405 5407 5409 5411 TAPERED 0.6 0.012 0.6 0.3 0.025 0.3 0.025
1127. 5341 TO 5344 TAPERED 0.5 0.012 0.5 0.25 0.025 0.25 0.025
1128. MEMBER PROPERTY EUROPEAN
1129. 3707 3708 3796 3797 4118 4124 4128 4129 4131 4132 4134 4135 4137 4138 4140 -
1130. 4141 TO 4149 TABLE ST L90X90X8
1131. 3924 3950 TO 3952 4442 4444 4445 4449 4450 4452 4454 TO 4462 4464 -
1132. 4471 TO 4473 4476 TO 4479 5627 5632 5634 5637 5677 5684 TABLE ST IPE500
1133. MEMBER PROPERTY EUROPEAN
1134. 1942 4574 4579 4597 4832 4836 TO 4838 4840 4842 TO 4844 4846 4847 4849 4853 -
1135. 4854 4856 TAPERED 0.3 0.01 0.3 0.18 0.016 0.18 0.016
1136. 3510 3511 3601 3602 3689 3690 3798 3799 3873 3874 3934 3935 4104 4106 4109 -
1137. 4111 4117 4120 4122 4126 4536 4538 4540 4542 4547 TO 4550 5345 5348 5358 -
1138. 5363 5366 5369 5379 5384 TABLE ST UPN200
1139. 5621 5623 5624 5626 5628 5630 5631 5642 TO 5644 5647 5649 5650 5664 TO 5666 -
1140. 5670 5671 5673 5675 5676 5678 5680 5681 5683 5685 TO 5688 -
1141. 5689 TABLE ST L90X90X8
1142. 5633 5638 TO 5641 5652 5654 5656 5659 5660 TABLE ST UPN100
1143. MEMBER PROPERTY EUROPEAN
1144. 3891 4441 4470 4500 4501 5622 5625 5629 5885 -
1145. 5887 TAPERED 0.5 0.01 0.5 0.25 0.02 0.25 0.02
1146. MEMBER PROPERTY EUROPEAN
1147. 5346 5347 5364 5365 5367 5368 5385 5386 5607 5609 5620 5645 5744 5745 5756 -
1148. 5757 5759 5760 TABLE ST L110X110X10
1149. MEMBER PROPERTY EUROPEAN
1150. 3541 TO 3543 3545 3547 3551 3652 TO 3654 3656 3659 3664 3746 TO 3748 3750 -
1151. 3752 3756 3825 3826 3829 3832 3837 3897 3899 3901 3905 4092 4099 4347 4436 -
1152. 4438 5252 5255 TAPERED 0.5 0.01 0.5 0.25 0.02 0.25 0.02
1153. MEMBER PROPERTY EUROPEAN
1154. 4036 4037 4040 4042 4043 4046 UPTABLE 1 CHN_300
1155. 3514 3609 3865 3926 TABLE LD L110X110X10 SP 0.01
1156. 5893 5894 5899 TO 5902 5904 5906 TO 5908 TABLE LD L150X150X16 SP 0.01
1157. 3554 3555 3759 3760 3908 3909 4484 TABLE ST IPE200
1158. MEMBER PROPERTY EUROPEAN
```

```
1159. 5903 TAPERED 0.6 0.012 0.6 0.3 0.025 0.3 0.025
1160. 3822 TAPERED 0.6 0.012 0.6 0.3 0.025 0.3 0.025
1161. 5905 TAPERED 0.6 0.012 0.6 0.3 0.025 0.3 0.025
1162. 5397 TAPERED 0.6 0.012 0.6 0.3 0.025 0.3 0.025
1163. 3516 3517 3537 TO 3540 3611 3612 3705 3706 3761 TO 3764 3792 3793 3867 3868 -
1164. 3910 TO 3913 3928 3929 4105 4110 4543 TO 4545 -
1165. 4546 TAPERED 0.5 0.01 0.5 0.25 0.02 0.25 0.02
1166. 3497 3498 3527 3528 3587 3588 3615 3616 3673 3674 3713 3714 3769 3770 3809 -
1167. 3810 3850 3851 3878 3879 3918 3919 3939 3940 5692 5695 5761 5763 5764 5766 -
1168. 5767 5769 5770 5772 5773 5775 5776 5778 5805 5807 5808 5810 5811 5813 5814 -
1169. 5816 5817 5819 5820 5822 TAPERED 0.75 0.006 0.75 0.21 0.01 0.21 0.01
1170. ********************************************************************************
1171. CONSTANTS
1172. BETA 90 MEMB 97 130 800 1709 1823 1824 1838 TO 1841 1989 1996 1998 2298 2592 -
1173. 2920 2949 2956 3102 3269 3441 3450 3451 3462 3475 3483 3484 3541 TO 3548 -
1174. 3551 3554 3555 3564 TO 3566 3568 TO 3570 3579 TO 3582 3621 TO 3624 -
1175. 3633 TO 3635 3637 TO 3639 3652 TO 3656 3658 TO 3661 3664 3667 3668 -
1176. 3719 TO 3722 3731 TO 3733 3735 TO 3737 3746 TO 3750 3752 3756 3759 3760 3815 -
1177. 3816 TO 3817 3825 3826 3828 3829 3831 TO 3834 3837 3840 3841 3884 TO 3886 -
1178. 3897 3899 TO 3901 3905 3908 3909 3949 3957 3958 3968 3979 3980 3987 3988 -
1179. 4066 4092 4093 4096 4099 4100 4347 TO 4350 4358 4360 4436 TO 4438 4663 4665 -
1180. 4666 4866 4867 4869 4870 4998 5019 5040 5061 5082 5103 5124 5145 5160 5164 -
1181. 5165 5167 5199 5206 5246 5249 5252 5255 5286 5289 5291 5294 5311 5314 5317 -
1182. 5320 5329 5331 5333 5335 5337 5339 5387 5399 5421 5423 5425 5430 5432 5434 -
1183. 5474 5477 5480 5610 5611 5613 5619 5698 5701 5717 5719 5881 5882 5886 5888 -
1184. 5895 5897 5943 5947
1185. ********************************************************************************
1186. ********************************************************************************
1187. MATERIAL STEEL MEMB 5 13 97 130 175 208 241 274 307 340 373 406 439 460 472 -
1188. 551 552 559 564 TO 566 583 584 587 612 620 624 TO 627 644 645 648 673 674 -
1189. 681 686 TO 688 705 706 709 734 735 742 747 TO 749 766 767 770 795 796 800 -
1190. 802 803 806 808 TO 810 818 827 828 831 853 855 TO 858 890 898 903 1005 1019 -
1191. 1020 TO 1024 1047 1049 1072 1126 1128 1160 1162 1202 1206 1275 1283 1309 1317 -
1192. 1337 1341 1388 1414 1422 1436 1448 1476 1480 1497 1523 1537 1540 1544 1546 -
1193. 1547 1549 1551 1556 1573 1576 1577 1580 1582 1583 1585 1587 1596 TO 1602 -
1194. 1604 TO 1611 1629 1633 1637 1644 1652 1661 1670 1673 1677 1689 TO 1691 1693 -
1195. 1697 1709 1747 1748 1823 1824 1837 TO 1845 1940 TO 1942 1966 1968 1970 1971 -
1196. 1973 1974 1976 1979 1981 1987 TO 1989 1991 1995 TO 2002 2004 TO 2006 2015 -
1197. 2016 2019 2023 TO 2027 2036 2040 TO 2043 2055 2056 2059 2063 TO 2067 2076 -
1198. 2080 TO 2083 2095 2096 2099 2103 TO 2107 2116 2120 TO 2123 2125 TO 2127 2135 -
1199. 2136 2139 2143 TO 2147 2156 2160 TO 2163 2175 2176 2179 2183 TO 2187 2196 -
1200. 2200 TO 2203 2215 2216 2219 2223 TO 2227 2236 2240 TO 2243 2245 TO 2247 2256 -
1201. 2257 2260 2264 TO 2268 2277 2281 TO 2284 2298 2471 2473 2475 2476 2499 2501 -
1202. 2502 2521 2534 TO 2543 2556 TO 2560 2565 2567 TO 2571 2588 TO 2596 2598 2599 -
1203. 2607 TO 2609 2611 2613 2630 TO 2641 2649 TO 2651 2653 TO 2655 2672
1204. MATERIAL STEEL MEMB 2673 TO 2683 2691 TO 2693 2695 TO 2697 2714 TO 2725 2733 -
1205. 2734 TO 2735 2737 TO 2739 2756 TO 2767 2775 TO 2777 2779 TO 2781 2798 TO 2809 -
1206. 2817 TO 2819 2821 TO 2823 2840 TO 2851 2859 TO 2861 2863 TO 2865 -
1207. 2917 TO 2944 2949 TO 2956 2959 TO 2970 2973 TO 2986 2989 2990 2993 TO 2996 -
1208. 2999 TO 3002 3005 TO 3008 3011 TO 3014 3017 TO 3020 3023 TO 3026 -
1209. 3029 TO 3032 3035 TO 3038 3041 TO 3044 3047 TO 3050 3053 TO 3056 -
1210. 3059 TO 3062 3065 TO 3068 3071 3072 3085 3088 3096 3097 3101 3102 3106 3166 -
1211. 3170 3215 3217 3269 3276 3277 3437 TO 3462 3464 TO 3469 3471 TO 3475 3477 -
1212. 3478 TO 3481 3483 TO 3492 3494 3495 3497 TO 3502 3505 TO 3507 3510 TO 3517 -
1213. 3520 TO 3524 3527 TO 3532 3534 3535 3537 TO 3548 3551 TO 3582 3584 3585 3587 -
1214. 3588 3591 TO 3602 3607 TO 3612 3615 3616 3618 3619 3621 TO 3656 3658 TO 3668 -
```

```
1215. 3670 3671 3673 3674 3677 TO 3683 3686 3689 3690 3693 TO 3710 3713 3714 3716 -
1216. 3717 3719 TO 3750 3752 3756 TO 3764 3766 3767 3769 3770 3773 TO 3785 3787 -
1217. 3788 TO 3793 3796 TO 3799 3802 3803 3806 3809 3810 3812 3813 3815 TO 3826 -
1218. 3828 3829 3831 TO 3845 3847 3848 3850 3851 3854 TO 3868 3873 TO 3875 3878 -
1219. 3879 3881 3882 3884 TO 3893 3897 3899 TO 3901 3905 TO 3913 3915 3916 3918 -
1220. 3919 3922 TO 3929 3934 TO 3936 3939 3940 3942 3943 3945 TO 3962 3964 TO 3968 -
1221. 3971 TO 3973 3976 3977 3979 TO 3985 3987
1222. MATERIAL STEEL MEMB 3988 TO 3996 4033 4036 4037 4040 4042 4043 4046 4066 4092 -
1223. 4093 4096 4099 4100 4102 TO 4111 4117 4118 4120 4122 4124 4126 4128 4129 -
1224. 4131 4132 4134 TO 4149 4347 TO 4350 4358 TO 4361 4366 4369 TO 4409 -
1225. 4415 TO 4432 4436 TO 4445 4449 4450 4452 4454 TO 4484 4487 TO 4491 -
1226. 4493 TO 4506 4513 4515 4516 4518 4519 4521 4522 4524 TO 4532 4535 TO 4550 -
1227. 4555 TO 4560 4567 TO 4579 4585 TO 4599 4602 4603 4605 TO 4611 4614 TO 4620 -
1228. 4623 TO 4634 4659 4660 4663 4665 4666 4669 TO 4672 4674 TO 4679 4681 TO 4688 -
1229. 4690 4691 4693 4694 4705 TO 4715 4717 TO 4721 4723 4724 4728 TO 4731 4733 -
1230. 4734 4738 TO 4741 4743 4744 4748 TO 4751 4753 4754 4758 TO 4761 4763 4764 -
1231. 4768 TO 4771 4773 4774 4778 TO 4781 4783 4784 4788 TO 4817 4822 TO 4825 4829 -
1232. 4832 4836 TO 4838 4840 4842 TO 4847 4849 4851 TO 4859 4861 TO 4870 -
1233. 4875 TO 4877 4879 4880 4882 TO 5158 5160 TO 5169 5172 5175 TO 5178 -
1234. 5180 TO 5221 5230 TO 5261 5264 5267 5273 5276 TO 5286 5288 TO 5292 5294 5302 -
1235. 5303 TO 5412 5414 TO 5434 5436 TO 5472 5474 TO 5478 5480 TO 5562 5564 5566 -
1236. 5568 TO 5573 5582 TO 5660 5664 TO 5666 5669 TO 5692 5695 5698 5699 -
1237. 5701 TO 5708 5711 TO 5730 5732 5734 TO 5746 5749 TO 5895 5897 5899 TO 5940 -
1238. 5942 TO 5945 5947 TO 5954
1239. ********************************************************************************
1240. MATERIAL CONCRETE MEMB 4004 4006 TO 4023 4410 TO 4414 5574 TO 5581
1241. ********************************************************************************
1242. SUPPORTS
1243. 6 8 19 607 609 729 730 737 739 1841 1844 PINNED
1244. 659 TO 663 676 679 TO 684 696 PINNED
1245. ********************************************************************************
1246. 1196 1245 1268 1279 1295 1318 1331 1355 1363 1389 1397 1424 PINNED
1247. *1210 1219 1303  1371 1435 1441 FIXED BUT FY MX MY MZ
1248. 1194 1195 1422 1423 1872 1876 1890 1892 PINNED
1249. 1247 1297 1333 1365 PINNED
1250. 1707 1867 FIXED BUT FX FZ MX MY MZ
1251. 1563 1569 1868 FIXED BUT FX FZ MX MY MZ
1252. ********************************************************************************
1253. MEMBER RELEASE
1254. 552 584 645 674 706 735 767 796 802 806 818 828 853 855 TO 858 890 898 903 -
1255. 1005 1128 1162 1283 1317 1422 1497 1537 1540 1544 1546 1547 1549 1556 1573 -
1256. 1576 1577 1580 1583 1585 1587 1596 TO 1602 1604 TO 1611 1629 1637 1644 1661 -
1257. 1670 1677 1690 1697 1837 1842 TO 1845 1940 TO 1942 1966 1968 1970 1971 1987 -
1258. 1988 TO 1989 1991 1995 TO 1998 2002 2019 2036 2043 2059 2076 2083 2099 2116 -
1259. 2123 2139 2156 2163 2179 2196 2203 2219 2236 2243 2260 2277 2284 2471 2473 -
1260. 2475 2476 2499 2501 2502 2521 2535 2537 2539 2541 2543 2567 TO 2571 2589 -
1261. 2590 TO 2593 2595 2599 2611 2613 2631 TO 2635 2637 2639 2641 2653 TO 2655 -
1262. 2673 TO 2677 2679 2681 2683 2695 TO 2697 2715 TO 2719 2721 2723 2725 2737 -
1263. 2738 TO 2739 2757 TO 2761 2763 2765 2767 2779 TO 2781 2799 TO 2803 2805 2807 -
1264. 2809 2821 TO 2823 2847 2863 3085 3166 3170 3215 3217 3276 3455 3514 3539 -
1265. 3540 3562 3609 3646 3689 3696 3761 3762 3783 3865 3910 3911 3926 4036 4037 -
1266. 4040 4042 4043 4046 4359 4361 4366 4369 4374 TO 4377 4415 TO 4419 4421 4422 -
1267. 4424 4426 4428 4429 4431 4432 4439 4442 4444 4462 TO 4469 4471 TO 4475 4555 -
1268. 4556 TO 4560 4568 4571 TO 4578 4586 4678 4679 4686 4687 4705 4706 4708 4710 -
1269. 4712 4713 4715 4718 4721 4724 4859 4861 4868 4875 5781 TO 5802 5825 TO 5846 -
1270. 5857 TO 5864 5866 TO 5870 5883 TO 5885 5890 5892 TO 5894 5899 TO 5902 5904 -
```

```
1271. 5906 TO 5908 5912 TO 5915 5917 5919 5921 5923 5925 5926 START MY MZ
1272. 5928 5930 5942 START MY MZ
1273. 4876 4877 4880 4886 4887 4889 4891 4896 4897 4900 4902 4904 4906 4910 TO 4912 -
1274. 4914 4915 4917 4918 4922 TO 4924 4926 4927 4929 4930 4934 TO 4936 4938 4939 -
1275. 4941 4942 4946 TO 4948 4950 4951 4953 4954 4958 TO 4960 4962 4963 5704 5706 -
1276. 5723 5725 5728 5730 5737 5739 5741 5742 5744 5745 5750 5751 5753 5754 5756 -
1277. 5757 5759 5760 5803 5804 5847 5848 5879 5880 5909 5910 5938 5940 5944 -
1278. 5948 START MY MZ
1279. 5711 5712 5715 5716 5872 5873 5875 5876 5932 5933 5935 5936 START MY MZ
1280. 4965 4966 5620 5621 5623 5624 5626 5628 5630 5631 5633 5638 TO 5645 5647 5649 -
1281. 5650 5652 5654 5656 5659 5660 5664 TO 5666 5670 5671 5673 5675 5676 5678 -
1282. 5680 5681 5683 5685 TO 5689 START MY MZ
1283. 5415 START MY MZ
1284. 4970 5474 5477 5493 5496 5505 TO 5512 5517 5519 5521 5526 5528 5530 5533 5536 -
1285. 5538 5540 5541 5544 5547 5549 5551 5552 5555 5558 5561 5571 TO 5573 5603 -
1286. 5605 TO 5609 5612 5614 START MY MZ
1287. 5481 TO 5486 START MY MZ
1288. 5480 START MY MZ
1289. 4971 4972 5436 TO 5438 5440 5442 TO 5444 5446 5450 5453 5456 5459 5462 5465 -
1290. 5468 5471 START MY MZ
1291. 5392 5394 5396 5398 5402 5404 5406 5408 5410 5412 START MY MZ
1292. 5346 5347 5349 TO 5352 5354 TO 5357 5359 TO 5362 5364 5365 5367 5368 5370 -
1293. 5371 TO 5373 5375 TO 5378 5380 TO 5383 5385 5386 START MY MZ
1294. 5323 TO 5328 5330 5332 5334 5336 5338 5340 TO 5344 START MY MZ
1295. 5284 TO 5286 5288 TO 5292 5294 5304 5307 5310 5690 5691 START MY MZ
1296. 5236 TO 5241 5247 5250 5253 5256 5258 5260 START MY MZ
1297. 5184 5186 5187 5189 5191 START MY MZ
1298. 5161 TO 5163 5166 5168 5182 START MY MZ
1299. 4974 4975 4977 4978 4982 TO 4984 4986 4987 4989 4990 4998 TO 5000 -
1300. 5002 TO 5005 5007 5008 5010 5011 5019 TO 5021 5023 TO 5026 5028 5029 5031 -
1301. 5032 5040 TO 5042 5044 TO 5047 5049 5050 5052 5053 5061 TO 5063 5065 TO 5068 -
1302. 5070 5071 5073 5074 5082 TO 5084 5086 TO 5089 5091 5092 5094 5095 -
1303. 5103 TO 5105 5107 TO 5110 5112 5113 5115 5116 5124 TO 5126 5128 TO 5131 5133 -
1304. 5134 5136 5137 5145 TO 5147 5149 TO 5152 5154 5155 5157 5158 START MY MZ
1305. 1551 1689 4836 4838 4843 4847 4854 START MY MZ
1306. 4728 4731 4734 4738 4741 4744 4748 4751 4817 START MY MZ
1307. 4754 4758 4761 4764 4768 4771 4774 4778 4781 4784 4788 4790 4792 4794 4796 -
1308. 4798 4800 4802 4804 4806 4808 4810 4812 4814 4816 START MY MZ
1309. 4590 4597 4605 TO 4611 4614 4856 START MY MZ
1310. 4615 TO 4620 4659 4660 4669 TO 4672 START MY MZ
1311. 4502 4536 START MY MZ
1312. 4538 4540 4542 4547 TO 4550 START MY MZ
1313. 4503 4506 4515 4518 4521 4524 4526 4528 4530 4532 5185 5198 START MY MZ
1314. 4481 4484 4488 TO 4491 START MY MZ
1315. 3798 4104 4106 4109 4111 4118 4122 4124 4126 4128 4129 4131 4132 4134 4135 -
1316. 4137 4138 4140 TO 4149 START MY MZ
1317. 2841 TO 2845 2849 2851 2864 2865 2917 TO 2944 2959 TO 2970 2973 TO 2986 2995 -
1318. 2996 2999 3000 3007 3008 3011 3012 3019 3020 3023 3024 3031 3032 3035 3036 -
1319. 3043 3044 3047 3048 3055 3056 3059 3060 3067 3068 3071 3072 START MY MZ
1320. 1582 4567 4569 4570 4585 4587 TO 4589 START MY MZ
1321. 800 2949 TO 2955 3906 START MY MZ
1322. 855 TO 858 890 898 903 1005 1537 1540 1544 1546 1547 1549 1551 1573 1576 1577 -
1323. 1580 1583 1585 1597 TO 1602 1605 TO 1610 1629 1633 1637 1644 1652 1661 1670 -
1324. 1673 1677 1690 1693 1697 1842 TO 1845 1940 1941 1968 1970 1971 1989 1996 -
1325. 1997 TO 1998 2471 2473 2499 2521 2534 2535 2537 TO 2539 2541 TO 2543 2558 -
1326. 2560 2567 TO 2571 2592 2594 TO 2596 2598 2599 2607 TO 2609 2611 2613 2634 -
```

```
1327. 2636 TO 2641 2649 TO 2651 2653 TO 2655 2676 2678 TO 2683 2691 TO 2693 2695 -
1328. 2696 TO 2697 2718 2720 TO 2725 2733 TO 2735 2737 TO 2739 2760 2762 TO 2767 -
1329. 2775 TO 2777 2779 TO 2781 2802 2804 TO 2809 2817 TO 2819 2821 TO 2823 2844 -
1330. 2846 TO 2851 2859 TO 2861 2863 TO 2865 2917 TO 2944 2959 TO 2970 2995 2996 -
1331. 2999 3000 3007 3008 3011 3012 3019 3020 3023 3024 3031 3032 3035 3036 3043 -
1332. 3044 3047 3048 3055 3215 3277 3514 3609 3689 3696 3707 3708 3757 3783 3796 -
1333. 3797 TO 3798 3865 3926 4036 4037 4040 4042 4043 4046 4359 4366 4369 4421 4422 -
1334. 4424 TO 4426 4428 4429 4431 4432 4521 4524 4555 TO 4560 4568 4570 4572 4573 -
1335. 4575 TO 4578 4585 4588 4590 4605 TO 4611 4614 TO 4620 4669 TO 4672 4707 4708 -
1336. 4710 4712 4715 4718 4723 4724 4728 4733 4734 4738 4743 4744 4748 4753 4754 -
1337. 4758 4763 4764 4768 4773 4774 4778 4783 4784 4788 4790 4792 4794 4796 4798 -
1338. 4800 4802 4804 4806 4808 4810 4812 4814 4816 4829 4832 4859 4861 4862 4865 -
1339. 4868 4875 TO 4877 4879 4882 TO 4887 4889 4891 5883 END MY MZ
1340. 5893 5894 5899 TO 5902 5904 5906 TO 5908 END MY MZ
1341. 5884 5887 5890 5892 END MY MZ
1342. 4892 TO 4897 5723 5862 TO 5870 5917 5919 5921 TO 5923 5925 5926 5928 5930 -
1343. 5953 END MY MZ
1344. 5725 5727 5728 5730 5737 5739 END MY MZ
1345. 5493 5496 5708 5711 5712 5714 TO 5716 5847 5871 TO 5876 5931 TO 5933 5935 -
1346. 5936 END MY MZ
1347. 5803 5804 5848 5909 5910 END MY MZ
1348. 5620 5621 5623 5624 5626 5628 5630 5631 5633 5638 TO 5645 5647 5649 5650 5652 -
1349. 5654 5656 5659 5660 5664 TO 5666 5670 5671 5673 5675 5676 5678 5680 5681 -
1350. 5683 5685 TO 5689 END MY MZ
1351. 5505 END MY MZ
1352. 5506 TO 5512 5517 5519 5521 5526 5528 5530 5533 5534 5536 TO 5538 5540 5541 -
1353. 5544 5545 5547 5549 5551 5552 5555 5558 5561 5571 TO 5573 5603 5605 TO 5609 -
1354. 5615 5616 END MY MZ
1355. 5481 TO 5486 END MY MZ
1356. 5474 5477 5480 END MY MZ
1357. 5438 5443 5448 5450 5451 5453 5456 5457 5459 5461 5462 5465 5467 5468 -
1358. 5471 END MY MZ
1359. 5392 5394 5396 5398 5402 5404 5406 5408 5410 5412 END MY MZ
1360. 5346 5347 5349 TO 5352 5354 TO 5357 5359 TO 5362 5364 5365 5367 5368 5370 -
1361. 5371 TO 5373 5375 TO 5378 5380 TO 5383 5385 5386 END MY MZ
1362. 5330 5332 5334 5336 5338 5340 TO 5344 END MY MZ
1363. 5284 5304 5311 5314 5317 5320 5691 5740 TO 5746 5749 TO 5760 END MY MZ
1364. 5236 TO 5241 5247 5250 5253 5256 5258 5260 END MY MZ
1365. 4899 4900 5183 5184 5186 5187 5189 5191 END MY MZ
1366. 5169 5172 5175 5178 5182 5200 END MY MZ
1367. 4902 TO 4904 4906 4912 TO 4918 4924 TO 4930 4936 TO 4942 4948 TO 4954 4960 -
1368. 4961 TO 4966 4972 TO 4978 4984 TO 4990 4997 4998 5001 5002 5004 TO 5011 5018 -
1369. 5019 5022 5023 5025 TO 5032 5039 5040 5043 5044 5046 TO 5053 5060 5061 5064 -
1370. 5065 5067 TO 5074 5081 5082 5085 5086 5088 TO 5095 5100 5102 5103 5106 5107 -
1371. 5109 TO 5116 5123 5124 5127 5128 5130 TO 5137 5144 5145 5148 5149 -
1372. 5151 TO 5158 END MY MZ
1373. 4837 END MY MZ
1374. 4842 4844 4853 TO 4855 END MY MZ
1375. 5345 5348 5358 5363 5366 5369 5379 5384 END MY MZ
1376. 4526 4528 4530 4532 4857 4858 5195 END MY MZ
1377. 4454 4458 4463 4469 4472 4475 4476 4482 4484 5634 TO 5637 5648 5655 5658 5669 -
1378. 5672 5674 5677 5679 END MY MZ
1379. 3906 END MY MZ
1380. 4117 4120 4131 4132 4134 4135 4137 4138 4140 TO 4149 END MY MZ
1381. 3056 3059 3060 3067 3068 3071 3072 3088 3096 3097 3101 3102 3106 END MY MZ
1382. 1556 END MY MZ
```

```
1383. 4567 4569 4571 4586 4587 4589 4846 END MY MZ
1384. 800 2949 TO 2955 END MY MZ
1385. ************************************************************************
1386. 3438 3439 3444 3445 3447 3448 3457 3459 3460 3467 3469 3472 3473 3478 3480 -
1387. 3487 3488 3497 3498 3507 3510 TO 3513 3515 TO 3517 3520 TO 3524 3529 TO 3532 -
1388. 3552 3553 3557 TO 3561 3572 TO 3577 3591 TO 3597 3600 TO 3602 3607 3608 3610 -
1389. 3626 TO 3631 3641 TO 3645 3662 3663 3665 3666 3670 3671 3673 3674 -
1390. 3677 TO 3683 3686 3690 3693 TO 3695 3697 3698 3700 TO 3708 3724 TO 3729 3739 -
1391. 3740 TO 3743 3757 3758 3773 TO 3782 3784 3785 3787 TO 3791 3796 3797 3799 -
1392. 3806 3835 3836 3838 3839 3847 3848 3850 3851 3854 TO 3860 3863 3864 3866 -
1393. 3867 TO 3868 3873 TO 3875 3907 3924 3925 3927 3934 TO 3936 3945 3946 3951 -
1394. 3952 3959 3961 3962 3965 3966 3972 3973 3976 3977 3982 3984 3991 3992 5312 -
1395. 5313 5315 5316 5318 5319 5321 5322 5389 5780 5824 START MY MZ
1396. 3442 3445 3447 3448 3452 3459 3460 3464 3472 3473 3477 3487 3488 3494 3495 -
1397. 3499 TO 3502 3510 TO 3513 3515 3520 TO 3522 3552 3553 3557 TO 3561 -
1398. 3572 TO 3576 3591 TO 3593 3595 3597 3600 TO 3602 3607 3608 3610 TO 3612 3618 -
1399. 3619 3627 TO 3630 3641 3643 TO 3645 3662 3663 3677 TO 3683 3690 3694 3697 -
1400. 3700 3725 TO 3728 3739 TO 3743 3758 3773 TO 3775 3777 3779 3781 3784 3787 -
1401. 3792 3793 3799 3812 3813 3835 3836 3855 TO 3860 3863 3864 3866 3873 TO 3875 -
1402. 3907 3927 TO 3929 3934 3935 3945 3946 3950 3954 3955 3965 3966 3971 3973 -
1403. 3976 3977 3981 3991 3992 4118 4124 4128 4129 4136 4139 4423 4430 4452 4480 -
1404. 5312 5313 5315 5316 5318 5319 5321 5322 5333 5335 5337 5339 5353 5374 5390 -
1405. 5452 5458 5466 5469 5497 5500 5502 5524 5529 5548 5550 5566 5569 5582 5586 -
1406. 5588 5590 5592 5594 5596 5598 5600 5602 5604 5632 5692 5695 5766 5772 5779 -
1407. 5780 TO 5802 5810 5816 5823 TO 5846 5852 5854 5889 5891 5895 5897 5916 5920 -
1408. 5927 5945 5951 5952 END MY MZ
1409. 2475 2476 2501 2502 3166 3170 3217 4659 4660 END MY MZ
1410. 1523 START MY MZ
1411. 1523 END MY MZ
1412. 1709 1823 1824 3269 START FX
1413. 4862 4865 START FX FY FZ
1414. 4515 END MY MZ
1415. 4518 END MY MZ
1416. 5198 END MY MZ
1417. 5464 START MY MZ
1418. 5539 END MY MZ
1419. 3744 START MY MZ
1420. 3481 START MY MZ
1421. 4417 END MZ
1422. 5704 5879 5938 5944 END MY MZ
1423. 5706 5880 5940 5948 END MY MZ
1424. 5702 5720 START MY MZ
1425. 5702 5720 END MY MZ
1426. 5699 5718 START MY MZ
1427. 5699 5718 END MY MZ
1428. 3985 START MY MZ
1429. 5726 5735 START MY MZ
1430. 5721 START MY MZ
1431. 5584 END MY MZ
1432. 3548 START FX MY MZ
1433. 4349 END FX MY MZ
1434. 3554 START FX MY MZ
1435. 3759 START FX MY MZ
1436. 3551 3555 3756 3760 3905 3909 START FX MY MZ
1437. 3555 3760 3909 END MY MZ
1438. 3759 END MY MZ
```

```
1439. 3554 END MY MZ
1440. 3908 END MY MZ
1441. 5888 END MY MZ
1442. 4033 START MY MZ
1443. 4033 END MY MZ
1444. 3699 START MY MZ
1445. 3699 END MY MZ
1446. 3908 START FX MY MZ
1447. 3900 END FX MY MZ
1448. 5949 END MY MZ
1449. 5950 END MY MZ
1450. ************************************************************************
1451. MEMBER TRUSS
1452. 4370 TO 4373 4378 TO 4409 4591 TO 4596 4598 4599 4602 4603 4623 TO 4634 4674 -
1453. 4675 TO 4677 4682 TO 4685 4822 TO 4825 4845 4851 4852 4863 4864 5216 TO 5221
1454. MEMBER TRUSS
1455. 4370 TO 4373 4378 TO 4381 4384 TO 4407 4409 4598 4599 4602 4603
1456. MEMBER TRUSS
1457. 5583 5585 5587 5589 5591 5593 5595 5597 5599 5601
1458. ELEMENT PLANE STRESS
1459. 4004 4006 TO 4023 4410 TO 4414
1460. ************************************************************************
1461. *PRIMARY LOAD CASES*****************************************************
1462. LOAD 1 LOADTYPE DEAD  TITLE DEAD LOAD
1463. SELFWEIGHT Y -1
1464. *CONC. STORAGE BLDG ROOF DEAD LOAD
1465. JOINT LOAD
1466. 3 13 15 22 24 31 33 40 42 49 TO 51 491 502 547 558 601 612 749 751 752 759 -
1467. 760 TO 761 907 909 922 924 1616 TO 1619 1638 1640 1641 1643 1644 1723 1725 -
1468. 1762 1764 1765 1768 1770 FY -0.07
1469. 10 11 FY -0.035
1470. 14 23 32 41 442 445 447 764 TO 766 772 TO 774 777 TO 779 785 TO 787 -
1471. 790 TO 792 798 TO 800 803 TO 805 811 TO 813 816 TO 818 824 TO 826 -
1472. 829 TO 831 837 TO 839 842 TO 844 850 TO 852 1077 1078 1081 TO 1084 -
1473. 1087 TO 1090 1093 TO 1096 1099 TO 1102 1105 TO 1108 1111 TO 1114 1117 1118 -
1474. 1625 1627 1629 1631 1633 1635 1637 1647 1648 1651 1652 1655 1656 1659 1660 -
1475. 1663 1664 1667 1668 1671 TO 1686 1728 1730 1733 1735 1738 1740 1743 1745 -
1476. 1748 1750 1753 1755 1758 1760 1772 1774 1775 1778 1780 1782 1784 1785 1788 -
1477. 1790 1792 1794 1795 1798 1800 1802 1804 1805 1808 1810 1812 1814 1815 1818 -
1478. 1820 1822 1824 1825 1828 1830 1832 1834 1835 1838 1840 FY -0.15
1479. ************************************************************************
1480. ************************************************************************
1481. *ADDITIONAL LOAD FOR PIPING(ASSUMED)
1482. JOINT LOAD
1483. 80 96 119 135 151 167 183 199 215 231 247 263 513 527 572 586 628 642 FY -2
1484. *SHEETING + SIDE RUNNER LOAD
1485. MEMBER LOAD
1486. 5 13 175 208 241 274 307 340 373 406 439 472 1126 1160 1275 1309 1388 1414 -
1487. 1448 1747 1748 2015 2016 2055 2056 2095 2096 2135 2136 2175 2176 2215 2216 -
1488. 2256 2257 5181 5202 UNI GY -0.09
1489. 460 UNI GY -0.09 2.57515 2.65015
1490. 460 UNI GY -0.09 0 2.57515
1491. 1436 UNI GY -0.09 0 5.225
1492. *JOINT LOAD
1493. *80 119 151 183 215 247 513 572 628 MZ 1
1494. *96 135 167 199 231 247 263 527 586 642 MZ -1
```

```
1495. ********************************************
1496. *6 O/P CHEQD PL LOAD @55KG/M2
1497. 4521 4524 4526 4528 4530 4532 4859 4861 5184 5187 5191 UNI GY -0.055
1498. ************************************************************
1499. *STAIRCASE DEAD LOAD
1500. 5162 5182 CON GY -0.2 0.2
1501. 5162 5182 CON GY -0.2 1.4
1502. 5182 CON GY -0.2 1.8
1503. 5182 CON GY -0.2 3
1504. 5169 CON GY -0.2 0.05
1505. 5169 CON GY -0.2 1.25
1506. 5198 CON GY -2.6
1507. *LOAD ON FILTRATION BLDG************************
1508. *LOAD FOR CONVEYOR PLATFORM
1509. FLOOR LOAD
1510. YRANGE 4 5 FLOAD -0.055 XRANGE 26.8 32.8  ZRANGE 52 68.4  GY
**NOTE** about Floor/OneWay Loads/Weights.
  Please note that depending on the shape of the floor you may
  have to break up the FLOOR/ONEWAY LOAD into multiple commands.
  For details please refer to Technical Reference Manual
  Section 5.32.4.2 Note d and/or "5.32.4.3 Note f.

1511. YRANGE 4 5 FLOAD -0.055 XRANGE 25.25 26.8  ZRANGE 52 55  GY
1512. *LOAD FOR CONVEYOR WALKWAY
1513. JOINT LOAD
1514. 1570 1571 FY -0.2
1515. 1572 1573 FY -0.23
1516. 1545 1546 1549 1550 1554 1555 1565 1566 FY -3.25
1517. MEMBER LOAD
1518. 5655 CON GY -2.5 0.699999
1519. 5648 CON GY -2.5 0.699999
1520. 5684 CON GY -2.5 0.4
1521. 4462 CON GY -2.5 2.49
1522. *SIDE SHEETING LOAD
1523. MEMBER LOAD
1524. 3440 3446 3458 3461 3471 3474 3485 3486 3541 TO 3543 3545 3547 3548 3551 3554 -
1525. 3555 3652 TO 3654 3656 3659 3661 3664 3667 3668 3746 TO 3748 3750 3752 3756 -
1526. 3759 3760 3825 3826 3829 3832 3834 3837 3840 3841 3897 3899 TO 3901 3905 -
1527. 3908 3909 3947 3948 3953 3956 3964 3967 3989 3990 4092 4099 4347 4349 4436 -
1528. 4438 4663 4665 4681 5252 5255 5303 5306 5309 5388 5617 5618 5703 5705 5877 -
1529. 5878 5937 5939 UNI GY -0.08
1530. 2956 UNI GY -0.08 0 0.728001
1531. 3449 UNI GY -0.08 1.2 5.1301
1532. 3449 UNI GY -0.08 0 1.2
1533. 5414 UNI GY -0.08 0 0.1201
1534. 3437 UNI GY -0.08 0 3.5799
1535. 97 130 2298 3441 3450 3462 3483 3484 3949 3957 3958 3968 3979 3980 3987 3988 -
1536. 4066 4348 4350 4358 4360 5246 5249 5387 5619 5698 5701 5717 5719 5881 5886 -
1537. 5943 5947 UNI GY -0.08
1538. 3475 UNI GY -0.08 2.336 3.504
1539. 3475 UNI GY -0.08 0 2.336
1540. 3451 UNI GY -0.08 1.3 1.5472
1541. 3451 UNI GY -0.08 0 0.3162
```

```
1542. 3451 UNI GY -0.08 0.3162 1.3
1543. ************************************************************
1544. *ROOF SHEETING + PURLIN LOAD
1545. *LOAD ON INTERNAL FRAMES
1546. 3539 3540 3650 3651 3761 3762 3842 3843 3910 3911 CON Y -0.11 1.375
1547. 4102 4103 4105 4107 4108 4110 4543 TO 4546 CON Y -0.11 0.249
1548. 4102 4103 4105 4107 4108 4110 4543 TO 4546 CON Y -0.11 1.624
1549. 3537 3538 3648 3649 3763 3764 3844 3845 3912 3913 CON Y -0.11 0.51
1550. 3537 3538 3648 3649 3763 3764 3844 3845 3912 3913 CON Y -0.11 1.885
1551. JOINT LOAD
1552. 1231 1258 1259 1310 1311 1344 1345 1378 1379 1411 1412 1453 FY -0.055
1553. 1242 1292 1348 1382 1415 FY -0.11
1554. JOINT LOAD
1555. 1227 1228 1449 1450 FY -0.03
1556. *LOAD ON EXTERNAL FRAMES
1557. MEMBER LOAD
1558. 3489 3490 3993 3994 CON Y -0.055 1.375
1559. 4535 4537 4539 4541 CON Y -0.055 0.249
1560. 4535 4537 4539 4541 CON Y -0.055 1.624
1561. 3491 3492 3995 3996 CON Y -0.055 0.51
1562. 3491 3492 3995 3996 CON Y -0.055 1.885
1563. ************************************************************
1564. *DEAD LOAD @ CRANE WALKWAY LEVEL @50KG/M2
1565. MEMBER LOAD
1566. 3478 TO 3480 4415 4416 4418 4423 4425 4427 4430 5708 5714 UNI GY -0.033
1567. 3494 3495 3497 3498 3505 3506 3527 3528 3534 3535 3584 3585 3587 3588 3598 -
1568. 3599 3615 3616 3618 3619 3670 3671 3673 3674 3709 3710 3713 3714 3716 3717 -
1569. 3766 3767 3769 3770 3802 3803 3809 3810 3812 3813 3847 3848 3850 3851 3861 -
1570. 3862 3878 3879 3881 3882 3915 3916 3918 3919 3922 3923 3939 3940 3942 3943 -
1571. 5692 5695 5761 TO 5779 5805 TO 5823 5849 5850 UNI GY -0.033
1572. MEMBER LOAD
1573. 4420 5284 5288 5292 5707 5713 5725 5728 5732 5736 5737 5752 5758 UNI GY -0.033
1574. ************************************************************************
1575. *DEAD LOAD ON STAIRCASE @ 35KG/M2
1576. 5236 5239 5240 5247 5250 5304 5691 CON GY -0.4
1577. 5310 CON GY -0.4 2.04
1578. 5690 CON GY -0.4 2.04
1579. 5288 CON GY -0.4 2.04
1580. 5284 CON GY -0.4 2.04
1581. 5292 CON GY -0.4 2.04
1582. 5307 CON GY -0.4 2.04
1583. 5236 5239 5240 5247 5250 5304 5310 5690 5691 CON GY -0.2 0.5
1584. 5288 CON GY -0.2 0.5
1585. 5284 CON GY -0.2 0.5
1586. 5307 CON GY -0.2 0.5
1587. 5292 CON GY -0.2 0.5
1588. 5236 5239 5240 5247 5250 CON GY -0.2 3
1589. 5304 5691 CON GY -0.2 3.6
1590. 5746 CON GY -0.2 1.55
1591. 5740 CON GY -0.2 1.55
1592. 5752 CON GY -0.2 1.55
1593. 5284 CON GY -0.2 3.6
1594. 5758 CON GY -0.2 1.55
1595. 5743 CON GY -0.2 1.55
1596. 5244 CON GY -0.3 0
1597. 5243 CON GY -0.3 0
```

```
1598. 5244 CON GY -0.3 1.2
1599. 5243 CON GY -0.3 1.2
1600. ************************************************************
1601. *CONVEYOR 3350 WALKWAY DEAD LOAD @ 1KN/M2
1602. JOINT LOAD
1603. 1260 1264 1284 1288 1323 1327 1939 TO 1942 1946 TO 1949 2175 2176 FY -0.35
1604. MEMBER LOAD
1605. 3822 5400 CON GY -0.35 2.725
1606. 5411 CON GY -0.35 1.275
1607. 5905 CON GY -0.35 0.025
1608. JOINT LOAD
1609. 1869 1870 1879 1986 1988 1990 FY -0.3
1610. MEMBER LOAD
1611. 4036 4037 4040 4042 4043 4046 CON GY -0.07 1.5
1612. 4036 4037 4040 4042 4043 4046 CON GY -0.07 3
1613. 4036 4037 4040 4042 4043 4046 CON GY -0.07 4.5
1614. ************************************************************************
1615. ************************************************************************
1616. LOAD 2 LOADTYPE LIVE  TITLE LIVE LOAD
1617. ************************************************************************
1618. MEMBER LOAD
1619. *LIVE LOAD @500KG/M2
1620. 4521 4524 4526 4528 4530 4532 4859 4861 5184 5187 5191 UNI GY -0.5
1621. ************************************************************************
1622. *STAIRCASE LIVE LOAD
1623. 5162 CON GY -0.7 0.2
1624. 5162 CON GY -0.7 1.4
1625. 5182 CON GY -0.7 1.8
1626. 5182 CON GY -0.7 3
1627. 5169 CON GY -0.7 0.05
1628. 5169 CON GY -0.7 1.25
1629. ************************************************************************8
1630. *500KG/M2 ON FILTER PRESS PLATFORM
1631. FLOOR LOAD
1632. YRANGE 10 11 FLOAD -0.5 XRANGE 0 28  ZRANGE 58 62  GY
1633. YRANGE 10 11 FLOAD -0.5 XRANGE 0 28  ZRANGE 65.4749 68.4  GY
1634. *YRANGE 10 11 FLOAD -0.5 XRANGE 0.3 3.67574  ZRANGE 61.52 65.4969  GY
1635. YRANGE 10 11 FLOAD -0.5 XRANGE 21.918 27  ZRANGE 27.357 69  GY
1636. ************************************************************************
1637. YRANGE 13 14 FLOAD -0.5 XRANGE 0 28  ZRANGE 58 62  GY
1638. YRANGE 13 14 FLOAD -0.5 XRANGE 0 28  ZRANGE 65.4749 68.4  GY
1639. *YRANGE 13 14 FLOAD -0.5 XRANGE 0.3 3.67574  ZRANGE 61.52 65.4969  GY
1640. YRANGE 13 14 FLOAD -0.5 XRANGE 21.918 27  ZRANGE 27.357 69  GY
1641. FLOOR LOAD
1642. YRANGE 4 5 FLOAD -0.5 XRANGE 25.25 26.8  ZRANGE 52 55  GY
1643. YRANGE 4 5 FLOAD -0.5 XRANGE 26.8 32.8  ZRANGE 52 68.4  GY
1644. JOINT LOAD
1645. 1570 1571 FY -1.5
1646. 1572 1573 FY -2
1647. ************************************************************************
1648. *LIVE LOAD @ CRANE WALKWAY LEVEL @400KG/M2
1649. MEMBER LOAD
1650. 3478 TO 3480 4415 4416 4418 4420 4423 4425 4427 4430 5284 5288 5292 5707 5708 -
```

```
1651. 5713 5714 5725 5728 5732 5736 5737 5752 5758 UNI GY -0.26
1652. 3494 3495 3497 3498 3505 3506 3527 3528 3534 3535 3584 3585 3587 3588 5761 -
1653. 5762 TO 5764 5785 5805 TO 5808 UNI GY -0.26
1654. ********************************************************************************
1655. *LIVE LOAD ON STAIRCASE @400KG/M2
1656. 5236 5239 5240 5247 5250 CON GY -1.4
1657. 5236 5239 5240 5247 5250 CON GY -0.7 0.5
1658. 5236 5239 5240 5247 5250 CON GY -0.7 3
1659. 5304 5691 CON GY -1.6
1660. 5310 CON GY -1.6 2.04
1661. 5690 CON GY -1.6 2.04
1662. 5288 CON GY -1.6 2.04
1663. 5284 CON GY -1.6 2.04
1664. 5292 CON GY -1.6 2.04
1665. 5307 CON GY -1.6 2.04
1666. 5304 5310 5690 5691 CON GY -0.8 0.5
1667. 5288 CON GY -0.8 0.5
1668. 5284 CON GY -0.8 0.5
1669. 5307 CON GY -0.8 0.5
1670. 5292 CON GY -0.8 0.5
1671. 5304 5691 CON GY -0.8 3.6
1672. 5746 CON GY -0.8 1.55
1673. 5740 CON GY -0.8 1.55
1674. 5752 CON GY -0.8 1.55
1675. 5284 CON GY -0.8 3.6
1676. 5758 CON GY -0.8 1.55
1677. 5743 CON GY -0.8 1.55
1678. 5244 CON GY -0.75 0
1679. 5243 CON GY -0.75 0
1680. 5244 CON GY -0.75 1.2
1681. 5243 CON GY -0.75 1.2
1682. FLOOR LOAD
1683. YRANGE 10 11 FLOAD -0.5 XRANGE 0.3 2.8  ZRANGE 61.125 65.675  GY
1684. YRANGE 13 14 FLOAD -0.5 XRANGE 0.3 3.675  ZRANGE 61.125 65.675  GY
1685. *CONVEYOR 3350 WALKWAY LIVE LOAD @ 4KN/M2
1686. JOINT LOAD
1687. 1260 1264 1284 1288 1323 1327 1939 TO 1942 1946 TO 1949 2175 2176 FY -1.5
1688. MEMBER LOAD
1689. 3822 5400 CON GY -1.5 2.725
1690. 5411 CON GY -1.5 1.275
1691. 5905 CON GY -1.5 0.025
1692. JOINT LOAD
1693. 1869 1870 1879 1986 1988 1990 FY -1.2
1694. ********************************************************************************
1695. LOAD 3 LOADTYPE LIVE  TITLE ROOF LIVE LOAD
1696. JOINT LOAD
1697. 3 13 15 22 24 31 33 40 42 49 51 491 502 547 558 601 612 749 751 752 -
1698. 759 TO 761 907 909 922 924 1638 1640 1641 1643 1644 1723 1725 1762 1764 1765 -
1699. 1768 1770 FY -0.25
1700. 10 11 FY -0.125
1701. 14 23 32 41 442 445 447 764 TO 766 772 TO 774 777 TO 779 785 TO 787 -
1702. 790 TO 792 798 TO 800 803 TO 805 811 TO 813 816 TO 818 824 TO 826 -
1703. 829 TO 831 837 TO 839 842 TO 844 850 TO 852 1077 1078 1081 TO 1084 -
```

```
1087 TO 1090 1093 TO 1096 1099 TO 1102 1105 TO 1108 1111 TO 1114 1117 1118 -
1625 1627 1629 1631 1633 1635 1637 1647 1648 1651 1652 1655 1656 1659 1660 -
1663 1664 1667 1668 1671 TO 1686 1728 1730 1733 1735 1738 1740 1743 1745 -
1748 1750 1753 1755 1758 1760 1772 1774 1775 1778 1780 1782 1784 1785 1788 -
1790 1792 1794 1795 1798 1800 1802 1804 1805 1808 1810 1812 1814 1815 1818 -
1820 1822 1824 1825 1828 1830 1832 1834 1835 1838 1840 FY -0.53
**LOAD ON FILTRATION BLDG*****************************************************
*LOAD ON INTERNAL FRAMES
MEMBER LOAD
3539 3540 3650 3651 3761 3762 3842 3843 3910 3911 CON Y -0.41 1.375
4102 4103 4105 4107 4108 4110 4543 TO 4546 CON Y -0.41 0.249
4102 4103 4105 4107 4108 4110 4543 TO 4546 CON Y -0.41 1.624
3537 3538 3648 3649 3763 3764 3844 3845 3912 3913 CON Y -0.41 0.51
3537 3538 3648 3649 3763 3764 3844 3845 3912 3913 CON Y -0.41 1.885
JOINT LOAD
1231 1258 1259 1310 1311 1344 1345 1378 1379 1411 1412 1453 FY -0.21
1242 1292 1348 1382 1415 FY -0.41
*LOAD ON EXTERNAL FRAMES
MEMBER LOAD
3489 3490 3993 3994 CON Y -0.21 1.375
4535 4537 4539 4541 CON Y -0.21 0.249
4535 4537 4539 4541 CON Y -0.21 1.624
3491 3492 3995 3996 CON Y -0.21 0.51
3491 3492 3995 3996 CON Y -0.21 1.885
JOINT LOAD
1227 1228 1449 1450 FY -0.1
MEMBER LOAD
4036 4037 4040 4042 4043 4046 CON GY -0.25 1.5
4036 4037 4040 4042 4043 4046 CON GY -0.25 3
4036 4037 4040 4042 4043 4046 CON GY -0.25 4.5
*******************************************************************************
*MEMBER LOAD
*3537 TO 3540 3648 TO 3651 3761 TO 3764 3842 TO 3845 3910 TO 3913 4102 4103 -
*4105 4107 4108 4110 4543 TO 4546 UNI GY -0.27
*3489 TO 3492 3993 TO 3996 4535 4537 4539 4541 UNI GY -0.135
*******************************************************************************
LOAD 4 LOADTYPE CRANE HOOK  TITLE CRANE LOAD 1
*******************************************************************************
*WHEEL LOAD = 1.25*(8) = 10T { 25% IMPACT)
*LATERAL FORCE = 20% OF 16/4 = 0.8 T PER WHEEL
JOINT LOAD
1375 FY -10 FZ -0.8
MEMBER LOAD
3861 CON GY -10 1.15
3861 CON GZ -0.8 1.15
*******************************************************************************
LOAD 5 LOADTYPE CRANE HOOK  TITLE CRANE LOAD 2
*******************************************************************************
JOINT LOAD
1307 FY -10 FZ -0.8
MEMBER LOAD
3709 CON GY -10 0.75
3709 CON GZ -0.8 0.75
*******************************************************************************
LOAD 6 LOADTYPE CRANE HOOK  TITLE CRANE LOAD 3
*******************************************************************************
```

```
1760. JOINT LOAD
1761. 1341 FY -10 FZ -0.8
1762. MEMBER LOAD
1763. 3802 CON GY -10 0.75
1764. 3802 CON GZ -0.8 0.75
1765. ********************************************************************************
1766. ********************************************************************************
1767. LOAD 7 LOADTYPE WIND  TITLE WIND LOAD IN +X DIR (CP = +0.55)
1768. MEMBER LOAD
1769. *WIND ON STORAGE BLDG WALL
1770. 472 1748 5181 5202 UNI GX 0.31
1771. 460 UNI GX 0.31 2.57515 2.65015
1772. 460 UNI GX 0.31 0 2.57515
1773. 5 1747 UNI GX 0.091
1774. 439 UNI GX 0.091
1775. 439 UNI GX 0.091 0 0.1544
1776. 439 UNI GX 0.091 0 0.1544
1777. 439 UNI GX 0.091 0 0.1544
1778. 2016 2056 2096 2136 2176 2216 2257 UNI GX 0.62
1779. 1436 UNI GX 0.62 0 5.225
1780. 1160 UNI GX 0.62
1781. 1160 UNI GX 0.62 0 0.1544
1782. 274 UNI GX 0.62
1783. 274 UNI GX 0.62 0 0.1544
1784. 208 UNI GX 0.62
1785. 208 UNI GX 0.62 0 0.1544
1786. 1309 UNI GX 0.62
1787. 1309 UNI GX 0.62 0 0.1544
1788. 406 UNI GX 0.62
1789. 406 UNI GX 0.62 0 0.1544
1790. 340 UNI GX 0.62
1791. 1448 UNI GX 0.62
1792. 13 1388 2015 2055 2095 2135 2175 2215 2256 UNI GX 0.18
1793. 1126 UNI GX 0.18
1794. 1126 UNI GX 0.18 0 0.1544
1795. 175 UNI GX 0.18
1796. 175 UNI GX 0.18 0 0.1544
1797. 1275 UNI GX 0.18
1798. 1275 UNI GX 0.18 0 0.1544
1799. 373 UNI GX 0.18
1800. 373 UNI GX 0.18 0 0.1544
1801. 307 UNI GX 0.18
1802. 307 UNI GX 0.18 0 0.1544
1803. 241 UNI GX 0.18
1804. 241 UNI GX 0.18 0 0.1544
1805. 1414 UNI GX 0.18
1806. 1414 UNI GX 0.18 0 0.1544
1807. 5 439 472 5181 5202 UNI GZ -0.45
1808. 460 UNI GZ -0.45 2.57515 2.65015
1809. 460 UNI GZ -0.45 0 2.57515
1810. 1709 1823 1824 1838 TO 1841 3269 4866 4867 4869 4870 5167 UNI GZ -0.9
1811. **WIND ON STORAGE BLDG ROOF
1812. JOINT LOAD
1813. 3 13 15 22 24 31 33 40 42 49 51 491 502 547 558 601 612 749 751 752 -
1814. 759 TO 761 907 909 922 924 1638 1640 1641 1643 1644 1723 1725 1762 1764 1765 -
1815. 1768 1770 FY 0.87
```

```
1816. 10 11 FY 0.44
1817. 14 23 32 41 442 445 447 764 TO 766 772 TO 774 777 TO 779 785 TO 787 -
1818. 790 TO 792 798 TO 800 803 TO 805 811 TO 813 816 TO 818 824 TO 826 -
1819. 829 TO 831 837 TO 839 842 TO 844 850 TO 852 1077 1078 1081 TO 1084 -
1820. 1087 TO 1090 1093 TO 1096 1099 TO 1102 1105 TO 1108 1111 TO 1114 1117 1118 -
1821. 1625 1627 1629 1631 1633 1635 1637 1647 1648 1651 1652 1655 1656 1659 1660 -
1822. 1663 1664 1667 1668 1671 TO 1686 1728 1730 1733 1735 1738 1740 1743 1745 -
1823. 1748 1750 1753 1755 1758 1760 1772 1774 1775 1778 1780 1782 1784 1785 1788 -
1824. 1790 1792 1794 1795 1798 1800 1802 1804 1805 1808 1810 1812 1814 1815 1818 -
1825. 1820 1822 1824 1825 1828 1830 1832 1834 1835 1838 1840 FY 1.74
1826. *WIND ON FILTRATION BLDG WALL
1827. MEMBER LOAD
1828. 130 2298 3947 3948 3953 3956 3958 3964 3967 3989 3990 4358 5617 5618 5877 -
1829. 5878 5886 5937 5939 5943 UNI GX 0.56
1830. 3949 3957 3968 3979 3980 3987 3988 4066 4350 5246 5249 5619 5717 5719 -
1831. 5947 UNI GX 0.24
1832. 3441 3450 3462 3483 3484 4348 5387 5698 5701 UNI GX 0.07
1833. 3475 UNI GX 0.07 2.336 3.504
1834. 3475 UNI GX 0.07 0 2.336
1835. 3451 UNI GX 0.07 0 0.3162
1836. 97 3440 3446 3458 3461 3471 3474 3485 3486 4360 5303 5306 5309 5388 5703 5705 -
1837. 5881 UNI GX 0.17
1838. 3451 UNI GX 0.17 1.3 1.5472
1839. 3451 UNI GX 0.17 0.3162 1.3
1840. 3449 UNI GX 0.17 1.2 5.1301
1841. 3449 UNI GX 0.17 0 1.2
1842. 5414 UNI GX 0.17 0 0.1201
1843. 3437 UNI GX 0.17 0 3.5799
1844. 3544 3546 3554 3655 3658 3660 3661 3667 3749 3759 3828 3831 3833 3834 3840 -
1845. 3908 4349 4663 4665 4666 5610 5611 5613 5882 5888 UNI GZ -0.77
1846. 2956 UNI GZ -0.77 0.728001 3.203
1847. 2956 UNI GZ -0.77 0 0.728001
1848. 3548 UNI GZ -0.77 1.475 1.6191
1849. 3548 UNI GZ -0.77 0 1.475
1850. 3900 UNI GZ -0.77 0.0854988 1.5605
1851. 3900 UNI GZ -0.77 0 0.0854988
1852. 97 130 2298 3483 3958 3980 3987 4066 4348 4350 4358 4360 5698 5717 5881 5886 -
1853. 5943 UNI GZ -0.39
1854. 3451 UNI GZ -0.39 1.3 1.5472
1855. 3451 UNI GZ -0.39 0 0.3162
1856. 3451 UNI GZ -0.39 0.3162 1.3
1857. 3441 3450 3462 3484 3949 3957 3968 3979 3988 5246 5249 5387 5619 5701 5719 -
1858. 5947 UNI GZ 0.39
1859. 3475 UNI GZ 0.39 2.336 3.504
1860. 3475 UNI GZ 0.39 0 2.336
1861. 3541 TO 3543 3545 3547 3551 3555 3652 TO 3654 3656 3659 3664 3668 -
1862. 3746 TO 3748 3750 3752 3756 3760 3825 3826 3829 3832 3837 3841 3897 3899 -
1863. 3901 3905 3909 4092 4099 4347 4436 4438 5252 5255 UNI GZ 0.77
1864. *WIND ON FILTRATION BLDG ROOF
1865. 3539 3540 3650 3651 3761 3762 3842 3843 3910 3911 CON Y 1.45 1.625
1866. 4546 CON Y 1.45 0.761429
1867. 4545 CON Y 1.45 0.761433
1868. 4544 CON Y 1.45 0.761429
1869. 4543 CON Y 1.45 0.812911
1870. 4110 CON Y 1.45 0.761429
1871. 4108 CON Y 1.45 0.761429
```

```
1872. 4107 CON Y 1.45 0.761429
1873. 4105 CON Y 1.45 0.81293
1874. 4103 CON Y 1.45 0.761429
1875. 4102 CON Y 1.45 0.864431
1876. 4546 CON Y 1.45 2.38643
1877. 4545 CON Y 1.45 2.38643
1878. 4544 CON Y 1.45 2.38643
1879. 4543 CON Y 1.45 2.43791
1880. 4110 CON Y 1.45 2.38643
1881. 4108 CON Y 1.45 2.38643
1882. 4107 CON Y 1.45 2.38643
1883. 4105 CON Y 1.45 2.43793
1884. 4103 CON Y 1.45 2.38643
1885. 4102 CON Y 1.45 2.48943
1886. 3537 3538 3648 3649 3763 3764 3844 3845 3912 3913 CON Y 1.45 1.625
1887. 3538 3649 3764 3845 3913 CON Y 1.45 3.25
1888. JOINT LOAD
1889. 1258 1259 1310 1311 1344 1345 1378 1379 1411 1412 FY 0.72
1890. MEMBER LOAD
1891. 3489 3490 3993 3994 CON Y 0.72 1.625
1892. 4541 CON Y 0.72 0.761429
1893. 4539 CON Y 0.72 0.761429
1894. 4537 CON Y 0.72 0.761429
1895. 4535 CON Y 0.72 0.761429
1896. 4541 CON Y 0.72 2.38643
1897. 4539 CON Y 0.72 2.38643
1898. 4537 CON Y 0.72 2.38643
1899. 4535 CON Y 0.72 2.38643
1900. 3491 3492 3995 3996 CON Y 0.72 1.625
1901. 3491 3995 CON Y 0.72 3.25
1902. JOINT LOAD
1903. 1227 1228 1449 1450 FY 0.36
1904. MEMBER LOAD
1905. 1966 1973 1974 1976 1979 1981 1995 1999 TO 2002 2536 2540 2557 2559 2565 4709 -
1906. 4711 4714 4717 4901 4905 4992 TO 4994 4996 4997 UNI GZ -0.34
1907. *STAIR WIND LOAD
1908. 5160 TO 5162 5164 5165 5168 5169 5172 5182 5199 5200 5206 UNI GX 0.04
1909. *STAIR WIND LOAD
1910. 5230 TO 5241 5245 5247 5248 5250 5251 5253 5254 5256 5286 5289 5291 5294 5311 -
1911. 5314 5317 5320 UNI GX 0.04
1912. 5276 TO 5283 5302 5305 5308 5722 5729 5738 UNI GX 0.02
1913. 5312 5313 5315 5316 5318 5319 5321 5322 UNI GX 0.01
1914. ********************************************************************************
1915. ********************************************************************************
1916. LOAD 8 LOADTYPE WIND  TITLE WIND LOAD IN +X DIR (CP = -0.55)
1917. **WIND ON STORAGE BLDG ROOF
1918. JOINT LOAD
1919. 3 13 15 22 24 31 33 40 42 49 51 491 502 547 558 601 612 749 751 752 -
1920. 759 TO 761 907 909 922 924 1638 1640 1641 1643 1644 1723 1725 1762 1764 1765 -
1921. 1768 1770 FY 0.23
1922. 10 11 FY 0.11
1923. 14 23 32 41 442 445 447 764 TO 766 772 TO 774 777 TO 779 785 TO 787 -
1924. 790 TO 792 798 TO 800 803 TO 805 811 TO 813 816 TO 818 824 TO 826 -
1925. 829 TO 831 837 TO 839 842 TO 844 850 TO 852 1077 1078 1081 TO 1084 -
1926. 1087 TO 1090 1093 TO 1096 1099 TO 1102 1105 TO 1108 1111 TO 1114 1117 1118 -
1927. 1625 1627 1629 1631 1633 1635 1637 1647 1648 1651 1652 1655 1656 1659 1660 -
```

```
1928. 1663 1664 1667 1668 1671 TO 1686 1728 1730 1733 1735 1738 1740 1743 1745 -
1929. 1748 1750 1753 1755 1758 1760 1772 1774 1775 1778 1780 1782 1784 1785 1788 -
1930. 1790 1792 1794 1795 1798 1800 1802 1804 1805 1808 1810 1812 1814 1815 1818 -
1931. 1820 1822 1824 1825 1828 1830 1832 1834 1835 1838 1840 FY 0.46
1932. ********************************************************************************
1933. *WIND ON STORAGE BLDG WALL
1934. MEMBER LOAD
1935. *97 130 2297 2298 UNI GZ 0.07
1936. 5 1747 1748 5181 5202 UNI GZ -0.055
1937. 460 UNI GZ -0.055 2.57515 2.65015
1938. 460 UNI GZ -0.055 0 2.57515
1939. 472 UNI GZ -0.055
1940. 472 UNI GZ -0.055 0 0.1544
1941. 439 UNI GZ -0.055
1942. 439 UNI GZ -0.055 0 0.1544
1943. 439 UNI GZ -0.055 0 0.1544
1944. 439 UNI GZ -0.055 0 0.1544
1945. 13 175 241 307 373 1126 1275 1388 1414 2015 2055 2095 2135 2175 2215 -
1946. 2256 UNI GX 1
1947. 2016 2056 2096 2136 2176 2216 2257 UNI GX -0.18
1948. 1436 UNI GX -0.18 0 5.225
1949. 1160 UNI GX -0.18
1950. 1160 UNI GX -0.18 0 0.1544
1951. 274 UNI GX -0.18
1952. 274 UNI GX -0.18 0 0.1544
1953. 208 UNI GX -0.18
1954. 208 UNI GX -0.18 0 0.1544
1955. 1309 UNI GX -0.18
1956. 1309 UNI GX -0.18 0 0.1544
1957. 406 UNI GX -0.18
1958. 406 UNI GX -0.18 0 0.1544
1959. 340 UNI GX -0.18
1960. 340 UNI GX -0.18 0 0.1544
1961. 1448 UNI GX -0.18
1962. 1448 UNI GX -0.18 0 0.1544
1963. 1748 5181 5202 UNI GX -0.09
1964. 460 UNI GX -0.09 2.57515 2.65015
1965. 460 UNI GX -0.09 0 2.57515
1966. 130 UNI GX -0.09 0 0.1544
1967. 472 UNI GX -0.09
1968. 472 UNI GX -0.09 0 0.1544
1969. 5 1747 UNI GX 0.49
1970. 439 UNI GX 0.49
1971. 439 UNI GX 0.49 0 0.1544
1972. 439 UNI GX 0.49 0 0.1544
1973. 439 UNI GX 0.49 0 0.1544
1974. 97 UNI GX 0.49 0 0.1544
1975. 97 UNI GX 0.49 0 0.1544
1976. 97 UNI GX 0.49 0 0.1544
1977. 1709 1823 1824 1838 TO 1841 3269 4866 4867 4869 4870 5167 UNI GZ -0.11
1978. ********************************************************************************
1979. *WIND ON FILTRATION BLDG WALL
1980. 3441 3450 3462 3483 3484 4348 5387 5698 5701 UNI GX 0.38
1981. 3475 UNI GX 0.38 2.336 3.504
1982. 3475 UNI GX 0.38 0 2.336
1983. 3451 UNI GX 0.38 0 0.3162
```

```
1984. 97 3440 3446 3458 3461 3471 3474 3485 3486 4360 5303 5306 5309 5388 5703 5705 -
1985. 5881 UNI GX 0.9
1986. 3451 UNI GX 0.9 1.3 1.5472
1987. 3451 UNI GX 0.9 0.3162 1.3
1988. 3449 UNI GX 0.9 1.2 5.1301
1989. 3449 UNI GX 0.9 0 1.2
1990. 5414 UNI GX 0.9 0 0.1201
1991. 3437 UNI GX 0.9 0 3.5799
1992. 130 2298 3947 3948 3953 3956 3958 3964 3967 3989 3990 4358 5617 5618 5877 -
1993. 5878 5886 5937 5939 5943 UNI GX -0.16
1994. 3949 3957 3968 3979 3980 3987 3988 4066 4350 5246 5249 5619 5717 5719 -
1995. 5947 UNI GX -0.07
1996. 3541 TO 3543 3545 3547 3551 3555 3652 TO 3654 3656 3659 3664 3668 -
1997. 3746 TO 3748 3750 3752 3756 3760 3825 3826 3829 3832 3837 3841 3897 3899 -
1998. 3901 3905 3909 4092 4099 4347 4436 4438 5252 5255 UNI GZ 0.09
1999. 3441 3450 3462 3484 3949 3957 3968 3979 3988 5246 5249 5387 5619 5701 5719 -
2000. 5947 UNI GZ 0.045
2001. 3475 UNI GZ 0.045 2.336 3.504
2002. 3475 UNI GZ 0.045 0 2.336
2003. 3544 3546 3554 3655 3658 3660 3661 3667 3749 3759 3828 3831 3833 3834 3840 -
2004. 3908 4349 4663 4665 4666 5610 5611 5613 5882 UNI GZ -0.09
2005. 2956 UNI GZ -0.09 0.728001 3.203
2006. 2956 UNI GZ -0.09 0 0.728001
2007. 3548 UNI GZ -0.09 1.475 1.6191
2008. 3548 UNI GZ -0.09 0 1.475
2009. 3900 UNI GZ -0.09 0.0854988 1.5605
2010. 3900 UNI GZ -0.09 0 0.0854988
2011. 97 130 2298 3483 3958 3980 3987 4066 4348 4350 4358 4360 5698 5717 5881 5886 -
2012. 5943 UNI GZ -0.045
2013. 3451 UNI GZ -0.045 1.3 1.5472
2014. 3451 UNI GZ -0.045 0 0.3162
2015. 3451 UNI GZ -0.045 0.3162 1.3
2016. *WIND ON FILTRATION BLDG ROOF
2017. 3539 3540 3650 3651 3761 3762 3842 3843 3910 3911 CON Y -0.37 1.625
2018. 4546 CON Y -0.37 0.761429
2019. 4545 CON Y -0.37 0.761433
2020. 4544 CON Y -0.37 0.761429
2021. 4543 CON Y -0.37 0.812911
2022. 4110 CON Y -0.37 0.761429
2023. 4108 CON Y -0.37 0.761429
2024. 4107 CON Y -0.37 0.761429
2025. 4105 CON Y -0.37 0.81293
2026. 4103 CON Y -0.37 0.761429
2027. 4102 CON Y -0.37 0.864431
2028. 4546 CON Y -0.37 2.38643
2029. 4545 CON Y -0.37 2.38643
2030. 4544 CON Y -0.37 2.38643
2031. 4543 CON Y -0.37 2.43791
2032. 4110 CON Y -0.37 2.38643
2033. 4108 CON Y -0.37 2.38643
2034. 4107 CON Y -0.37 2.38643
2035. 4105 CON Y -0.37 2.43793
2036. 4103 CON Y -0.37 2.38643
2037. 4102 CON Y -0.37 2.48943
2038. 3537 3538 3648 3649 3763 3764 3844 3845 3912 3913 CON Y -0.37 1.625
2039. 3538 3649 3764 3845 3913 CON Y -0.37 3.25
```

```
2040. JOINT LOAD
2041. 1258 1259 1310 1311 1344 1345 1378 1379 1411 1412 FY -0.19
2042. MEMBER LOAD
2043. 3489 3490 3993 3994 CON Y -0.19 1.625
2044. 4541 CON Y -0.19 0.761429
2045. 4539 CON Y -0.19 0.761429
2046. 4537 CON Y -0.19 0.761429
2047. 4535 CON Y -0.19 0.761429
2048. 4541 CON Y -0.19 2.38643
2049. 4539 CON Y -0.19 2.38643
2050. 4537 CON Y -0.19 2.38643
2051. 4535 CON Y -0.19 2.38643
2052. 3491 3492 3995 3996 CON Y -0.19 1.625
2053. 3491 3995 CON Y -0.19 3.25
2054. JOINT LOAD
2055. 1227 1228 1449 1450 FY -0.09
2056. MEMBER LOAD
2057. 1966 1973 1974 1976 1979 1981 1995 1999 TO 2002 2536 2540 2557 2559 2565 4709 -
2058. 4711 4714 4717 4901 4905 4992 TO 4994 4996 4997 UNI GZ -0.04
2059. *STAIR WIND LOAD
2060. 5160 TO 5162 5164 5165 5168 5169 5172 5182 5199 5200 5206 UNI GX 0.04
2061. *STAIR WIND LOAD
2062. 5230 TO 5241 5245 5247 5248 5250 5251 5253 5254 5256 5286 5289 5291 5294 5311 -
2063. 5314 5317 5320 UNI GX 0.04
2064. 5276 TO 5283 5302 5305 5308 5722 5729 5738 UNI GX 0.02
2065. 5312 5313 5315 5316 5318 5319 5321 5322 UNI GX 0.01
2066. ******************************************************************************
2067. ******************************************************************************
2068. LOAD 9 LOADTYPE WIND  TITLE WIND LOAD IN +Z DIR (CP = +0.55)
2069. MEMBER LOAD
2070. *WINDWARD WALL
2071. 3441 3450 3462 3484 3949 3957 3968 3979 3988 5246 5249 5387 5619 5701 5719 -
2072. 5947 UNI GZ -0.077
2073. 3475 UNI GZ -0.077 2.336 3.504
2074. 3475 UNI GZ -0.077 0 2.336
2075. 3541 TO 3543 3545 3547 3551 3555 3897 3899 3901 3905 3909 4092 4436 5252 -
2076. 5255 UNI GZ -0.155
2077. 3652 TO 3654 3656 3659 3664 3668 3825 3826 3829 3832 3837 3841 4347 -
2078. 4438 UNI GZ -0.155
2079. 3746 TO 3748 3750 3752 3756 3760 4099 UNI GZ -0.155
2080. *LEEWARD WALL
2081. 97 130 2298 3483 3958 3980 3987 4066 4348 4350 4358 4360 5698 5717 5881 5886 -
2082. 5943 UNI GZ -0.26
2083. 3451 UNI GZ -0.26 1.3 1.5472
2084. 3451 UNI GZ -0.26 0 0.3162
2085. 3451 UNI GZ -0.26 0.3162 1.3
2086. 3544 3546 3554 3655 3658 3660 3661 3667 3749 3759 3828 3831 3833 3834 3840 -
2087. 3908 4349 4663 4665 4666 5610 5611 5613 5882 5888 UNI GZ -0.53
2088. 2956 UNI GZ -0.53 0.728001 3.203
2089. 2956 UNI GZ -0.53 0 0.728001
2090. 3548 UNI GZ -0.53 1.475 1.6191
2091. 3548 UNI GZ -0.53 0 1.475
2092. 3900 UNI GZ -0.53 0.0854988 1.5605
2093. 3900 UNI GZ -0.53 0 0.0854988
2094. *SIDEWALL
2095. 97 3441 3450 3462 3483 3484 4348 4360 5387 5698 5701 5881 UNI GX -0.35
```

```
2096. 3475 UNI GX -0.35 2.336 3.504
2097. 3475 UNI GX -0.35 0 2.336
2098. 3451 UNI GX -0.35 1.3 1.5472
2099. 3451 UNI GX -0.35 0 0.3162
2100. 3451 UNI GX -0.35 0.3162 1.3
2101. 3440 3446 3458 3461 3471 3474 3485 3486 5303 5306 5309 5388 5703 -
2102. 5705 UNI GX -0.82
2103. 3449 UNI GX -0.82 1.2 5.1301
2104. 3449 UNI GX -0.82 0 1.2
2105. 5414 UNI GX -0.82 0 0.1201
2106. 3437 UNI GX -0.82 0 3.5799
2107. 130 2298 3949 3957 3958 3968 3979 3980 3987 3988 4066 4350 4358 5246 5249 -
2108. 5619 5717 5719 5886 5943 5947 UNI GX 0.35
2109. 3947 3948 3953 3956 3964 3967 3989 3990 5617 5618 5877 5878 5937 -
2110. 5939 UNI GX 0.82
2111. ******************************************************************************
2112. *ROOF
2113. *3489 TO 3492 3993 TO 3996 4535 4537 4539 4541 UNI Y 0.42
2114. *3537 TO 3540 3648 TO 3651 3761 TO 3764 3842 TO 3845 3910 TO 3913 4102 4103 -
2115. *4105 4107 4108 4110 4543 TO 4546 UNI Y 0.84
2116. ************************************************************
2117. *LOAD ON INTERNAL FRAMES
2118. 3539 3540 3650 3651 3761 3762 3842 3843 3910 3911 CON Y 1.4 1.375
2119. 4102 4103 4105 4107 4108 4110 4543 TO 4546 CON Y 1.4 0.249
2120. 4102 4103 4105 4107 4108 4110 4543 TO 4546 CON Y 1.4 1.624
2121. 3537 3538 3648 3649 3763 3764 3844 3845 3912 3913 CON Y 1.4 0.51
2122. 3537 3538 3648 3649 3763 3764 3844 3845 3912 3913 CON Y 1.4 1.885
2123. JOINT LOAD
2124. 1231 1258 1259 1310 1311 1344 1345 1378 1379 1411 1412 1453 FY 0.7
2125. 1242 1292 1348 1382 1415 FY 1.4
2126. *LOAD ON EXTERNAL FRAMES
2127. MEMBER LOAD
2128. 3489 3490 3993 3994 CON Y 0.7 1.375
2129. 4535 4537 4539 4541 CON Y 0.7 0.249
2130. 4535 4537 4539 4541 CON Y 0.7 1.624
2131. 3491 3492 3995 3996 CON Y 0.7 0.51
2132. 3491 3492 3995 3996 CON Y 0.7 1.885
2133. ******************************************************************
2134. *STAIR WIND LOAD
2135. 5160 5164 5165 5199 5206 UNI GZ 0.02
2136. 5163 5166 5175 5178 UNI GZ 0.04
2137. 5176 5177 5180 5207 UNI GZ 0.01
2138. JOINT LOAD
2139. 1227 1228 1449 1450 FY 0.35
2140. MEMBER LOAD
2141. 5230 TO 5235 5245 5248 5251 5254 UNI GZ 0.02
2142. 5242 5244 5257 5259 5261 5264 5276 TO 5285 5288 5290 5292 5302 5304 5305 5307 -
2143. 5308 5310 5472 5476 5690 5691 5722 5729 5738 5740 5743 5746 5749 5752 5755 -
2144. 5758 UNI GZ 0.04
2145. 5273 UNI GZ 0.04 3 4.8
2146. 5273 UNI GZ 0.04 0 3
2147. 5478 UNI GZ 0.04 1.8 3.6
2148. 5478 UNI GZ 0.04 0 1.8
2149. 5243 UNI GZ 0.04 0 1.2
2150. 5475 UNI GZ 0.04 1.8 3.6
2151. 5475 UNI GZ 0.04 0 1.8
```

```
2152. 5267 UNI GZ 0.04 0 1.2
2153. ******************************************************************************
2154. LOAD 10 LOADTYPE WIND  TITLE WIND LOAD IN +Z DIR (CP = -0.55)
2155. MEMBER LOAD
2156. *WINDWARD WALL
2157. 3441 3450 3462 3484 3949 3957 3968 3979 3988 5246 5249 5387 5619 5701 5719 -
2158. 5947 UNI GZ -0.42
2159. 3475 UNI GZ -0.42 2.336 3.504
2160. 3475 UNI GZ -0.42 0 2.336
2161. 3541 TO 3543 3545 3547 3551 3555 3897 3899 3901 3905 3909 4092 4436 5252 -
2162. 5255 UNI GZ -0.84
2163. 3652 TO 3654 3656 3659 3664 3668 3825 3826 3829 3832 3837 3841 4347 -
2164. 4438 UNI GZ -0.84
2165. 3746 TO 3748 3750 3752 3756 3760 4099 UNI GZ -0.84
2166. *LEEWARD WALL
2167. 97 130 2298 3483 3958 3980 3987 4066 4348 4350 4358 4360 5698 5717 5881 5886 -
2168. 5943 UNI GZ 0.076
2169. 3451 UNI GZ 0.076 1.3 1.5472
2170. 3451 UNI GZ 0.076 0 0.3162
2171. 3451 UNI GZ 0.076 0.3162 1.3
2172. 3544 3546 3554 3655 3658 3660 3661 3667 3749 3759 3828 3831 3833 3834 3840 -
2173. 3908 4349 4663 4665 4666 5610 5611 5613 5882 5888 UNI GZ 0.153
2174. 2956 UNI GZ 0.153 0.728001 3.203
2175. 2956 UNI GZ 0.153 0 0.728001
2176. 3548 UNI GZ 0.153 1.475 1.6191
2177. 3548 UNI GZ 0.153 0 1.475
2178. 3900 UNI GZ 0.153 0.0854988 1.5605
2179. 3900 UNI GZ 0.153 0 0.0854988
2180. *SIDEWALL
2181. 97 3441 3450 3462 3483 3484 4348 4360 5387 5698 5701 5881 UNI GX -0.042
2182. 3475 UNI GX -0.042 2.336 3.504
2183. 3475 UNI GX -0.042 0 2.336
2184. 3451 UNI GX -0.042 1.3 1.5472
2185. 3451 UNI GX -0.042 0 0.3162
2186. 3451 UNI GX -0.042 0.3162 1.3
2187. 3440 3446 3458 3461 3471 3474 3485 3486 5303 5306 5309 5388 5703 -
2188. 5705 UNI GX -0.098
2189. 3449 UNI GX -0.098 1.2 5.1301
2190. 3449 UNI GX -0.098 0 1.2
2191. 5414 UNI GX -0.098 0 0.1201
2192. 3437 UNI GX -0.098 0 3.5799
2193. 130 2298 3949 3957 3958 3968 3979 3980 3987 3988 4066 4350 4358 5246 5249 -
2194. 5619 5717 5719 5886 5943 5947 UNI GX 0.042
2195. 3947 3948 3953 3956 3964 3967 3989 3990 5617 5618 5877 5878 5937 -
2196. 5939 UNI GX 0.098
2197. *ROOF
2198. *3489 TO 3492 3993 TO 3996 4535 4537 4539 4541 UNI Y 0.08
2199. *3537 TO 3540 3648 TO 3651 3761 TO 3764 3842 TO 3845 3910 TO 3913 4102 4103 -
2200. *4105 4107 4108 4110 4543 TO 4546 UNI Y 0.16
2201. ******************************************************************************8
2202. ************************************************************
2203. *LOAD ON INTERNAL FRAMES
2204. 3539 3540 3650 3651 3761 3762 3842 3843 3910 3911 CON Y 0.4 1.375
2205. 4102 4103 4105 4107 4108 4110 4543 TO 4546 CON Y 0.4 0.249
2206. 4102 4103 4105 4107 4108 4110 4543 TO 4546 CON Y 0.4 1.624
2207. 3537 3538 3648 3649 3763 3764 3844 3845 3912 3913 CON Y 0.4 0.51
```

```
2208. 3537 3538 3648 3649 3763 3764 3844 3845 3912 3913 CON Y 0.4 1.885
2209. JOINT LOAD
2210. 1231 1258 1259 1310 1311 1344 1345 1378 1379 1411 1412 1453 FY 0.2
2211. 1242 1292 1348 1382 1415 FY 0.4
2212. *LOAD ON EXTERNAL FRAMES
2213. MEMBER LOAD
2214. 3489 3490 3993 3994 CON Y 0.2 1.375
2215. 4535 4537 4539 4541 CON Y 0.2 0.249
2216. 4535 4537 4539 4541 CON Y 0.2 1.624
2217. 3491 3492 3995 3996 CON Y 0.2 0.51
2218. 3491 3492 3995 3996 CON Y 0.2 1.885
2219. ************************************************************************
2220. *STAIR WIND LOAD
2221. 5160 5164 5165 5199 5206 UNI GZ 0.02
2222. 5163 5166 5175 5178 UNI GZ 0.04
2223. 5176 5177 5180 5207 UNI GZ 0.01
2224. MEMBER LOAD
2225. 5230 TO 5235 5245 5248 5251 5254 UNI GZ 0.02
2226. 5242 5244 5257 5259 5261 5264 5276 TO 5285 5288 5290 5292 5302 5304 5305 5307 -
2227. 5308 5310 5472 5476 5690 5691 5722 5729 5738 5740 5743 5746 5749 5752 5755 -
2228. 5758 UNI GZ 0.04
2229. 5273 UNI GZ 0.04 3 4.8
2230. 5273 UNI GZ 0.04 0 3
2231. 5478 UNI GZ 0.04 1.8 3.6
2232. 5478 UNI GZ 0.04 0 1.8
2233. 5243 UNI GZ 0.04 0 1.2
2234. 5475 UNI GZ 0.04 1.8 3.6
2235. 5475 UNI GZ 0.04 0 1.8
2236. 5267 UNI GZ 0.04 0 1.2
2237. JOINT LOAD
2238. 1227 1228 1449 1450 FY 0.1
2239. ************************************************************************
2240. LOAD 11 LOADTYPE DEAD  TITLE EQUIPMENT DEAD LOAD
2241. **************CONC. STORAGE BLDG************************************************
2242. *3T CAP. MONORAIL LOAD FOR TRIPPER CONVEYOR
2243. JOINT LOAD
2244. 1626 1628 1630 1632 1634 1689 1695 FY -5
2245. MEMBER LOAD
2246. 4856 CON GY -5 1.9
2247. *3360-CNV-001 SHORT POST LOAD
2248. 5189 CON GY -0.65 0.55
2249. 5186 CON GY -0.65 0.55
2250. 5189 CON GZ 0.15 0.55
2251. 5186 CON GZ 0.15 0.55
2252. 5189 CON GX 0.1 0.55
2253. 5186 CON GX 0.1 0.55
2254. ************************************************************************
2255. *HEAD PULLEY FRAME(3360-CNV-001) LOAD ON STORAGE BLDG
2256. JOINT LOAD
2257. 1580 1582 FY 1.52 FZ 2.23
2258. MEMBER LOAD
2259. 4515 4518 CON GY -4 1.5
2260. 4515 4518 CON GZ 1.6 1.5
2261. 4515 4518 CON GY -4 2.4
2262. 4515 4518 CON GZ 3.7 2.4
2263. *CONC. FILTRATION BLDG*****************************************
```

```
2264. *FILTER PRESS EMPTY LOAD**************************
2265. MEMBER LOAD
2266. 5450 5462 CON GY -5.2 0.685
2267. 5453 5471 CON GY -2.3 0.685
2268. 5456 5465 CON GY -20 0.685
2269. 5459 5468 CON GY -7.6 0.685
2270. 5436 5446 CON GY -0.4 1.2
2271. 5454 5470 CON GY -0.9 1.795
2272. 5444 5464 CON GY -0.4 1.19
2273. 5438 5443 CON GY -0.4 5
2274. 5438 5443 CON GY -0.9 3.05
2275. 5440 5442 CON GY -0.4 0.58
2276. **DEAD LOAD OF 3350-CNV-001*****************************************************
2277. 5392 5404 CON GY -2.5 4.09
2278. 5392 5404 CON GX 1.9 4.09
2279. 5394 5406 CON GY -0.8 1.66
2280. 5394 5406 CON GX -1.1 1.66
2281. 5394 5406 CON GY -1.54 4.485
2282. 5394 5406 CON GX -0.07 4.485
2283. 5394 5406 CON GZ 0.05 4.485
2284. 5396 5408 CON GY -1.2 1.96
2285. 5396 5408 CON GX -0.3 1.96
2286. 5396 5408 CON GY -1.5 4.95
2287. 5396 5408 CON GX 0.18 4.95
2288. 5398 5410 CON GY -1.13 1.95
2289. 5398 5410 CON GX 0.16 1.95
2290. 5398 5410 CON GY -1.6 4.635
2291. 5398 5410 CON GX 0.4 4.635
2292. 5402 5412 CON GY 0.16 2.035
2293. 5402 5412 CON GX 1.25 2.035
2294. 5402 5412 CMOM GX 0.5 2.035
2295. 5402 5412 CMOM GY -0.5 2.035
2296. 5402 5412 CMOM GZ 0.2 2.035
2297. JOINT LOAD
2298. 1944 1950 FX -2.5 FY -4.65 FZ 0.08 MX -1.52 MY 1.1 MZ 1.5
2299. ********************************************************************
2300. *TAIL PULLEY FRAME LOAD 3360-CNV-001
2301. MEMBER LOAD
2302. 5684 CON GY -6.8 0.389998
2303. 4462 CON GY -6.8 2.49
2304. 5684 CON GZ -4.2 0.389998
2305. 4462 CON GZ -4.2 2.49
2306. 5684 CON GY 4.7 1.39
2307. 5627 CON GY 4.7 0.98
2308. 5684 CON GZ -3.5 1.39
2309. 5627 CON GZ -3.5 0.98
2310. 4463 CON GY -1 2.689
2311. 5674 CON GY -1 0.589001
2312. 4463 CON GZ 0.2 2.689
2313. 5674 CON GZ 0.2 0.589001
2314. 4463 CON GX 0.2 2.689
2315. 5674 CON GX 0.2 0.589001
2316. 4463 4465 CON GY -1 1.189
2317. 4463 4465 CON GX 0.2 1.189
2318. 4463 4465 CON GZ 0.2 1.189
2319. *4463 4465 CON GY -4.46 0.839
```

```
2320. *4463 4465 CON GZ 2.24 0.839
2321. *4463 4465 CON GX 0.2 0.839
2322. *4488 4489 CON GY -4.46 3.74
2323. *4488 4489 CON GZ -2.24 3.74
2324. *4488 4489 CON GX 0.2 3.74
2325. ************************************************
2326. *3360-CNV-001 SHORT POST LOAD
2327. 5655 CON GY -0.65 1.624
2328. 5648 CON GY -0.65 1.624
2329. 5655 CON GZ 0.15 1.624
2330. 5648 CON GZ 0.15 1.624
2331. 5655 CON GX 0.09 1.624
2332. 5648 CON GX 0.09 1.624
2333. 4488 4489 CON GY -0.65 1.024
2334. 4488 4489 CON GZ 0.15 1.024
2335. 4488 4489 CON GX 0.09 1.024
2336. 4462 4464 CON GY -0.65 0.33
2337. 4462 4464 CON GZ 0.1 0.33
2338. 4462 4464 CON GX 0.06 0.33
2339. 4472 4473 CON GY -0.65 0.3
2340. 4472 4473 CON GZ 0.1 0.3
2341. 4472 4473 CON GX 0.06 0.3
2342. ***FILTER PRESS CHUTE LOAD*******************
2343. JOINT LOAD
2344. 1914 1916 1917 1919 FY -1.
2345. MEMBER LOAD
2346. 5341 5344 CON GY -1 2.7
2347. 5341 5344 CON GY -1 5.4
2348. 5342 5343 CON GY -1 2.3
2349. ****************************************************************
2350. LOAD 12 LOADTYPE DEAD  TITLE EQUIPMENT LIVE LOAD
2351. **************CONC. STORAGE BLDG************************************************
2352. MEMBER LOAD
2353. *3360-CNV-001 SHORT POST LOAD
2354. 5189 CON GY -0.3 0.55
2355. 5186 CON GY -0.3 0.55
2356. 5189 CON GZ 0.15 0.55
2357. 5186 CON GZ 0.15 0.55
2358. 5189 CON GX 0.1 0.55
2359. 5186 CON GX 0.1 0.55
2360. *FILTER PRESS MAX CAKE LOAD**********************************************
2361. MEMBER LOAD
2362. 5450 5462 CON GY -4.4 0.685
2363. 5453 5471 CON GY -4.3 0.685
2364. 5456 5465 CON GY -24.4 0.685
2365. 5459 5468 CON GY -5.5 0.685
2366. 5450 5462 CON GX 1.5 0.685
2367. 5453 5471 CON GX 1.5 0.685
2368. 5456 5465 CON GX 1.5 0.685
2369. 5459 5468 CON GX 1.5 0.685
2370. ************************************************
2371. *3360-CNV-001 SHORT POST LOAD
2372. 5655 CON GY -0.3 1.624
2373. 5648 CON GY -0.3 1.624
2374. 5655 CON GZ 0.15 1.624
2375. 5648 CON GZ 0.15 1.624
```

```
2376. 5655 CON GX 0.09 1.624
2377. 5648 CON GX 0.09 1.624
2378. 4488 4489 CON GY -0.3 1.024
2379. 4488 4489 CON GZ 0.15 1.024
2380. 4488 4489 CON GX 0.09 1.024
2381. 4462 4464 CON GY -0.3 0.33
2382. 4462 4464 CON GZ 0.1 0.33
2383. 4462 4464 CON GX 0.06 0.33
2384. 4472 4473 CON GY -0.3 0.3
2385. 4472 4473 CON GZ 0.1 0.3
2386. 4472 4473 CON GX 0.06 0.3
2387. ************************************************************************
2388. *3360-CNV-001 BUFFER LOAD
2389. JOINT LOAD
2390. 1567 1569 FZ 4
2391. ***FILTER PRESS CHUTE LOAD*******************
2392. JOINT LOAD
2393. 1914 1916 1917 1919 FY -13
2394. MEMBER LOAD
2395. 5341 5344 CON GY -13 2.7
2396. 5341 5344 CON GY -13 5.4
2397. 5342 5343 CON GY -13 2.3
2398. ************************************************************************
2399. **LIVE LOAD OF 3350-CNV-001*****************************************************
2400. MEMBER LOAD
2401. 5392 5404 CON GY -3.4 4.09
2402. 5392 5404 CON GX 2 4.09
2403. 5394 5406 CON GY -1.6 1.66
2404. 5394 5406 CON GX -1.1 1.66
2405. 5394 5406 CON GY -2.3 4.485
2406. 5394 5406 CON GX -0.05 4.485
2407. 5394 5406 CON GZ 0.05 4.485
2408. 5396 5408 CON GY -2.1 1.96
2409. 5396 5408 CON GX -0.33 1.96
2410. 5396 5408 CON GY -2.34 4.95
2411. 5396 5408 CON GX 0.2 4.95
2412. 5398 5410 CON GY -1.9 1.95
2413. 5398 5410 CON GX 0.15 1.95
2414. 5398 5410 CON GY -2.3 4.635
2415. 5398 5410 CON GX 0.4 4.635
2416. 5402 5412 CON GY -0.7 2.035
2417. 5402 5412 CON GX 1.22 2.035
2418. 5402 5412 CMOM GX 0.5 2.035
2419. 5402 5412 CMOM GY -0.5 2.035
2420. 5402 5412 CMOM GZ -0.2 2.035
2421. JOINT LOAD
2422. 1944 1950 FX -2.5 FY -5.3 FZ 0.08 MX -1.5 MY 1.1 MZ 1.7
2423. ************************************************************************
2424. LOAD 13 LOADTYPE SEISMIC  TITLE SEISMIC DEAD LOAD IN X DIR
2425. JOINT LOAD
2426. 51 FX 0.21
2427. 1197 FX 0.16
2428. 1200 FX 0.23
2429. 1201 FX 0.05
2430. 1203 FX 0.17
2431. 1209 FX 0.22
```

2432. 1212 FX 0.1
2433. 1216 FX 0.16
2434. 1218 FX 0.21
2435. 1220 1221 FX 0.1
2436. 1222 1430 1431 1444 FX 0.13
2437. 1224 1433 1434 1446 FX 0.1
2438. 1220 1221 1225 1226 FX 0.09
2439. 1227 FX 0.03
2440. 1228 FX 0.04
2441. 1249 FX 0.73
2442. 1251 FX 0.22
2443. 1254 1255 FX 0.11
2444. 1254 TO 1257 FX 0.06
2445. 1258 FX 0.1
2446. 1259 FX 0.1
2447. 1271 FX 0.72
2448. 1272 FX 0.19
2449. 1282 FX 0.71
2450. 1283 FX 0.24
2451. 1296 FX 0.85
2452. 1299 FX 0.74
2453. 1301 2057 FX 0.13
2454. 1302 FX 0.26
2455. 1306 1307 FX 0.13
2456. 1306 TO 1309 FX 0.13
2457. 1310 FX 0.1
2458. 1311 FX 0.1
2459. 1321 FX 0.57
2460. 1322 FX 0.22
2461. 1335 FX 0.56
2462. 1337 FX 0.22
2463. 1340 1341 FX 0.13
2464. 1340 TO 1343 FX 0.06
2465. 1344 FX 0.11
2466. 1345 FX 0.1
2467. 1357 FX 0.59
2468. 1358 FX 0.41
2469. 1367 FX 0.53
2470. 1369 2058 FX 0.13
2471. 1370 FX 0.49
2472. 1374 1375 FX 0.12
2473. 1374 TO 1377 FX 0.13
2474. 1378 FX 0.1
2475. 1379 FX 0.1
2476. 1390 FX 0.92
2477. 1391 FX 0.28
2478. 1392 FX 0.27
2479. 1398 FX 0.45
2480. 1402 FX 0.31
2481. 1404 FX 0.31
2482. 1407 1408 FX 0.13
2483. 1407 TO 1410 FX 0.06
2484. 1411 FX 0.1
2485. 1412 FX 0.1
2486. 1428 FX 0.12
2487. 1434 FX 0.03

```
2488. 1440 FX 0.06
2489. 1430 1442 FX 0.06
2490. 1430 1434 1442 1443 1448 FX 0.08
2491. 1449 FX 0.05
2492. 1450 FX 0.05
2493. 1472 FX 0.89
2494. 1475 FX 0.86
2495. 1476 FX 0.85
2496. 1480 FX 0.59
2497. 1483 FX 0.53
2498. 1484 FX 0.19
2499. 1485 FX 0.21
2500. 1520 FX 0.2
2501. 1869 FX 0.07
2502. 1870 FX 0.06
2503. 1871 FX 0.02
2504. 1873 FX 0.01
2505. 1874 FX 0.02
2506. 1875 FX 0.03
2507. 1877 FX 0.03
2508. 1878 FX 0.04
2509. 1879 FX 0.05
2510. 1880 FX 0.04
2511. 1881 FX 0.01
2512. 1882 FX 0.03
2513. 1883 FX 0.02
2514. 1884 FX 0.24
2515. 1891 FX 0.02
2516. 1893 FX 0.05
2517. 1894 FX 0.03
2518. 1895 FX 0.03
2519. 1896 FX 0.03
2520. 1898 FX 0.03
2521. 1899 FX 0.01
2522. 1904 FX 0.03
2523. 1905 FX 0.04
2524. 1908 FX 0.03
2525. 1909 FX 0.04
2526. 1943 FX 0.25
2527. 1976 FX 0.51
2528. 2037 FX 0.38
2529. **********
2530. LOAD 14 LOADTYPE SEISMIC  TITLE SEISMIC DEAD+LIVE LOAD IN X DIR
2531. JOINT LOAD
2532. 51 FX 0.21
2533. 1197 FX 0.28
2534. 1200 FX 0.5
2535. 1201 FX 0.05
2536. 1203 FX 0.33
2537. 1209 FX 0.37
2538. 1212 FX 0.2
2539. 1216 FX 0.35
2540. 1218 FX 0.36
2541. 1220 1221 FX 0.21
2542. 1222 1430 1431 1444 FX 0.3
2543. 1224 1433 1434 1446 FX 0.16
```

```
2544. 1220 1221 1225 1226 FX 0.2
2545. 1227 FX 0.04
2546. 1228 FX 0.04
2547. 1249 FX 1.57
2548. 1251 FX 0.4
2549. 1254 1255 FX 0.17
2550. 1254 TO 1257 FX 0.12
2551. 1258 FX 0.1
2552. 1259 FX 0.1
2553. 1271 FX 1.55
2554. 1272 FX 0.39
2555. 1282 FX 1.61
2556. 1283 FX 0.5
2557. 1296 FX 1.91
2558. 1299 FX 1.6
2559. 1301 2057 FX 0.14
2560. 1302 FX 0.44
2561. 1306 1307 FX 0.15
2562. 1306 TO 1309 FX 0.16
2563. 1310 FX 0.1
2564. 1311 FX 0.1
2565. 1321 FX 1.29
2566. 1322 FX 0.45
2567. 1335 FX 1.35
2568. 1337 FX 0.39
2569. 1340 1341 FX 0.13
2570. 1340 TO 1343 FX 0.06
2571. 1344 FX 0.11
2572. 1345 FX 0.11
2573. 1357 FX 1.12
2574. 1358 FX 0.92
2575. 1367 FX 1.01
2576. 1369 2058 FX 0.13
2577. 1370 FX 1.01
2578. 1374 1375 FX 0.12
2579. 1374 TO 1377 FX 0.13
2580. 1378 FX 0.1
2581. 1379 FX 0.09
2582. 1390 FX 1.57
2583. 1391 FX 0.65
2584. 1392 FX 0.63
2585. 1398 FX 0.91
2586. 1402 FX 0.73
2587. 1404 FX 0.68
2588. 1407 1408 FX 0.13
2589. 1407 TO 1410 FX 0.06
2590. 1411 FX 0.1
2591. 1412 FX 0.1
2592. 1428 FX 0.28
2593. 1434 FX 0.03
2594. 1440 FX 0.12
2595. 1430 1442 FX 0.06
2596. 1430 1434 1442 1443 1448 FX 0.08
2597. 1449 FX 0.05
2598. 1450 FX 0.05
2599. 1472 FX 2.13
```

```
2600. 1475 FX 2.07
2601. 1476 FX 2.16
2602. 1480 FX 1.46
2603. 1483 FX 1.58
2604. 1484 FX 0.43
2605. 1485 FX 0.45
2606. 1520 FX 0.21
2607. 1869 FX 0.24
2608. 1870 FX 0.23
2609. 1871 FX 0.05
2610. 1873 FX 0.02
2611. 1874 FX 0.04
2612. 1875 FX 0.09
2613. 1877 FX 0.08
2614. 1878 FX 0.09
2615. 1879 FX 0.18
2616. 1880 FX 0.09
2617. 1881 FX 0.01
2618. 1882 FX 0.03
2619. 1883 FX 0.05
2620. 1884 FX 0.5
2621. 1891 FX 0.04
2622. 1893 FX 0.19
2623. 1894 FX 0.09
2624. 1895 FX 0.07
2625. 1896 FX 0.08
2626. 1898 FX 0.13
2627. 1899 FX 0.01
2628. 1904 FX 0.09
2629. 1905 FX 0.1
2630. 1908 FX 0.09
2631. 1909 FX 0.13
2632. 1943 FX 0.53
2633. 1976 FX 0.94
2634. 2037 FX 0.71
2635. *************************
2636. ********************************************************************************
2637. LOAD 15 LOADTYPE SEISMIC  TITLE SEISMIC DEAD LOAD IN Z DIR
2638. JOINT LOAD
2639. 51 FZ 0.21
2640. 1197 FZ 0.16
2641. 1200 FZ 0.23
2642. 1201 FZ 0.05
2643. 1203 FZ 0.17
2644. 1209 FZ 0.22
2645. 1212 FZ 0.1
2646. 1216 FZ 0.16
2647. 1218 FZ 0.21
2648. 1220 1221 FZ 0.1
2649. 1222 1430 1431 1444 FZ 0.13
2650. 1224 1433 1434 1446 FZ 0.1
2651. 1220 1221 1225 1226 FZ 0.09
2652. 1227 FZ 0.03
2653. 1228 FZ 0.04
2654. 1249 FZ 0.73
2655. 1251 FZ 0.22
```

2656. 1254 1255 FZ 0.11
2657. 1254 TO 1257 FZ 0.06
2658. 1258 FZ 0.1
2659. 1259 FZ 0.1
2660. 1271 FZ 0.72
2661. 1272 FZ 0.19
2662. 1282 FZ 0.71
2663. 1283 FZ 0.24
2664. 1296 FZ 0.85
2665. 1299 FZ 0.74
2666. 1301 2057 FZ 0.13
2667. 1302 FZ 0.26
2668. 1306 1307 FZ 0.13
2669. 1306 TO 1309 FZ 0.13
2670. 1310 FZ 0.1
2671. 1311 FZ 0.1
2672. 1321 FZ 0.57
2673. 1322 FZ 0.22
2674. 1335 FZ 0.56
2675. 1337 FZ 0.22
2676. 1340 1341 FZ 0.13
2677. 1340 TO 1343 FZ 0.06
2678. 1344 FZ 0.11
2679. 1345 FZ 0.1
2680. 1357 FZ 0.59
2681. 1358 FZ 0.41
2682. 1367 FZ 0.53
2683. 1369 2058 FZ 0.13
2684. 1370 FZ 0.49
2685. 1374 1375 FZ 0.12
2686. 1374 TO 1377 FZ 0.13
2687. 1378 FZ 0.1
2688. 1379 FZ 0.1
2689. 1390 FZ 0.92
2690. 1391 FZ 0.28
2691. 1392 FZ 0.27
2692. 1398 FZ 0.45
2693. 1402 FZ 0.31
2694. 1404 FZ 0.31
2695. 1407 1408 FZ 0.13
2696. 1407 TO 1410 FZ 0.06
2697. 1411 FZ 0.1
2698. 1412 FZ 0.1
2699. 1428 FZ 0.12
2700. 1434 FZ 0.03
2701. 1440 FZ 0.06
2702. 1430 1442 FZ 0.06
2703. 1430 1434 1442 1443 1448 FZ 0.08
2704. 1449 FZ 0.05
2705. 1450 FZ 0.05
2706. 1472 FZ 0.89
2707. 1475 FZ 0.86
2708. 1476 FZ 0.85
2709. 1480 FZ 0.59
2710. 1483 FZ 0.53
2711. 1484 FZ 0.19

```
2712. 1485 FZ 0.21
2713. 1520 FZ 0.2
2714. 1869 FZ 0.07
2715. 1870 FZ 0.06
2716. 1871 FZ 0.02
2717. 1873 FZ 0.01
2718. 1874 FZ 0.02
2719. 1875 FZ 0.03
2720. 1877 FZ 0.03
2721. 1878 FZ 0.04
2722. 1879 FZ 0.05
2723. 1880 FZ 0.04
2724. 1881 FZ 0.01
2725. 1882 FZ 0.03
2726. 1883 FZ 0.02
2727. 1884 FZ 0.24
2728. 1891 FZ 0.02
2729. 1893 FZ 0.05
2730. 1894 FZ 0.03
2731. 1895 FZ 0.03
2732. 1896 FZ 0.03
2733. 1898 FZ 0.03
2734. 1899 FZ 0.01
2735. 1904 FZ 0.03
2736. 1905 FZ 0.04
2737. 1908 FZ 0.03
2738. 1909 FZ 0.04
2739. 1943 FZ 0.25
2740. 1976 FZ 0.51
2741. 2037 FZ 0.38
2742. **********
2743. LOAD 16 LOADTYPE SEISMIC  TITLE SEISMIC DEAD+LIVE LOAD IN Z DIR
2744. JOINT LOAD
2745. 51 FZ 0.21
2746. 1197 FZ 0.28
2747. 1200 FZ 0.5
2748. 1201 FZ 0.05
2749. 1203 FZ 0.33
2750. 1209 FZ 0.37
2751. 1212 FZ 0.2
2752. 1216 FZ 0.35
2753. 1218 FZ 0.36
2754. 1220 1221 FZ 0.21
2755. 1222 1430 1431 1444 FZ 0.3
2756. 1224 1433 1434 1446 FZ 0.16
2757. 1220 1221 1225 1226 FZ 0.2
2758. 1227 FZ 0.04
2759. 1228 FZ 0.04
2760. 1249 FZ 1.57
2761. 1251 FZ 0.4
2762. 1254 1255 FZ 0.17
2763. 1254 TO 1257 FZ 0.12
2764. 1258 FZ 0.1
2765. 1259 FZ 0.1
2766. 1271 FZ 1.55
2767. 1272 FZ 0.39
```

2768. 1282 FZ 1.61
2769. 1283 FZ 0.5
2770. 1296 FZ 1.91
2771. 1299 FZ 1.6
2772. 1301 2057 FZ 0.14
2773. 1302 FZ 0.44
2774. 1306 1307 FZ 0.15
2775. 1306 TO 1309 FZ 0.16
2776. 1310 FZ 0.1
2777. 1311 FZ 0.1
2778. 1321 FZ 1.29
2779. 1322 FZ 0.45
2780. 1335 FZ 1.35
2781. 1337 FZ 0.39
2782. 1340 1341 FZ 0.13
2783. 1340 TO 1343 FZ 0.06
2784. 1344 FZ 0.11
2785. 1345 FZ 0.11
2786. 1357 FZ 1.12
2787. 1358 FZ 0.92
2788. 1367 FZ 1.01
2789. 1369 2058 FZ 0.13
2790. 1370 FZ 1.01
2791. 1374 1375 FZ 0.12
2792. 1374 TO 1377 FZ 0.13
2793. 1378 FZ 0.1
2794. 1379 FZ 0.09
2795. 1390 FZ 1.57
2796. 1391 FZ 0.65
2797. 1392 FZ 0.63
2798. 1398 FZ 0.91
2799. 1402 FZ 0.73
2800. 1404 FZ 0.68
2801. 1407 1408 FZ 0.13
2802. 1407 TO 1410 FZ 0.06
2803. 1411 FZ 0.1
2804. 1412 FZ 0.1
2805. 1428 FZ 0.28
2806. 1434 FZ 0.03
2807. 1440 FZ 0.12
2808. 1430 1442 FZ 0.06
2809. 1430 1434 1442 1443 1448 FZ 0.08
2810. 1449 FZ 0.05
2811. 1450 FZ 0.05
2812. 1472 FZ 2.13
2813. 1475 FZ 2.07
2814. 1476 FZ 2.16
2815. 1480 FZ 1.46
2816. 1483 FZ 1.58
2817. 1484 FZ 0.43
2818. 1485 FZ 0.45
2819. 1520 FZ 0.21
2820. 1869 FZ 0.24
2821. 1870 FZ 0.23
2822. 1871 FZ 0.05
2823. 1873 FZ 0.02

```
2824. 1874 FZ 0.04
2825. 1875 FZ 0.09
2826. 1877 FZ 0.08
2827. 1878 FZ 0.09
2828. 1879 FZ 0.18
2829. 1880 FZ 0.09
2830. 1881 FZ 0.01
2831. 1882 FZ 0.03
2832. 1883 FZ 0.05
2833. 1884 FZ 0.5
2834. 1891 FZ 0.04
2835. 1893 FZ 0.19
2836. 1894 FZ 0.09
2837. 1895 FZ 0.07
2838. 1896 FZ 0.08
2839. 1898 FZ 0.13
2840. 1899 FZ 0.01
2841. 1904 FZ 0.09
2842. 1905 FZ 0.1
2843. 1908 FZ 0.09
2844. 1909 FZ 0.13
2845. 1943 FZ 0.53
2846. 1976 FZ 0.94
2847. 2037 FZ 0.71
2848. **************************
2849. LOAD 17 LOADTYPE CRANE HOOK  TITLE CRANE LOAD 4
2850. ******************************************************************************
2851. *WHEEL LOAD = 1.25*(8) = 10T { 25% IMPACT)
2852. *LATERAL FORCE = 20% OF 16/4 = 0.8 T PER WHEEL
2853. JOINT LOAD
2854. 1374 TO 1376 FY -10 FZ 0.8
2855. MEMBER LOAD
2856. 3862 CON GY -10 1.15
2857. 3862 CON GZ 0.8 1.15
2858. ******************************************************************************
2859. LOAD 18 LOADTYPE CRANE HOOK  TITLE CRANE LOAD 5
2860. ******************************************************************************
2861. JOINT LOAD
2862. 1306 TO 1308 FY -10 FZ 0.8
2863. MEMBER LOAD
2864. 3710 CON GY -10 0.75
2865. 3710 CON GZ 0.8 0.75
2866. ******************************************************************************
2867. LOAD 19 LOADTYPE CRANE HOOK  TITLE CRANE LOAD 6
2868. ******************************************************************************
2869. JOINT LOAD
2870. 1340 TO 1342 FY -10 FZ 0.8
2871. MEMBER LOAD
2872. 3803 CON GY -10 0.75
2873. 3803 CON GZ 0.8 0.75
2874. ******************************************************************************
2875. PERFORM ANALYSIS PRINT STATICS CHECK
```

P R O B L E M S T A T I S T I C S

NUMBER OF JOINTS 1179 NUMBER OF MEMBERS 2458
NUMBER OF PLATES 32 NUMBER OF SOLIDS 0
NUMBER OF SURFACES 0 NUMBER OF SUPPORTS 53

SOLVER USED IS THE OUT-OF-CORE BASIC SOLVER

ORIGINAL/FINAL BAND-WIDTH= 1058/ 79/ 474 DOF
TOTAL PRIMARY LOAD CASES = 19, TOTAL DEGREES OF FREEDOM = 6925
TOTAL LOAD COMBINATION CASES = 0 SO FAR.
SIZE OF STIFFNESS MATRIX = 3283 DOUBLE KILO-WORDS
REQRD/AVAIL. DISK SPACE = 54.4/ 165858.9 MB

STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO. 1
LOADTYPE DEAD TITLE DEAD LOAD

CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.165052562E+02
Y = 0.118839793E+02
Z = 0.498976752E+02

***TOTAL APPLIED LOAD (MTON METE) SUMMARY (LOADING 1)
SUMMATION FORCE-X = 0.00
SUMMATION FORCE-Y = -685.45
SUMMATION FORCE-Z = 0.00

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= 34202.38 MY= 0.00 MZ= -11313.54

***TOTAL REACTION LOAD(MTON METE) SUMMARY (LOADING 1)
SUMMATION FORCE-X = 0.00
SUMMATION FORCE-Y = 685.45
SUMMATION FORCE-Z = 0.00

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= -34202.38 MY= 0.00 MZ= 11313.54

MAXIMUM DISPLACEMENTS (CM /RADIANS) (LOADING 1)

	MAXIMUMS	AT NODE
X	-2.49512E-01	658
Y	-4.68153E+00	1690
Z	1.87461E-01	1309
RX	2.38789E-03	1488
RY	8.30515E-04	513
RZ	2.38373E-03	1933

STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO. 2
LOADTYPE LIVE TITLE LIVE LOAD

CENTER OF FORCE BASED ON X FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.260250027E+02
Y = -0.283478975E+08
Z = 0.542499986E+02

CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.168857176E+02
Y = 0.989997598E+01
Z = 0.604165258E+02

CENTER OF FORCE BASED ON Z FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.252499995E+02
Y = -0.148186313E+06
Z = 0.544909008E+02

***TOTAL APPLIED LOAD (MTON METE) SUMMARY (LOADING 2)
SUMMATION FORCE-X = 0.00
SUMMATION FORCE-Y = -381.57
SUMMATION FORCE-Z = 0.00

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= 23053.30 MY= 0.00 MZ= -6443.13

***TOTAL REACTION LOAD(MTON METE) SUMMARY (LOADING 2)
SUMMATION FORCE-X = 0.00
SUMMATION FORCE-Y = 381.57
SUMMATION FORCE-Z = 0.00

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= -23053.30 MY= 0.00 MZ= 6443.13

MAXIMUM DISPLACEMENTS (CM /RADIANS) (LOADING 2)

	MAXIMUMS	AT NODE
X =	7.68198E-02	1871
Y =	-9.69755E-01	1525
Z =	-3.14626E-01	2101
RX=	-2.95816E-03	1898
RY=	2.41857E-04	2110
RZ=	-3.16073E-03	1705

STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO. 3
LOADTYPE LIVE TITLE ROOF LIVE LOAD

CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.165093676E+02
Y = 0.179049155E+02
Z = 0.336058984E+02

***TOTAL APPLIED LOAD (MTON METE) SUMMARY (LOADING 3)
SUMMATION FORCE-X = 0.00
SUMMATION FORCE-Y = -129.37
SUMMATION FORCE-Z = 0.00

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= 4347.43 MY= 0.00 MZ= -2135.74

***TOTAL REACTION LOAD(MTON METE) SUMMARY (LOADING 3)
SUMMATION FORCE-X = 0.00
SUMMATION FORCE-Y = 129.37
SUMMATION FORCE-Z = 0.00

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= -4347.43 MY= 0.00 MZ= 2135.74

MAXIMUM DISPLACEMENTS (CM /RADIANS) (LOADING 3)

	MAXIMUMS	AT NODE
X =	-2.46024E-01	664
Y =	-1.63865E+00	1348
Z =	2.44552E-01	1342
RX=	2.68308E-03	1488
RY=	-8.47189E-04	1621
RZ=	-2.55387E-03	1928

STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO. 4
LOADTYPE CRANE HOOK TITLE CRANE LOAD 1

CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.231988994E+02
Y = 0.181500005E+02
Z = 0.532000017E+02

CENTER OF FORCE BASED ON Z FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.231988994E+02
Y = 0.181500005E+02
Z = 0.532000017E+02

***TOTAL APPLIED LOAD (MTON METE) SUMMARY (LOADING 4)
SUMMATION FORCE-X = 0.00
SUMMATION FORCE-Y = -20.00
SUMMATION FORCE-Z = -1.60

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= 1034.96 MY= 37.12 MZ= -463.98

***TOTAL REACTION LOAD(MTON METE) SUMMARY (LOADING 4)
SUMMATION FORCE-X = 0.00
SUMMATION FORCE-Y = 20.00
SUMMATION FORCE-Z = 1.60

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= -1034.96 MY= -37.12 MZ= 463.98

MAXIMUM DISPLACEMENTS (CM /RADIANS) (LOADING 4)

	MAXIMUMS	AT NODE
X =	3.86119E-02	1931
Y =	-5.19563E-01	1387
Z =	1.42294E-01	1375
RX=	1.86606E-03	1375
RY=	-4.75471E-04	1621
RZ=	9.21621E-04	2153

STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO. 5
LOADTYPE CRANE HOOK TITLE CRANE LOAD 2

CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.119989996E+02
Y = 0.181500005E+02
Z = 0.532000017E+02

CENTER OF FORCE BASED ON Z FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.119989997E+02
Y = 0.181500005E+02
Z = 0.532000017E+02

***TOTAL APPLIED LOAD (MTON METE) SUMMARY (LOADING 5)
SUMMATION FORCE-X = 0.00
SUMMATION FORCE-Y = -20.00
SUMMATION FORCE-Z = -1.60

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= 1034.96 MY= 19.20 MZ= -239.98

***TOTAL REACTION LOAD(MTON METE) SUMMARY (LOADING 5)
SUMMATION FORCE-X = 0.00
SUMMATION FORCE-Y = 20.00
SUMMATION FORCE-Z = 1.60

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= -1034.96 MY= -19.20 MZ= 239.98

MAXIMUM DISPLACEMENTS (CM /RADIANS) (LOADING 5)

	MAXIMUMS	AT NODE
X =	-3.54707E-02	1930
Y =	-5.37062E-01	1316
Z =	1.43286E-01	1307
RX=	1.91162E-03	1307
RY=	2.39121E-04	1312
RZ=	9.48253E-04	1353

STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO. 6
LOADTYPE CRANE HOOK TITLE CRANE LOAD 3

CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.175990004E+02
Y = 0.181500005E+02
Z = 0.532000017E+02

CENTER OF FORCE BASED ON Z FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.175990004E+02
Y = 0.181500005E+02
Z = 0.532000017E+02

***TOTAL APPLIED LOAD (MTON METE) SUMMARY (LOADING 6)
SUMMATION FORCE-X = 0.00
SUMMATION FORCE-Y = -20.00
SUMMATION FORCE-Z = -1.60

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= 1034.96 MY= 28.16 MZ= -351.98

***TOTAL REACTION LOAD(MTON METE) SUMMARY (LOADING 6)
SUMMATION FORCE-X = 0.00
SUMMATION FORCE-Y = 20.00
SUMMATION FORCE-Z = 1.60

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= -1034.96 MY= -28.16 MZ= 351.98

MAXIMUM DISPLACEMENTS (CM /RADIANS) (LOADING 6)

	MAXIMUMS	AT NODE
X =	-1.52847E-02	1519
Y =	-1.12905E+00	1341
Z =	1.05954E-01	1375
RX=	1.35190E-03	1375
RY=	-2.15488E-04	1353
RZ=	2.36007E-03	1353

STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO. 7
LOADTYPE WIND TITLE WIND LOAD IN +X DIR (CP = +0.55)

CENTER OF FORCE BASED ON X FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.247537333E+02
Y = 0.106356857E+02
Z = 0.389685530E+02

CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.165149803E+02
Y = 0.178175596E+02
Z = 0.321204295E+02

***TOTAL APPLIED LOAD (MTON METE) SUMMARY (LOADING 7)
SUMMATION FORCE-X = 119.18
SUMMATION FORCE-Y = 401.37
SUMMATION FORCE-Z = -39.37

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= -13392.21 MY= 5269.83 MZ= 5361.10

***TOTAL REACTION LOAD(MTON METE) SUMMARY (LOADING 7)
SUMMATION FORCE-X = -119.18
SUMMATION FORCE-Y = -401.37
SUMMATION FORCE-Z = 39.37

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= 13392.21 MY= -5269.83 MZ= -5361.10

MAXIMUM DISPLACEMENTS (CM /RADIANS) (LOADING 7)

	MAXIMUMS	AT NODE
X =	2.44825E+00	215
Y =	4.19956E+00	1348
Z =	-2.48582E+00	743
RX=	-6.92435E-03	1488
RY=	4.38142E-03	1859
RZ=	7.09728E-03	1928

STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO. 8
LOADTYPE WIND TITLE WIND LOAD IN +X DIR (CP = -0.55)

***TOTAL APPLIED LOAD (MTON METE) SUMMARY (LOADING 8)
SUMMATION FORCE-X = 125.03
SUMMATION FORCE-Y = 61.03
SUMMATION FORCE-Z = -5.02

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= -760.25 MY= 4806.43 MZ= -286.68

***TOTAL REACTION LOAD(MTON METE) SUMMARY (LOADING 8)
SUMMATION FORCE-X = -125.03
SUMMATION FORCE-Y = -61.03
SUMMATION FORCE-Z = 5.02

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= 760.25 MY= -4806.43 MZ= 286.68

MAXIMUM DISPLACEMENTS (CM /RADIANS) (LOADING 8)

	MAXIMUMS	AT NODE
X =	2.90126E+00	658
Y =	1.41164E+00	1087
Z =	3.95447E-01	2126
RX=	2.15435E-03	1488
RY=	3.93109E-03	676
RZ=	-6.65597E-03	607

STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO. 9
LOADTYPE WIND TITLE WIND LOAD IN +Z DIR (CP = +0.55)

CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.163869818E+02
Y = 0.226889245E+02
Z = 0.601890533E+02

***TOTAL APPLIED LOAD (MTON METE) SUMMARY (LOADING 9)
SUMMATION FORCE-X = 1.00
SUMMATION FORCE-Y = 100.34
SUMMATION FORCE-Z = -63.06

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= -6923.43 MY= 1092.48 MZ= 1639.98

***TOTAL REACTION LOAD(MTON METE) SUMMARY (LOADING 9)
SUMMATION FORCE-X = -1.00
SUMMATION FORCE-Y = -100.34
SUMMATION FORCE-Z = 63.06

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= 6923.43 MY= -1092.48 MZ= -1639.98

MAXIMUM DISPLACEMENTS (CM /RADIANS) (LOADING 9)

	MAXIMUMS	AT NODE
X =	1.53790E+00	1439
Y =	5.58525E+00	1348
Z =	3.79608E+00	1851
RX=	1.09265E-02	1850
RY=	-1.55309E-02	1844
RZ=	8.74028E-03	1928

STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO. 10
LOADTYPE WIND TITLE WIND LOAD IN +Z DIR (CP = -0.55)

CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.163869534E+02
Y = 0.226889244E+02
Z = 0.602167533E+02

***TOTAL APPLIED LOAD (MTON METE) SUMMARY (LOADING 10)
SUMMATION FORCE-X = 0.12
SUMMATION FORCE-Y = 28.67
SUMMATION FORCE-Z = -92.54

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= -2725.21 MY= 1553.36 MZ= 469.28

***TOTAL REACTION LOAD(MTON METE) SUMMARY (LOADING 10)
SUMMATION FORCE-X = -0.12
SUMMATION FORCE-Y = -28.67
SUMMATION FORCE-Z = 92.54

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= 2725.21 MY= -1553.36 MZ= -469.28

MAXIMUM DISPLACEMENTS (CM /RADIANS) (LOADING 10)

	MAXIMUMS	AT NODE
X =	1.41345E+00	1866
Y =	2.07697E+00	1348
Z =	3.86403E+00	1851
RX=	1.09932E-02	1850
RY=	-1.56004E-02	1844
RZ=	-5.30755E-03	1866

STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO. 11
LOADTYPE DEAD TITLE EQUIPMENT DEAD LOAD

CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.180201222E+02
Y = 0.950909806E+01
Z = 0.487921392E+02

***TOTAL APPLIED LOAD (MTON METE) SUMMARY (LOADING 11)
SUMMATION FORCE-X = 1.44
SUMMATION FORCE-Y = -184.18
SUMMATION FORCE-Z = 2.02

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= 9010.56 MY= 18.02 MZ= -3318.54

***TOTAL REACTION LOAD(MTON METE) SUMMARY (LOADING 11)
SUMMATION FORCE-X = -1.44
SUMMATION FORCE-Y = 184.18
SUMMATION FORCE-Z = -2.02

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= -9010.56 MY= -18.02 MZ= 3318.54

MAXIMUM DISPLACEMENTS (CM /RADIANS) (LOADING 11)

	MAXIMUMS	AT NODE
X =	7.90611E-01	1575
Y =	-1.63797E+00	1689
Z =	2.83502E+00	1867
RX=	6.08466E-03	1844
RY=	4.07093E-03	1584
RZ=	2.18087E-01	1950

STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO. 12
LOADTYPE DEAD TITLE EQUIPMENT LIVE LOAD

CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.120420931E+02
Y = 0.854814920E+01
Z = 0.632087488E+02

CENTER OF FORCE BASED ON Z FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.283564533E+02
Y = 0.478586798E+01
Z = 0.520862417E+02

***TOTAL APPLIED LOAD (MTON METE) SUMMARY (LOADING 12)
SUMMATION FORCE-X = 12.78
SUMMATION FORCE-Y = -254.08
SUMMATION FORCE-Z = 9.56

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= 16107.95 MY= 524.22 MZ= -3176.33

***TOTAL REACTION LOAD(MTON METE) SUMMARY (LOADING 12)
SUMMATION FORCE-X = -12.78
SUMMATION FORCE-Y = 254.08
SUMMATION FORCE-Z = -9.56

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= -16107.95 MY= -524.22 MZ= 3176.33

MAXIMUM DISPLACEMENTS (CM /RADIANS) (LOADING 12)

	MAXIMUMS	AT NODE
X =	2.50979E-01	1324
Y =	-5.98972E-01	1981
Z =	1.36041E-01	1921
RX=	1.21228E-03	1954
RY=	5.29759E-04	1198
RZ=	2.46731E-01	1950

STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO. 13
LOADTYPE SEISMIC TITLE SEISMIC DEAD LOAD IN X DIR

CENTER OF FORCE BASED ON X FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.152930865E+02
Y = 0.110975347E+02
Z = 0.617752832E+02

***TOTAL APPLIED LOAD (MTON METE) SUMMARY (LOADING 13)
SUMMATION FORCE-X = 25.68
SUMMATION FORCE-Y = 0.00
SUMMATION FORCE-Z = 0.00

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= 0.00 MY= 1586.39 MZ= -284.98

***TOTAL REACTION LOAD(MTON METE) SUMMARY (LOADING 13)
SUMMATION FORCE-X = -25.68
SUMMATION FORCE-Y = 0.00
SUMMATION FORCE-Z = 0.00

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= 0.00 MY= -1586.39 MZ= 284.98

MAXIMUM DISPLACEMENTS (CM /RADIANS) (LOADING 13)

	MAXIMUMS	AT NODE
X =	5.60451E-01	1199
Y =	-7.93797E-02	2183
Z =	-5.45222E-02	1449
RX=	1.76463E-04	2181
RY=	1.88737E-03	1198
RZ=	-1.82804E-03	1268

STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO. 14
LOADTYPE SEISMIC TITLE SEISMIC DEAD+LIVE LOAD IN X DIR

CENTER OF FORCE BASED ON X FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.147100399E+02
Y = 0.101547416E+02
Z = 0.623809931E+02

***TOTAL APPLIED LOAD (MTON METE) SUMMARY (LOADING 14)
SUMMATION FORCE-X = 49.98
SUMMATION FORCE-Y = 0.00
SUMMATION FORCE-Z = 0.00

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= 0.00 MY= 3117.80 MZ= -507.53

***TOTAL REACTION LOAD(MTON METE) SUMMARY (LOADING 14)
SUMMATION FORCE-X = -49.98
SUMMATION FORCE-Y = 0.00
SUMMATION FORCE-Z = 0.00

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= 0.00 MY= -3117.80 MZ= 507.53

MAXIMUM DISPLACEMENTS (CM /RADIANS) (LOADING 14)

	MAXIMUMS	AT NODE
X =	1.23420E+00	1199
Y =	-1.84707E-01	2183
Z =	-1.12442E-01	1449
RX=	3.85944E-04	2181
RY=	4.20204E-03	1198
RZ=	-4.15508E-03	1268

STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO. 15
LOADTYPE SEISMIC TITLE SEISMIC DEAD LOAD IN Z DIR

CENTER OF FORCE BASED ON Z FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.152930865E+02
Y = 0.110975347E+02
Z = 0.617752832E+02

***TOTAL APPLIED LOAD (MTON METE) SUMMARY (LOADING 15)
SUMMATION FORCE-X = 0.00
SUMMATION FORCE-Y = 0.00
SUMMATION FORCE-Z = 25.68

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= 284.98 MY= -392.73 MZ= 0.00

***TOTAL REACTION LOAD(MTON METE) SUMMARY (LOADING 15)
SUMMATION FORCE-X = 0.00
SUMMATION FORCE-Y = 0.00
SUMMATION FORCE-Z = -25.68

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= -284.98 MY= 392.73 MZ= 0.00

MAXIMUM DISPLACEMENTS (CM /RADIANS) (LOADING 15)

	MAXIMUMS	AT NODE
X =	-7.53891E-02	1563
Y =	6.57202E-02	1919
Z =	3.63864E-01	1976
RX=	3.29339E-04	1883
RY=	4.33315E-04	1621
RZ=	-1.96441E-04	1943

STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO. 16
LOADTYPE SEISMIC TITLE SEISMIC DEAD+LIVE LOAD IN Z DIR

CENTER OF FORCE BASED ON Z FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.147100399E+02
Y = 0.101547416E+02
Z = 0.623809931E+02

***TOTAL APPLIED LOAD (MTON METE) SUMMARY (LOADING 16)
SUMMATION FORCE-X = 0.00
SUMMATION FORCE-Y = 0.00
SUMMATION FORCE-Z = 49.98

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= 507.53 MY= -735.21 MZ= 0.00

***TOTAL REACTION LOAD(MTON METE) SUMMARY (LOADING 16)
SUMMATION FORCE-X = 0.00
SUMMATION FORCE-Y = 0.00
SUMMATION FORCE-Z = -49.98

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= -507.53 MY= 735.21 MZ= 0.00

MAXIMUM DISPLACEMENTS (CM /RADIANS) (LOADING 16)

	MAXIMUMS	AT NODE
X =	-1.63389E-01	1563
Y =	1.34475E-01	1919
Z =	7.19143E-01	1976
RX=	-7.04142E-04	1406
RY=	8.46356E-04	1875
RZ=	-4.30724E-04	1943

STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO. 17
LOADTYPE CRANE HOOK TITLE CRANE LOAD 4

CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.225739495E+02
Y = 0.181500005E+02
Z = 0.599000020E+02

CENTER OF FORCE BASED ON Z FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.225739495E+02
Y = 0.181500005E+02
Z = 0.599000020E+02

***TOTAL APPLIED LOAD (MTON METE) SUMMARY (LOADING 17)
SUMMATION FORCE-X = 0.00
SUMMATION FORCE-Y = -40.00
SUMMATION FORCE-Z = 3.20

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= 2454.08 MY= -72.24 MZ= -902.96

***TOTAL REACTION LOAD(MTON METE) SUMMARY (LOADING 17)
SUMMATION FORCE-X = 0.00
SUMMATION FORCE-Y = 40.00
SUMMATION FORCE-Z = -3.20

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= -2454.08 MY= 72.24 MZ= 902.96

MAXIMUM DISPLACEMENTS (CM /RADIANS) (LOADING 17)

	MAXIMUMS	AT NODE
X =	7.19840E-02	1935
Y =	-5.31153E-01	1388
Z =	1.71240E-01	1373
RX=	-1.87698E-03	1376
RY=	5.59622E-04	1621
RZ=	9.45950E-04	2134

STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO. 18
LOADTYPE CRANE HOOK TITLE CRANE LOAD 5

CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.113740496E+02
Y = 0.181500005E+02
Z = 0.599000020E+02

CENTER OF FORCE BASED ON Z FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.113740496E+02
Y = 0.181500005E+02
Z = 0.599000019E+02

***TOTAL APPLIED LOAD (MTON METE) SUMMARY (LOADING 18)
SUMMATION FORCE-X = 0.00
SUMMATION FORCE-Y = -40.00
SUMMATION FORCE-Z = 3.20

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= 2454.08 MY= -36.40 MZ= -454.96

***TOTAL REACTION LOAD(MTON METE) SUMMARY (LOADING 18)
SUMMATION FORCE-X = 0.00
SUMMATION FORCE-Y = 40.00
SUMMATION FORCE-Z = -3.20

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= -2454.08 MY= 36.40 MZ= 454.96

MAXIMUM DISPLACEMENTS (CM /RADIANS) (LOADING 18)

	MAXIMUMS	AT NODE
X =	-6.42771E-02	1926
Y =	-5.41479E-01	1317
Z =	1.42890E-01	1305
RX=	-1.82196E-03	1308
RY=	1.85559E-04	50
RZ=	9.49679E-04	1354

STATIC LOAD/REACTION/EQUILIBRIUM SUMMARY FOR CASE NO. 19
LOADTYPE CRANE HOOK TITLE CRANE LOAD 6

CENTER OF FORCE BASED ON Y FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.170740005E+02
Y = 0.181500005E+02
Z = 0.599000020E+02

CENTER OF FORCE BASED ON Z FORCES ONLY (METE).
(FORCES IN NON-GLOBAL DIRECTIONS WILL INVALIDATE RESULTS)

X = 0.170740005E+02
Y = 0.181500005E+02
Z = 0.599000020E+02

***TOTAL APPLIED LOAD (MTON METE) SUMMARY (LOADING 19)
SUMMATION FORCE-X = 0.00
SUMMATION FORCE-Y = -40.00
SUMMATION FORCE-Z = 3.20

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= 2454.08 MY= -54.64 MZ= -682.96

***TOTAL REACTION LOAD(MTON METE) SUMMARY (LOADING 19)
SUMMATION FORCE-X = 0.00
SUMMATION FORCE-Y = 40.00
SUMMATION FORCE-Z = -3.20

SUMMATION OF MOMENTS AROUND THE ORIGIN-
MX= -2454.08 MY= 54.64 MZ= 682.96

MAXIMUM DISPLACEMENTS (CM /RADIANS) (LOADING 19)

	MAXIMUMS	AT NODE
X =	3.33755E-02	1283
Y =	-1.13750E+00	1342
Z =	1.38070E-01	1373
RX=	-1.34834E-03	1376
RY=	2.20631E-04	1875
RZ=	2.34870E-03	1354

********** END OF DATA FROM INTERNAL STORAGE **********

2876. LOAD LIST 1 TO 19
2877. PRINT SUPPORT REACTION LIST 6 8 19 607 609 659 TO 663 679 TO 684 729 730 737 -
2878. 739 1841 1844

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
6	1	-0.32	12.55	0.72	0.00	0.00	0.00
	2	-0.01	-0.23	-0.05	0.00	0.00	0.00
	3	-0.22	4.67	0.54	0.00	0.00	0.00
	4	0.00	0.19	0.06	0.00	0.00	0.00
	5	-0.01	0.81	0.21	0.00	0.00	0.00
	6	0.00	0.51	0.14	0.00	0.00	0.00
	7	2.25	10.62	6.10	0.00	0.00	0.00
	8	1.52	2.97	1.52	0.00	0.00	0.00
	9	-0.04	9.27	2.16	0.00	0.00	0.00
	10	0.00	6.04	1.33	0.00	0.00	0.00
	11	-0.08	1.13	-0.02	0.00	0.00	0.00
	12	0.01	-0.18	-0.04	0.00	0.00	0.00
	13	0.01	-0.29	-0.06	0.00	0.00	0.00
	14	0.01	-0.46	-0.10	0.00	0.00	0.00
	15	0.01	-2.72	-0.59	0.00	0.00	0.00
	16	0.01	-4.47	-0.98	0.00	0.00	0.00
	17	0.01	-0.30	-0.05	0.00	0.00	0.00
	18	-0.01	-0.41	-0.06	0.00	0.00	0.00
	19	0.00	-0.57	-0.11	0.00	0.00	0.00
8	1	0.22	14.00	0.05	0.00	0.00	0.00
	2	-0.01	4.52	0.01	0.00	0.00	0.00
	3	0.11	3.20	0.06	0.00	0.00	0.00
	4	0.01	-0.07	0.03	0.00	0.00	0.00
	5	-0.01	-0.06	0.01	0.00	0.00	0.00
	6	0.00	-0.06	0.02	0.00	0.00	0.00
	7	0.75	-16.13	1.40	0.00	0.00	0.00
	8	2.20	-2.44	0.08	0.00	0.00	0.00
	9	0.00	0.44	0.24	0.00	0.00	0.00
	10	-0.01	0.70	0.09	0.00	0.00	0.00
	11	0.30	13.77	-0.41	0.00	0.00	0.00
	12	0.01	0.17	-0.01	0.00	0.00	0.00
	13	0.01	0.00	0.01	0.00	0.00	0.00
	14	0.01	0.01	0.02	0.00	0.00	0.00
	15	0.00	-0.18	-0.07	0.00	0.00	0.00
	16	0.00	-0.25	-0.09	0.00	0.00	0.00
	17	0.01	-0.11	0.00	0.00	0.00	0.00
	18	-0.01	-0.10	-0.01	0.00	0.00	0.00
	19	0.00	-0.11	-0.01	0.00	0.00	0.00
19	1	0.21	11.38	0.00	0.00	0.00	0.00
	2	0.00	0.00	0.00	0.00	0.00	0.00
	3	0.24	6.30	0.00	0.00	0.00	0.00
	4	0.00	0.00	0.00	0.00	0.00	0.00
	5	0.00	0.00	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	-2.13	-21.03	-0.04	0.00	0.00	0.00
	8	-6.21	-5.50	-0.03	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	9	0.00	0.00	-0.01	0.00	0.00	0.00
	10	0.00	0.00	0.00	0.00	0.00	0.00
	11	0.06	0.62	0.00	0.00	0.00	0.00
	12	0.00	0.00	0.00	0.00	0.00	0.00
	13	0.00	-0.01	0.00	0.00	0.00	0.00
	14	-0.01	-0.01	0.00	0.00	0.00	0.00
	15	0.00	0.00	0.00	0.00	0.00	0.00
	16	0.00	0.00	0.00	0.00	0.00	0.00
	17	0.00	0.00	0.00	0.00	0.00	0.00
	18	0.00	0.00	0.00	0.00	0.00	0.00
	19	0.00	0.00	0.00	0.00	0.00	0.00
607	1	0.24	12.57	-0.37	0.00	0.00	0.00
	2	0.00	0.23	-0.05	0.00	0.00	0.00
	3	0.23	4.69	0.13	0.00	0.00	0.00
	4	0.00	-0.19	0.06	0.00	0.00	0.00
	5	0.00	-0.80	0.22	0.00	0.00	0.00
	6	0.00	-0.51	0.14	0.00	0.00	0.00
	7	-2.07	-42.86	7.56	0.00	0.00	0.00
	8	-6.21	-12.32	2.04	0.00	0.00	0.00
	9	0.00	-9.26	2.21	0.00	0.00	0.00
	10	0.00	-6.04	1.35	0.00	0.00	0.00
	11	0.10	2.19	-0.18	0.00	0.00	0.00
	12	0.00	0.18	-0.04	0.00	0.00	0.00
	13	0.00	0.28	-0.07	0.00	0.00	0.00
	14	-0.01	0.44	-0.10	0.00	0.00	0.00
	15	0.00	2.71	-0.60	0.00	0.00	0.00
	16	0.00	4.47	-0.99	0.00	0.00	0.00
	17	0.00	0.30	-0.05	0.00	0.00	0.00
	18	0.00	0.41	-0.06	0.00	0.00	0.00
	19	0.00	0.57	-0.11	0.00	0.00	0.00
609	1	-0.31	16.12	0.01	0.00	0.00	0.00
	2	-0.01	2.62	0.00	0.00	0.00	0.00
	3	-0.27	6.21	0.01	0.00	0.00	0.00
	4	0.00	0.02	0.00	0.00	0.00	0.00
	5	0.00	0.02	0.00	0.00	0.00	0.00
	6	0.00	0.01	0.00	0.00	0.00	0.00
	7	-2.95	-14.33	0.12	0.00	0.00	0.00
	8	0.43	-3.23	0.00	0.00	0.00	0.00
	9	-0.04	-1.18	0.04	0.00	0.00	0.00
	10	-0.03	-1.10	0.02	0.00	0.00	0.00
	11	-0.70	2.86	-0.08	0.00	0.00	0.00
	12	-0.10	0.06	0.00	0.00	0.00	0.00
	13	-0.01	-0.01	0.00	0.00	0.00	0.00
	14	-0.01	-0.03	0.00	0.00	0.00	0.00
	15	0.01	0.32	-0.01	0.00	0.00	0.00
	16	0.01	0.45	-0.02	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	17	0.00	0.12	0.00	0.00	0.00	0.00
	18	0.00	0.10	0.00	0.00	0.00	0.00
	19	0.00	0.13	0.00	0.00	0.00	0.00
659	1	0.56	9.89	0.00	0.00	0.00	0.00
	2	0.00	0.00	0.00	0.00	0.00	0.00
	3	0.63	6.35	0.00	0.00	0.00	0.00
	4	0.01	0.00	0.00	0.00	0.00	0.00
	5	0.01	0.00	0.01	0.00	0.00	0.00
	6	0.01	0.00	0.01	0.00	0.00	0.00
	7	-3.12	-21.09	0.13	0.00	0.00	0.00
	8	-4.58	-5.74	0.08	0.00	0.00	0.00
	9	0.01	-0.02	0.02	0.00	0.00	0.00
	10	-0.04	-0.01	-0.01	0.00	0.00	0.00
	11	0.09	0.57	-0.01	0.00	0.00	0.00
	12	-0.01	-0.01	0.00	0.00	0.00	0.00
	13	-0.06	-0.03	0.00	0.00	0.00	0.00
	14	-0.09	-0.04	0.00	0.00	0.00	0.00
	15	0.00	0.00	0.00	0.00	0.00	0.00
	16	0.00	0.00	0.00	0.00	0.00	0.00
	17	0.00	0.00	0.00	0.00	0.00	0.00
	18	0.01	0.00	0.00	0.00	0.00	0.00
	19	0.00	0.00	0.00	0.00	0.00	0.00
660	1	0.61	12.12	0.97	0.00	0.00	0.00
	2	0.00	0.22	0.31	0.00	0.00	0.00
	3	0.55	6.39	0.18	0.00	0.00	0.00
	4	0.00	0.09	0.04	0.00	0.00	0.00
	5	0.02	0.57	0.15	0.00	0.00	0.00
	6	0.01	0.35	0.09	0.00	0.00	0.00
	7	-2.87	3.84	6.79	0.00	0.00	0.00
	8	-4.43	6.41	3.79	0.00	0.00	0.00
	9	-0.02	14.92	5.60	0.00	0.00	0.00
	10	-0.04	14.07	6.29	0.00	0.00	0.00
	11	0.03	-2.06	-0.72	0.00	0.00	0.00
	12	-0.01	-0.38	-0.10	0.00	0.00	0.00
	13	-0.06	-0.57	-0.11	0.00	0.00	0.00
	14	-0.10	-0.89	-0.15	0.00	0.00	0.00
	15	0.01	-5.06	-2.07	0.00	0.00	0.00
	16	0.01	-8.69	-3.66	0.00	0.00	0.00
	17	0.00	-0.42	-0.09	0.00	0.00	0.00
	18	0.01	-0.89	-0.39	0.00	0.00	0.00
	19	0.02	-0.60	-0.17	0.00	0.00	0.00
661	1	0.55	9.83	0.00	0.00	0.00	0.00
	2	0.00	0.00	0.00	0.00	0.00	0.00
	3	0.65	6.35	0.00	0.00	0.00	0.00
	4	0.00	0.00	0.00	0.00	0.00	0.00
	5	0.01	0.00	0.01	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	6	0.01	0.00	0.01	0.00	0.00	0.00
	7	-3.50	-21.22	0.14	0.00	0.00	0.00
	8	-4.90	-5.88	0.09	0.00	0.00	0.00
	9	-0.01	-0.02	0.02	0.00	0.00	0.00
	10	-0.02	-0.01	-0.01	0.00	0.00	0.00
	11	0.13	0.58	-0.01	0.00	0.00	0.00
	12	-0.01	-0.01	0.00	0.00	0.00	0.00
	13	-0.05	-0.02	0.00	0.00	0.00	0.00
	14	-0.07	-0.04	0.00	0.00	0.00	0.00
	15	0.00	0.00	0.00	0.00	0.00	0.00
	16	0.01	0.00	0.00	0.00	0.00	0.00
	17	0.00	0.00	0.00	0.00	0.00	0.00
	18	0.01	0.00	0.00	0.00	0.00	0.00
	19	0.00	0.00	0.00	0.00	0.00	0.00
662	1	0.57	9.83	0.00	0.00	0.00	0.00
	2	0.00	0.00	0.00	0.00	0.00	0.00
	3	0.67	6.36	0.00	0.00	0.00	0.00
	4	-0.01	0.00	0.00	0.00	0.00	0.00
	5	0.01	0.00	0.01	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	-4.07	-21.44	0.11	0.00	0.00	0.00
	8	-5.49	-6.13	0.07	0.00	0.00	0.00
	9	-0.02	-0.01	0.02	0.00	0.00	0.00
	10	-0.01	0.00	0.00	0.00	0.00	0.00
	11	0.15	0.58	-0.01	0.00	0.00	0.00
	12	-0.01	0.00	0.00	0.00	0.00	0.00
	13	-0.03	-0.01	0.00	0.00	0.00	0.00
	14	-0.04	-0.02	0.00	0.00	0.00	0.00
	15	0.00	0.00	0.00	0.00	0.00	0.00
	16	0.01	0.00	0.00	0.00	0.00	0.00
	17	-0.01	0.00	0.00	0.00	0.00	0.00
	18	0.01	0.00	0.00	0.00	0.00	0.00
	19	0.00	0.00	0.00	0.00	0.00	0.00
663	1	0.56	9.83	0.00	0.00	0.00	0.00
	2	0.00	0.00	0.00	0.00	0.00	0.00
	3	0.66	6.35	0.00	0.00	0.00	0.00
	4	-0.01	0.00	0.00	0.00	0.00	0.00
	5	0.01	0.00	0.01	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	-3.82	-21.34	0.13	0.00	0.00	0.00
	8	-5.20	-6.02	0.09	0.00	0.00	0.00
	9	-0.02	-0.01	0.02	0.00	0.00	0.00
	10	-0.01	-0.01	-0.01	0.00	0.00	0.00
	11	0.14	0.58	-0.01	0.00	0.00	0.00
	12	-0.01	0.00	0.00	0.00	0.00	0.00
	13	-0.04	-0.02	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	14	-0.06	-0.03	0.00	0.00	0.00	0.00
	15	0.00	0.00	0.00	0.00	0.00	0.00
	16	0.01	0.00	0.00	0.00	0.00	0.00
	17	-0.01	0.00	0.00	0.00	0.00	0.00
	18	0.01	0.00	0.00	0.00	0.00	0.00
	19	0.00	0.00	0.00	0.00	0.00	0.00
679	1	-0.55	9.88	0.01	0.00	0.00	0.00
	2	0.00	0.00	0.00	0.00	0.00	0.00
	3	-0.62	6.34	0.00	0.00	0.00	0.00
	4	-0.01	0.00	0.01	0.00	0.00	0.00
	5	-0.01	0.00	0.00	0.00	0.00	0.00
	6	-0.01	0.00	0.01	0.00	0.00	0.00
	7	-0.77	-20.67	0.00	0.00	0.00	0.00
	8	0.58	-5.30	-0.06	0.00	0.00	0.00
	9	-0.08	0.02	0.02	0.00	0.00	0.00
	10	0.01	0.01	-0.01	0.00	0.00	0.00
	11	-0.28	4.43	-0.01	0.00	0.00	0.00
	12	-0.01	0.01	0.00	0.00	0.00	0.00
	13	-0.06	0.03	0.00	0.00	0.00	0.00
	14	-0.09	0.04	0.00	0.00	0.00	0.00
	15	0.01	0.00	0.00	0.00	0.00	0.00
	16	0.01	0.00	0.00	0.00	0.00	0.00
	17	-0.01	0.00	0.00	0.00	0.00	0.00
	18	0.00	0.00	0.00	0.00	0.00	0.00
	19	0.00	0.00	0.00	0.00	0.00	0.00
680	1	-0.61	13.85	1.65	0.00	0.00	0.00
	2	0.00	0.81	0.32	0.00	0.00	0.00
	3	-0.54	7.29	0.53	0.00	0.00	0.00
	4	-0.02	1.21	0.52	0.00	0.00	0.00
	5	-0.01	0.29	0.10	0.00	0.00	0.00
	6	-0.01	0.65	0.20	0.00	0.00	0.00
	7	-0.89	0.53	6.62	0.00	0.00	0.00
	8	0.63	-8.91	-1.26	0.00	0.00	0.00
	9	-0.08	17.33	6.43	0.00	0.00	0.00
	10	0.01	12.08	4.98	0.00	0.00	0.00
	11	-0.01	-7.09	-2.43	0.00	0.00	0.00
	12	-0.01	-0.34	-0.19	0.00	0.00	0.00
	13	-0.06	0.95	0.27	0.00	0.00	0.00
	14	-0.09	1.64	0.48	0.00	0.00	0.00
	15	0.00	-4.57	-1.73	0.00	0.00	0.00
	16	0.00	-6.57	-2.53	0.00	0.00	0.00
	17	-0.02	-0.31	-0.11	0.00	0.00	0.00
	18	0.00	-0.56	-0.16	0.00	0.00	0.00
	19	-0.03	-0.26	0.00	0.00	0.00	0.00
681	1	-0.53	9.81	0.01	0.00	0.00	0.00
	2	0.00	0.00	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	3	-0.63	6.34	0.00	0.00	0.00	0.00
	4	-0.01	0.00	0.01	0.00	0.00	0.00
	5	0.00	0.00	0.00	0.00	0.00	0.00
	6	-0.01	0.00	0.01	0.00	0.00	0.00
	7	-0.92	-20.54	-0.01	0.00	0.00	0.00
	8	0.33	-5.16	-0.08	0.00	0.00	0.00
	9	-0.06	0.02	0.02	0.00	0.00	0.00
	10	-0.01	0.01	-0.01	0.00	0.00	0.00
	11	-0.29	4.42	-0.01	0.00	0.00	0.00
	12	-0.01	0.01	0.00	0.00	0.00	0.00
	13	-0.05	0.02	0.00	0.00	0.00	0.00
	14	-0.07	0.04	0.00	0.00	0.00	0.00
	15	0.00	0.00	0.00	0.00	0.00	0.00
	16	0.01	0.00	0.00	0.00	0.00	0.00
	17	-0.01	0.00	0.00	0.00	0.00	0.00
	18	0.00	0.00	0.00	0.00	0.00	0.00
	19	0.00	0.00	0.00	0.00	0.00	0.00
682	1	-0.52	9.80	0.00	0.00	0.00	0.00
	2	0.00	0.00	0.00	0.00	0.00	0.00
	3	-0.62	6.33	0.00	0.00	0.00	0.00
	4	-0.01	0.00	0.01	0.00	0.00	0.00
	5	0.01	0.00	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	-1.28	-20.32	0.04	0.00	0.00	0.00
	8	-0.15	-4.91	-0.04	0.00	0.00	0.00
	9	-0.02	0.01	0.02	0.00	0.00	0.00
	10	-0.01	0.00	0.00	0.00	0.00	0.00
	11	-0.29	4.42	-0.02	0.00	0.00	0.00
	12	-0.01	0.00	0.00	0.00	0.00	0.00
	13	-0.03	0.01	0.00	0.00	0.00	0.00
	14	-0.04	0.02	0.00	0.00	0.00	0.00
	15	0.00	0.00	0.00	0.00	0.00	0.00
	16	0.01	0.00	0.00	0.00	0.00	0.00
	17	-0.01	0.00	0.00	0.00	0.00	0.00
	18	0.01	0.00	0.00	0.00	0.00	0.00
	19	0.00	0.00	0.00	0.00	0.00	0.00
683	1	-0.52	9.80	0.01	0.00	0.00	0.00
	2	0.00	0.00	0.00	0.00	0.00	0.00
	3	-0.62	6.34	0.00	0.00	0.00	0.00
	4	-0.01	0.00	0.01	0.00	0.00	0.00
	5	0.00	0.00	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.01	0.00	0.00	0.00
	7	-1.12	-20.42	0.01	0.00	0.00	0.00
	8	0.05	-5.02	-0.07	0.00	0.00	0.00
	9	-0.04	0.01	0.02	0.00	0.00	0.00
	10	-0.01	0.01	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	11	-0.29	4.42	-0.01	0.00	0.00	0.00
	12	-0.01	0.00	0.00	0.00	0.00	0.00
	13	-0.04	0.02	0.00	0.00	0.00	0.00
	14	-0.06	0.03	0.00	0.00	0.00	0.00
	15	0.00	0.00	0.00	0.00	0.00	0.00
	16	0.01	0.00	0.00	0.00	0.00	0.00
	17	-0.01	0.00	0.00	0.00	0.00	0.00
	18	0.01	0.00	0.00	0.00	0.00	0.00
	19	0.00	0.00	0.00	0.00	0.00	0.00
684	1	-0.55	10.46	0.00	0.00	0.00	0.00
	2	0.00	0.00	0.00	0.00	0.00	0.00
	3	-0.61	6.39	0.00	0.00	0.00	0.00
	4	-0.01	0.00	0.00	0.00	0.00	0.00
	5	0.01	0.00	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	-1.36	-20.73	0.07	0.00	0.00	0.00
	8	-0.21	-5.54	-0.01	0.00	0.00	0.00
	9	-0.01	0.00	0.02	0.00	0.00	0.00
	10	-0.01	0.00	0.00	0.00	0.00	0.00
	11	-0.34	5.43	-0.04	0.00	0.00	0.00
	12	-0.01	0.00	0.00	0.00	0.00	0.00
	13	-0.02	0.01	0.00	0.00	0.00	0.00
	14	-0.03	0.01	0.00	0.00	0.00	0.00
	15	0.00	0.00	0.00	0.00	0.00	0.00
	16	0.00	0.00	-0.01	0.00	0.00	0.00
	17	-0.01	0.00	0.00	0.00	0.00	0.00
	18	0.01	0.00	0.00	0.00	0.00	0.00
	19	0.00	0.00	0.00	0.00	0.00	0.00
729	1	0.02	2.46	0.00	0.00	0.00	0.00
	2	0.00	0.00	0.00	0.00	0.00	0.00
	3	0.01	0.00	0.00	0.00	0.00	0.00
	4	0.00	0.00	0.00	0.00	0.00	0.00
	5	0.00	0.00	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	-0.19	0.00	6.16	0.00	0.00	0.00
	8	-0.22	0.00	0.75	0.00	0.00	0.00
	9	0.00	0.00	0.00	0.00	0.00	0.00
	10	0.00	0.00	0.00	0.00	0.00	0.00
	11	0.00	0.00	0.00	0.00	0.00	0.00
	12	0.00	0.00	0.00	0.00	0.00	0.00
	13	0.00	0.00	0.00	0.00	0.00	0.00
	14	0.00	0.00	0.00	0.00	0.00	0.00
	15	0.00	0.00	0.00	0.00	0.00	0.00
	16	0.00	0.00	0.00	0.00	0.00	0.00
	17	0.00	0.00	0.00	0.00	0.00	0.00
	18	0.00	0.00	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	19	0.00	0.00	0.00	0.00	0.00	0.00
730	1	-0.01	4.59	-0.04	0.00	0.00	0.00
	2	0.00	4.86	0.00	0.00	0.00	0.00
	3	-0.01	0.00	-0.03	0.00	0.00	0.00
	4	0.00	0.00	0.00	0.00	0.00	0.00
	5	0.00	0.00	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	-0.18	0.00	5.32	0.00	0.00	0.00
	8	-0.19	0.00	0.56	0.00	0.00	0.00
	9	0.00	0.00	-0.23	0.00	0.00	0.00
	10	0.00	0.00	-0.25	0.00	0.00	0.00
	11	-0.01	2.06	-5.17	0.00	0.00	0.00
	12	0.00	0.04	-0.11	0.00	0.00	0.00
	13	0.00	0.00	0.00	0.00	0.00	0.00
	14	0.00	0.00	0.00	0.00	0.00	0.00
	15	0.00	0.00	-0.01	0.00	0.00	0.00
	16	0.00	0.00	-0.01	0.00	0.00	0.00
	17	0.00	0.00	0.00	0.00	0.00	0.00
	18	0.00	0.00	0.00	0.00	0.00	0.00
	19	0.00	0.00	0.00	0.00	0.00	0.00
737	1	0.08	3.49	0.00	0.00	0.00	0.00
	2	0.02	0.05	0.00	0.00	0.00	0.00
	3	0.07	0.42	0.00	0.00	0.00	0.00
	4	-0.02	-0.04	0.00	0.00	0.00	0.00
	5	0.03	0.08	0.00	0.00	0.00	0.00
	6	0.00	0.01	0.00	0.00	0.00	0.00
	7	-9.14	-20.77	6.17	0.00	0.00	0.00
	8	-9.54	-23.07	0.75	0.00	0.00	0.00
	9	0.11	0.24	0.00	0.00	0.00	0.00
	10	0.04	0.05	0.00	0.00	0.00	0.00
	11	0.05	0.00	0.00	0.00	0.00	0.00
	12	-0.05	-0.12	0.00	0.00	0.00	0.00
	13	-0.04	-0.09	0.00	0.00	0.00	0.00
	14	-0.05	-0.14	0.00	0.00	0.00	0.00
	15	-0.03	-0.06	0.00	0.00	0.00	0.00
	16	-0.02	-0.04	0.00	0.00	0.00	0.00
	17	-0.03	-0.06	0.00	0.00	0.00	0.00
	18	0.02	0.06	0.00	0.00	0.00	0.00
	19	0.00	-0.01	0.00	0.00	0.00	0.00
739	1	0.22	2.68	0.00	0.00	0.00	0.00
	2	0.02	-0.05	0.00	0.00	0.00	0.00
	3	0.25	-0.42	0.00	0.00	0.00	0.00
	4	-0.01	0.04	0.00	0.00	0.00	0.00
	5	0.04	-0.08	0.00	0.00	0.00	0.00
	6	0.01	-0.01	0.00	0.00	0.00	0.00
	7	-9.18	20.77	6.16	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	8	-10.41	23.07	0.75	0.00	0.00	0.00
	9	0.11	-0.24	0.00	0.00	0.00	0.00
	10	0.03	-0.05	0.00	0.00	0.00	0.00
	11	0.10	0.00	0.00	0.00	0.00	0.00
	12	-0.05	0.12	0.00	0.00	0.00	0.00
	13	-0.04	0.09	0.00	0.00	0.00	0.00
	14	-0.05	0.14	0.00	0.00	0.00	0.00
	15	-0.03	0.06	0.00	0.00	0.00	0.00
	16	-0.02	0.04	0.00	0.00	0.00	0.00
	17	-0.02	0.06	0.00	0.00	0.00	0.00
	18	0.02	-0.06	0.00	0.00	0.00	0.00
	19	0.00	0.01	0.00	0.00	0.00	0.00
1841	1	-0.05	0.86	0.02	0.00	0.00	0.00
	2	0.00	0.30	0.00	0.00	0.00	0.00
	3	0.00	0.12	0.01	0.00	0.00	0.00
	4	0.00	0.06	0.01	0.00	0.00	0.00
	5	0.00	0.03	0.00	0.00	0.00	0.00
	6	0.00	0.05	0.00	0.00	0.00	0.00
	7	-0.33	1.71	0.15	0.00	0.00	0.00
	8	-0.33	0.31	0.00	0.00	0.00	0.00
	9	0.00	0.72	0.01	0.00	0.00	0.00
	10	0.00	0.40	-0.02	0.00	0.00	0.00
	11	0.00	-0.85	-0.08	0.00	0.00	0.00
	12	0.00	-0.02	0.00	0.00	0.00	0.00
	13	0.00	0.03	0.00	0.00	0.00	0.00
	14	0.00	0.05	0.00	0.00	0.00	0.00
	15	0.00	-0.14	-0.01	0.00	0.00	0.00
	16	0.00	-0.20	-0.02	0.00	0.00	0.00
	17	0.00	0.00	0.00	0.00	0.00	0.00
	18	0.00	-0.02	0.00	0.00	0.00	0.00
	19	0.00	-0.02	0.00	0.00	0.00	0.00
1844	1	0.05	0.73	0.00	0.00	0.00	0.00
	2	0.00	1.42	0.00	0.00	0.00	0.00
	3	0.00	0.00	0.00	0.00	0.00	0.00
	4	0.00	0.00	0.00	0.00	0.00	0.00
	5	0.00	0.00	0.00	0.00	0.00	0.00
	6	0.00	0.00	0.00	0.00	0.00	0.00
	7	-0.33	-0.32	0.13	0.00	0.00	0.00
	8	-0.33	-0.32	0.01	0.00	0.00	0.00
	9	0.01	0.01	-0.05	0.00	0.00	0.00
	10	0.01	0.01	-0.05	0.00	0.00	0.00
	11	0.00	0.00	-0.17	0.00	0.00	0.00
	12	0.00	0.00	0.00	0.00	0.00	0.00
	13	0.00	0.00	0.00	0.00	0.00	0.00
	14	0.00	0.00	0.00	0.00	0.00	0.00
	15	0.00	0.00	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	16	0.00	0.00	0.00	0.00	0.00	0.00
	17	0.00	0.00	0.00	0.00	0.00	0.00
	18	0.00	0.00	0.00	0.00	0.00	0.00
	19	0.00	0.00	0.00	0.00	0.00	0.00

********** END OF LATEST ANALYSIS RESULT **********

2880. FINISH

********** END OF THE STAAD.Pro RUN **********

**** DATE= MAR 9,2020 TIME= 19:19:56 ****

****
* For technical assistance on STAAD.Pro, please visit *
* http://selectservices.bentley.com/en-US/ *
* *
* Details about additional assistance from *
* Bentley and Partners can be found at program menu *
* Help->Technical Support *
* *
* Copyright (c) 1997-2014 Bentley Systems, Inc.
* http://www.bentley.com *
****

Global Project ID	**900707**
Delivery Type	**ENGINEERING PROCUREMENT CONSTRUCTION**
Project Name	**MANSOURAH MASSARAH GOLD PROJECT**
Customer	**MA'ADEN GOLD AND BASE METALS (MA'ADEN)**
Project Country	**KINGDOM OF SAUDI ARABIA**

Ma'aden Revision No:	A01	A02	C01	D01
Date	10-03-2020	02-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 27.03.20 AND REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Outotec / L&T Revision No.:	0	1	2	3
Date	10-03-2020	02-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 27.03.20 AND REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

ATTACHMENT 2 STAAD INPUT & OUTPUT FILE OF FOUNDATION MKD. F1A & F1B

```
**************************************************
*                                                *
*           STAAD.Pro V8i SELECTseries5           *
*           Version  20.07.10.64                 *
*           Proprietary Program of               *
*           Bentley Systems, Inc.                *
*           Date=    MAR 31, 2020                *
*           Time=    14:28: 5                    *
*                                                *
*      USER ID: LNT ECC DIV                      *
**************************************************
```

```
     1. STAAD SPACE
INPUT FILE: MD-216-3350-EG-CV-CAL-1226_F1A.STD
     2. START JOB INFORMATION
     3. ENGINEER DATE 16-DEC-19
     4. END JOB INFORMATION
     5. INPUT WIDTH 79
     6. UNIT METER MTON
     7. JOINT COORDINATES
     8. 1 0 0 0; 2 0 9.35 0.25; 3 0 0 1; 5 1 0 0; 6 1 0 1; 8 -1 0 0; 9 -1 0 1
     9. 11 -0.75 0 0; 12 -0.75 0 0.25; 13 -1 0 0.25; 14 -0.5 0 0; 15 -0.5 0 0.25
    10. 16 -0.25 0 0; 17 -0.25 0 0.25; 18 0 0 0.25; 19 -0.75 0 0.5; 20 -1 0 0.5
    11. 21 -0.5 0 0.5; 22 -0.25 0 0.5; 23 0 0 0.5; 24 -0.75 0 0.75; 25 -1 0 0.75
    12. 26 -0.5 0 0.75; 27 -0.25 0 0.75; 28 0 0 0.75; 29 -0.75 0 1; 30 -0.5 0 1
    13. 31 -0.25 0 1; 32 0.25 0 0; 33 0.25 0 0.25; 34 0.5 0 0; 35 0.5 0 0.25
    14. 36 0.75 0 0; 37 0.75 0 0.25; 38 1 0 0.25; 39 0.25 0 0.5; 40 0.5 0 0.5
    15. 41 0.75 0 0.5; 42 1 0 0.5; 43 0.25 0 0.75; 44 0.5 0 0.75; 45 0.75 0 0.75
    16. 46 1 0 0.75; 47 0.25 0 1; 48 0.5 0 1; 49 0.75 0 1; 73 -0.75 0 -0.75
    17. 74 -1 0 -0.75; 75 -0.5 0 -0.75; 76 -0.25 0 -0.75; 77 0 0 -0.75
    18. 78 -0.75 0 -0.5; 79 -1 0 -0.5; 80 -0.5 0 -0.5; 81 -0.25 0 -0.5; 82 0 0 -0.5
    19. 83 -0.75 0 -0.25; 84 -1 0 -0.25; 85 -0.5 0 -0.25; 86 -0.25 0 -0.25
    20. 87 0 0 -0.25; 107 0.25 0 -0.75; 108 0.5 0 -0.75; 109 0.75 0 -0.75
    21. 110 1 0 -0.75; 111 0.25 0 -0.5; 112 0.5 0 -0.5; 113 0.75 0 -0.5; 114 1 0 -0.5
    22. 115 0.25 0 -0.25; 116 0.5 0 -0.25; 117 0.75 0 -0.25; 118 1 0 -0.25
    23. 119 -0.75 0 1.25; 120 -1 0 1.25; 121 -0.5 0 1.25; 122 -0.25 0 1.25
    24. 123 0 0 1.25; 124 0.25 0 1.25; 125 0.5 0 1.25; 126 0.75 0 1.25; 127 1 0 1.25
    25. 146 -1.25 0 0; 147 -1.25 0 0.25; 148 -1.25 0 0.5; 149 -1.25 0 0.75
    26. 150 -1.25 0 1; 154 -1.25 0 -0.75; 155 -1.25 0 -0.5; 156 -1.25 0 -0.25
    27. 157 -1.25 0 1.25; 160 1.25 0 0; 161 1.25 0 0.25; 162 1.25 0 0.5
    28. 163 1.25 0 0.75; 164 1.25 0 1; 168 1.25 0 -0.75; 169 1.25 0 -0.5
    29. 170 1.25 0 -0.25; 171 1.25 0 1.25; 172 -1 0 -1; 173 -0.75 0 -1; 174 -0.5 0 -1.
    30. 175 -0.25 0 -1; 176 0 0 -1; 177 0.25 0 -1; 178 0.5 0 -1; 179 0.75 0 -1.
    31. 180 1 0 -1; 181 -1.25 0 -1; 182 1.25 0 -1; 183 -0.75 0 1.5; 184 -1 0 1.5
    32. 185 -0.5 0 1.5; 186 -0.25 0 1.5; 187 0 0 1.5; 188 0.25 0 1.5; 189 0.5 0 1.5
    33. 190 0.75 0 1.5; 191 1 0 1.5; 192 -1.25 0 1.5; 193 1.25 0 1.5; 194 -1 0 -1.25
    34. 195 -0.75 0 -1.25; 196 -0.5 0 -1.25; 197 -0.25 0 -1.25; 198 0 0 -1.25
    35. 199 0.25 0 -1.25; 200 0.5 0 -1.25; 201 0.75 0 -1.25; 202 1 0 -1.25
    36. 203 -1.25 0 -1.25; 204 1.25 0 -1.25; 205 -0.75 0 1.75; 206 -1 0 1.75
    37. 207 -0.5 0 1.75; 208 -0.25 0 1.75; 209 0 0 1.75; 210 0.25 0 1.75
    38. 211 0.5 0 1.75; 212 0.75 0 1.75; 213 1 0 1.75; 214 -1.25 0 1.75
```

```
39. 215 1.25 0 1.75; 216 -1 0 -1.75; 217 -0.75 0 -1.75; 218 -0.75 0 -1.5
40. 219 -1 0 -1.5; 220 -0.5 0 -1.75; 221 -0.5 0 -1.5; 222 -0.25 0 -1.75
41. 223 -0.25 0 -1.5; 224 0 0 -1.75; 225 0 0 -1.5; 226 0.25 0 -1.75
42. 227 0.25 0 -1.5; 228 0.5 0 -1.75; 229 0.5 0 -1.5; 230 0.75 0 -1.75
43. 231 0.75 0 -1.5; 232 1 0 -1.75; 233 1 0 -1.5; 234 -1.25 0 -1.75
44. 235 -1.25 0 -1.5; 236 1.25 0 -1.75; 237 1.25 0 -1.5; 238 -1 0 -2
45. 239 -0.75 0 -2; 240 -0.5 0 -2; 241 -0.25 0 -2; 242 0 0 -2; 243 0.25 0 -2
46. 244 0.5 0 -2; 245 0.75 0 -2; 246 1 0 -2; 247 -1.25 0 -2; 248 1.25 0 -2
47. 249 -1 0 -2.25; 250 -0.75 0 -2.25; 251 -0.5 0 -2.25; 252 -0.25 0 -2.25
48. 253 0 0 -2.25; 254 0.25 0 -2.25; 255 0.5 0 -2.25; 256 0.75 0 -2.25
49. 257 1 0 -2.25; 258 -1.25 0 -2.25; 259 1.25 0 -2.25; 260 -0.75 0 2; 261 -1 0 2
50. 262 -0.5 0 2; 263 -0.25 0 2; 264 0 0 2; 265 0.25 0 2; 266 0.5 0 2
51. 267 0.75 0 2; 268 1 0 2; 269 -0.75 0 2.25; 270 -1 0 2.25; 271 -0.5 0 2.25
52. 272 -0.25 0 2.25; 273 0 0 2.25; 274 0.25 0 2.25; 275 0.5 0 2.25
53. 276 0.75 0 2.25; 277 1 0 2.25; 278 -1.25 0 2; 279 -1.25 0 2.25; 280 1.25 0 2
54. 281 1.25 0 2.25; 282 -0.75 0 2.5; 283 -1 0 2.5; 284 -0.5 0 2.5
55. 285 -0.25 0 2.5; 286 0 0 2.5; 287 0.25 0 2.5; 288 0.5 0 2.5; 289 0.75 0 2.5
56. 290 1 0 2.5; 291 -1.25 0 2.5; 292 1.25 0 2.5; 293 -0.75 0 2.75; 294 -1 0 2.75
57. 295 -0.5 0 2.75; 296 -0.25 0 2.75; 297 0 0 2.75; 298 0.25 0 2.75
58. 299 0.5 0 2.75; 300 0.75 0 2.75; 301 1 0 2.75; 302 -1.25 0 2.75
59. 303 1.25 0 2.75; 304 -1.5 0 0; 305 -1.5 0 0.25; 306 -1.5 0 0.5
60. 307 -1.5 0 0.75; 308 -1.5 0 1; 309 -1.5 0 -0.75; 310 -1.5 0 -0.5
61. 311 -1.5 0 -0.25; 312 -1.5 0 1.25; 313 -1.5 0 -1; 314 -1.5 0 1.5
62. 315 -1.5 0 -1.25; 316 -1.5 0 1.75; 317 -1.5 0 -1.75; 318 -1.5 0 -1.5
63. 319 -1.5 0 -2; 320 -1.5 0 -2.25; 321 -1.5 0 2; 322 -1.5 0 2.25; 323 -1.5 0 2.5
64. 324 -1.5 0 2.75; 325 1.5 0 0; 326 1.5 0 0.25; 327 1.5 0 0.5; 328 1.5 0 0.75
65. 329 1.5 0 1; 330 1.5 0 -0.75; 331 1.5 0 -0.5; 332 1.5 0 -0.25; 333 1.5 0 1.25
66. 334 1.5 0 -1; 335 1.5 0 1.5; 336 1.5 0 -1.25; 337 1.5 0 1.75; 338 1.5 0 -1.75
67. 339 1.5 0 -1.5; 340 1.5 0 -2; 341 1.5 0 -2.25; 342 1.5 0 2; 343 1.5 0 2.25
68. 344 1.5 0 2.5; 345 1.5 0 2.75; 346 -1.75 0 0; 347 -1.75 0 0.25
69. 348 -1.75 0 0.5; 349 -1.75 0 0.75; 350 -1.75 0 1; 351 -1.75 0 -0.75
70. 352 -1.75 0 -0.5; 353 -1.75 0 -0.25; 354 -1.75 0 1.25; 355 -1.75 0 -1.
71. 356 -1.75 0 1.5; 357 -1.75 0 -1.25; 358 -1.75 0 1.75; 359 -1.75 0 -1.75
72. 360 -1.75 0 -1.5; 361 -1.75 0 -2; 362 -1.75 0 -2.25; 363 -1.75 0 2
73. 364 -1.75 0 2.25; 365 -1.75 0 2.5; 366 -1.75 0 2.75; 367 1.75 0 0
74. 368 1.75 0 0.25; 369 1.75 0 0.5; 370 1.75 0 0.75; 371 1.75 0 1
75. 372 1.75 0 -0.75; 373 1.75 0 -0.5; 374 1.75 0 -0.25; 375 1.75 0 1.25
76. 376 1.75 0 -1; 377 1.75 0 1.5; 378 1.75 0 -1.25; 379 1.75 0 1.75
77. 380 1.75 0 -1.75; 381 1.75 0 -1.5; 382 1.75 0 -2; 383 1.75 0 -2.25
78. 384 1.75 0 2; 385 1.75 0 2.25; 386 1.75 0 2.5; 387 1.75 0 2.75
79. MEMBER INCIDENCES
80. 101 2 18
81. ELEMENT INCIDENCES SHELL
82. 5 8 11 12 13; 6 11 14 15 12; 7 14 16 17 15; 8 16 1 18 17; 9 13 12 19 20
83. 10 12 15 21 19; 11 15 17 22 21; 12 17 18 23 22; 13 20 19 24 25; 14 19 21 26 24
84. 15 21 22 27 26; 16 22 23 28 27; 17 25 24 29 9; 18 24 26 30 29; 19 26 27 31 30
85. 20 27 28 3 31; 21 1 32 33 18; 22 32 34 35 33; 23 34 36 37 35; 24 36 5 38 37
86. 25 18 33 39 23; 26 33 35 40 39; 27 35 37 41 40; 28 37 38 42 41; 29 23 39 43 28
87. 30 39 40 44 43; 31 40 41 45 44; 32 41 42 46 45; 33 28 43 47 3; 34 43 44 48 47
88. 35 44 45 49 48; 36 45 46 6 49; 57 74 73 78 79; 58 73 75 80 78; 59 75 76 81 80
89. 60 76 77 82 81; 61 79 78 83 84; 62 78 80 85 83; 63 80 81 86 85; 64 81 82 87 86
90. 65 84 83 11 8; 66 83 85 14 11; 67 85 86 16 14; 68 86 87 1 16; 89 77 107 111 82
91. 90 107 108 112 111; 91 108 109 113 112; 92 109 110 114 113; 93 82 111 115 87
92. 94 111 112 116 115; 95 112 113 117 116; 96 113 114 118 117; 97 87 115 32 1
93. 98 115 116 34 32; 99 116 117 36 34; 100 117 118 5 36; 102 9 29 119 120
94. 103 29 30 121 119; 104 30 31 122 121; 105 31 3 123 122; 106 3 47 124 123
```

95. 107 47 48 125 124; 108 48 49 126 125; 109 49 6 127 126; 126 146 8 13 147
96. 127 147 13 20 148; 128 148 20 25 149; 129 149 25 9 150; 133 154 74 79 155
97. 134 155 79 84 156; 135 156 84 8 146; 136 150 9 120 157; 139 5 160 161 38
98. 140 38 161 162 42; 141 42 162 163 46; 142 46 163 164 6; 146 110 168 169 114
99. 147 114 169 170 118; 148 118 170 160 5; 149 6 164 171 127; 150 172 173 73 74
100. 151 173 174 75 73; 152 174 175 76 75; 153 175 176 77 76; 154 176 177 107 77
101. 155 177 178 108 107; 156 178 179 109 108; 157 179 180 110 109
102. 158 181 172 74 154; 159 180 182 168 110; 160 120 119 183 184
103. 161 119 121 185 183; 162 121 122 186 185; 163 122 123 187 186
104. 164 123 124 188 187; 165 124 125 189 188; 166 125 126 190 189
105. 167 126 127 191 190; 168 157 120 184 192; 169 127 171 193 191
106. 170 194 195 173 172; 171 195 196 174 173; 172 196 197 175 174
107. 173 197 198 176 175; 174 198 199 177 176; 175 199 200 178 177
108. 176 200 201 179 178; 177 201 202 180 179; 178 203 194 172 181
109. 179 202 204 182 180; 180 184 183 205 206; 181 183 185 207 205
110. 182 185 186 208 207; 183 186 187 209 208; 184 187 188 210 209
111. 185 188 189 211 210; 186 189 190 212 211; 187 190 191 213 212
112. 188 192 184 206 214; 189 191 193 215 213; 190 216 217 218 219
113. 191 217 220 221 218; 192 220 222 223 221; 193 222 224 225 223
114. 194 219 218 195 194; 195 218 221 196 195; 196 221 223 197 196
115. 197 223 225 198 197; 198 224 226 227 225; 199 226 228 229 227
116. 200 228 230 231 229; 201 230 232 233 231; 202 225 227 199 198
117. 203 227 229 200 199; 204 229 231 201 200; 205 231 233 202 201
118. 206 234 216 219 235; 207 235 219 194 203; 208 232 236 237 233
119. 209 233 237 204 202; 210 238 239 217 216; 211 239 240 220 217
120. 212 240 241 222 220; 213 241 242 224 222; 214 242 243 226 224
121. 215 243 244 228 226; 216 244 245 230 228; 217 245 246 232 230
122. 218 247 238 216 234; 219 246 248 236 232; 220 249 250 239 238
123. 221 250 251 240 239; 222 251 252 241 240; 223 252 253 242 241
124. 224 253 254 243 242; 225 254 255 244 243; 226 255 256 245 244
125. 227 256 257 246 245; 228 258 249 238 247; 229 257 259 248 246
126. 230 206 205 260 261; 231 205 207 262 260; 232 207 208 263 262
127. 233 208 209 264 263; 234 209 210 265 264; 235 210 211 266 265
128. 236 211 212 267 266; 237 212 213 268 267; 238 261 260 269 270
129. 239 260 262 271 269; 240 262 263 272 271; 241 263 264 273 272
130. 242 264 265 274 273; 243 265 266 275 274; 244 266 267 276 275
131. 245 267 268 277 276; 246 214 206 261 278; 247 278 261 270 279
132. 248 213 215 280 268; 249 268 280 281 277; 250 270 269 282 283
133. 251 269 271 284 282; 252 271 272 285 284; 253 272 273 286 285
134. 254 273 274 287 286; 255 274 275 288 287; 256 275 276 289 288
135. 257 276 277 290 289; 258 279 270 283 291; 259 277 281 292 290
136. 260 283 282 293 294; 261 282 284 295 293; 262 284 285 296 295
137. 263 285 286 297 296; 264 286 287 298 297; 265 287 288 299 298
138. 266 288 289 300 299; 267 289 290 301 300; 268 291 283 294 302
139. 269 290 292 303 301; 270 304 146 147 305; 271 305 147 148 306
140. 272 306 148 149 307; 273 307 149 150 308; 274 309 154 155 310
141. 275 310 155 156 311; 276 311 156 146 304; 277 308 150 157 312
142. 278 313 181 154 309; 279 312 157 192 314; 280 315 203 181 313
143. 281 314 192 214 316; 282 317 234 235 318; 283 318 235 203 315
144. 284 319 247 234 317; 285 320 258 247 319; 286 316 214 278 321
145. 287 321 278 279 322; 288 322 279 291 323; 289 323 291 302 324
146. 290 160 325 326 161; 291 161 326 327 162; 292 162 327 328 163
147. 293 163 328 329 164; 294 168 330 331 169; 295 169 331 332 170
148. 296 170 332 325 160; 297 164 329 333 171; 298 182 334 330 168
149. 299 171 333 335 193; 300 204 336 334 182; 301 193 335 337 215
150. 302 236 338 339 237; 303 237 339 336 204; 304 248 340 338 236

```
151. 305 259 341 340 248; 306 215 337 342 280; 307 280 342 343 281
152. 308 281 343 344 292; 309 292 344 345 303; 310 346 304 305 347
153. 311 347 305 306 348; 312 348 306 307 349; 313 349 307 308 350
154. 314 351 309 310 352; 315 352 310 311 353; 316 353 311 304 346
155. 317 350 308 312 354; 318 355 313 309 351; 319 354 312 314 356
156. 320 357 315 313 355; 321 356 314 316 358; 322 359 317 318 360
157. 323 360 318 315 357; 324 361 319 317 359; 325 362 320 319 361
158. 326 358 316 321 363; 327 363 321 322 364; 328 364 322 323 365
159. 329 365 323 324 366; 330 325 367 368 326; 331 326 368 369 327
160. 332 327 369 370 328; 333 328 370 371 329; 334 330 372 373 331
161. 335 331 373 374 332; 336 332 374 367 325; 337 329 371 375 333
162. 338 334 376 372 330; 339 333 375 377 335; 340 336 378 376 334
163. 341 335 377 379 337; 342 338 380 381 339; 343 339 381 378 336
164. 344 340 382 380 338; 345 341 383 382 340; 346 337 379 384 342
165. 347 342 384 385 343; 348 343 385 386 344; 349 344 386 387 345
166. START GROUP DEFINITION
167. ELEMENT
168. _MAX_BM 5 6 9 10 13 14 17 TO 20 23 24 27 28 31 TO 36 57 TO 66 89 TO 96 99 -
169. 100 102 TO 109 126 TO 129 133 TO 136 139 TO 142 146 TO 349
170. _MAX_SF 126 TO 129 133 TO 136 139 TO 142 146 TO 194 198 TO 201 205 TO 230 -
171. 237 TO 349
172. END GROUP DEFINITION
173. ELEMENT PROPERTY
174. 5 TO 36 57 TO 68 89 TO 100 102 TO 109 126 TO 129 133 TO 136 139 TO 142 146 -
175. 147 TO 349 THICKNESS 0.65
176. DEFINE MATERIAL START
177. ISOTROPIC CONCRETE
178. E 2.21467E+006
179. POISSON 0.17
180. DENSITY 2.40262
181. ALPHA 1E-005
182. DAMP 0.05
183. TYPE CONCRETE
184. STRENGTH FCU 2812.28
185. END DEFINE MATERIAL
186. MEMBER PROPERTY AMERICAN
187. 101 PRIS YD 0.85 ZD 0.85
188. CONSTANTS
189. MATERIAL CONCRETE ALL
190. SUPPORTS
191. 5 TO 36 57 TO 68 89 TO 100 102 TO 109 126 TO 129 133 TO 136 139 TO 142 146 -
192. 147 TO 349 PLATE MAT DIRECT Y SUBGRADE 5400 PRINT COMPRESSION
```

JOINT	INFLUENCE AREA
1	0.062500
3	0.062500
5	0.062500
6	0.062500
8	0.062500
9	0.062500
11	0.062500
12	0.062500
13	0.062500
14	0.062500

15	0.062500
16	0.062500
17	0.062500
18	0.062500
19	0.062500
20	0.062500
21	0.062500
22	0.062500
23	0.062500
24	0.062500
25	0.062500
26	0.062500
27	0.062500
28	0.062500
29	0.062500
30	0.062500
31	0.062500
32	0.062500
33	0.062500
34	0.062500
35	0.062500
36	0.062500
37	0.062500
38	0.062500
39	0.062500
40	0.062500
41	0.062500
42	0.062500
43	0.062500
44	0.062500
45	0.062500
46	0.062500
47	0.062500
48	0.062500
49	0.062500
73	0.062500
74	0.062500
75	0.062500
76	0.062500
77	0.062500
78	0.062500
79	0.062500
80	0.062500
81	0.062500
82	0.062500
83	0.062500
84	0.062500
85	0.062500
86	0.062500
87	0.062500
107	0.062500
108	0.062500
109	0.062500
110	0.062500
111	0.062500
112	0.062500

113	0.062500
114	0.062500
115	0.062500
116	0.062500
117	0.062500
118	0.062500
119	0.062500
120	0.062500
121	0.062500
122	0.062500
123	0.062500
124	0.062500
125	0.062500
126	0.062500
127	0.062500
146	0.062500
147	0.062500
148	0.062500
149	0.062500
150	0.062500
154	0.062500
155	0.062500
156	0.062500
157	0.062500
160	0.062500
161	0.062500
162	0.062500
163	0.062500
164	0.062500
168	0.062500
169	0.062500
170	0.062500
171	0.062500
172	0.062500
173	0.062500
174	0.062500
175	0.062500
176	0.062500
177	0.062500
178	0.062500
179	0.062500
180	0.062500
181	0.062500
182	0.062500
183	0.062500
184	0.062500
185	0.062500
186	0.062500
187	0.062500
188	0.062500
189	0.062500
190	0.062500
191	0.062500
192	0.062500
193	0.062500
194	0.062500

195	0.062500
196	0.062500
197	0.062500
198	0.062500
199	0.062500
200	0.062500
201	0.062500
202	0.062500
203	0.062500
204	0.062500
205	0.062500
206	0.062500
207	0.062500
208	0.062500
209	0.062500
210	0.062500
211	0.062500
212	0.062500
213	0.062500
214	0.062500
215	0.062500
216	0.062500
217	0.062500
218	0.062500
219	0.062500
220	0.062500
221	0.062500
222	0.062500
223	0.062500
224	0.062500
225	0.062500
226	0.062500
227	0.062500
228	0.062500
229	0.062500
230	0.062500
231	0.062500
232	0.062500
233	0.062500
234	0.062500
235	0.062500
236	0.062500
237	0.062500
238	0.062500
239	0.062500
240	0.062500
241	0.062500
242	0.062500
243	0.062500
244	0.062500
245	0.062500
246	0.062500
247	0.062500
248	0.062500
249	0.031250
250	0.031250

251	0.031250
252	0.031250
253	0.031250
254	0.031250
255	0.031250
256	0.031250
257	0.031250
258	0.031250
259	0.031250
260	0.062500
261	0.062500
262	0.062500
263	0.062500
264	0.062500
265	0.062500
266	0.062500
267	0.062500
268	0.062500
269	0.062500
270	0.062500
271	0.062500
272	0.062500
273	0.062500
274	0.062500
275	0.062500
276	0.062500
277	0.062500
278	0.062500
279	0.062500
280	0.062500
281	0.062500
282	0.062500
283	0.062500
284	0.062500
285	0.062500
286	0.062500
287	0.062500
288	0.062500
289	0.062500
290	0.062500
291	0.062500
292	0.062500
293	0.031250
294	0.031250
295	0.031250
296	0.031250
297	0.031250
298	0.031250
299	0.031250
300	0.031250
301	0.031250
302	0.031250
303	0.031250
304	0.062500
305	0.062500
306	0.062500

307	0.062500
308	0.062500
309	0.062500
310	0.062500
311	0.062500
312	0.062500
313	0.062500
314	0.062500
315	0.062500
316	0.062500
317	0.062500
318	0.062500
319	0.062500
320	0.031250
321	0.062500
322	0.062500
323	0.062500
324	0.031250
325	0.062500
326	0.062500
327	0.062500
328	0.062500
329	0.062500
330	0.062500
331	0.062500
332	0.062500
333	0.062500
334	0.062500
335	0.062500
336	0.062500
337	0.062500
338	0.062500
339	0.062500
340	0.062500
341	0.031250
342	0.062500
343	0.062500
344	0.062500
345	0.031250
346	0.031250
347	0.031250
348	0.031250
349	0.031250
350	0.031250
351	0.031250
352	0.031250
353	0.031250
354	0.031250
355	0.031250
356	0.031250
357	0.031250
358	0.031250
359	0.031250
360	0.031250
361	0.031250
362	0.015625

363	0.031250
364	0.031250
365	0.031250
366	0.015625
367	0.031250
368	0.031250
369	0.031250
370	0.031250
371	0.031250
372	0.031250
373	0.031250
374	0.031250
375	0.031250
376	0.031250
377	0.031250
378	0.031250
379	0.031250
380	0.031250
381	0.031250
382	0.031250
383	0.015625
384	0.031250
385	0.031250
386	0.031250
387	0.015625
TOTAL	17.500000

```
193. **ALLOWABLE STRESS LOAD COMBS FOR BEARING PRESSURE CHECK**********************
194. LOAD 1 LOADTYPE NONE  TITLE DL+LL
195. SELFWEIGHT Y -1
196. JOINT LOAD
197. *CRITICAL SUPPORT REACTIONS FROM STORAGE SUPERSTRUCTURE NODE 676
198. 2 FX 0 FY -16.8 FZ 2.2
199. ELEMENT LOAD
200. 5 TO 36 57 TO 68 89 TO 100 102 TO 109 126 TO 129 133 TO 136 139 TO 142 146 -
201. 147 TO 349 PR GY -4.5
202. 25 TO 36 106 TO 109 140 TO 142 149 164 TO 167 169 184 TO 187 189 234 TO 237 -
203. 242 TO 245 248 249 254 TO 257 259 264 TO 267 269 291 TO 293 297 299 301 306 -
204. 307 TO 309 331 TO 333 337 339 341 346 TO 349 PR GY -9.6
205. ******************************
206. LOAD 2 LOADTYPE NONE  TITLE DL+LR
207. SELFWEIGHT Y -1
208. JOINT LOAD
209. 2 FX 0 FY -14.3 FZ 2.4
210. ELEMENT LOAD
211. 5 TO 36 57 TO 68 89 TO 100 102 TO 109 126 TO 129 133 TO 136 139 TO 142 146 -
212. 147 TO 349 PR GY -4.5
213. 25 TO 36 106 TO 109 140 TO 142 149 164 TO 167 169 184 TO 187 189 234 TO 237 -
214. 242 TO 245 248 249 254 TO 257 259 264 TO 267 269 291 TO 293 297 299 301 306 -
215. 307 TO 309 331 TO 333 337 339 341 346 TO 349 PR GY -9.6
216. ******************************
217. LOAD 3 LOADTYPE NONE  TITLE DL+0.75*LL+0.75*LR+0.75CR1
218. JOINT LOAD
219. 2 FX 0 FY -17 FZ 2.4
220. SELFWEIGHT Y -1
221. ELEMENT LOAD
222. 5 TO 36 57 TO 68 89 TO 100 102 TO 109 126 TO 129 133 TO 136 139 TO 142 146 -
```

```
223. 147 TO 349 PR GY -4.5
224. 25 TO 36 106 TO 109 140 TO 142 149 164 TO 167 169 184 TO 187 189 234 TO 237 -
225. 242 TO 245 248 249 254 TO 257 259 264 TO 267 269 291 TO 293 297 299 301 306 -
226. 307 TO 309 331 TO 333 337 339 341 346 TO 349 PR GY -9.6
227. ************************
228. LOAD 4 LOADTYPE NONE  TITLE DL+0.75*LL+0.75*LR+0.75CR2
229. SELFWEIGHT Y -1
230. ELEMENT LOAD
231. 5 TO 36 57 TO 68 89 TO 100 102 TO 109 126 TO 129 133 TO 136 139 TO 142 146 -
232. 147 TO 349 PR GY -4.5
233. 25 TO 36 106 TO 109 140 TO 142 149 164 TO 167 169 184 TO 187 189 234 TO 237 -
234. 242 TO 245 248 249 254 TO 257 259 264 TO 267 269 291 TO 293 297 299 301 306 -
235. 307 TO 309 331 TO 333 337 339 341 346 TO 349 PR GY -9.6
236. JOINT LOAD
237. 2 FX 0 FY -16.6 FZ 2.2
238. ****************************
239. LOAD 5 LOADTYPE NONE  TITLE DL+0.75*LL+0.75*LR+0.75CR3
240. SELFWEIGHT Y -1
241. ELEMENT LOAD
242. 5 TO 36 57 TO 68 89 TO 100 102 TO 109 126 TO 129 133 TO 136 139 TO 142 146 -
243. 147 TO 349 PR GY -4.5
244. 25 TO 36 106 TO 109 140 TO 142 149 164 TO 167 169 184 TO 187 189 234 TO 237 -
245. 242 TO 245 248 249 254 TO 257 259 264 TO 267 269 291 TO 293 297 299 301 306 -
246. 307 TO 309 331 TO 333 337 339 341 346 TO 349 PR GY -9.6
247. JOINT LOAD
248. 2 FX 0 FY -16.8 FZ 2.3
249. ****************************
250. LOAD 6 LOADTYPE NONE  TITLE DL+0.75*LL+0.75*LR+0.75CR4
251. SELFWEIGHT Y -1
252. ELEMENT LOAD
253. 5 TO 36 57 TO 68 89 TO 100 102 TO 109 126 TO 129 133 TO 136 139 TO 142 146 -
254. 147 TO 349 PR GY -4.5
255. 25 TO 36 106 TO 109 140 TO 142 149 164 TO 167 169 184 TO 187 189 234 TO 237 -
256. 242 TO 245 248 249 254 TO 257 259 264 TO 267 269 291 TO 293 297 299 301 306 -
257. 307 TO 309 331 TO 333 337 339 341 346 TO 349 PR GY -9.6
258. JOINT LOAD
259. 2 FX 0 FY -17.3 FZ 2.5
260. ****************************
261. LOAD 7 LOADTYPE NONE  TITLE DL+0.75*LL+0.75*LR+0.75CR5
262. SELFWEIGHT Y -1
263. JOINT LOAD
264. 2 FX 0 FY -17.8 FZ 2.7
265. ELEMENT LOAD
266. 5 TO 36 57 TO 68 89 TO 100 102 TO 109 126 TO 129 133 TO 136 139 TO 142 146 -
267. 147 TO 349 PR GY -4.5
268. 25 TO 36 106 TO 109 140 TO 142 149 164 TO 167 169 184 TO 187 189 234 TO 237 -
269. 242 TO 245 248 249 254 TO 257 259 264 TO 267 269 291 TO 293 297 299 301 306 -
270. 307 TO 309 331 TO 333 337 339 341 346 TO 349 PR GY -9.6
271. ****************************
272. LOAD 8 LOADTYPE NONE  TITLE DL+0.75*LL+0.75*LR+0.75CR6
273. SELFWEIGHT Y -1
274. ELEMENT LOAD
275. 5 TO 36 57 TO 68 89 TO 100 102 TO 109 126 TO 129 133 TO 136 139 TO 142 146 -
276. 147 TO 349 PR GY -4.5
277. 25 TO 36 106 TO 109 140 TO 142 149 164 TO 167 169 184 TO 187 189 234 TO 237 -
278. 242 TO 245 248 249 254 TO 257 259 264 TO 267 269 291 TO 293 297 299 301 306 -
```

```
279. 307 TO 309 331 TO 333 337 339 341 346 TO 349 PR GY -9.6
280. JOINT LOAD
281. 2 FX 0 FY -17.4 FZ 2.6
282. ********************************
283. LOAD 9 LOADTYPE NONE  TITLE DL+0.75*(LL+LR+W(+X))
284. SELFWEIGHT Y -1
285. ELEMENT LOAD
286. 5 TO 36 57 TO 68 89 TO 100 102 TO 109 126 TO 129 133 TO 136 139 TO 142 146 -
287. 147 TO 349 PR GY -4.5
288. 25 TO 36 106 TO 109 140 TO 142 149 164 TO 167 169 184 TO 187 189 234 TO 237 -
289. 242 TO 245 248 249 254 TO 257 259 264 TO 267 269 291 TO 293 297 299 301 306 -
290. 307 TO 309 331 TO 333 337 339 341 346 TO 349 PR GY -9.6
291. JOINT LOAD
292. 2 FX 0.2 FY 4.5 FZ -8.5
293. ********************************
294. LOAD 10 LOADTYPE NONE  TITLE DL+0.75*(LL+LR+W(-X))
295. SELFWEIGHT Y -1
296. ELEMENT LOAD
297. 5 TO 36 57 TO 68 89 TO 100 102 TO 109 126 TO 129 133 TO 136 139 TO 142 146 -
298. 147 TO 349 PR GY -4.5
299. 25 TO 36 106 TO 109 140 TO 142 149 164 TO 167 169 184 TO 187 189 234 TO 237 -
300. 242 TO 245 248 249 254 TO 257 259 264 TO 267 269 291 TO 293 297 299 301 306 -
301. 307 TO 309 331 TO 333 337 339 341 346 TO 349 PR GY -9.6
302. JOINT LOAD
303. 2 FX 1.1 FY -9.1 FZ -2.3
304. ********************************
305. LOAD 11 LOADTYPE NONE  TITLE DL+0.75*(LL+LR+W(+Z))
306. SELFWEIGHT Y -1
307. ELEMENT LOAD
308. 5 TO 36 57 TO 68 89 TO 100 102 TO 109 126 TO 129 133 TO 136 139 TO 142 146 -
309. 147 TO 349 PR GY -4.5
310. 25 TO 36 106 TO 109 140 TO 142 149 164 TO 167 169 184 TO 187 189 234 TO 237 -
311. 242 TO 245 248 249 254 TO 257 259 264 TO 267 269 291 TO 293 297 299 301 306 -
312. 307 TO 309 331 TO 333 337 339 341 346 TO 349 PR GY -9.6
313. JOINT LOAD
314. 2 FX -0.4 FY -2.9 FZ -3
315. ********************************
316. LOAD 12 LOADTYPE NONE  TITLE DL+0.75*(LL+LR+W(-Z))
317. SELFWEIGHT Y -1
318. ELEMENT LOAD
319. 5 TO 36 57 TO 68 89 TO 100 102 TO 109 126 TO 129 133 TO 136 139 TO 142 146 -
320. 147 TO 349 PR GY -4.5
321. 25 TO 36 106 TO 109 140 TO 142 149 164 TO 167 169 184 TO 187 189 234 TO 237 -
322. 242 TO 245 248 249 254 TO 257 259 264 TO 267 269 291 TO 293 297 299 301 306 -
323. 307 TO 309 331 TO 333 337 339 341 346 TO 349 PR GY -9.6
324. JOINT LOAD
325. 2 FX 0 FY -6.2 FZ -1.4
326. ********************************
327. LOAD 13 LOADTYPE NONE  TITLE 0.6*D + 1.0W(+X)
328. SELFWEIGHT Y -1
329. ELEMENT LOAD
330. 5 TO 36 57 TO 68 89 TO 100 102 TO 109 126 TO 129 133 TO 136 139 TO 142 146 -
331. 147 TO 349 PR GY -2.7
332. 25 TO 36 106 TO 109 140 TO 142 149 164 TO 167 169 184 TO 187 189 234 TO 237 -
333. 242 TO 245 248 249 254 TO 257 259 264 TO 267 269 291 TO 293 297 299 301 306 -
334. 307 TO 309 331 TO 333 337 339 341 346 TO 349 PR GY -5.8
```

```
335. JOINT LOAD
336. 2 FX 0.3 FY 22.6 FZ -14
337. ********************************************
338. LOAD 14 LOADTYPE NONE  TITLE 0.6*D + 1.0W(-X)
339. SELFWEIGHT Y -1
340. ELEMENT LOAD
341. 5 TO 36 57 TO 68 89 TO 100 102 TO 109 126 TO 129 133 TO 136 139 TO 142 146 -
342. 147 TO 349 PR GY -2.7
343. 25 TO 36 106 TO 109 140 TO 142 149 164 TO 167 169 184 TO 187 189 234 TO 237 -
344. 242 TO 245 248 249 254 TO 257 259 264 TO 267 269 291 TO 293 297 299 301 306 -
345. 307 TO 309 331 TO 333 337 339 341 346 TO 349 PR GY -5.8
346. JOINT LOAD
347. 2 FX 1.4 FY 4.4 FZ -5.8
348. ********************************************
349. LOAD 15 LOADTYPE NONE  TITLE 0.6*D + 1.0W(+Z)
350. SELFWEIGHT Y -1
351. ELEMENT LOAD
352. 5 TO 36 57 TO 68 89 TO 100 102 TO 109 126 TO 129 133 TO 136 139 TO 142 146 -
353. 147 TO 349 PR GY -2.7
354. 25 TO 36 106 TO 109 140 TO 142 149 164 TO 167 169 184 TO 187 189 234 TO 237 -
355. 242 TO 245 248 249 254 TO 257 259 264 TO 267 269 291 TO 293 297 299 301 306 -
356. 307 TO 309 331 TO 333 337 339 341 346 TO 349 PR GY -5.8
357. JOINT LOAD
358. 2 FX -0.5 FY 12.7 FZ -6.8
359. ********************************************
360. LOAD 16 LOADTYPE NONE  TITLE 0.6*D + 1.0W(-Z)
361. SELFWEIGHT Y -1
362. ELEMENT LOAD
363. 5 TO 36 57 TO 68 89 TO 100 102 TO 109 126 TO 129 133 TO 136 139 TO 142 146 -
364. 147 TO 349 PR GY -2.7
365. 25 TO 36 106 TO 109 140 TO 142 149 164 TO 167 169 184 TO 187 189 234 TO 237 -
366. 242 TO 245 248 249 254 TO 257 259 264 TO 267 269 291 TO 293 297 299 301 306 -
367. 307 TO 309 331 TO 333 337 339 341 346 TO 349 PR GY -5.8
368. JOINT LOAD
369. 2 FX -0.1 FY 8.4 FZ -4.6
370. ********************************************
371. LOAD 17 LOADTYPE NONE  TITLE DL+0.75*(LL+LR+0.7E(+X))
372. SELFWEIGHT Y -1
373. ELEMENT LOAD
374. 5 TO 36 57 TO 68 89 TO 100 102 TO 109 126 TO 129 133 TO 136 139 TO 142 146 -
375. 147 TO 349 PR GY -4.5
376. 25 TO 36 106 TO 109 140 TO 142 149 164 TO 167 169 184 TO 187 189 234 TO 237 -
377. 242 TO 245 248 249 254 TO 257 259 264 TO 267 269 291 TO 293 297 299 301 306 -
378. 307 TO 309 331 TO 333 337 339 341 346 TO 349 PR GY -9.6
379. JOINT LOAD
380. 2 FX 0 FY -17.4 FZ 2.6
381. ********************************************
382. LOAD 18 LOADTYPE NONE  TITLE DL+0.75*(LL+LR+0.7E(-X))
383. SELFWEIGHT Y -1
384. ELEMENT LOAD
385. 5 TO 36 57 TO 68 89 TO 100 102 TO 109 126 TO 129 133 TO 136 139 TO 142 146 -
386. 147 TO 349 PR GY -4.5
387. 25 TO 36 106 TO 109 140 TO 142 149 164 TO 167 169 184 TO 187 189 234 TO 237 -
388. 242 TO 245 248 249 254 TO 257 259 264 TO 267 269 291 TO 293 297 299 301 306 -
389. 307 TO 309 331 TO 333 337 339 341 346 TO 349 PR GY -9.6
390. JOINT LOAD
```

```
391. 2 FX 0 FY -16.9 FZ 2.4
392. ************************************************
393. LOAD 19 LOADTYPE NONE  TITLE DL+0.75*(LL+LR+0.7E(+Z))
394. SELFWEIGHT Y -1
395. ELEMENT LOAD
396. 5 TO 36 57 TO 68 89 TO 100 102 TO 109 126 TO 129 133 TO 136 139 TO 142 146 -
397. 147 TO 349 PR GY -4.5
398. 25 TO 36 106 TO 109 140 TO 142 149 164 TO 167 169 184 TO 187 189 234 TO 237 -
399. 242 TO 245 248 249 254 TO 257 259 264 TO 267 269 291 TO 293 297 299 301 306 -
400. 307 TO 309 331 TO 333 337 339 341 346 TO 349 PR GY -9.6
401. JOINT LOAD
402. 2 FX 0 FY -21.5 FZ 4.2
403. ************************************************
404. LOAD 20 LOADTYPE NONE  TITLE DL+0.75*(LL+LR+0.7E(-Z))
405. SELFWEIGHT Y -1
406. ELEMENT LOAD
407. 5 TO 36 57 TO 68 89 TO 100 102 TO 109 126 TO 129 133 TO 136 139 TO 142 146 -
408. 147 TO 349 PR GY -4.5
409. 25 TO 36 106 TO 109 140 TO 142 149 164 TO 167 169 184 TO 187 189 234 TO 237 -
410. 242 TO 245 248 249 254 TO 257 259 264 TO 267 269 291 TO 293 297 299 301 306 -
411. 307 TO 309 331 TO 333 337 339 341 346 TO 349 PR GY -9.6
412. JOINT LOAD
413. 2 FX 0 FY -12.7 FZ 0.7
414. ************************************************
415. LOAD 21 LOADTYPE NONE  TITLE 0.6*D + 0.7E(+X)
416. SELFWEIGHT Y -1
417. ELEMENT LOAD
418. 5 TO 36 57 TO 68 89 TO 100 102 TO 109 126 TO 129 133 TO 136 139 TO 142 146 -
419. 147 TO 349 PR GY -2.7
420. 25 TO 36 106 TO 109 140 TO 142 149 164 TO 167 169 184 TO 187 189 234 TO 237 -
421. 242 TO 245 248 249 254 TO 257 259 264 TO 267 269 291 TO 293 297 299 301 306 -
422. 307 TO 309 331 TO 333 337 339 341 346 TO 349 PR GY -5.76
423. JOINT LOAD
424. 2 FX 0 FY -6.5 FZ 0.7
425. ************************************************
426. LOAD 22 LOADTYPE NONE  TITLE 0.6*D + 0.7E(-X)
427. SELFWEIGHT Y -1
428. ELEMENT LOAD
429. 5 TO 36 57 TO 68 89 TO 100 102 TO 109 126 TO 129 133 TO 136 139 TO 142 146 -
430. 147 TO 349 PR GY -2.7
431. 25 TO 36 106 TO 109 140 TO 142 149 164 TO 167 169 184 TO 187 189 234 TO 237 -
432. 242 TO 245 248 249 254 TO 257 259 264 TO 267 269 291 TO 293 297 299 301 306 -
433. 307 TO 309 331 TO 333 337 339 341 346 TO 349 PR GY -5.76
434. JOINT LOAD
435. 2 FX 0 FY -6 FZ 0.5
436. ************************************************
437. LOAD 23 LOADTYPE NONE  TITLE 0.6*D + 0.7E(+Z)
438. SELFWEIGHT Y -1
439. ELEMENT LOAD
440. 5 TO 36 57 TO 68 89 TO 100 102 TO 109 126 TO 129 133 TO 136 139 TO 142 146 -
441. 147 TO 349 PR GY -2.7
442. 25 TO 36 106 TO 109 140 TO 142 149 164 TO 167 169 184 TO 187 189 234 TO 237 -
443. 242 TO 245 248 249 254 TO 257 259 264 TO 267 269 291 TO 293 297 299 301 306 -
444. 307 TO 309 331 TO 333 337 339 341 346 TO 349 PR GY -5.76
445. JOINT LOAD
446. 2 FX 0 FY -9.6 FZ 1.9
```

```
447. ****************************************************
448. LOAD 24 LOADTYPE NONE  TITLE 0.6*D + 0.7E(-Z)
449. SELFWEIGHT Y -1
450. ELEMENT LOAD
451. 5 TO 36 57 TO 68 89 TO 100 102 TO 109 126 TO 129 133 TO 136 139 TO 142 146 -
452. 147 TO 349 PR GY -2.7
453. 25 TO 36 106 TO 109 140 TO 142 149 164 TO 167 169 184 TO 187 189 234 TO 237 -
454. 242 TO 245 248 249 254 TO 257 259 264 TO 267 269 291 TO 293 297 299 301 306 -
455. 307 TO 309 331 TO 333 337 339 341 346 TO 349 PR GY -5.76
456. JOINT LOAD
457. 2 FX 0 FY -2.9 FZ -0.8
458. ****************************************************************
459. **STRENGTH LOAD COMBS FOR DESIGN OF FOUNDATION*********************************
460. LOAD 101 LOADTYPE NONE  TITLE 1.4(DL+LL)
461. SELFWEIGHT Y -1
462. JOINT LOAD
463. *CRITICAL SUPPORT REACTIONS FROM STORAGE SUPERSTRUCTURE NODE 676
464. 2 FX 0 FY -23.5 FZ 3.1
465. ELEMENT LOAD
466. 5 TO 36 57 TO 68 89 TO 100 102 TO 109 126 TO 129 133 TO 136 139 TO 142 146 -
467. 147 TO 349 PR GY -6.3
468. 25 TO 36 106 TO 109 140 TO 142 149 164 TO 167 169 184 TO 187 189 234 TO 237 -
469. 242 TO 245 248 249 254 TO 257 259 264 TO 267 269 291 TO 293 297 299 301 306 -
470. 307 TO 309 331 TO 333 337 339 341 346 TO 349 PR GY -13.5
471. ********************************
472. LOAD 102 LOADTYPE NONE  TITLE 1.2DL+1.6LL + 0.5LR + 1.6 CR1
473. SELFWEIGHT Y -1
474. JOINT LOAD
475. 2 FX 0 FY -22.5 FZ 2.7
476. ELEMENT LOAD
477. 5 TO 36 57 TO 68 89 TO 100 102 TO 109 126 TO 129 133 TO 136 139 TO 142 146 -
478. 147 TO 349 PR GY -5.4
479. 25 TO 36 106 TO 109 140 TO 142 149 164 TO 167 169 184 TO 187 189 234 TO 237 -
480. 242 TO 245 248 249 254 TO 257 259 264 TO 267 269 291 TO 293 297 299 301 306 -
481. 307 TO 309 331 TO 333 337 339 341 346 TO 349 PR GY -11.5
482. ******************************
483. LOAD 103 LOADTYPE NONE  TITLE 1.2DL+1.6LL + 0.5LR + 1.6 CR2
484. JOINT LOAD
485. 2 FX 0 FY -21.8 FZ 2.4
486. SELFWEIGHT Y -1
487. ELEMENT LOAD
488. 5 TO 36 57 TO 68 89 TO 100 102 TO 109 126 TO 129 133 TO 136 139 TO 142 146 -
489. 147 TO 349 PR GY -5.4
490. 25 TO 36 106 TO 109 140 TO 142 149 164 TO 167 169 184 TO 187 189 234 TO 237 -
491. 242 TO 245 248 249 254 TO 257 259 264 TO 267 269 291 TO 293 297 299 301 306 -
492. 307 TO 309 331 TO 333 337 339 341 346 TO 349 PR GY -11.5
493. ************************
494. LOAD 104 LOADTYPE NONE  TITLE 1.2DL+1.6LL + 0.5LR + 1.6 CR3
495. SELFWEIGHT Y -1
496. ELEMENT LOAD
497. 5 TO 36 57 TO 68 89 TO 100 102 TO 109 126 TO 129 133 TO 136 139 TO 142 146 -
498. 147 TO 349 PR GY -5.4
499. 25 TO 36 106 TO 109 140 TO 142 149 164 TO 167 169 184 TO 187 189 234 TO 237 -
500. 242 TO 245 248 249 254 TO 257 259 264 TO 267 269 291 TO 293 297 299 301 306 -
501. 307 TO 309 331 TO 333 337 339 341 346 TO 349 PR GY -11.5
502. JOINT LOAD
```

```
2 FX 0 FY -22.2 FZ 2.6
*****************************
LOAD 105 LOADTYPE NONE  TITLE 1.2DL+1.6LL + 0.5LR + 1.6 CR4
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 57 TO 68 89 TO 100 102 TO 109 126 TO 129 133 TO 136 139 TO 142 146 -
147 TO 349 PR GY -5.4
25 TO 36 106 TO 109 140 TO 142 149 164 TO 167 169 184 TO 187 189 234 TO 237 -
242 TO 245 248 249 254 TO 257 259 264 TO 267 269 291 TO 293 297 299 301 306 -
307 TO 309 331 TO 333 337 339 341 346 TO 349 PR GY -11.5
JOINT LOAD
2 FX 0 FY -23.3 FZ 3.1
*****************************
LOAD 106 LOADTYPE NONE  TITLE 1.2DL+1.6LL + 0.5LR + 1.6 CR5
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 57 TO 68 89 TO 100 102 TO 109 126 TO 129 133 TO 136 139 TO 142 146 -
147 TO 349 PR GY -5.4
25 TO 36 106 TO 109 140 TO 142 149 164 TO 167 169 184 TO 187 189 234 TO 237 -
242 TO 245 248 249 254 TO 257 259 264 TO 267 269 291 TO 293 297 299 301 306 -
307 TO 309 331 TO 333 337 339 341 346 TO 349 PR GY -11.5
JOINT LOAD
2 FX 0 FY -24.2 FZ 3.5
*****************************
LOAD 107 LOADTYPE NONE  TITLE 1.2DL+1.6LL + 0.5LR + 1.6 CR6
SELFWEIGHT Y -1
JOINT LOAD
2 FX 0 FY -23.6 FZ 3.2
ELEMENT LOAD
5 TO 36 57 TO 68 89 TO 100 102 TO 109 126 TO 129 133 TO 136 139 TO 142 146 -
147 TO 349 PR GY -5.4
25 TO 36 106 TO 109 140 TO 142 149 164 TO 167 169 184 TO 187 189 234 TO 237 -
242 TO 245 248 249 254 TO 257 259 264 TO 267 269 291 TO 293 297 299 301 306 -
307 TO 309 331 TO 333 337 339 341 346 TO 349 PR GY -11.5
*****************************
LOAD 108 LOADTYPE NONE  TITLE 1.2DL+1.6LR+0.5W(+X)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 57 TO 68 89 TO 100 102 TO 109 126 TO 129 133 TO 136 139 TO 142 146 -
147 TO 349 PR GY -5.4
25 TO 36 106 TO 109 140 TO 142 149 164 TO 167 169 184 TO 187 189 234 TO 237 -
242 TO 245 248 249 254 TO 257 259 264 TO 267 269 291 TO 293 297 299 301 306 -
307 TO 309 331 TO 333 337 339 341 346 TO 349 PR GY -11.5
JOINT LOAD
2 FX 0.2 FY -3.5 FZ -4.3
*********************************
LOAD 109 LOADTYPE NONE  TITLE 1.2DL+1.6LR+0.5W(-X)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 57 TO 68 89 TO 100 102 TO 109 126 TO 129 133 TO 136 139 TO 142 146 -
147 TO 349 PR GY -5.4
25 TO 36 106 TO 109 140 TO 142 149 164 TO 167 169 184 TO 187 189 234 TO 237 -
242 TO 245 248 249 254 TO 257 259 264 TO 267 269 291 TO 293 297 299 301 306 -
307 TO 309 331 TO 333 337 339 341 346 TO 349 PR GY -11.5
JOINT LOAD
2 FX 0.7 FY -12.6 FZ -0.2
```

```
559. *********************************
560. LOAD 110 LOADTYPE NONE  TITLE 1.2DL+1.6LR+0.5W(+Z)
561. SELFWEIGHT Y -1
562. ELEMENT LOAD
563. 5 TO 36 57 TO 68 89 TO 100 102 TO 109 126 TO 129 133 TO 136 139 TO 142 146 -
564. 147 TO 349 PR GY -5.4
565. 25 TO 36 106 TO 109 140 TO 142 149 164 TO 167 169 184 TO 187 189 234 TO 237 -
566. 242 TO 245 248 249 254 TO 257 259 264 TO 267 269 291 TO 293 297 299 301 306 -
567. 307 TO 309 331 TO 333 337 339 341 346 TO 349 PR GY -11.5
568. JOINT LOAD
569. 2 FX -0.2 FY -8.5 FZ -0.7
570. *********************************
571. LOAD 111 LOADTYPE NONE  TITLE 1.2DL+1.6LR+0.5W(-Z)
572. SELFWEIGHT Y -1
573. ELEMENT LOAD
574. 5 TO 36 57 TO 68 89 TO 100 102 TO 109 126 TO 129 133 TO 136 139 TO 142 146 -
575. 147 TO 349 PR GY -5.4
576. 25 TO 36 106 TO 109 140 TO 142 149 164 TO 167 169 184 TO 187 189 234 TO 237 -
577. 242 TO 245 248 249 254 TO 257 259 264 TO 267 269 291 TO 293 297 299 301 306 -
578. 307 TO 309 331 TO 333 337 339 341 346 TO 349 PR GY -11.5
579. JOINT LOAD
580. 2 FX 0 FY -10.6 FZ 0.5
581. *************************************
582. LOAD 112 LOADTYPE NONE  TITLE 1.2DL+1.0L+0.5LR+1.6W(+X)
583. SELFWEIGHT Y -1
584. ELEMENT LOAD
585. 5 TO 36 57 TO 68 89 TO 100 102 TO 109 126 TO 129 133 TO 136 139 TO 142 146 -
586. 147 TO 349 PR GY -5.4
587. 25 TO 36 106 TO 109 140 TO 142 149 164 TO 167 169 184 TO 187 189 234 TO 237 -
588. 242 TO 245 248 249 254 TO 257 259 264 TO 267 269 291 TO 293 297 299 301 306 -
589. 307 TO 309 331 TO 333 337 339 341 346 TO 349 PR GY -11.5
590. JOINT LOAD
591. 2 FX 0.4 FY 25.9 FZ -20.5
593. *************************************
594. LOAD 113 LOADTYPE NONE  TITLE 1.2DL+1.0L+0.5LR+1.6W(-X)
595. SELFWEIGHT Y -1
596. ELEMENT LOAD
597. 5 TO 36 57 TO 68 89 TO 100 102 TO 109 126 TO 129 133 TO 136 139 TO 142 146 -
598. 147 TO 349 PR GY -5.4
599. 25 TO 36 106 TO 109 140 TO 142 149 164 TO 167 169 184 TO 187 189 234 TO 237 -
600. 242 TO 245 248 249 254 TO 257 259 264 TO 267 269 291 TO 293 297 299 301 306 -
601. 307 TO 309 331 TO 333 337 339 341 346 TO 349 PR GY -11.5
602. JOINT LOAD
603. 2 FX 2.3 FY -3.1 FZ -7.3
605. *****************************************
606. LOAD 114 LOADTYPE NONE  TITLE 1.2DL+1.0L+0.5LR+1.6W(+Z)
607. SELFWEIGHT Y -1
608. ELEMENT LOAD
609. 5 TO 36 57 TO 68 89 TO 100 102 TO 109 126 TO 129 133 TO 136 139 TO 142 146 -
610. 147 TO 349 PR GY -5.4
611. 25 TO 36 106 TO 109 140 TO 142 149 164 TO 167 169 184 TO 187 189 234 TO 237 -
612. 242 TO 245 248 249 254 TO 257 259 264 TO 267 269 291 TO 293 297 299 301 306 -
613. 307 TO 309 331 TO 333 337 339 341 346 TO 349 PR GY -11.5
614. JOINT LOAD
615. 2 FX -0.9 FY 10.1 FZ -8.9
617. *****************************************************
```

```
618. LOAD 115 LOADTYPE NONE  TITLE 1.2DL+1.0L+0.5LR+1.6W(-Z)
619. SELFWEIGHT Y -1
620. ELEMENT LOAD
621. 5 TO 36 57 TO 68 89 TO 100 102 TO 109 126 TO 129 133 TO 136 139 TO 142 146 -
622. 147 TO 349 PR GY -5.4
623. 25 TO 36 106 TO 109 140 TO 142 149 164 TO 167 169 184 TO 187 189 234 TO 237 -
624. 242 TO 245 248 249 254 TO 257 259 264 TO 267 269 291 TO 293 297 299 301 306 -
625. 307 TO 309 331 TO 333 337 339 341 346 TO 349 PR GY -11.5
626. JOINT LOAD
627. 2 FX -0.1 FY 3.2 FZ -5.4
629. ******************************************************
630. LOAD 116 LOADTYPE NONE  TITLE 0.9D + 1.6W(+X)
631. SELFWEIGHT Y -1
632. ELEMENT LOAD
633. 5 TO 36 57 TO 68 89 TO 100 102 TO 109 126 TO 129 133 TO 136 139 TO 142 146 -
634. 147 TO 349 PR GY -4
635. 25 TO 36 106 TO 109 140 TO 142 149 164 TO 167 169 184 TO 187 189 234 TO 237 -
636. 242 TO 245 248 249 254 TO 257 259 264 TO 267 269 291 TO 293 297 299 301 306 -
637. 307 TO 309 331 TO 333 337 339 341 346 TO 349 PR GY -8.64
638. JOINT LOAD
639. 2 FX 0.4 FY 36.7 FZ -22.5
641. ******************************************************
642. LOAD 117 LOADTYPE NONE  TITLE 0.9D + 1.6W(-X)
643. SELFWEIGHT Y -1
644. ELEMENT LOAD
645. 5 TO 36 57 TO 68 89 TO 100 102 TO 109 126 TO 129 133 TO 136 139 TO 142 146 -
646. 147 TO 349 PR GY -4
647. 25 TO 36 106 TO 109 140 TO 142 149 164 TO 167 169 184 TO 187 189 234 TO 237 -
648. 242 TO 245 248 249 254 TO 257 259 264 TO 267 269 291 TO 293 297 299 301 306 -
649. 307 TO 309 331 TO 333 337 339 341 346 TO 349 PR GY -8.64
650. JOINT LOAD
651. 2 FX 2.3 FY 7.7 FZ -9.3
653. ******************************************************
654. LOAD 118 LOADTYPE NONE  TITLE 0.9D + 1.6W(+Z)
655. SELFWEIGHT Y -1
656. ELEMENT LOAD
657. 5 TO 36 57 TO 68 89 TO 100 102 TO 109 126 TO 129 133 TO 136 139 TO 142 146 -
658. 147 TO 349 PR GY -4
659. 25 TO 36 106 TO 109 140 TO 142 149 164 TO 167 169 184 TO 187 189 234 TO 237 -
660. 242 TO 245 248 249 254 TO 257 259 264 TO 267 269 291 TO 293 297 299 301 306 -
661. 307 TO 309 331 TO 333 337 339 341 346 TO 349 PR GY -8.64
662. JOINT LOAD
663. 2 FX -0.9 FY 20.9 FZ -10.9
665. ******************************************************
666. LOAD 119 LOADTYPE NONE  TITLE 0.9D + 1.6W(-Z)
667. SELFWEIGHT Y -1
668. ELEMENT LOAD
669. 5 TO 36 57 TO 68 89 TO 100 102 TO 109 126 TO 129 133 TO 136 139 TO 142 146 -
670. 147 TO 349 PR GY -4
671. 25 TO 36 106 TO 109 140 TO 142 149 164 TO 167 169 184 TO 187 189 234 TO 237 -
672. 242 TO 245 248 249 254 TO 257 259 264 TO 267 269 291 TO 293 297 299 301 306 -
673. 307 TO 309 331 TO 333 337 339 341 346 TO 349 PR GY -8.64
674. JOINT LOAD
675. 2 FX -0.1 FY 14.0 FZ -7.3
677. ******************************************************
678. LOAD 120 LOADTYPE NONE  TITLE 1.2DL+1.0L+1.0E(+X)
```

```
679. SELFWEIGHT Y -1
680. ELEMENT LOAD
681. 5 TO 36 57 TO 68 89 TO 100 102 TO 109 126 TO 129 133 TO 136 139 TO 142 146 -
682. 147 TO 349 PR GY -5.4
683. 25 TO 36 106 TO 109 140 TO 142 149 164 TO 167 169 184 TO 187 189 234 TO 237 -
684. 242 TO 245 248 249 254 TO 257 259 264 TO 267 269 291 TO 293 297 299 301 306 -
685. 307 TO 309 331 TO 333 337 339 341 346 TO 349 PR GY -11.5
686. JOINT LOAD
687. 2 FX 0.0 FY -19.8 FZ 2.8
689. ************************************************
690. LOAD 121 LOADTYPE NONE  TITLE 1.2DL+1.0L+1.0E(-X)
691. SELFWEIGHT Y -1
692. ELEMENT LOAD
693. 5 TO 36 57 TO 68 89 TO 100 102 TO 109 126 TO 129 133 TO 136 139 TO 142 146 -
694. 147 TO 349 PR GY -5.4
695. 25 TO 36 106 TO 109 140 TO 142 149 164 TO 167 169 184 TO 187 189 234 TO 237 -
696. 242 TO 245 248 249 254 TO 257 259 264 TO 267 269 291 TO 293 297 299 301 306 -
697. 307 TO 309 331 TO 333 337 339 341 346 TO 349 PR GY -11.5
698. JOINT LOAD
699. 2 FX 0.0 FY -18.8 FZ 2.4
701. ************************************************
702. LOAD 122 LOADTYPE NONE  TITLE 1.2DL+1.0L+1.0E(+Z)
703. SELFWEIGHT Y -1
704. ELEMENT LOAD
705. 5 TO 36 57 TO 68 89 TO 100 102 TO 109 126 TO 129 133 TO 136 139 TO 142 146 -
706. 147 TO 349 PR GY -5.4
707. 25 TO 36 106 TO 109 140 TO 142 149 164 TO 167 169 184 TO 187 189 234 TO 237 -
708. 242 TO 245 248 249 254 TO 257 259 264 TO 267 269 291 TO 293 297 299 301 306 -
709. 307 TO 309 331 TO 333 337 339 341 346 TO 349 PR GY -11.5
710. JOINT LOAD
711. 2 FX 0.0 FY -27.7 FZ 5.9
713. ************************************************
714. LOAD 123 LOADTYPE NONE  TITLE 1.2DL+1.0L+1.0E(-Z)
715. SELFWEIGHT Y -1
716. ELEMENT LOAD
717. 5 TO 36 57 TO 68 89 TO 100 102 TO 109 126 TO 129 133 TO 136 139 TO 142 146 -
718. 147 TO 349 PR GY -5.4
719. 25 TO 36 106 TO 109 140 TO 142 149 164 TO 167 169 184 TO 187 189 234 TO 237 -
720. 242 TO 245 248 249 254 TO 257 259 264 TO 267 269 291 TO 293 297 299 301 306 -
721. 307 TO 309 331 TO 333 337 339 341 346 TO 349 PR GY -11.5
722. JOINT LOAD
723. 2 FX 0 FY -10.9 FZ -0.7
724. ************************************************
725. LOAD 124 LOADTYPE NONE  TITLE 0.9D + 1.0E(+X)
726. SELFWEIGHT Y -1
727. ELEMENT LOAD
728. 5 TO 36 57 TO 68 89 TO 100 102 TO 109 126 TO 129 133 TO 136 139 TO 142 146 -
729. 147 TO 349 PR GY -4.1
730. 25 TO 36 106 TO 109 140 TO 142 149 164 TO 167 169 184 TO 187 189 234 TO 237 -
731. 242 TO 245 248 249 254 TO 257 259 264 TO 267 269 291 TO 293 297 299 301 306 -
732. 307 TO 309 331 TO 333 337 339 341 346 TO 349 PR GY -8.64
733. JOINT LOAD
734. 2 FX 0 FY -11.5 FZ 1.9
735. ************************************************
736. LOAD 125 LOADTYPE NONE  TITLE 0.9D + 1.0E(-X)
737. SELFWEIGHT Y -1
```

```
738. ELEMENT LOAD
739. 5 TO 36 57 TO 68 89 TO 100 102 TO 109 126 TO 129 133 TO 136 139 TO 142 146 -
740. 147 TO 349 PR GY -4.1
741. 25 TO 36 106 TO 109 140 TO 142 149 164 TO 167 169 184 TO 187 189 234 TO 237 -
742. 242 TO 245 248 249 254 TO 257 259 264 TO 267 269 291 TO 293 297 299 301 306 -
743. 307 TO 309 331 TO 333 337 339 341 346 TO 349 PR GY -8.64
744. JOINT LOAD
745. 2 FX 0 FY -10.8 FZ 1.5
746. ************************************
747. LOAD 126 LOADTYPE NONE  TITLE 0.9D + 1.0E(+Z)
748. SELFWEIGHT Y -1
749. ELEMENT LOAD
750. 5 TO 36 57 TO 68 89 TO 100 102 TO 109 126 TO 129 133 TO 136 139 TO 142 146 -
751. 147 TO 349 PR GY -4.1
752. 25 TO 36 106 TO 109 140 TO 142 149 164 TO 167 169 184 TO 187 189 234 TO 237 -
753. 242 TO 245 248 249 254 TO 257 259 264 TO 267 269 291 TO 293 297 299 301 306 -
754. 307 TO 309 331 TO 333 337 339 341 346 TO 349 PR GY -8.64
755. JOINT LOAD
756. 2 FX 0 FY -15.9 FZ 3.6
757. ************************************
758. LOAD 127 LOADTYPE NONE  TITLE 0.9D + 1.0E(-Z)
759. SELFWEIGHT Y -1
760. ELEMENT LOAD
761. 5 TO 36 57 TO 68 89 TO 100 102 TO 109 126 TO 129 133 TO 136 139 TO 142 146 -
762. 147 TO 349 PR GY -4.1
763. 25 TO 36 106 TO 109 140 TO 142 149 164 TO 167 169 184 TO 187 189 234 TO 237 -
764. 242 TO 245 248 249 254 TO 257 259 264 TO 267 269 291 TO 293 297 299 301 306 -
765. 307 TO 309 331 TO 333 337 339 341 346 TO 349 PR GY -8.64
766. JOINT LOAD
767. 2 FX 0 FY -6.3 FZ -0.2
768. ************************************
769. PERFORM ANALYSIS
```

P R O B L E M S T A T I S T I C S

NUMBER OF JOINTS	**316**	**NUMBER OF MEMBERS**	**1**
NUMBER OF PLATES	**280**	**NUMBER OF SOLIDS**	**0**
NUMBER OF SURFACES	**0**	**NUMBER OF SUPPORTS**	**315**

SOLVER USED IS THE OUT-OF-CORE BASIC SOLVER

ORIGINAL/FINAL BAND-WIDTH= 169/ 25/ 78 DOF
TOTAL PRIMARY LOAD CASES = 51, TOTAL DEGREES OF FREEDOM = 951
TOTAL LOAD COMBINATION CASES = 0 SO FAR.
SIZE OF STIFFNESS MATRIX = 75 DOUBLE KILO-WORDS
REQRD/AVAIL. DISK SPACE = 14.9/ 165075.3 MB

**NOTE-Tension/Compression converged after 1 iterations, Case= 1

**NOTE-Tension/Compression converged after 1 iterations, Case= 2

**NOTE-Tension/Compression converged after 1 iterations, Case= 3

**NOTE-Tension/Compression converged after 1 iterations, Case= 4

**NOTE-Tension/Compression converged after 1 iterations, Case= 5

**NOTE-Tension/Compression converged after 1 iterations, Case= 6

**NOTE-Tension/Compression converged after 1 iterations, Case= 7

**NOTE-Tension/Compression converged after 1 iterations, Case= 8

**NOTE-Tension/Compression converged after 1 iterations, Case= 9

**NOTE-Tension/Compression converged after 1 iterations, Case= 10

**NOTE-Tension/Compression converged after 1 iterations, Case= 11

**NOTE-Tension/Compression converged after 1 iterations, Case= 12

**START ITERATION NO. 2
**START ITERATION NO. 3
**START ITERATION NO. 4

**NOTE-Tension/Compression converged after 4 iterations, Case= 13

**NOTE-Tension/Compression converged after 1 iterations, Case= 14

**NOTE-Tension/Compression converged after 1 iterations, Case= 15

**NOTE-Tension/Compression converged after 1 iterations, Case= 16

**NOTE-Tension/Compression converged after 1 iterations, Case= 17

**NOTE-Tension/Compression converged after 1 iterations, Case= 18

**NOTE-Tension/Compression converged after 1 iterations, Case= 19

**NOTE-Tension/Compression converged after 1 iterations, Case= 20

**NOTE-Tension/Compression converged after 1 iterations, Case= 21

**NOTE-Tension/Compression converged after 1 iterations, Case= 22

**NOTE-Tension/Compression converged after 1 iterations, Case= 23

**NOTE-Tension/Compression converged after 1 iterations, Case= 24

**NOTE-Tension/Compression converged after 1 iterations, Case= 101

**NOTE-Tension/Compression converged after 1 iterations, Case= 102

**NOTE-Tension/Compression converged after 1 iterations, Case= 104

**NOTE-Tension/Compression converged after 1 iterations, Case= 105

**NOTE-Tension/Compression converged after 1 iterations, Case= 106

**NOTE-Tension/Compression converged after 1 iterations, Case= 107

**NOTE-Tension/Compression converged after 1 iterations, Case= 108

**NOTE-Tension/Compression converged after 1 iterations, Case= 109

**NOTE-Tension/Compression converged after 1 iterations, Case= 110

**NOTE-Tension/Compression converged after 1 iterations, Case= 111

**START ITERATION NO. 2
**START ITERATION NO. 3

**NOTE-Tension/Compression converged after 3 iterations, Case= 112

**NOTE-Tension/Compression converged after 1 iterations, Case= 113

**NOTE-Tension/Compression converged after 1 iterations, Case= 114

**NOTE-Tension/Compression converged after 1 iterations, Case= 115

**START ITERATION NO. 2
**START ITERATION NO. 3
**START ITERATION NO. 4
**START ITERATION NO. 5

**NOTE-Tension/Compression converged after 5 iterations, Case= 116

**START ITERATION NO. 2

**NOTE-Tension/Compression converged after 2 iterations, Case= 117

**NOTE-Tension/Compression converged after 1 iterations, Case= 118

**NOTE-Tension/Compression converged after 1 iterations, Case= 119

**NOTE-Tension/Compression converged after 1 iterations, Case= 120

**NOTE-Tension/Compression converged after 1 iterations, Case= 121

**NOTE-Tension/Compression converged after 1 iterations, Case= 122

**NOTE-Tension/Compression converged after 1 iterations, Case= 123

**NOTE-Tension/Compression converged after 1 iterations, Case= 124

**NOTE-Tension/Compression converged after 1 iterations, Case= 125

**NOTE-Tension/Compression converged after 1 iterations, Case= 126

**NOTE-Tension/Compression converged after 1 iterations, Case= 127

```
770. LOAD LIST 1 TO 24
771. PRINT SUPPORT REACTION LIST 1 TO 3 5 6 8 9 11 TO 49 73 TO 87 107 TO 127 146 -
772. 147 TO 150 154 TO 157 160 TO 164 168 TO 171
```

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
1	1	0.00	0.64	0.00	0.00	0.00	0.00
	2	0.00	0.63	0.00	0.00	0.00	0.00
	3	0.00	0.64	0.00	0.00	0.00	0.00
	4	0.00	0.64	0.00	0.00	0.00	0.00
	5	0.00	0.64	0.00	0.00	0.00	0.00
	6	0.00	0.64	0.00	0.00	0.00	0.00
	7	0.00	0.64	0.00	0.00	0.00	0.00
	8	0.00	0.64	0.00	0.00	0.00	0.00
	9	0.00	0.61	0.00	0.00	0.00	0.00
	10	0.00	0.63	0.00	0.00	0.00	0.00
	11	0.00	0.61	0.00	0.00	0.00	0.00
	12	0.00	0.62	0.00	0.00	0.00	0.00
	13	0.00	0.39	0.00	0.00	0.00	0.00
	14	0.00	0.43	0.00	0.00	0.00	0.00
	15	0.00	0.40	0.00	0.00	0.00	0.00
	16	0.00	0.41	0.00	0.00	0.00	0.00
	17	0.00	0.64	0.00	0.00	0.00	0.00
	18	0.00	0.64	0.00	0.00	0.00	0.00
	19	0.00	0.65	0.00	0.00	0.00	0.00
	20	0.00	0.63	0.00	0.00	0.00	0.00
	21	0.00	0.44	0.00	0.00	0.00	0.00
	22	0.00	0.44	0.00	0.00	0.00	0.00
	23	0.00	0.45	0.00	0.00	0.00	0.00
	24	0.00	0.43	0.00	0.00	0.00	0.00
3	1	0.00	0.77	0.00	0.00	0.00	0.00
	2	0.00	0.76	0.00	0.00	0.00	0.00
	3	0.00	0.77	0.00	0.00	0.00	0.00
	4	0.00	0.77	0.00	0.00	0.00	0.00
	5	0.00	0.77	0.00	0.00	0.00	0.00
	6	0.00	0.77	0.00	0.00	0.00	0.00
	7	0.00	0.78	0.00	0.00	0.00	0.00
	8	0.00	0.78	0.00	0.00	0.00	0.00
	9	0.00	0.52	0.00	0.00	0.00	0.00
	10	0.00	0.67	0.00	0.00	0.00	0.00
	11	0.00	0.63	0.00	0.00	0.00	0.00
	12	0.00	0.67	0.00	0.00	0.00	0.00
	13	0.00	0.13	0.00	0.00	0.00	0.00
	14	0.00	0.36	0.00	0.00	0.00	0.00
	15	0.00	0.31	0.00	0.00	0.00	0.00
	16	0.00	0.36	0.00	0.00	0.00	0.00
	17	0.00	0.78	0.00	0.00	0.00	0.00
	18	0.00	0.77	0.00	0.00	0.00	0.00
	19	0.00	0.82	0.00	0.00	0.00	0.00
	20	0.00	0.73	0.00	0.00	0.00	0.00
	21	0.00	0.50	0.00	0.00	0.00	0.00
	22	0.00	0.50	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	23	0.00	0.53	0.00	0.00	0.00	0.00
	24	0.00	0.47	0.00	0.00	0.00	0.00
5	1	0.00	0.76	0.00	0.00	0.00	0.00
	2	0.00	0.74	0.00	0.00	0.00	0.00
	3	0.00	0.76	0.00	0.00	0.00	0.00
	4	0.00	0.76	0.00	0.00	0.00	0.00
	5	0.00	0.76	0.00	0.00	0.00	0.00
	6	0.00	0.76	0.00	0.00	0.00	0.00
	7	0.00	0.76	0.00	0.00	0.00	0.00
	8	0.00	0.76	0.00	0.00	0.00	0.00
	9	0.00	0.72	0.00	0.00	0.00	0.00
	10	0.00	0.78	0.00	0.00	0.00	0.00
	11	0.00	0.71	0.00	0.00	0.00	0.00
	12	0.00	0.73	0.00	0.00	0.00	0.00
	13	0.00	0.47	0.00	0.00	0.00	0.00
	14	0.00	0.54	0.00	0.00	0.00	0.00
	15	0.00	0.45	0.00	0.00	0.00	0.00
	16	0.00	0.47	0.00	0.00	0.00	0.00
	17	0.00	0.76	0.00	0.00	0.00	0.00
	18	0.00	0.76	0.00	0.00	0.00	0.00
	19	0.00	0.77	0.00	0.00	0.00	0.00
	20	0.00	0.75	0.00	0.00	0.00	0.00
	21	0.00	0.51	0.00	0.00	0.00	0.00
	22	0.00	0.51	0.00	0.00	0.00	0.00
	23	0.00	0.51	0.00	0.00	0.00	0.00
	24	0.00	0.50	0.00	0.00	0.00	0.00
6	1	0.00	0.90	0.00	0.00	0.00	0.00
	2	0.00	0.89	0.00	0.00	0.00	0.00
	3	0.00	0.90	0.00	0.00	0.00	0.00
	4	0.00	0.89	0.00	0.00	0.00	0.00
	5	0.00	0.90	0.00	0.00	0.00	0.00
	6	0.00	0.90	0.00	0.00	0.00	0.00
	7	0.00	0.91	0.00	0.00	0.00	0.00
	8	0.00	0.90	0.00	0.00	0.00	0.00
	9	0.00	0.68	0.00	0.00	0.00	0.00
	10	0.00	0.84	0.00	0.00	0.00	0.00
	11	0.00	0.76	0.00	0.00	0.00	0.00
	12	0.00	0.81	0.00	0.00	0.00	0.00
	13	0.00	0.27	0.00	0.00	0.00	0.00
	14	0.00	0.50	0.00	0.00	0.00	0.00
	15	0.00	0.39	0.00	0.00	0.00	0.00
	16	0.00	0.45	0.00	0.00	0.00	0.00
	17	0.00	0.90	0.00	0.00	0.00	0.00
	18	0.00	0.90	0.00	0.00	0.00	0.00
	19	0.00	0.94	0.00	0.00	0.00	0.00
	20	0.00	0.86	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	21	0.00	0.58	0.00	0.00	0.00	0.00
	22	0.00	0.57	0.00	0.00	0.00	0.00
	23	0.00	0.61	0.00	0.00	0.00	0.00
	24	0.00	0.55	0.00	0.00	0.00	0.00
8	1	0.00	0.51	0.00	0.00	0.00	0.00
	2	0.00	0.50	0.00	0.00	0.00	0.00
	3	0.00	0.51	0.00	0.00	0.00	0.00
	4	0.00	0.51	0.00	0.00	0.00	0.00
	5	0.00	0.51	0.00	0.00	0.00	0.00
	6	0.00	0.51	0.00	0.00	0.00	0.00
	7	0.00	0.51	0.00	0.00	0.00	0.00
	8	0.00	0.51	0.00	0.00	0.00	0.00
	9	0.00	0.46	0.00	0.00	0.00	0.00
	10	0.00	0.46	0.00	0.00	0.00	0.00
	11	0.00	0.49	0.00	0.00	0.00	0.00
	12	0.00	0.48	0.00	0.00	0.00	0.00
	13	0.00	0.26	0.00	0.00	0.00	0.00
	14	0.00	0.30	0.00	0.00	0.00	0.00
	15	0.00	0.33	0.00	0.00	0.00	0.00
	16	0.00	0.33	0.00	0.00	0.00	0.00
	17	0.00	0.51	0.00	0.00	0.00	0.00
	18	0.00	0.51	0.00	0.00	0.00	0.00
	19	0.00	0.52	0.00	0.00	0.00	0.00
	20	0.00	0.50	0.00	0.00	0.00	0.00
	21	0.00	0.36	0.00	0.00	0.00	0.00
	22	0.00	0.36	0.00	0.00	0.00	0.00
	23	0.00	0.37	0.00	0.00	0.00	0.00
	24	0.00	0.35	0.00	0.00	0.00	0.00
9	1	0.00	0.62	0.00	0.00	0.00	0.00
	2	0.00	0.61	0.00	0.00	0.00	0.00
	3	0.00	0.62	0.00	0.00	0.00	0.00
	4	0.00	0.62	0.00	0.00	0.00	0.00
	5	0.00	0.62	0.00	0.00	0.00	0.00
	6	0.00	0.62	0.00	0.00	0.00	0.00
	7	0.00	0.63	0.00	0.00	0.00	0.00
	8	0.00	0.63	0.00	0.00	0.00	0.00
	9	0.00	0.39	0.00	0.00	0.00	0.00
	10	0.00	0.49	0.00	0.00	0.00	0.00
	11	0.00	0.51	0.00	0.00	0.00	0.00
	12	0.00	0.53	0.00	0.00	0.00	0.00
	13	0.00	0.04	0.00	0.00	0.00	0.00
	14	0.00	0.24	0.00	0.00	0.00	0.00
	15	0.00	0.26	0.00	0.00	0.00	0.00
	16	0.00	0.29	0.00	0.00	0.00	0.00
	17	0.00	0.63	0.00	0.00	0.00	0.00
	18	0.00	0.62	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	19	0.00	0.66	0.00	0.00	0.00	0.00
	20	0.00	0.58	0.00	0.00	0.00	0.00
	21	0.00	0.41	0.00	0.00	0.00	0.00
	22	0.00	0.41	0.00	0.00	0.00	0.00
	23	0.00	0.44	0.00	0.00	0.00	0.00
	24	0.00	0.38	0.00	0.00	0.00	0.00
11	1	0.00	0.54	0.00	0.00	0.00	0.00
	2	0.00	0.53	0.00	0.00	0.00	0.00
	3	0.00	0.54	0.00	0.00	0.00	0.00
	4	0.00	0.54	0.00	0.00	0.00	0.00
	5	0.00	0.54	0.00	0.00	0.00	0.00
	6	0.00	0.54	0.00	0.00	0.00	0.00
	7	0.00	0.54	0.00	0.00	0.00	0.00
	8	0.00	0.54	0.00	0.00	0.00	0.00
	9	0.00	0.50	0.00	0.00	0.00	0.00
	10	0.00	0.50	0.00	0.00	0.00	0.00
	11	0.00	0.52	0.00	0.00	0.00	0.00
	12	0.00	0.52	0.00	0.00	0.00	0.00
	13	0.00	0.29	0.00	0.00	0.00	0.00
	14	0.00	0.33	0.00	0.00	0.00	0.00
	15	0.00	0.35	0.00	0.00	0.00	0.00
	16	0.00	0.35	0.00	0.00	0.00	0.00
	17	0.00	0.54	0.00	0.00	0.00	0.00
	18	0.00	0.54	0.00	0.00	0.00	0.00
	19	0.00	0.55	0.00	0.00	0.00	0.00
	20	0.00	0.53	0.00	0.00	0.00	0.00
	21	0.00	0.38	0.00	0.00	0.00	0.00
	22	0.00	0.38	0.00	0.00	0.00	0.00
	23	0.00	0.39	0.00	0.00	0.00	0.00
	24	0.00	0.37	0.00	0.00	0.00	0.00
12	1	0.00	0.57	0.00	0.00	0.00	0.00
	2	0.00	0.56	0.00	0.00	0.00	0.00
	3	0.00	0.58	0.00	0.00	0.00	0.00
	4	0.00	0.57	0.00	0.00	0.00	0.00
	5	0.00	0.57	0.00	0.00	0.00	0.00
	6	0.00	0.58	0.00	0.00	0.00	0.00
	7	0.00	0.58	0.00	0.00	0.00	0.00
	8	0.00	0.58	0.00	0.00	0.00	0.00
	9	0.00	0.48	0.00	0.00	0.00	0.00
	10	0.00	0.51	0.00	0.00	0.00	0.00
	11	0.00	0.53	0.00	0.00	0.00	0.00
	12	0.00	0.53	0.00	0.00	0.00	0.00
	13	0.00	0.23	0.00	0.00	0.00	0.00
	14	0.00	0.31	0.00	0.00	0.00	0.00
	15	0.00	0.33	0.00	0.00	0.00	0.00
	16	0.00	0.34	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	17	0.00	0.58	0.00	0.00	0.00	0.00
	18	0.00	0.57	0.00	0.00	0.00	0.00
	19	0.00	0.59	0.00	0.00	0.00	0.00
	20	0.00	0.56	0.00	0.00	0.00	0.00
	21	0.00	0.40	0.00	0.00	0.00	0.00
	22	0.00	0.39	0.00	0.00	0.00	0.00
	23	0.00	0.41	0.00	0.00	0.00	0.00
	24	0.00	0.38	0.00	0.00	0.00	0.00
13	1	0.00	0.54	0.00	0.00	0.00	0.00
	2	0.00	0.53	0.00	0.00	0.00	0.00
	3	0.00	0.54	0.00	0.00	0.00	0.00
	4	0.00	0.54	0.00	0.00	0.00	0.00
	5	0.00	0.54	0.00	0.00	0.00	0.00
	6	0.00	0.54	0.00	0.00	0.00	0.00
	7	0.00	0.54	0.00	0.00	0.00	0.00
	8	0.00	0.54	0.00	0.00	0.00	0.00
	9	0.00	0.44	0.00	0.00	0.00	0.00
	10	0.00	0.47	0.00	0.00	0.00	0.00
	11	0.00	0.50	0.00	0.00	0.00	0.00
	12	0.00	0.49	0.00	0.00	0.00	0.00
	13	0.00	0.21	0.00	0.00	0.00	0.00
	14	0.00	0.28	0.00	0.00	0.00	0.00
	15	0.00	0.31	0.00	0.00	0.00	0.00
	16	0.00	0.32	0.00	0.00	0.00	0.00
	17	0.00	0.54	0.00	0.00	0.00	0.00
	18	0.00	0.54	0.00	0.00	0.00	0.00
	19	0.00	0.56	0.00	0.00	0.00	0.00
	20	0.00	0.52	0.00	0.00	0.00	0.00
	21	0.00	0.37	0.00	0.00	0.00	0.00
	22	0.00	0.37	0.00	0.00	0.00	0.00
	23	0.00	0.39	0.00	0.00	0.00	0.00
	24	0.00	0.36	0.00	0.00	0.00	0.00
14	1	0.00	0.58	0.00	0.00	0.00	0.00
	2	0.00	0.56	0.00	0.00	0.00	0.00
	3	0.00	0.58	0.00	0.00	0.00	0.00
	4	0.00	0.58	0.00	0.00	0.00	0.00
	5	0.00	0.58	0.00	0.00	0.00	0.00
	6	0.00	0.58	0.00	0.00	0.00	0.00
	7	0.00	0.58	0.00	0.00	0.00	0.00
	8	0.00	0.58	0.00	0.00	0.00	0.00
	9	0.00	0.54	0.00	0.00	0.00	0.00
	10	0.00	0.55	0.00	0.00	0.00	0.00
	11	0.00	0.55	0.00	0.00	0.00	0.00
	12	0.00	0.55	0.00	0.00	0.00	0.00
	13	0.00	0.32	0.00	0.00	0.00	0.00
	14	0.00	0.36	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	15	0.00	0.37	0.00	0.00	0.00	0.00
	16	0.00	0.37	0.00	0.00	0.00	0.00
	17	0.00	0.58	0.00	0.00	0.00	0.00
	18	0.00	0.58	0.00	0.00	0.00	0.00
	19	0.00	0.59	0.00	0.00	0.00	0.00
	20	0.00	0.57	0.00	0.00	0.00	0.00
	21	0.00	0.40	0.00	0.00	0.00	0.00
	22	0.00	0.40	0.00	0.00	0.00	0.00
	23	0.00	0.41	0.00	0.00	0.00	0.00
	24	0.00	0.39	0.00	0.00	0.00	0.00
15	1	0.00	0.61	0.00	0.00	0.00	0.00
	2	0.00	0.60	0.00	0.00	0.00	0.00
	3	0.00	0.61	0.00	0.00	0.00	0.00
	4	0.00	0.61	0.00	0.00	0.00	0.00
	5	0.00	0.61	0.00	0.00	0.00	0.00
	6	0.00	0.61	0.00	0.00	0.00	0.00
	7	0.00	0.61	0.00	0.00	0.00	0.00
	8	0.00	0.61	0.00	0.00	0.00	0.00
	9	0.00	0.51	0.00	0.00	0.00	0.00
	10	0.00	0.56	0.00	0.00	0.00	0.00
	11	0.00	0.56	0.00	0.00	0.00	0.00
	12	0.00	0.56	0.00	0.00	0.00	0.00
	13	0.00	0.26	0.00	0.00	0.00	0.00
	14	0.00	0.34	0.00	0.00	0.00	0.00
	15	0.00	0.34	0.00	0.00	0.00	0.00
	16	0.00	0.35	0.00	0.00	0.00	0.00
	17	0.00	0.61	0.00	0.00	0.00	0.00
	18	0.00	0.61	0.00	0.00	0.00	0.00
	19	0.00	0.63	0.00	0.00	0.00	0.00
	20	0.00	0.59	0.00	0.00	0.00	0.00
	21	0.00	0.42	0.00	0.00	0.00	0.00
	22	0.00	0.42	0.00	0.00	0.00	0.00
	23	0.00	0.43	0.00	0.00	0.00	0.00
	24	0.00	0.40	0.00	0.00	0.00	0.00
16	1	0.00	0.61	0.00	0.00	0.00	0.00
	2	0.00	0.60	0.00	0.00	0.00	0.00
	3	0.00	0.61	0.00	0.00	0.00	0.00
	4	0.00	0.61	0.00	0.00	0.00	0.00
	5	0.00	0.61	0.00	0.00	0.00	0.00
	6	0.00	0.61	0.00	0.00	0.00	0.00
	7	0.00	0.61	0.00	0.00	0.00	0.00
	8	0.00	0.61	0.00	0.00	0.00	0.00
	9	0.00	0.58	0.00	0.00	0.00	0.00
	10	0.00	0.59	0.00	0.00	0.00	0.00
	11	0.00	0.58	0.00	0.00	0.00	0.00
	12	0.00	0.58	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	13	0.00	0.36	0.00	0.00	0.00	0.00
	14	0.00	0.40	0.00	0.00	0.00	0.00
	15	0.00	0.39	0.00	0.00	0.00	0.00
	16	0.00	0.39	0.00	0.00	0.00	0.00
	17	0.00	0.61	0.00	0.00	0.00	0.00
	18	0.00	0.61	0.00	0.00	0.00	0.00
	19	0.00	0.62	0.00	0.00	0.00	0.00
	20	0.00	0.60	0.00	0.00	0.00	0.00
	21	0.00	0.42	0.00	0.00	0.00	0.00
	22	0.00	0.42	0.00	0.00	0.00	0.00
	23	0.00	0.43	0.00	0.00	0.00	0.00
	24	0.00	0.41	0.00	0.00	0.00	0.00
17	1	0.00	0.65	0.00	0.00	0.00	0.00
	2	0.00	0.64	0.00	0.00	0.00	0.00
	3	0.00	0.65	0.00	0.00	0.00	0.00
	4	0.00	0.65	0.00	0.00	0.00	0.00
	5	0.00	0.65	0.00	0.00	0.00	0.00
	6	0.00	0.65	0.00	0.00	0.00	0.00
	7	0.00	0.65	0.00	0.00	0.00	0.00
	8	0.00	0.65	0.00	0.00	0.00	0.00
	9	0.00	0.55	0.00	0.00	0.00	0.00
	10	0.00	0.60	0.00	0.00	0.00	0.00
	11	0.00	0.59	0.00	0.00	0.00	0.00
	12	0.00	0.60	0.00	0.00	0.00	0.00
	13	0.00	0.28	0.00	0.00	0.00	0.00
	14	0.00	0.38	0.00	0.00	0.00	0.00
	15	0.00	0.36	0.00	0.00	0.00	0.00
	16	0.00	0.37	0.00	0.00	0.00	0.00
	17	0.00	0.65	0.00	0.00	0.00	0.00
	18	0.00	0.65	0.00	0.00	0.00	0.00
	19	0.00	0.67	0.00	0.00	0.00	0.00
	20	0.00	0.63	0.00	0.00	0.00	0.00
	21	0.00	0.44	0.00	0.00	0.00	0.00
	22	0.00	0.44	0.00	0.00	0.00	0.00
	23	0.00	0.45	0.00	0.00	0.00	0.00
	24	0.00	0.42	0.00	0.00	0.00	0.00
18	1	0.00	0.69	-2.20	0.00	0.00	0.00
	2	0.00	0.67	-2.40	0.00	0.00	0.00
	3	0.00	0.69	-2.40	0.00	0.00	0.00
	4	0.00	0.69	-2.20	0.00	0.00	0.00
	5	0.00	0.69	-2.30	0.00	0.00	0.00
	6	0.00	0.69	-2.50	0.00	0.00	0.00
	7	0.00	0.69	-2.70	0.00	0.00	0.00
	8	0.00	0.69	-2.60	0.00	0.00	0.00
	9	-0.20	0.58	8.50	0.00	0.00	0.00
	10	-1.10	0.65	2.30	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	11	0.40	0.62	3.00	0.00	0.00	0.00
	12	0.00	0.64	1.40	0.00	0.00	0.00
	13	-0.30	0.31	14.00	0.00	0.00	0.00
	14	-1.40	0.41	5.80	0.00	0.00	0.00
	15	0.50	0.37	6.80	0.00	0.00	0.00
	16	0.10	0.39	4.60	0.00	0.00	0.00
	17	0.00	0.69	-2.60	0.00	0.00	0.00
	18	0.00	0.69	-2.40	0.00	0.00	0.00
	19	0.00	0.71	-4.20	0.00	0.00	0.00
	20	0.00	0.67	-0.70	0.00	0.00	0.00
	21	0.00	0.46	-0.70	0.00	0.00	0.00
	22	0.00	0.46	-0.50	0.00	0.00	0.00
	23	0.00	0.48	-1.90	0.00	0.00	0.00
	24	0.00	0.45	0.80	0.00	0.00	0.00
19	1	0.00	0.60	0.00	0.00	0.00	0.00
	2	0.00	0.59	0.00	0.00	0.00	0.00
	3	0.00	0.61	0.00	0.00	0.00	0.00
	4	0.00	0.60	0.00	0.00	0.00	0.00
	5	0.00	0.60	0.00	0.00	0.00	0.00
	6	0.00	0.61	0.00	0.00	0.00	0.00
	7	0.00	0.61	0.00	0.00	0.00	0.00
	8	0.00	0.61	0.00	0.00	0.00	0.00
	9	0.00	0.46	0.00	0.00	0.00	0.00
	10	0.00	0.52	0.00	0.00	0.00	0.00
	11	0.00	0.53	0.00	0.00	0.00	0.00
	12	0.00	0.54	0.00	0.00	0.00	0.00
	13	0.00	0.17	0.00	0.00	0.00	0.00
	14	0.00	0.30	0.00	0.00	0.00	0.00
	15	0.00	0.31	0.00	0.00	0.00	0.00
	16	0.00	0.32	0.00	0.00	0.00	0.00
	17	0.00	0.61	0.00	0.00	0.00	0.00
	18	0.00	0.61	0.00	0.00	0.00	0.00
	19	0.00	0.63	0.00	0.00	0.00	0.00
	20	0.00	0.58	0.00	0.00	0.00	0.00
	21	0.00	0.41	0.00	0.00	0.00	0.00
	22	0.00	0.41	0.00	0.00	0.00	0.00
	23	0.00	0.43	0.00	0.00	0.00	0.00
	24	0.00	0.39	0.00	0.00	0.00	0.00
20	1	0.00	0.57	0.00	0.00	0.00	0.00
	2	0.00	0.56	0.00	0.00	0.00	0.00
	3	0.00	0.57	0.00	0.00	0.00	0.00
	4	0.00	0.57	0.00	0.00	0.00	0.00
	5	0.00	0.57	0.00	0.00	0.00	0.00
	6	0.00	0.57	0.00	0.00	0.00	0.00
	7	0.00	0.57	0.00	0.00	0.00	0.00
	8	0.00	0.57	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	9	0.00	0.42	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.50	0.00	0.00	0.00	0.00
	12	0.00	0.51	0.00	0.00	0.00	0.00
	13	0.00	0.15	0.00	0.00	0.00	0.00
	14	0.00	0.26	0.00	0.00	0.00	0.00
	15	0.00	0.29	0.00	0.00	0.00	0.00
	16	0.00	0.31	0.00	0.00	0.00	0.00
	17	0.00	0.57	0.00	0.00	0.00	0.00
	18	0.00	0.57	0.00	0.00	0.00	0.00
	19	0.00	0.60	0.00	0.00	0.00	0.00
	20	0.00	0.54	0.00	0.00	0.00	0.00
	21	0.00	0.39	0.00	0.00	0.00	0.00
	22	0.00	0.39	0.00	0.00	0.00	0.00
	23	0.00	0.41	0.00	0.00	0.00	0.00
	24	0.00	0.37	0.00	0.00	0.00	0.00
21	1	0.00	0.64	0.00	0.00	0.00	0.00
	2	0.00	0.63	0.00	0.00	0.00	0.00
	3	0.00	0.64	0.00	0.00	0.00	0.00
	4	0.00	0.64	0.00	0.00	0.00	0.00
	5	0.00	0.64	0.00	0.00	0.00	0.00
	6	0.00	0.65	0.00	0.00	0.00	0.00
	7	0.00	0.65	0.00	0.00	0.00	0.00
	8	0.00	0.65	0.00	0.00	0.00	0.00
	9	0.00	0.49	0.00	0.00	0.00	0.00
	10	0.00	0.56	0.00	0.00	0.00	0.00
	11	0.00	0.56	0.00	0.00	0.00	0.00
	12	0.00	0.58	0.00	0.00	0.00	0.00
	13	0.00	0.19	0.00	0.00	0.00	0.00
	14	0.00	0.33	0.00	0.00	0.00	0.00
	15	0.00	0.32	0.00	0.00	0.00	0.00
	16	0.00	0.34	0.00	0.00	0.00	0.00
	17	0.00	0.65	0.00	0.00	0.00	0.00
	18	0.00	0.64	0.00	0.00	0.00	0.00
	19	0.00	0.67	0.00	0.00	0.00	0.00
	20	0.00	0.62	0.00	0.00	0.00	0.00
	21	0.00	0.43	0.00	0.00	0.00	0.00
	22	0.00	0.43	0.00	0.00	0.00	0.00
	23	0.00	0.45	0.00	0.00	0.00	0.00
	24	0.00	0.41	0.00	0.00	0.00	0.00
22	1	0.00	0.68	0.00	0.00	0.00	0.00
	2	0.00	0.67	0.00	0.00	0.00	0.00
	3	0.00	0.68	0.00	0.00	0.00	0.00
	4	0.00	0.68	0.00	0.00	0.00	0.00
	5	0.00	0.68	0.00	0.00	0.00	0.00
	6	0.00	0.68	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	7	0.00	0.69	0.00	0.00	0.00	0.00
	8	0.00	0.68	0.00	0.00	0.00	0.00
	9	0.00	0.52	0.00	0.00	0.00	0.00
	10	0.00	0.61	0.00	0.00	0.00	0.00
	11	0.00	0.59	0.00	0.00	0.00	0.00
	12	0.00	0.61	0.00	0.00	0.00	0.00
	13	0.00	0.21	0.00	0.00	0.00	0.00
	14	0.00	0.36	0.00	0.00	0.00	0.00
	15	0.00	0.33	0.00	0.00	0.00	0.00
	16	0.00	0.36	0.00	0.00	0.00	0.00
	17	0.00	0.68	0.00	0.00	0.00	0.00
	18	0.00	0.68	0.00	0.00	0.00	0.00
	19	0.00	0.71	0.00	0.00	0.00	0.00
	20	0.00	0.65	0.00	0.00	0.00	0.00
	21	0.00	0.46	0.00	0.00	0.00	0.00
	22	0.00	0.45	0.00	0.00	0.00	0.00
	23	0.00	0.48	0.00	0.00	0.00	0.00
	24	0.00	0.43	0.00	0.00	0.00	0.00
23	1	0.00	0.71	0.00	0.00	0.00	0.00
	2	0.00	0.70	0.00	0.00	0.00	0.00
	3	0.00	0.72	0.00	0.00	0.00	0.00
	4	0.00	0.71	0.00	0.00	0.00	0.00
	5	0.00	0.72	0.00	0.00	0.00	0.00
	6	0.00	0.72	0.00	0.00	0.00	0.00
	7	0.00	0.72	0.00	0.00	0.00	0.00
	8	0.00	0.72	0.00	0.00	0.00	0.00
	9	0.00	0.55	0.00	0.00	0.00	0.00
	10	0.00	0.65	0.00	0.00	0.00	0.00
	11	0.00	0.62	0.00	0.00	0.00	0.00
	12	0.00	0.64	0.00	0.00	0.00	0.00
	13	0.00	0.23	0.00	0.00	0.00	0.00
	14	0.00	0.39	0.00	0.00	0.00	0.00
	15	0.00	0.34	0.00	0.00	0.00	0.00
	16	0.00	0.38	0.00	0.00	0.00	0.00
	17	0.00	0.72	0.00	0.00	0.00	0.00
	18	0.00	0.72	0.00	0.00	0.00	0.00
	19	0.00	0.75	0.00	0.00	0.00	0.00
	20	0.00	0.69	0.00	0.00	0.00	0.00
	21	0.00	0.48	0.00	0.00	0.00	0.00
	22	0.00	0.47	0.00	0.00	0.00	0.00
	23	0.00	0.50	0.00	0.00	0.00	0.00
	24	0.00	0.45	0.00	0.00	0.00	0.00
24	1	0.00	0.63	0.00	0.00	0.00	0.00
	2	0.00	0.62	0.00	0.00	0.00	0.00
	3	0.00	0.63	0.00	0.00	0.00	0.00
	4	0.00	0.63	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	5	0.00	0.63	0.00	0.00	0.00	0.00
	6	0.00	0.64	0.00	0.00	0.00	0.00
	7	0.00	0.64	0.00	0.00	0.00	0.00
	8	0.00	0.64	0.00	0.00	0.00	0.00
	9	0.00	0.44	0.00	0.00	0.00	0.00
	10	0.00	0.53	0.00	0.00	0.00	0.00
	11	0.00	0.53	0.00	0.00	0.00	0.00
	12	0.00	0.55	0.00	0.00	0.00	0.00
	13	0.00	0.11	0.00	0.00	0.00	0.00
	14	0.00	0.28	0.00	0.00	0.00	0.00
	15	0.00	0.29	0.00	0.00	0.00	0.00
	16	0.00	0.31	0.00	0.00	0.00	0.00
	17	0.00	0.64	0.00	0.00	0.00	0.00
	18	0.00	0.63	0.00	0.00	0.00	0.00
	19	0.00	0.67	0.00	0.00	0.00	0.00
	20	0.00	0.60	0.00	0.00	0.00	0.00
	21	0.00	0.42	0.00	0.00	0.00	0.00
	22	0.00	0.42	0.00	0.00	0.00	0.00
	23	0.00	0.45	0.00	0.00	0.00	0.00
	24	0.00	0.39	0.00	0.00	0.00	0.00
25	1	0.00	0.59	0.00	0.00	0.00	0.00
	2	0.00	0.59	0.00	0.00	0.00	0.00
	3	0.00	0.60	0.00	0.00	0.00	0.00
	4	0.00	0.59	0.00	0.00	0.00	0.00
	5	0.00	0.60	0.00	0.00	0.00	0.00
	6	0.00	0.60	0.00	0.00	0.00	0.00
	7	0.00	0.60	0.00	0.00	0.00	0.00
	8	0.00	0.60	0.00	0.00	0.00	0.00
	9	0.00	0.40	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.50	0.00	0.00	0.00	0.00
	12	0.00	0.52	0.00	0.00	0.00	0.00
	13	0.00	0.09	0.00	0.00	0.00	0.00
	14	0.00	0.25	0.00	0.00	0.00	0.00
	15	0.00	0.27	0.00	0.00	0.00	0.00
	16	0.00	0.30	0.00	0.00	0.00	0.00
	17	0.00	0.60	0.00	0.00	0.00	0.00
	18	0.00	0.60	0.00	0.00	0.00	0.00
	19	0.00	0.63	0.00	0.00	0.00	0.00
	20	0.00	0.56	0.00	0.00	0.00	0.00
	21	0.00	0.40	0.00	0.00	0.00	0.00
	22	0.00	0.40	0.00	0.00	0.00	0.00
	23	0.00	0.43	0.00	0.00	0.00	0.00
	24	0.00	0.37	0.00	0.00	0.00	0.00
26	1	0.00	0.67	0.00	0.00	0.00	0.00
	2	0.00	0.66	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	3	0.00	0.67	0.00	0.00	0.00	0.00
	4	0.00	0.67	0.00	0.00	0.00	0.00
	5	0.00	0.67	0.00	0.00	0.00	0.00
	6	0.00	0.67	0.00	0.00	0.00	0.00
	7	0.00	0.68	0.00	0.00	0.00	0.00
	8	0.00	0.68	0.00	0.00	0.00	0.00
	9	0.00	0.47	0.00	0.00	0.00	0.00
	10	0.00	0.57	0.00	0.00	0.00	0.00
	11	0.00	0.57	0.00	0.00	0.00	0.00
	12	0.00	0.59	0.00	0.00	0.00	0.00
	13	0.00	0.13	0.00	0.00	0.00	0.00
	14	0.00	0.31	0.00	0.00	0.00	0.00
	15	0.00	0.30	0.00	0.00	0.00	0.00
	16	0.00	0.33	0.00	0.00	0.00	0.00
	17	0.00	0.68	0.00	0.00	0.00	0.00
	18	0.00	0.67	0.00	0.00	0.00	0.00
	19	0.00	0.71	0.00	0.00	0.00	0.00
	20	0.00	0.64	0.00	0.00	0.00	0.00
	21	0.00	0.45	0.00	0.00	0.00	0.00
	22	0.00	0.44	0.00	0.00	0.00	0.00
	23	0.00	0.47	0.00	0.00	0.00	0.00
	24	0.00	0.42	0.00	0.00	0.00	0.00
27	1	0.00	0.71	0.00	0.00	0.00	0.00
	2	0.00	0.70	0.00	0.00	0.00	0.00
	3	0.00	0.71	0.00	0.00	0.00	0.00
	4	0.00	0.71	0.00	0.00	0.00	0.00
	5	0.00	0.71	0.00	0.00	0.00	0.00
	6	0.00	0.71	0.00	0.00	0.00	0.00
	7	0.00	0.72	0.00	0.00	0.00	0.00
	8	0.00	0.71	0.00	0.00	0.00	0.00
	9	0.00	0.50	0.00	0.00	0.00	0.00
	10	0.00	0.62	0.00	0.00	0.00	0.00
	11	0.00	0.60	0.00	0.00	0.00	0.00
	12	0.00	0.62	0.00	0.00	0.00	0.00
	13	0.00	0.15	0.00	0.00	0.00	0.00
	14	0.00	0.34	0.00	0.00	0.00	0.00
	15	0.00	0.31	0.00	0.00	0.00	0.00
	16	0.00	0.35	0.00	0.00	0.00	0.00
	17	0.00	0.71	0.00	0.00	0.00	0.00
	18	0.00	0.71	0.00	0.00	0.00	0.00
	19	0.00	0.75	0.00	0.00	0.00	0.00
	20	0.00	0.67	0.00	0.00	0.00	0.00
	21	0.00	0.47	0.00	0.00	0.00	0.00
	22	0.00	0.46	0.00	0.00	0.00	0.00
	23	0.00	0.50	0.00	0.00	0.00	0.00
	24	0.00	0.44	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
28	1	0.00	0.74	0.00	0.00	0.00	0.00
	2	0.00	0.73	0.00	0.00	0.00	0.00
	3	0.00	0.75	0.00	0.00	0.00	0.00
	4	0.00	0.74	0.00	0.00	0.00	0.00
	5	0.00	0.74	0.00	0.00	0.00	0.00
	6	0.00	0.75	0.00	0.00	0.00	0.00
	7	0.00	0.75	0.00	0.00	0.00	0.00
	8	0.00	0.75	0.00	0.00	0.00	0.00
	9	0.00	0.53	0.00	0.00	0.00	0.00
	10	0.00	0.66	0.00	0.00	0.00	0.00
	11	0.00	0.63	0.00	0.00	0.00	0.00
	12	0.00	0.66	0.00	0.00	0.00	0.00
	13	0.00	0.18	0.00	0.00	0.00	0.00
	14	0.00	0.37	0.00	0.00	0.00	0.00
	15	0.00	0.33	0.00	0.00	0.00	0.00
	16	0.00	0.37	0.00	0.00	0.00	0.00
	17	0.00	0.75	0.00	0.00	0.00	0.00
	18	0.00	0.75	0.00	0.00	0.00	0.00
	19	0.00	0.78	0.00	0.00	0.00	0.00
	20	0.00	0.71	0.00	0.00	0.00	0.00
	21	0.00	0.49	0.00	0.00	0.00	0.00
	22	0.00	0.49	0.00	0.00	0.00	0.00
	23	0.00	0.52	0.00	0.00	0.00	0.00
	24	0.00	0.46	0.00	0.00	0.00	0.00
29	1	0.00	0.66	0.00	0.00	0.00	0.00
	2	0.00	0.65	0.00	0.00	0.00	0.00
	3	0.00	0.66	0.00	0.00	0.00	0.00
	4	0.00	0.66	0.00	0.00	0.00	0.00
	5	0.00	0.66	0.00	0.00	0.00	0.00
	6	0.00	0.66	0.00	0.00	0.00	0.00
	7	0.00	0.67	0.00	0.00	0.00	0.00
	8	0.00	0.66	0.00	0.00	0.00	0.00
	9	0.00	0.42	0.00	0.00	0.00	0.00
	10	0.00	0.54	0.00	0.00	0.00	0.00
	11	0.00	0.54	0.00	0.00	0.00	0.00
	12	0.00	0.56	0.00	0.00	0.00	0.00
	13	0.00	0.06	0.00	0.00	0.00	0.00
	14	0.00	0.27	0.00	0.00	0.00	0.00
	15	0.00	0.27	0.00	0.00	0.00	0.00
	16	0.00	0.31	0.00	0.00	0.00	0.00
	17	0.00	0.66	0.00	0.00	0.00	0.00
	18	0.00	0.66	0.00	0.00	0.00	0.00
	19	0.00	0.70	0.00	0.00	0.00	0.00
	20	0.00	0.62	0.00	0.00	0.00	0.00
	21	0.00	0.44	0.00	0.00	0.00	0.00
	22	0.00	0.43	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	23	0.00	0.47	0.00	0.00	0.00	0.00
	24	0.00	0.40	0.00	0.00	0.00	0.00
30	1	0.00	0.69	0.00	0.00	0.00	0.00
	2	0.00	0.69	0.00	0.00	0.00	0.00
	3	0.00	0.70	0.00	0.00	0.00	0.00
	4	0.00	0.69	0.00	0.00	0.00	0.00
	5	0.00	0.70	0.00	0.00	0.00	0.00
	6	0.00	0.70	0.00	0.00	0.00	0.00
	7	0.00	0.71	0.00	0.00	0.00	0.00
	8	0.00	0.70	0.00	0.00	0.00	0.00
	9	0.00	0.45	0.00	0.00	0.00	0.00
	10	0.00	0.58	0.00	0.00	0.00	0.00
	11	0.00	0.57	0.00	0.00	0.00	0.00
	12	0.00	0.60	0.00	0.00	0.00	0.00
	13	0.00	0.08	0.00	0.00	0.00	0.00
	14	0.00	0.30	0.00	0.00	0.00	0.00
	15	0.00	0.28	0.00	0.00	0.00	0.00
	16	0.00	0.32	0.00	0.00	0.00	0.00
	17	0.00	0.70	0.00	0.00	0.00	0.00
	18	0.00	0.70	0.00	0.00	0.00	0.00
	19	0.00	0.74	0.00	0.00	0.00	0.00
	20	0.00	0.66	0.00	0.00	0.00	0.00
	21	0.00	0.46	0.00	0.00	0.00	0.00
	22	0.00	0.45	0.00	0.00	0.00	0.00
	23	0.00	0.49	0.00	0.00	0.00	0.00
	24	0.00	0.42	0.00	0.00	0.00	0.00
31	1	0.00	0.73	0.00	0.00	0.00	0.00
	2	0.00	0.72	0.00	0.00	0.00	0.00
	3	0.00	0.74	0.00	0.00	0.00	0.00
	4	0.00	0.73	0.00	0.00	0.00	0.00
	5	0.00	0.73	0.00	0.00	0.00	0.00
	6	0.00	0.74	0.00	0.00	0.00	0.00
	7	0.00	0.74	0.00	0.00	0.00	0.00
	8	0.00	0.74	0.00	0.00	0.00	0.00
	9	0.00	0.48	0.00	0.00	0.00	0.00
	10	0.00	0.62	0.00	0.00	0.00	0.00
	11	0.00	0.60	0.00	0.00	0.00	0.00
	12	0.00	0.63	0.00	0.00	0.00	0.00
	13	0.00	0.10	0.00	0.00	0.00	0.00
	14	0.00	0.33	0.00	0.00	0.00	0.00
	15	0.00	0.30	0.00	0.00	0.00	0.00
	16	0.00	0.34	0.00	0.00	0.00	0.00
	17	0.00	0.74	0.00	0.00	0.00	0.00
	18	0.00	0.74	0.00	0.00	0.00	0.00
	19	0.00	0.78	0.00	0.00	0.00	0.00
	20	0.00	0.69	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	21	0.00	0.48	0.00	0.00	0.00	0.00
	22	0.00	0.48	0.00	0.00	0.00	0.00
	23	0.00	0.51	0.00	0.00	0.00	0.00
	24	0.00	0.44	0.00	0.00	0.00	0.00
32	1	0.00	0.67	0.00	0.00	0.00	0.00
	2	0.00	0.66	0.00	0.00	0.00	0.00
	3	0.00	0.67	0.00	0.00	0.00	0.00
	4	0.00	0.67	0.00	0.00	0.00	0.00
	5	0.00	0.67	0.00	0.00	0.00	0.00
	6	0.00	0.67	0.00	0.00	0.00	0.00
	7	0.00	0.67	0.00	0.00	0.00	0.00
	8	0.00	0.67	0.00	0.00	0.00	0.00
	9	0.00	0.64	0.00	0.00	0.00	0.00
	10	0.00	0.67	0.00	0.00	0.00	0.00
	11	0.00	0.64	0.00	0.00	0.00	0.00
	12	0.00	0.65	0.00	0.00	0.00	0.00
	13	0.00	0.41	0.00	0.00	0.00	0.00
	14	0.00	0.46	0.00	0.00	0.00	0.00
	15	0.00	0.41	0.00	0.00	0.00	0.00
	16	0.00	0.42	0.00	0.00	0.00	0.00
	17	0.00	0.67	0.00	0.00	0.00	0.00
	18	0.00	0.67	0.00	0.00	0.00	0.00
	19	0.00	0.68	0.00	0.00	0.00	0.00
	20	0.00	0.66	0.00	0.00	0.00	0.00
	21	0.00	0.46	0.00	0.00	0.00	0.00
	22	0.00	0.46	0.00	0.00	0.00	0.00
	23	0.00	0.47	0.00	0.00	0.00	0.00
	24	0.00	0.45	0.00	0.00	0.00	0.00
33	1	0.00	0.71	0.00	0.00	0.00	0.00
	2	0.00	0.70	0.00	0.00	0.00	0.00
	3	0.00	0.71	0.00	0.00	0.00	0.00
	4	0.00	0.71	0.00	0.00	0.00	0.00
	5	0.00	0.71	0.00	0.00	0.00	0.00
	6	0.00	0.71	0.00	0.00	0.00	0.00
	7	0.00	0.72	0.00	0.00	0.00	0.00
	8	0.00	0.71	0.00	0.00	0.00	0.00
	9	0.00	0.62	0.00	0.00	0.00	0.00
	10	0.00	0.69	0.00	0.00	0.00	0.00
	11	0.00	0.64	0.00	0.00	0.00	0.00
	12	0.00	0.66	0.00	0.00	0.00	0.00
	13	0.00	0.34	0.00	0.00	0.00	0.00
	14	0.00	0.44	0.00	0.00	0.00	0.00
	15	0.00	0.39	0.00	0.00	0.00	0.00
	16	0.00	0.41	0.00	0.00	0.00	0.00
	17	0.00	0.71	0.00	0.00	0.00	0.00
	18	0.00	0.71	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	19	0.00	0.73	0.00	0.00	0.00	0.00
	20	0.00	0.69	0.00	0.00	0.00	0.00
	21	0.00	0.48	0.00	0.00	0.00	0.00
	22	0.00	0.48	0.00	0.00	0.00	0.00
	23	0.00	0.49	0.00	0.00	0.00	0.00
	24	0.00	0.46	0.00	0.00	0.00	0.00
34	1	0.00	0.70	0.00	0.00	0.00	0.00
	2	0.00	0.69	0.00	0.00	0.00	0.00
	3	0.00	0.70	0.00	0.00	0.00	0.00
	4	0.00	0.70	0.00	0.00	0.00	0.00
	5	0.00	0.70	0.00	0.00	0.00	0.00
	6	0.00	0.70	0.00	0.00	0.00	0.00
	7	0.00	0.70	0.00	0.00	0.00	0.00
	8	0.00	0.70	0.00	0.00	0.00	0.00
	9	0.00	0.67	0.00	0.00	0.00	0.00
	10	0.00	0.71	0.00	0.00	0.00	0.00
	11	0.00	0.66	0.00	0.00	0.00	0.00
	12	0.00	0.67	0.00	0.00	0.00	0.00
	13	0.00	0.43	0.00	0.00	0.00	0.00
	14	0.00	0.49	0.00	0.00	0.00	0.00
	15	0.00	0.42	0.00	0.00	0.00	0.00
	16	0.00	0.44	0.00	0.00	0.00	0.00
	17	0.00	0.70	0.00	0.00	0.00	0.00
	18	0.00	0.70	0.00	0.00	0.00	0.00
	19	0.00	0.71	0.00	0.00	0.00	0.00
	20	0.00	0.69	0.00	0.00	0.00	0.00
	21	0.00	0.48	0.00	0.00	0.00	0.00
	22	0.00	0.47	0.00	0.00	0.00	0.00
	23	0.00	0.48	0.00	0.00	0.00	0.00
	24	0.00	0.47	0.00	0.00	0.00	0.00
35	1	0.00	0.74	0.00	0.00	0.00	0.00
	2	0.00	0.73	0.00	0.00	0.00	0.00
	3	0.00	0.74	0.00	0.00	0.00	0.00
	4	0.00	0.74	0.00	0.00	0.00	0.00
	5	0.00	0.74	0.00	0.00	0.00	0.00
	6	0.00	0.74	0.00	0.00	0.00	0.00
	7	0.00	0.74	0.00	0.00	0.00	0.00
	8	0.00	0.74	0.00	0.00	0.00	0.00
	9	0.00	0.65	0.00	0.00	0.00	0.00
	10	0.00	0.73	0.00	0.00	0.00	0.00
	11	0.00	0.67	0.00	0.00	0.00	0.00
	12	0.00	0.69	0.00	0.00	0.00	0.00
	13	0.00	0.37	0.00	0.00	0.00	0.00
	14	0.00	0.47	0.00	0.00	0.00	0.00
	15	0.00	0.40	0.00	0.00	0.00	0.00
	16	0.00	0.43	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	17	0.00	0.74	0.00	0.00	0.00	0.00
	18	0.00	0.74	0.00	0.00	0.00	0.00
	19	0.00	0.76	0.00	0.00	0.00	0.00
	20	0.00	0.72	0.00	0.00	0.00	0.00
	21	0.00	0.49	0.00	0.00	0.00	0.00
	22	0.00	0.49	0.00	0.00	0.00	0.00
	23	0.00	0.51	0.00	0.00	0.00	0.00
	24	0.00	0.48	0.00	0.00	0.00	0.00
36	1	0.00	0.73	0.00	0.00	0.00	0.00
	2	0.00	0.72	0.00	0.00	0.00	0.00
	3	0.00	0.73	0.00	0.00	0.00	0.00
	4	0.00	0.73	0.00	0.00	0.00	0.00
	5	0.00	0.73	0.00	0.00	0.00	0.00
	6	0.00	0.73	0.00	0.00	0.00	0.00
	7	0.00	0.73	0.00	0.00	0.00	0.00
	8	0.00	0.73	0.00	0.00	0.00	0.00
	9	0.00	0.70	0.00	0.00	0.00	0.00
	10	0.00	0.75	0.00	0.00	0.00	0.00
	11	0.00	0.68	0.00	0.00	0.00	0.00
	12	0.00	0.70	0.00	0.00	0.00	0.00
	13	0.00	0.45	0.00	0.00	0.00	0.00
	14	0.00	0.52	0.00	0.00	0.00	0.00
	15	0.00	0.43	0.00	0.00	0.00	0.00
	16	0.00	0.45	0.00	0.00	0.00	0.00
	17	0.00	0.73	0.00	0.00	0.00	0.00
	18	0.00	0.73	0.00	0.00	0.00	0.00
	19	0.00	0.74	0.00	0.00	0.00	0.00
	20	0.00	0.72	0.00	0.00	0.00	0.00
	21	0.00	0.49	0.00	0.00	0.00	0.00
	22	0.00	0.49	0.00	0.00	0.00	0.00
	23	0.00	0.50	0.00	0.00	0.00	0.00
	24	0.00	0.48	0.00	0.00	0.00	0.00
37	1	0.00	0.77	0.00	0.00	0.00	0.00
	2	0.00	0.76	0.00	0.00	0.00	0.00
	3	0.00	0.77	0.00	0.00	0.00	0.00
	4	0.00	0.77	0.00	0.00	0.00	0.00
	5	0.00	0.77	0.00	0.00	0.00	0.00
	6	0.00	0.77	0.00	0.00	0.00	0.00
	7	0.00	0.77	0.00	0.00	0.00	0.00
	8	0.00	0.77	0.00	0.00	0.00	0.00
	9	0.00	0.68	0.00	0.00	0.00	0.00
	10	0.00	0.76	0.00	0.00	0.00	0.00
	11	0.00	0.70	0.00	0.00	0.00	0.00
	12	0.00	0.72	0.00	0.00	0.00	0.00
	13	0.00	0.39	0.00	0.00	0.00	0.00
	14	0.00	0.50	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	15	0.00	0.42	0.00	0.00	0.00	0.00
	16	0.00	0.45	0.00	0.00	0.00	0.00
	17	0.00	0.77	0.00	0.00	0.00	0.00
	18	0.00	0.77	0.00	0.00	0.00	0.00
	19	0.00	0.79	0.00	0.00	0.00	0.00
	20	0.00	0.75	0.00	0.00	0.00	0.00
	21	0.00	0.51	0.00	0.00	0.00	0.00
	22	0.00	0.51	0.00	0.00	0.00	0.00
	23	0.00	0.52	0.00	0.00	0.00	0.00
	24	0.00	0.50	0.00	0.00	0.00	0.00
38	1	0.00	0.79	0.00	0.00	0.00	0.00
	2	0.00	0.78	0.00	0.00	0.00	0.00
	3	0.00	0.79	0.00	0.00	0.00	0.00
	4	0.00	0.79	0.00	0.00	0.00	0.00
	5	0.00	0.79	0.00	0.00	0.00	0.00
	6	0.00	0.80	0.00	0.00	0.00	0.00
	7	0.00	0.80	0.00	0.00	0.00	0.00
	8	0.00	0.80	0.00	0.00	0.00	0.00
	9	0.00	0.71	0.00	0.00	0.00	0.00
	10	0.00	0.80	0.00	0.00	0.00	0.00
	11	0.00	0.72	0.00	0.00	0.00	0.00
	12	0.00	0.75	0.00	0.00	0.00	0.00
	13	0.00	0.42	0.00	0.00	0.00	0.00
	14	0.00	0.53	0.00	0.00	0.00	0.00
	15	0.00	0.43	0.00	0.00	0.00	0.00
	16	0.00	0.46	0.00	0.00	0.00	0.00
	17	0.00	0.80	0.00	0.00	0.00	0.00
	18	0.00	0.79	0.00	0.00	0.00	0.00
	19	0.00	0.81	0.00	0.00	0.00	0.00
	20	0.00	0.78	0.00	0.00	0.00	0.00
	21	0.00	0.53	0.00	0.00	0.00	0.00
	22	0.00	0.53	0.00	0.00	0.00	0.00
	23	0.00	0.54	0.00	0.00	0.00	0.00
	24	0.00	0.51	0.00	0.00	0.00	0.00
39	1	0.00	0.75	0.00	0.00	0.00	0.00
	2	0.00	0.74	0.00	0.00	0.00	0.00
	3	0.00	0.75	0.00	0.00	0.00	0.00
	4	0.00	0.75	0.00	0.00	0.00	0.00
	5	0.00	0.75	0.00	0.00	0.00	0.00
	6	0.00	0.75	0.00	0.00	0.00	0.00
	7	0.00	0.75	0.00	0.00	0.00	0.00
	8	0.00	0.75	0.00	0.00	0.00	0.00
	9	0.00	0.59	0.00	0.00	0.00	0.00
	10	0.00	0.70	0.00	0.00	0.00	0.00
	11	0.00	0.65	0.00	0.00	0.00	0.00
	12	0.00	0.68	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	13	0.00	0.26	0.00	0.00	0.00	0.00
	14	0.00	0.42	0.00	0.00	0.00	0.00
	15	0.00	0.36	0.00	0.00	0.00	0.00
	16	0.00	0.40	0.00	0.00	0.00	0.00
	17	0.00	0.75	0.00	0.00	0.00	0.00
	18	0.00	0.75	0.00	0.00	0.00	0.00
	19	0.00	0.78	0.00	0.00	0.00	0.00
	20	0.00	0.72	0.00	0.00	0.00	0.00
	21	0.00	0.50	0.00	0.00	0.00	0.00
	22	0.00	0.49	0.00	0.00	0.00	0.00
	23	0.00	0.52	0.00	0.00	0.00	0.00
	24	0.00	0.47	0.00	0.00	0.00	0.00
40	1	0.00	0.77	0.00	0.00	0.00	0.00
	2	0.00	0.76	0.00	0.00	0.00	0.00
	3	0.00	0.78	0.00	0.00	0.00	0.00
	4	0.00	0.77	0.00	0.00	0.00	0.00
	5	0.00	0.77	0.00	0.00	0.00	0.00
	6	0.00	0.78	0.00	0.00	0.00	0.00
	7	0.00	0.78	0.00	0.00	0.00	0.00
	8	0.00	0.78	0.00	0.00	0.00	0.00
	9	0.00	0.63	0.00	0.00	0.00	0.00
	10	0.00	0.74	0.00	0.00	0.00	0.00
	11	0.00	0.68	0.00	0.00	0.00	0.00
	12	0.00	0.71	0.00	0.00	0.00	0.00
	13	0.00	0.30	0.00	0.00	0.00	0.00
	14	0.00	0.46	0.00	0.00	0.00	0.00
	15	0.00	0.38	0.00	0.00	0.00	0.00
	16	0.00	0.42	0.00	0.00	0.00	0.00
	17	0.00	0.78	0.00	0.00	0.00	0.00
	18	0.00	0.78	0.00	0.00	0.00	0.00
	19	0.00	0.80	0.00	0.00	0.00	0.00
	20	0.00	0.75	0.00	0.00	0.00	0.00
	21	0.00	0.51	0.00	0.00	0.00	0.00
	22	0.00	0.51	0.00	0.00	0.00	0.00
	23	0.00	0.53	0.00	0.00	0.00	0.00
	24	0.00	0.49	0.00	0.00	0.00	0.00
41	1	0.00	0.80	0.00	0.00	0.00	0.00
	2	0.00	0.79	0.00	0.00	0.00	0.00
	3	0.00	0.80	0.00	0.00	0.00	0.00
	4	0.00	0.80	0.00	0.00	0.00	0.00
	5	0.00	0.80	0.00	0.00	0.00	0.00
	6	0.00	0.81	0.00	0.00	0.00	0.00
	7	0.00	0.81	0.00	0.00	0.00	0.00
	8	0.00	0.81	0.00	0.00	0.00	0.00
	9	0.00	0.66	0.00	0.00	0.00	0.00
	10	0.00	0.78	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	11	0.00	0.71	0.00	0.00	0.00	0.00
	12	0.00	0.74	0.00	0.00	0.00	0.00
	13	0.00	0.34	0.00	0.00	0.00	0.00
	14	0.00	0.49	0.00	0.00	0.00	0.00
	15	0.00	0.40	0.00	0.00	0.00	0.00
	16	0.00	0.44	0.00	0.00	0.00	0.00
	17	0.00	0.81	0.00	0.00	0.00	0.00
	18	0.00	0.80	0.00	0.00	0.00	0.00
	19	0.00	0.83	0.00	0.00	0.00	0.00
	20	0.00	0.78	0.00	0.00	0.00	0.00
	21	0.00	0.53	0.00	0.00	0.00	0.00
	22	0.00	0.53	0.00	0.00	0.00	0.00
	23	0.00	0.55	0.00	0.00	0.00	0.00
	24	0.00	0.51	0.00	0.00	0.00	0.00
42	1	0.00	0.83	0.00	0.00	0.00	0.00
	2	0.00	0.82	0.00	0.00	0.00	0.00
	3	0.00	0.83	0.00	0.00	0.00	0.00
	4	0.00	0.83	0.00	0.00	0.00	0.00
	5	0.00	0.83	0.00	0.00	0.00	0.00
	6	0.00	0.83	0.00	0.00	0.00	0.00
	7	0.00	0.84	0.00	0.00	0.00	0.00
	8	0.00	0.83	0.00	0.00	0.00	0.00
	9	0.00	0.70	0.00	0.00	0.00	0.00
	10	0.00	0.82	0.00	0.00	0.00	0.00
	11	0.00	0.73	0.00	0.00	0.00	0.00
	12	0.00	0.77	0.00	0.00	0.00	0.00
	13	0.00	0.37	0.00	0.00	0.00	0.00
	14	0.00	0.52	0.00	0.00	0.00	0.00
	15	0.00	0.42	0.00	0.00	0.00	0.00
	16	0.00	0.46	0.00	0.00	0.00	0.00
	17	0.00	0.83	0.00	0.00	0.00	0.00
	18	0.00	0.83	0.00	0.00	0.00	0.00
	19	0.00	0.86	0.00	0.00	0.00	0.00
	20	0.00	0.81	0.00	0.00	0.00	0.00
	21	0.00	0.55	0.00	0.00	0.00	0.00
	22	0.00	0.54	0.00	0.00	0.00	0.00
	23	0.00	0.56	0.00	0.00	0.00	0.00
	24	0.00	0.52	0.00	0.00	0.00	0.00
43	1	0.00	0.78	0.00	0.00	0.00	0.00
	2	0.00	0.77	0.00	0.00	0.00	0.00
	3	0.00	0.78	0.00	0.00	0.00	0.00
	4	0.00	0.77	0.00	0.00	0.00	0.00
	5	0.00	0.78	0.00	0.00	0.00	0.00
	6	0.00	0.78	0.00	0.00	0.00	0.00
	7	0.00	0.78	0.00	0.00	0.00	0.00
	8	0.00	0.78	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	9	0.00	0.57	0.00	0.00	0.00	0.00
	10	0.00	0.70	0.00	0.00	0.00	0.00
	11	0.00	0.66	0.00	0.00	0.00	0.00
	12	0.00	0.69	0.00	0.00	0.00	0.00
	13	0.00	0.21	0.00	0.00	0.00	0.00
	14	0.00	0.41	0.00	0.00	0.00	0.00
	15	0.00	0.34	0.00	0.00	0.00	0.00
	16	0.00	0.39	0.00	0.00	0.00	0.00
	17	0.00	0.78	0.00	0.00	0.00	0.00
	18	0.00	0.78	0.00	0.00	0.00	0.00
	19	0.00	0.82	0.00	0.00	0.00	0.00
	20	0.00	0.74	0.00	0.00	0.00	0.00
	21	0.00	0.51	0.00	0.00	0.00	0.00
	22	0.00	0.51	0.00	0.00	0.00	0.00
	23	0.00	0.54	0.00	0.00	0.00	0.00
	24	0.00	0.48	0.00	0.00	0.00	0.00
44	1	0.00	0.81	0.00	0.00	0.00	0.00
	2	0.00	0.80	0.00	0.00	0.00	0.00
	3	0.00	0.81	0.00	0.00	0.00	0.00
	4	0.00	0.80	0.00	0.00	0.00	0.00
	5	0.00	0.81	0.00	0.00	0.00	0.00
	6	0.00	0.81	0.00	0.00	0.00	0.00
	7	0.00	0.81	0.00	0.00	0.00	0.00
	8	0.00	0.81	0.00	0.00	0.00	0.00
	9	0.00	0.61	0.00	0.00	0.00	0.00
	10	0.00	0.75	0.00	0.00	0.00	0.00
	11	0.00	0.69	0.00	0.00	0.00	0.00
	12	0.00	0.72	0.00	0.00	0.00	0.00
	13	0.00	0.25	0.00	0.00	0.00	0.00
	14	0.00	0.44	0.00	0.00	0.00	0.00
	15	0.00	0.36	0.00	0.00	0.00	0.00
	16	0.00	0.41	0.00	0.00	0.00	0.00
	17	0.00	0.81	0.00	0.00	0.00	0.00
	18	0.00	0.81	0.00	0.00	0.00	0.00
	19	0.00	0.85	0.00	0.00	0.00	0.00
	20	0.00	0.77	0.00	0.00	0.00	0.00
	21	0.00	0.53	0.00	0.00	0.00	0.00
	22	0.00	0.52	0.00	0.00	0.00	0.00
	23	0.00	0.55	0.00	0.00	0.00	0.00
	24	0.00	0.50	0.00	0.00	0.00	0.00
45	1	0.00	0.83	0.00	0.00	0.00	0.00
	2	0.00	0.83	0.00	0.00	0.00	0.00
	3	0.00	0.84	0.00	0.00	0.00	0.00
	4	0.00	0.83	0.00	0.00	0.00	0.00
	5	0.00	0.84	0.00	0.00	0.00	0.00
	6	0.00	0.84	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	7	0.00	0.84	0.00	0.00	0.00	0.00
	8	0.00	0.84	0.00	0.00	0.00	0.00
	9	0.00	0.65	0.00	0.00	0.00	0.00
	10	0.00	0.79	0.00	0.00	0.00	0.00
	11	0.00	0.72	0.00	0.00	0.00	0.00
	12	0.00	0.76	0.00	0.00	0.00	0.00
	13	0.00	0.28	0.00	0.00	0.00	0.00
	14	0.00	0.48	0.00	0.00	0.00	0.00
	15	0.00	0.38	0.00	0.00	0.00	0.00
	16	0.00	0.43	0.00	0.00	0.00	0.00
	17	0.00	0.84	0.00	0.00	0.00	0.00
	18	0.00	0.84	0.00	0.00	0.00	0.00
	19	0.00	0.87	0.00	0.00	0.00	0.00
	20	0.00	0.80	0.00	0.00	0.00	0.00
	21	0.00	0.55	0.00	0.00	0.00	0.00
	22	0.00	0.54	0.00	0.00	0.00	0.00
	23	0.00	0.57	0.00	0.00	0.00	0.00
	24	0.00	0.52	0.00	0.00	0.00	0.00
46	1	0.00	0.86	0.00	0.00	0.00	0.00
	2	0.00	0.86	0.00	0.00	0.00	0.00
	3	0.00	0.87	0.00	0.00	0.00	0.00
	4	0.00	0.86	0.00	0.00	0.00	0.00
	5	0.00	0.86	0.00	0.00	0.00	0.00
	6	0.00	0.87	0.00	0.00	0.00	0.00
	7	0.00	0.87	0.00	0.00	0.00	0.00
	8	0.00	0.87	0.00	0.00	0.00	0.00
	9	0.00	0.69	0.00	0.00	0.00	0.00
	10	0.00	0.83	0.00	0.00	0.00	0.00
	11	0.00	0.75	0.00	0.00	0.00	0.00
	12	0.00	0.79	0.00	0.00	0.00	0.00
	13	0.00	0.32	0.00	0.00	0.00	0.00
	14	0.00	0.51	0.00	0.00	0.00	0.00
	15	0.00	0.40	0.00	0.00	0.00	0.00
	16	0.00	0.45	0.00	0.00	0.00	0.00
	17	0.00	0.87	0.00	0.00	0.00	0.00
	18	0.00	0.87	0.00	0.00	0.00	0.00
	19	0.00	0.90	0.00	0.00	0.00	0.00
	20	0.00	0.83	0.00	0.00	0.00	0.00
	21	0.00	0.56	0.00	0.00	0.00	0.00
	22	0.00	0.56	0.00	0.00	0.00	0.00
	23	0.00	0.59	0.00	0.00	0.00	0.00
	24	0.00	0.54	0.00	0.00	0.00	0.00
47	1	0.00	0.80	0.00	0.00	0.00	0.00
	2	0.00	0.79	0.00	0.00	0.00	0.00
	3	0.00	0.81	0.00	0.00	0.00	0.00
	4	0.00	0.80	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	5	0.00	0.80	0.00	0.00	0.00	0.00
	6	0.00	0.81	0.00	0.00	0.00	0.00
	7	0.00	0.81	0.00	0.00	0.00	0.00
	8	0.00	0.81	0.00	0.00	0.00	0.00
	9	0.00	0.56	0.00	0.00	0.00	0.00
	10	0.00	0.71	0.00	0.00	0.00	0.00
	11	0.00	0.66	0.00	0.00	0.00	0.00
	12	0.00	0.70	0.00	0.00	0.00	0.00
	13	0.00	0.16	0.00	0.00	0.00	0.00
	14	0.00	0.40	0.00	0.00	0.00	0.00
	15	0.00	0.33	0.00	0.00	0.00	0.00
	16	0.00	0.38	0.00	0.00	0.00	0.00
	17	0.00	0.81	0.00	0.00	0.00	0.00
	18	0.00	0.81	0.00	0.00	0.00	0.00
	19	0.00	0.85	0.00	0.00	0.00	0.00
	20	0.00	0.76	0.00	0.00	0.00	0.00
	21	0.00	0.52	0.00	0.00	0.00	0.00
	22	0.00	0.52	0.00	0.00	0.00	0.00
	23	0.00	0.55	0.00	0.00	0.00	0.00
	24	0.00	0.49	0.00	0.00	0.00	0.00
48	1	0.00	0.83	0.00	0.00	0.00	0.00
	2	0.00	0.83	0.00	0.00	0.00	0.00
	3	0.00	0.84	0.00	0.00	0.00	0.00
	4	0.00	0.83	0.00	0.00	0.00	0.00
	5	0.00	0.84	0.00	0.00	0.00	0.00
	6	0.00	0.84	0.00	0.00	0.00	0.00
	7	0.00	0.85	0.00	0.00	0.00	0.00
	8	0.00	0.84	0.00	0.00	0.00	0.00
	9	0.00	0.60	0.00	0.00	0.00	0.00
	10	0.00	0.76	0.00	0.00	0.00	0.00
	11	0.00	0.70	0.00	0.00	0.00	0.00
	12	0.00	0.74	0.00	0.00	0.00	0.00
	13	0.00	0.20	0.00	0.00	0.00	0.00
	14	0.00	0.43	0.00	0.00	0.00	0.00
	15	0.00	0.35	0.00	0.00	0.00	0.00
	16	0.00	0.41	0.00	0.00	0.00	0.00
	17	0.00	0.84	0.00	0.00	0.00	0.00
	18	0.00	0.84	0.00	0.00	0.00	0.00
	19	0.00	0.88	0.00	0.00	0.00	0.00
	20	0.00	0.80	0.00	0.00	0.00	0.00
	21	0.00	0.54	0.00	0.00	0.00	0.00
	22	0.00	0.54	0.00	0.00	0.00	0.00
	23	0.00	0.57	0.00	0.00	0.00	0.00
	24	0.00	0.51	0.00	0.00	0.00	0.00
49	1	0.00	0.86	0.00	0.00	0.00	0.00
	2	0.00	0.86	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	3	0.00	0.87	0.00	0.00	0.00	0.00
	4	0.00	0.86	0.00	0.00	0.00	0.00
	5	0.00	0.87	0.00	0.00	0.00	0.00
	6	0.00	0.87	0.00	0.00	0.00	0.00
	7	0.00	0.88	0.00	0.00	0.00	0.00
	8	0.00	0.87	0.00	0.00	0.00	0.00
	9	0.00	0.64	0.00	0.00	0.00	0.00
	10	0.00	0.80	0.00	0.00	0.00	0.00
	11	0.00	0.73	0.00	0.00	0.00	0.00
	12	0.00	0.77	0.00	0.00	0.00	0.00
	13	0.00	0.23	0.00	0.00	0.00	0.00
	14	0.00	0.47	0.00	0.00	0.00	0.00
	15	0.00	0.37	0.00	0.00	0.00	0.00
	16	0.00	0.43	0.00	0.00	0.00	0.00
	17	0.00	0.87	0.00	0.00	0.00	0.00
	18	0.00	0.87	0.00	0.00	0.00	0.00
	19	0.00	0.91	0.00	0.00	0.00	0.00
	20	0.00	0.83	0.00	0.00	0.00	0.00
	21	0.00	0.56	0.00	0.00	0.00	0.00
	22	0.00	0.56	0.00	0.00	0.00	0.00
	23	0.00	0.59	0.00	0.00	0.00	0.00
	24	0.00	0.53	0.00	0.00	0.00	0.00
73	1	0.00	0.44	0.00	0.00	0.00	0.00
	2	0.00	0.43	0.00	0.00	0.00	0.00
	3	0.00	0.44	0.00	0.00	0.00	0.00
	4	0.00	0.44	0.00	0.00	0.00	0.00
	5	0.00	0.44	0.00	0.00	0.00	0.00
	6	0.00	0.44	0.00	0.00	0.00	0.00
	7	0.00	0.44	0.00	0.00	0.00	0.00
	8	0.00	0.44	0.00	0.00	0.00	0.00
	9	0.00	0.54	0.00	0.00	0.00	0.00
	10	0.00	0.46	0.00	0.00	0.00	0.00
	11	0.00	0.49	0.00	0.00	0.00	0.00
	12	0.00	0.46	0.00	0.00	0.00	0.00
	13	0.00	0.45	0.00	0.00	0.00	0.00
	14	0.00	0.36	0.00	0.00	0.00	0.00
	15	0.00	0.40	0.00	0.00	0.00	0.00
	16	0.00	0.36	0.00	0.00	0.00	0.00
	17	0.00	0.44	0.00	0.00	0.00	0.00
	18	0.00	0.44	0.00	0.00	0.00	0.00
	19	0.00	0.42	0.00	0.00	0.00	0.00
	20	0.00	0.45	0.00	0.00	0.00	0.00
	21	0.00	0.33	0.00	0.00	0.00	0.00
	22	0.00	0.33	0.00	0.00	0.00	0.00
	23	0.00	0.32	0.00	0.00	0.00	0.00
	24	0.00	0.34	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
74	1	0.00	0.41	0.00	0.00	0.00	0.00
	2	0.00	0.40	0.00	0.00	0.00	0.00
	3	0.00	0.41	0.00	0.00	0.00	0.00
	4	0.00	0.41	0.00	0.00	0.00	0.00
	5	0.00	0.41	0.00	0.00	0.00	0.00
	6	0.00	0.41	0.00	0.00	0.00	0.00
	7	0.00	0.41	0.00	0.00	0.00	0.00
	8	0.00	0.41	0.00	0.00	0.00	0.00
	9	0.00	0.51	0.00	0.00	0.00	0.00
	10	0.00	0.42	0.00	0.00	0.00	0.00
	11	0.00	0.46	0.00	0.00	0.00	0.00
	12	0.00	0.43	0.00	0.00	0.00	0.00
	13	0.00	0.42	0.00	0.00	0.00	0.00
	14	0.00	0.33	0.00	0.00	0.00	0.00
	15	0.00	0.38	0.00	0.00	0.00	0.00
	16	0.00	0.35	0.00	0.00	0.00	0.00
	17	0.00	0.41	0.00	0.00	0.00	0.00
	18	0.00	0.41	0.00	0.00	0.00	0.00
	19	0.00	0.39	0.00	0.00	0.00	0.00
	20	0.00	0.42	0.00	0.00	0.00	0.00
	21	0.00	0.31	0.00	0.00	0.00	0.00
	22	0.00	0.31	0.00	0.00	0.00	0.00
	23	0.00	0.30	0.00	0.00	0.00	0.00
	24	0.00	0.32	0.00	0.00	0.00	0.00
75	1	0.00	0.47	0.00	0.00	0.00	0.00
	2	0.00	0.46	0.00	0.00	0.00	0.00
	3	0.00	0.47	0.00	0.00	0.00	0.00
	4	0.00	0.47	0.00	0.00	0.00	0.00
	5	0.00	0.47	0.00	0.00	0.00	0.00
	6	0.00	0.47	0.00	0.00	0.00	0.00
	7	0.00	0.47	0.00	0.00	0.00	0.00
	8	0.00	0.47	0.00	0.00	0.00	0.00
	9	0.00	0.58	0.00	0.00	0.00	0.00
	10	0.00	0.50	0.00	0.00	0.00	0.00
	11	0.00	0.52	0.00	0.00	0.00	0.00
	12	0.00	0.49	0.00	0.00	0.00	0.00
	13	0.00	0.48	0.00	0.00	0.00	0.00
	14	0.00	0.40	0.00	0.00	0.00	0.00
	15	0.00	0.41	0.00	0.00	0.00	0.00
	16	0.00	0.38	0.00	0.00	0.00	0.00
	17	0.00	0.47	0.00	0.00	0.00	0.00
	18	0.00	0.47	0.00	0.00	0.00	0.00
	19	0.00	0.45	0.00	0.00	0.00	0.00
	20	0.00	0.48	0.00	0.00	0.00	0.00
	21	0.00	0.34	0.00	0.00	0.00	0.00
	22	0.00	0.35	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	23	0.00	0.33	0.00	0.00	0.00	0.00
	24	0.00	0.36	0.00	0.00	0.00	0.00
76	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.49	0.00	0.00	0.00	0.00
	3	0.00	0.50	0.00	0.00	0.00	0.00
	4	0.00	0.50	0.00	0.00	0.00	0.00
	5	0.00	0.50	0.00	0.00	0.00	0.00
	6	0.00	0.50	0.00	0.00	0.00	0.00
	7	0.00	0.49	0.00	0.00	0.00	0.00
	8	0.00	0.49	0.00	0.00	0.00	0.00
	9	0.00	0.61	0.00	0.00	0.00	0.00
	10	0.00	0.54	0.00	0.00	0.00	0.00
	11	0.00	0.54	0.00	0.00	0.00	0.00
	12	0.00	0.52	0.00	0.00	0.00	0.00
	13	0.00	0.51	0.00	0.00	0.00	0.00
	14	0.00	0.43	0.00	0.00	0.00	0.00
	15	0.00	0.43	0.00	0.00	0.00	0.00
	16	0.00	0.40	0.00	0.00	0.00	0.00
	17	0.00	0.49	0.00	0.00	0.00	0.00
	18	0.00	0.50	0.00	0.00	0.00	0.00
	19	0.00	0.48	0.00	0.00	0.00	0.00
	20	0.00	0.51	0.00	0.00	0.00	0.00
	21	0.00	0.36	0.00	0.00	0.00	0.00
	22	0.00	0.36	0.00	0.00	0.00	0.00
	23	0.00	0.35	0.00	0.00	0.00	0.00
	24	0.00	0.38	0.00	0.00	0.00	0.00
77	1	0.00	0.53	0.00	0.00	0.00	0.00
	2	0.00	0.51	0.00	0.00	0.00	0.00
	3	0.00	0.53	0.00	0.00	0.00	0.00
	4	0.00	0.53	0.00	0.00	0.00	0.00
	5	0.00	0.53	0.00	0.00	0.00	0.00
	6	0.00	0.52	0.00	0.00	0.00	0.00
	7	0.00	0.52	0.00	0.00	0.00	0.00
	8	0.00	0.52	0.00	0.00	0.00	0.00
	9	0.00	0.64	0.00	0.00	0.00	0.00
	10	0.00	0.58	0.00	0.00	0.00	0.00
	11	0.00	0.57	0.00	0.00	0.00	0.00
	12	0.00	0.55	0.00	0.00	0.00	0.00
	13	0.00	0.54	0.00	0.00	0.00	0.00
	14	0.00	0.46	0.00	0.00	0.00	0.00
	15	0.00	0.44	0.00	0.00	0.00	0.00
	16	0.00	0.42	0.00	0.00	0.00	0.00
	17	0.00	0.52	0.00	0.00	0.00	0.00
	18	0.00	0.52	0.00	0.00	0.00	0.00
	19	0.00	0.51	0.00	0.00	0.00	0.00
	20	0.00	0.54	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	21	0.00	0.38	0.00	0.00	0.00	0.00
	22	0.00	0.38	0.00	0.00	0.00	0.00
	23	0.00	0.37	0.00	0.00	0.00	0.00
	24	0.00	0.39	0.00	0.00	0.00	0.00
78	1	0.00	0.48	0.00	0.00	0.00	0.00
	2	0.00	0.46	0.00	0.00	0.00	0.00
	3	0.00	0.47	0.00	0.00	0.00	0.00
	4	0.00	0.47	0.00	0.00	0.00	0.00
	5	0.00	0.47	0.00	0.00	0.00	0.00
	6	0.00	0.47	0.00	0.00	0.00	0.00
	7	0.00	0.47	0.00	0.00	0.00	0.00
	8	0.00	0.47	0.00	0.00	0.00	0.00
	9	0.00	0.53	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.50	0.00	0.00	0.00	0.00
	12	0.00	0.48	0.00	0.00	0.00	0.00
	13	0.00	0.40	0.00	0.00	0.00	0.00
	14	0.00	0.35	0.00	0.00	0.00	0.00
	15	0.00	0.38	0.00	0.00	0.00	0.00
	16	0.00	0.36	0.00	0.00	0.00	0.00
	17	0.00	0.47	0.00	0.00	0.00	0.00
	18	0.00	0.47	0.00	0.00	0.00	0.00
	19	0.00	0.47	0.00	0.00	0.00	0.00
	20	0.00	0.48	0.00	0.00	0.00	0.00
	21	0.00	0.34	0.00	0.00	0.00	0.00
	22	0.00	0.35	0.00	0.00	0.00	0.00
	23	0.00	0.34	0.00	0.00	0.00	0.00
	24	0.00	0.35	0.00	0.00	0.00	0.00
79	1	0.00	0.44	0.00	0.00	0.00	0.00
	2	0.00	0.43	0.00	0.00	0.00	0.00
	3	0.00	0.44	0.00	0.00	0.00	0.00
	4	0.00	0.44	0.00	0.00	0.00	0.00
	5	0.00	0.44	0.00	0.00	0.00	0.00
	6	0.00	0.44	0.00	0.00	0.00	0.00
	7	0.00	0.44	0.00	0.00	0.00	0.00
	8	0.00	0.44	0.00	0.00	0.00	0.00
	9	0.00	0.50	0.00	0.00	0.00	0.00
	10	0.00	0.44	0.00	0.00	0.00	0.00
	11	0.00	0.47	0.00	0.00	0.00	0.00
	12	0.00	0.45	0.00	0.00	0.00	0.00
	13	0.00	0.37	0.00	0.00	0.00	0.00
	14	0.00	0.32	0.00	0.00	0.00	0.00
	15	0.00	0.37	0.00	0.00	0.00	0.00
	16	0.00	0.34	0.00	0.00	0.00	0.00
	17	0.00	0.44	0.00	0.00	0.00	0.00
	18	0.00	0.44	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	19	0.00	0.44	0.00	0.00	0.00	0.00
	20	0.00	0.45	0.00	0.00	0.00	0.00
	21	0.00	0.33	0.00	0.00	0.00	0.00
	22	0.00	0.33	0.00	0.00	0.00	0.00
	23	0.00	0.32	0.00	0.00	0.00	0.00
	24	0.00	0.33	0.00	0.00	0.00	0.00
80	1	0.00	0.51	0.00	0.00	0.00	0.00
	2	0.00	0.49	0.00	0.00	0.00	0.00
	3	0.00	0.50	0.00	0.00	0.00	0.00
	4	0.00	0.51	0.00	0.00	0.00	0.00
	5	0.00	0.50	0.00	0.00	0.00	0.00
	6	0.00	0.50	0.00	0.00	0.00	0.00
	7	0.00	0.50	0.00	0.00	0.00	0.00
	8	0.00	0.50	0.00	0.00	0.00	0.00
	9	0.00	0.57	0.00	0.00	0.00	0.00
	10	0.00	0.52	0.00	0.00	0.00	0.00
	11	0.00	0.53	0.00	0.00	0.00	0.00
	12	0.00	0.51	0.00	0.00	0.00	0.00
	13	0.00	0.44	0.00	0.00	0.00	0.00
	14	0.00	0.39	0.00	0.00	0.00	0.00
	15	0.00	0.40	0.00	0.00	0.00	0.00
	16	0.00	0.38	0.00	0.00	0.00	0.00
	17	0.00	0.50	0.00	0.00	0.00	0.00
	18	0.00	0.50	0.00	0.00	0.00	0.00
	19	0.00	0.50	0.00	0.00	0.00	0.00
	20	0.00	0.51	0.00	0.00	0.00	0.00
	21	0.00	0.36	0.00	0.00	0.00	0.00
	22	0.00	0.36	0.00	0.00	0.00	0.00
	23	0.00	0.36	0.00	0.00	0.00	0.00
	24	0.00	0.37	0.00	0.00	0.00	0.00
81	1	0.00	0.54	0.00	0.00	0.00	0.00
	2	0.00	0.52	0.00	0.00	0.00	0.00
	3	0.00	0.53	0.00	0.00	0.00	0.00
	4	0.00	0.54	0.00	0.00	0.00	0.00
	5	0.00	0.53	0.00	0.00	0.00	0.00
	6	0.00	0.53	0.00	0.00	0.00	0.00
	7	0.00	0.53	0.00	0.00	0.00	0.00
	8	0.00	0.53	0.00	0.00	0.00	0.00
	9	0.00	0.60	0.00	0.00	0.00	0.00
	10	0.00	0.56	0.00	0.00	0.00	0.00
	11	0.00	0.56	0.00	0.00	0.00	0.00
	12	0.00	0.54	0.00	0.00	0.00	0.00
	13	0.00	0.47	0.00	0.00	0.00	0.00
	14	0.00	0.42	0.00	0.00	0.00	0.00
	15	0.00	0.42	0.00	0.00	0.00	0.00
	16	0.00	0.40	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	17	0.00	0.53	0.00	0.00	0.00	0.00
	18	0.00	0.53	0.00	0.00	0.00	0.00
	19	0.00	0.53	0.00	0.00	0.00	0.00
	20	0.00	0.54	0.00	0.00	0.00	0.00
	21	0.00	0.38	0.00	0.00	0.00	0.00
	22	0.00	0.38	0.00	0.00	0.00	0.00
	23	0.00	0.38	0.00	0.00	0.00	0.00
	24	0.00	0.39	0.00	0.00	0.00	0.00
82	1	0.00	0.57	0.00	0.00	0.00	0.00
	2	0.00	0.55	0.00	0.00	0.00	0.00
	3	0.00	0.56	0.00	0.00	0.00	0.00
	4	0.00	0.56	0.00	0.00	0.00	0.00
	5	0.00	0.56	0.00	0.00	0.00	0.00
	6	0.00	0.56	0.00	0.00	0.00	0.00
	7	0.00	0.56	0.00	0.00	0.00	0.00
	8	0.00	0.56	0.00	0.00	0.00	0.00
	9	0.00	0.64	0.00	0.00	0.00	0.00
	10	0.00	0.60	0.00	0.00	0.00	0.00
	11	0.00	0.58	0.00	0.00	0.00	0.00
	12	0.00	0.57	0.00	0.00	0.00	0.00
	13	0.00	0.49	0.00	0.00	0.00	0.00
	14	0.00	0.45	0.00	0.00	0.00	0.00
	15	0.00	0.43	0.00	0.00	0.00	0.00
	16	0.00	0.42	0.00	0.00	0.00	0.00
	17	0.00	0.56	0.00	0.00	0.00	0.00
	18	0.00	0.56	0.00	0.00	0.00	0.00
	19	0.00	0.56	0.00	0.00	0.00	0.00
	20	0.00	0.57	0.00	0.00	0.00	0.00
	21	0.00	0.40	0.00	0.00	0.00	0.00
	22	0.00	0.40	0.00	0.00	0.00	0.00
	23	0.00	0.39	0.00	0.00	0.00	0.00
	24	0.00	0.41	0.00	0.00	0.00	0.00
83	1	0.00	0.51	0.00	0.00	0.00	0.00
	2	0.00	0.50	0.00	0.00	0.00	0.00
	3	0.00	0.51	0.00	0.00	0.00	0.00
	4	0.00	0.51	0.00	0.00	0.00	0.00
	5	0.00	0.51	0.00	0.00	0.00	0.00
	6	0.00	0.51	0.00	0.00	0.00	0.00
	7	0.00	0.51	0.00	0.00	0.00	0.00
	8	0.00	0.51	0.00	0.00	0.00	0.00
	9	0.00	0.52	0.00	0.00	0.00	0.00
	10	0.00	0.49	0.00	0.00	0.00	0.00
	11	0.00	0.51	0.00	0.00	0.00	0.00
	12	0.00	0.50	0.00	0.00	0.00	0.00
	13	0.00	0.35	0.00	0.00	0.00	0.00
	14	0.00	0.34	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	15	0.00	0.37	0.00	0.00	0.00	0.00
	16	0.00	0.35	0.00	0.00	0.00	0.00
	17	0.00	0.51	0.00	0.00	0.00	0.00
	18	0.00	0.51	0.00	0.00	0.00	0.00
	19	0.00	0.51	0.00	0.00	0.00	0.00
	20	0.00	0.51	0.00	0.00	0.00	0.00
	21	0.00	0.36	0.00	0.00	0.00	0.00
	22	0.00	0.36	0.00	0.00	0.00	0.00
	23	0.00	0.36	0.00	0.00	0.00	0.00
	24	0.00	0.36	0.00	0.00	0.00	0.00
84	1	0.00	0.48	0.00	0.00	0.00	0.00
	2	0.00	0.46	0.00	0.00	0.00	0.00
	3	0.00	0.48	0.00	0.00	0.00	0.00
	4	0.00	0.48	0.00	0.00	0.00	0.00
	5	0.00	0.48	0.00	0.00	0.00	0.00
	6	0.00	0.48	0.00	0.00	0.00	0.00
	7	0.00	0.48	0.00	0.00	0.00	0.00
	8	0.00	0.48	0.00	0.00	0.00	0.00
	9	0.00	0.48	0.00	0.00	0.00	0.00
	10	0.00	0.45	0.00	0.00	0.00	0.00
	11	0.00	0.48	0.00	0.00	0.00	0.00
	12	0.00	0.47	0.00	0.00	0.00	0.00
	13	0.00	0.32	0.00	0.00	0.00	0.00
	14	0.00	0.31	0.00	0.00	0.00	0.00
	15	0.00	0.35	0.00	0.00	0.00	0.00
	16	0.00	0.33	0.00	0.00	0.00	0.00
	17	0.00	0.48	0.00	0.00	0.00	0.00
	18	0.00	0.48	0.00	0.00	0.00	0.00
	19	0.00	0.48	0.00	0.00	0.00	0.00
	20	0.00	0.47	0.00	0.00	0.00	0.00
	21	0.00	0.34	0.00	0.00	0.00	0.00
	22	0.00	0.34	0.00	0.00	0.00	0.00
	23	0.00	0.34	0.00	0.00	0.00	0.00
	24	0.00	0.34	0.00	0.00	0.00	0.00
85	1	0.00	0.54	0.00	0.00	0.00	0.00
	2	0.00	0.53	0.00	0.00	0.00	0.00
	3	0.00	0.54	0.00	0.00	0.00	0.00
	4	0.00	0.54	0.00	0.00	0.00	0.00
	5	0.00	0.54	0.00	0.00	0.00	0.00
	6	0.00	0.54	0.00	0.00	0.00	0.00
	7	0.00	0.54	0.00	0.00	0.00	0.00
	8	0.00	0.54	0.00	0.00	0.00	0.00
	9	0.00	0.55	0.00	0.00	0.00	0.00
	10	0.00	0.53	0.00	0.00	0.00	0.00
	11	0.00	0.54	0.00	0.00	0.00	0.00
	12	0.00	0.53	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	13	0.00	0.38	0.00	0.00	0.00	0.00
	14	0.00	0.38	0.00	0.00	0.00	0.00
	15	0.00	0.39	0.00	0.00	0.00	0.00
	16	0.00	0.37	0.00	0.00	0.00	0.00
	17	0.00	0.54	0.00	0.00	0.00	0.00
	18	0.00	0.54	0.00	0.00	0.00	0.00
	19	0.00	0.54	0.00	0.00	0.00	0.00
	20	0.00	0.54	0.00	0.00	0.00	0.00
	21	0.00	0.38	0.00	0.00	0.00	0.00
	22	0.00	0.38	0.00	0.00	0.00	0.00
	23	0.00	0.38	0.00	0.00	0.00	0.00
	24	0.00	0.38	0.00	0.00	0.00	0.00
86	1	0.00	0.57	0.00	0.00	0.00	0.00
	2	0.00	0.56	0.00	0.00	0.00	0.00
	3	0.00	0.57	0.00	0.00	0.00	0.00
	4	0.00	0.57	0.00	0.00	0.00	0.00
	5	0.00	0.57	0.00	0.00	0.00	0.00
	6	0.00	0.57	0.00	0.00	0.00	0.00
	7	0.00	0.57	0.00	0.00	0.00	0.00
	8	0.00	0.57	0.00	0.00	0.00	0.00
	9	0.00	0.59	0.00	0.00	0.00	0.00
	10	0.00	0.58	0.00	0.00	0.00	0.00
	11	0.00	0.57	0.00	0.00	0.00	0.00
	12	0.00	0.56	0.00	0.00	0.00	0.00
	13	0.00	0.42	0.00	0.00	0.00	0.00
	14	0.00	0.41	0.00	0.00	0.00	0.00
	15	0.00	0.40	0.00	0.00	0.00	0.00
	16	0.00	0.39	0.00	0.00	0.00	0.00
	17	0.00	0.57	0.00	0.00	0.00	0.00
	18	0.00	0.57	0.00	0.00	0.00	0.00
	19	0.00	0.57	0.00	0.00	0.00	0.00
	20	0.00	0.57	0.00	0.00	0.00	0.00
	21	0.00	0.40	0.00	0.00	0.00	0.00
	22	0.00	0.40	0.00	0.00	0.00	0.00
	23	0.00	0.40	0.00	0.00	0.00	0.00
	24	0.00	0.40	0.00	0.00	0.00	0.00
87	1	0.00	0.60	0.00	0.00	0.00	0.00
	2	0.00	0.59	0.00	0.00	0.00	0.00
	3	0.00	0.60	0.00	0.00	0.00	0.00
	4	0.00	0.60	0.00	0.00	0.00	0.00
	5	0.00	0.60	0.00	0.00	0.00	0.00
	6	0.00	0.60	0.00	0.00	0.00	0.00
	7	0.00	0.60	0.00	0.00	0.00	0.00
	8	0.00	0.60	0.00	0.00	0.00	0.00
	9	0.00	0.63	0.00	0.00	0.00	0.00
	10	0.00	0.62	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	11	0.00	0.60	0.00	0.00	0.00	0.00
	12	0.00	0.60	0.00	0.00	0.00	0.00
	13	0.00	0.44	0.00	0.00	0.00	0.00
	14	0.00	0.44	0.00	0.00	0.00	0.00
	15	0.00	0.42	0.00	0.00	0.00	0.00
	16	0.00	0.41	0.00	0.00	0.00	0.00
	17	0.00	0.60	0.00	0.00	0.00	0.00
	18	0.00	0.60	0.00	0.00	0.00	0.00
	19	0.00	0.60	0.00	0.00	0.00	0.00
	20	0.00	0.60	0.00	0.00	0.00	0.00
	21	0.00	0.42	0.00	0.00	0.00	0.00
	22	0.00	0.42	0.00	0.00	0.00	0.00
	23	0.00	0.42	0.00	0.00	0.00	0.00
	24	0.00	0.42	0.00	0.00	0.00	0.00
107	1	0.00	0.56	0.00	0.00	0.00	0.00
	2	0.00	0.54	0.00	0.00	0.00	0.00
	3	0.00	0.55	0.00	0.00	0.00	0.00
	4	0.00	0.56	0.00	0.00	0.00	0.00
	5	0.00	0.55	0.00	0.00	0.00	0.00
	6	0.00	0.55	0.00	0.00	0.00	0.00
	7	0.00	0.55	0.00	0.00	0.00	0.00
	8	0.00	0.55	0.00	0.00	0.00	0.00
	9	0.00	0.67	0.00	0.00	0.00	0.00
	10	0.00	0.62	0.00	0.00	0.00	0.00
	11	0.00	0.59	0.00	0.00	0.00	0.00
	12	0.00	0.58	0.00	0.00	0.00	0.00
	13	0.00	0.56	0.00	0.00	0.00	0.00
	14	0.00	0.48	0.00	0.00	0.00	0.00
	15	0.00	0.45	0.00	0.00	0.00	0.00
	16	0.00	0.43	0.00	0.00	0.00	0.00
	17	0.00	0.55	0.00	0.00	0.00	0.00
	18	0.00	0.55	0.00	0.00	0.00	0.00
	19	0.00	0.54	0.00	0.00	0.00	0.00
	20	0.00	0.57	0.00	0.00	0.00	0.00
	21	0.00	0.40	0.00	0.00	0.00	0.00
	22	0.00	0.40	0.00	0.00	0.00	0.00
	23	0.00	0.39	0.00	0.00	0.00	0.00
	24	0.00	0.41	0.00	0.00	0.00	0.00
108	1	0.00	0.58	0.00	0.00	0.00	0.00
	2	0.00	0.57	0.00	0.00	0.00	0.00
	3	0.00	0.58	0.00	0.00	0.00	0.00
	4	0.00	0.58	0.00	0.00	0.00	0.00
	5	0.00	0.58	0.00	0.00	0.00	0.00
	6	0.00	0.58	0.00	0.00	0.00	0.00
	7	0.00	0.58	0.00	0.00	0.00	0.00
	8	0.00	0.58	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	9	0.00	0.70	0.00	0.00	0.00	0.00
	10	0.00	0.65	0.00	0.00	0.00	0.00
	11	0.00	0.62	0.00	0.00	0.00	0.00
	12	0.00	0.61	0.00	0.00	0.00	0.00
	13	0.00	0.58	0.00	0.00	0.00	0.00
	14	0.00	0.51	0.00	0.00	0.00	0.00
	15	0.00	0.46	0.00	0.00	0.00	0.00
	16	0.00	0.45	0.00	0.00	0.00	0.00
	17	0.00	0.58	0.00	0.00	0.00	0.00
	18	0.00	0.58	0.00	0.00	0.00	0.00
	19	0.00	0.57	0.00	0.00	0.00	0.00
	20	0.00	0.60	0.00	0.00	0.00	0.00
	21	0.00	0.41	0.00	0.00	0.00	0.00
	22	0.00	0.41	0.00	0.00	0.00	0.00
	23	0.00	0.40	0.00	0.00	0.00	0.00
	24	0.00	0.43	0.00	0.00	0.00	0.00
109	1	0.00	0.61	0.00	0.00	0.00	0.00
	2	0.00	0.60	0.00	0.00	0.00	0.00
	3	0.00	0.61	0.00	0.00	0.00	0.00
	4	0.00	0.61	0.00	0.00	0.00	0.00
	5	0.00	0.61	0.00	0.00	0.00	0.00
	6	0.00	0.61	0.00	0.00	0.00	0.00
	7	0.00	0.61	0.00	0.00	0.00	0.00
	8	0.00	0.61	0.00	0.00	0.00	0.00
	9	0.00	0.72	0.00	0.00	0.00	0.00
	10	0.00	0.69	0.00	0.00	0.00	0.00
	11	0.00	0.64	0.00	0.00	0.00	0.00
	12	0.00	0.63	0.00	0.00	0.00	0.00
	13	0.00	0.60	0.00	0.00	0.00	0.00
	14	0.00	0.54	0.00	0.00	0.00	0.00
	15	0.00	0.47	0.00	0.00	0.00	0.00
	16	0.00	0.46	0.00	0.00	0.00	0.00
	17	0.00	0.61	0.00	0.00	0.00	0.00
	18	0.00	0.61	0.00	0.00	0.00	0.00
	19	0.00	0.59	0.00	0.00	0.00	0.00
	20	0.00	0.62	0.00	0.00	0.00	0.00
	21	0.00	0.43	0.00	0.00	0.00	0.00
	22	0.00	0.43	0.00	0.00	0.00	0.00
	23	0.00	0.42	0.00	0.00	0.00	0.00
	24	0.00	0.44	0.00	0.00	0.00	0.00
110	1	0.00	0.64	0.00	0.00	0.00	0.00
	2	0.00	0.63	0.00	0.00	0.00	0.00
	3	0.00	0.64	0.00	0.00	0.00	0.00
	4	0.00	0.64	0.00	0.00	0.00	0.00
	5	0.00	0.64	0.00	0.00	0.00	0.00
	6	0.00	0.64	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	7	0.00	0.63	0.00	0.00	0.00	0.00
	8	0.00	0.63	0.00	0.00	0.00	0.00
	9	0.00	0.75	0.00	0.00	0.00	0.00
	10	0.00	0.72	0.00	0.00	0.00	0.00
	11	0.00	0.66	0.00	0.00	0.00	0.00
	12	0.00	0.66	0.00	0.00	0.00	0.00
	13	0.00	0.62	0.00	0.00	0.00	0.00
	14	0.00	0.56	0.00	0.00	0.00	0.00
	15	0.00	0.48	0.00	0.00	0.00	0.00
	16	0.00	0.48	0.00	0.00	0.00	0.00
	17	0.00	0.63	0.00	0.00	0.00	0.00
	18	0.00	0.64	0.00	0.00	0.00	0.00
	19	0.00	0.62	0.00	0.00	0.00	0.00
	20	0.00	0.65	0.00	0.00	0.00	0.00
	21	0.00	0.44	0.00	0.00	0.00	0.00
	22	0.00	0.45	0.00	0.00	0.00	0.00
	23	0.00	0.44	0.00	0.00	0.00	0.00
	24	0.00	0.46	0.00	0.00	0.00	0.00
111	1	0.00	0.59	0.00	0.00	0.00	0.00
	2	0.00	0.58	0.00	0.00	0.00	0.00
	3	0.00	0.59	0.00	0.00	0.00	0.00
	4	0.00	0.59	0.00	0.00	0.00	0.00
	5	0.00	0.59	0.00	0.00	0.00	0.00
	6	0.00	0.59	0.00	0.00	0.00	0.00
	7	0.00	0.59	0.00	0.00	0.00	0.00
	8	0.00	0.59	0.00	0.00	0.00	0.00
	9	0.00	0.66	0.00	0.00	0.00	0.00
	10	0.00	0.64	0.00	0.00	0.00	0.00
	11	0.00	0.61	0.00	0.00	0.00	0.00
	12	0.00	0.60	0.00	0.00	0.00	0.00
	13	0.00	0.52	0.00	0.00	0.00	0.00
	14	0.00	0.48	0.00	0.00	0.00	0.00
	15	0.00	0.44	0.00	0.00	0.00	0.00
	16	0.00	0.43	0.00	0.00	0.00	0.00
	17	0.00	0.59	0.00	0.00	0.00	0.00
	18	0.00	0.59	0.00	0.00	0.00	0.00
	19	0.00	0.58	0.00	0.00	0.00	0.00
	20	0.00	0.60	0.00	0.00	0.00	0.00
	21	0.00	0.42	0.00	0.00	0.00	0.00
	22	0.00	0.42	0.00	0.00	0.00	0.00
	23	0.00	0.41	0.00	0.00	0.00	0.00
	24	0.00	0.42	0.00	0.00	0.00	0.00
112	1	0.00	0.62	0.00	0.00	0.00	0.00
	2	0.00	0.61	0.00	0.00	0.00	0.00
	3	0.00	0.62	0.00	0.00	0.00	0.00
	4	0.00	0.62	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	5	0.00	0.62	0.00	0.00	0.00	0.00
	6	0.00	0.62	0.00	0.00	0.00	0.00
	7	0.00	0.62	0.00	0.00	0.00	0.00
	8	0.00	0.62	0.00	0.00	0.00	0.00
	9	0.00	0.69	0.00	0.00	0.00	0.00
	10	0.00	0.67	0.00	0.00	0.00	0.00
	11	0.00	0.63	0.00	0.00	0.00	0.00
	12	0.00	0.63	0.00	0.00	0.00	0.00
	13	0.00	0.53	0.00	0.00	0.00	0.00
	14	0.00	0.51	0.00	0.00	0.00	0.00
	15	0.00	0.45	0.00	0.00	0.00	0.00
	16	0.00	0.45	0.00	0.00	0.00	0.00
	17	0.00	0.62	0.00	0.00	0.00	0.00
	18	0.00	0.62	0.00	0.00	0.00	0.00
	19	0.00	0.61	0.00	0.00	0.00	0.00
	20	0.00	0.63	0.00	0.00	0.00	0.00
	21	0.00	0.43	0.00	0.00	0.00	0.00
	22	0.00	0.43	0.00	0.00	0.00	0.00
	23	0.00	0.43	0.00	0.00	0.00	0.00
	24	0.00	0.44	0.00	0.00	0.00	0.00
113	1	0.00	0.65	0.00	0.00	0.00	0.00
	2	0.00	0.64	0.00	0.00	0.00	0.00
	3	0.00	0.65	0.00	0.00	0.00	0.00
	4	0.00	0.65	0.00	0.00	0.00	0.00
	5	0.00	0.65	0.00	0.00	0.00	0.00
	6	0.00	0.65	0.00	0.00	0.00	0.00
	7	0.00	0.65	0.00	0.00	0.00	0.00
	8	0.00	0.65	0.00	0.00	0.00	0.00
	9	0.00	0.72	0.00	0.00	0.00	0.00
	10	0.00	0.71	0.00	0.00	0.00	0.00
	11	0.00	0.66	0.00	0.00	0.00	0.00
	12	0.00	0.66	0.00	0.00	0.00	0.00
	13	0.00	0.55	0.00	0.00	0.00	0.00
	14	0.00	0.53	0.00	0.00	0.00	0.00
	15	0.00	0.46	0.00	0.00	0.00	0.00
	16	0.00	0.46	0.00	0.00	0.00	0.00
	17	0.00	0.65	0.00	0.00	0.00	0.00
	18	0.00	0.65	0.00	0.00	0.00	0.00
	19	0.00	0.64	0.00	0.00	0.00	0.00
	20	0.00	0.65	0.00	0.00	0.00	0.00
	21	0.00	0.45	0.00	0.00	0.00	0.00
	22	0.00	0.45	0.00	0.00	0.00	0.00
	23	0.00	0.45	0.00	0.00	0.00	0.00
	24	0.00	0.46	0.00	0.00	0.00	0.00
114	1	0.00	0.68	0.00	0.00	0.00	0.00
	2	0.00	0.67	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	3	0.00	0.68	0.00	0.00	0.00	0.00
	4	0.00	0.68	0.00	0.00	0.00	0.00
	5	0.00	0.68	0.00	0.00	0.00	0.00
	6	0.00	0.68	0.00	0.00	0.00	0.00
	7	0.00	0.68	0.00	0.00	0.00	0.00
	8	0.00	0.67	0.00	0.00	0.00	0.00
	9	0.00	0.74	0.00	0.00	0.00	0.00
	10	0.00	0.74	0.00	0.00	0.00	0.00
	11	0.00	0.68	0.00	0.00	0.00	0.00
	12	0.00	0.68	0.00	0.00	0.00	0.00
	13	0.00	0.57	0.00	0.00	0.00	0.00
	14	0.00	0.56	0.00	0.00	0.00	0.00
	15	0.00	0.47	0.00	0.00	0.00	0.00
	16	0.00	0.47	0.00	0.00	0.00	0.00
	17	0.00	0.67	0.00	0.00	0.00	0.00
	18	0.00	0.68	0.00	0.00	0.00	0.00
	19	0.00	0.67	0.00	0.00	0.00	0.00
	20	0.00	0.68	0.00	0.00	0.00	0.00
	21	0.00	0.47	0.00	0.00	0.00	0.00
	22	0.00	0.47	0.00	0.00	0.00	0.00
	23	0.00	0.46	0.00	0.00	0.00	0.00
	24	0.00	0.47	0.00	0.00	0.00	0.00
115	1	0.00	0.63	0.00	0.00	0.00	0.00
	2	0.00	0.62	0.00	0.00	0.00	0.00
	3	0.00	0.63	0.00	0.00	0.00	0.00
	4	0.00	0.63	0.00	0.00	0.00	0.00
	5	0.00	0.63	0.00	0.00	0.00	0.00
	6	0.00	0.63	0.00	0.00	0.00	0.00
	7	0.00	0.63	0.00	0.00	0.00	0.00
	8	0.00	0.63	0.00	0.00	0.00	0.00
	9	0.00	0.66	0.00	0.00	0.00	0.00
	10	0.00	0.66	0.00	0.00	0.00	0.00
	11	0.00	0.62	0.00	0.00	0.00	0.00
	12	0.00	0.62	0.00	0.00	0.00	0.00
	13	0.00	0.47	0.00	0.00	0.00	0.00
	14	0.00	0.47	0.00	0.00	0.00	0.00
	15	0.00	0.43	0.00	0.00	0.00	0.00
	16	0.00	0.43	0.00	0.00	0.00	0.00
	17	0.00	0.63	0.00	0.00	0.00	0.00
	18	0.00	0.63	0.00	0.00	0.00	0.00
	19	0.00	0.63	0.00	0.00	0.00	0.00
	20	0.00	0.63	0.00	0.00	0.00	0.00
	21	0.00	0.44	0.00	0.00	0.00	0.00
	22	0.00	0.44	0.00	0.00	0.00	0.00
	23	0.00	0.44	0.00	0.00	0.00	0.00
	24	0.00	0.44	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
116	1	0.00	0.66	0.00	0.00	0.00	0.00
	2	0.00	0.65	0.00	0.00	0.00	0.00
	3	0.00	0.66	0.00	0.00	0.00	0.00
	4	0.00	0.66	0.00	0.00	0.00	0.00
	5	0.00	0.66	0.00	0.00	0.00	0.00
	6	0.00	0.66	0.00	0.00	0.00	0.00
	7	0.00	0.66	0.00	0.00	0.00	0.00
	8	0.00	0.66	0.00	0.00	0.00	0.00
	9	0.00	0.68	0.00	0.00	0.00	0.00
	10	0.00	0.69	0.00	0.00	0.00	0.00
	11	0.00	0.65	0.00	0.00	0.00	0.00
	12	0.00	0.65	0.00	0.00	0.00	0.00
	13	0.00	0.49	0.00	0.00	0.00	0.00
	14	0.00	0.50	0.00	0.00	0.00	0.00
	15	0.00	0.44	0.00	0.00	0.00	0.00
	16	0.00	0.44	0.00	0.00	0.00	0.00
	17	0.00	0.66	0.00	0.00	0.00	0.00
	18	0.00	0.66	0.00	0.00	0.00	0.00
	19	0.00	0.66	0.00	0.00	0.00	0.00
	20	0.00	0.66	0.00	0.00	0.00	0.00
	21	0.00	0.45	0.00	0.00	0.00	0.00
	22	0.00	0.45	0.00	0.00	0.00	0.00
	23	0.00	0.46	0.00	0.00	0.00	0.00
	24	0.00	0.45	0.00	0.00	0.00	0.00
117	1	0.00	0.69	0.00	0.00	0.00	0.00
	2	0.00	0.68	0.00	0.00	0.00	0.00
	3	0.00	0.69	0.00	0.00	0.00	0.00
	4	0.00	0.69	0.00	0.00	0.00	0.00
	5	0.00	0.69	0.00	0.00	0.00	0.00
	6	0.00	0.69	0.00	0.00	0.00	0.00
	7	0.00	0.69	0.00	0.00	0.00	0.00
	8	0.00	0.69	0.00	0.00	0.00	0.00
	9	0.00	0.71	0.00	0.00	0.00	0.00
	10	0.00	0.73	0.00	0.00	0.00	0.00
	11	0.00	0.67	0.00	0.00	0.00	0.00
	12	0.00	0.68	0.00	0.00	0.00	0.00
	13	0.00	0.50	0.00	0.00	0.00	0.00
	14	0.00	0.53	0.00	0.00	0.00	0.00
	15	0.00	0.45	0.00	0.00	0.00	0.00
	16	0.00	0.46	0.00	0.00	0.00	0.00
	17	0.00	0.69	0.00	0.00	0.00	0.00
	18	0.00	0.69	0.00	0.00	0.00	0.00
	19	0.00	0.69	0.00	0.00	0.00	0.00
	20	0.00	0.69	0.00	0.00	0.00	0.00
	21	0.00	0.47	0.00	0.00	0.00	0.00
	22	0.00	0.47	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	23	0.00	0.47	0.00	0.00	0.00	0.00
	24	0.00	0.47	0.00	0.00	0.00	0.00
118	1	0.00	0.72	0.00	0.00	0.00	0.00
	2	0.00	0.71	0.00	0.00	0.00	0.00
	3	0.00	0.72	0.00	0.00	0.00	0.00
	4	0.00	0.72	0.00	0.00	0.00	0.00
	5	0.00	0.72	0.00	0.00	0.00	0.00
	6	0.00	0.72	0.00	0.00	0.00	0.00
	7	0.00	0.72	0.00	0.00	0.00	0.00
	8	0.00	0.72	0.00	0.00	0.00	0.00
	9	0.00	0.73	0.00	0.00	0.00	0.00
	10	0.00	0.76	0.00	0.00	0.00	0.00
	11	0.00	0.69	0.00	0.00	0.00	0.00
	12	0.00	0.71	0.00	0.00	0.00	0.00
	13	0.00	0.52	0.00	0.00	0.00	0.00
	14	0.00	0.55	0.00	0.00	0.00	0.00
	15	0.00	0.46	0.00	0.00	0.00	0.00
	16	0.00	0.47	0.00	0.00	0.00	0.00
	17	0.00	0.72	0.00	0.00	0.00	0.00
	18	0.00	0.72	0.00	0.00	0.00	0.00
	19	0.00	0.72	0.00	0.00	0.00	0.00
	20	0.00	0.71	0.00	0.00	0.00	0.00
	21	0.00	0.49	0.00	0.00	0.00	0.00
	22	0.00	0.49	0.00	0.00	0.00	0.00
	23	0.00	0.49	0.00	0.00	0.00	0.00
	24	0.00	0.49	0.00	0.00	0.00	0.00
119	1	0.00	0.68	0.00	0.00	0.00	0.00
	2	0.00	0.67	0.00	0.00	0.00	0.00
	3	0.00	0.68	0.00	0.00	0.00	0.00
	4	0.00	0.68	0.00	0.00	0.00	0.00
	5	0.00	0.68	0.00	0.00	0.00	0.00
	6	0.00	0.69	0.00	0.00	0.00	0.00
	7	0.00	0.69	0.00	0.00	0.00	0.00
	8	0.00	0.69	0.00	0.00	0.00	0.00
	9	0.00	0.40	0.00	0.00	0.00	0.00
	10	0.00	0.54	0.00	0.00	0.00	0.00
	11	0.00	0.54	0.00	0.00	0.00	0.00
	12	0.00	0.58	0.00	0.00	0.00	0.00
	13	0.00	0.01	0.00	0.00	0.00	0.00
	14	0.00	0.26	0.00	0.00	0.00	0.00
	15	0.00	0.25	0.00	0.00	0.00	0.00
	16	0.00	0.30	0.00	0.00	0.00	0.00
	17	0.00	0.69	0.00	0.00	0.00	0.00
	18	0.00	0.68	0.00	0.00	0.00	0.00
	19	0.00	0.73	0.00	0.00	0.00	0.00
	20	0.00	0.64	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	21	0.00	0.45	0.00	0.00	0.00	0.00
	22	0.00	0.44	0.00	0.00	0.00	0.00
	23	0.00	0.48	0.00	0.00	0.00	0.00
	24	0.00	0.41	0.00	0.00	0.00	0.00
120	1	0.00	0.64	0.00	0.00	0.00	0.00
	2	0.00	0.64	0.00	0.00	0.00	0.00
	3	0.00	0.65	0.00	0.00	0.00	0.00
	4	0.00	0.64	0.00	0.00	0.00	0.00
	5	0.00	0.64	0.00	0.00	0.00	0.00
	6	0.00	0.65	0.00	0.00	0.00	0.00
	7	0.00	0.65	0.00	0.00	0.00	0.00
	8	0.00	0.65	0.00	0.00	0.00	0.00
	9	0.00	0.37	0.00	0.00	0.00	0.00
	10	0.00	0.50	0.00	0.00	0.00	0.00
	11	0.00	0.51	0.00	0.00	0.00	0.00
	12	0.00	0.54	0.00	0.00	0.00	0.00
	13	0.00	0.00	0.00	0.00	0.00	0.00
	14	0.00	0.22	0.00	0.00	0.00	0.00
	15	0.00	0.24	0.00	0.00	0.00	0.00
	16	0.00	0.28	0.00	0.00	0.00	0.00
	17	0.00	0.65	0.00	0.00	0.00	0.00
	18	0.00	0.65	0.00	0.00	0.00	0.00
	19	0.00	0.69	0.00	0.00	0.00	0.00
	20	0.00	0.60	0.00	0.00	0.00	0.00
	21	0.00	0.42	0.00	0.00	0.00	0.00
	22	0.00	0.42	0.00	0.00	0.00	0.00
	23	0.00	0.46	0.00	0.00	0.00	0.00
	24	0.00	0.38	0.00	0.00	0.00	0.00
121	1	0.00	0.72	0.00	0.00	0.00	0.00
	2	0.00	0.71	0.00	0.00	0.00	0.00
	3	0.00	0.72	0.00	0.00	0.00	0.00
	4	0.00	0.72	0.00	0.00	0.00	0.00
	5	0.00	0.72	0.00	0.00	0.00	0.00
	6	0.00	0.73	0.00	0.00	0.00	0.00
	7	0.00	0.73	0.00	0.00	0.00	0.00
	8	0.00	0.73	0.00	0.00	0.00	0.00
	9	0.00	0.44	0.00	0.00	0.00	0.00
	10	0.00	0.59	0.00	0.00	0.00	0.00
	11	0.00	0.58	0.00	0.00	0.00	0.00
	12	0.00	0.61	0.00	0.00	0.00	0.00
	13	0.00	0.03	0.00	0.00	0.00	0.00
	14	0.00	0.29	0.00	0.00	0.00	0.00
	15	0.00	0.27	0.00	0.00	0.00	0.00
	16	0.00	0.32	0.00	0.00	0.00	0.00
	17	0.00	0.73	0.00	0.00	0.00	0.00
	18	0.00	0.72	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	19	0.00	0.77	0.00	0.00	0.00	0.00
	20	0.00	0.67	0.00	0.00	0.00	0.00
	21	0.00	0.47	0.00	0.00	0.00	0.00
	22	0.00	0.46	0.00	0.00	0.00	0.00
	23	0.00	0.50	0.00	0.00	0.00	0.00
	24	0.00	0.43	0.00	0.00	0.00	0.00
122	1	0.00	0.76	0.00	0.00	0.00	0.00
	2	0.00	0.75	0.00	0.00	0.00	0.00
	3	0.00	0.76	0.00	0.00	0.00	0.00
	4	0.00	0.75	0.00	0.00	0.00	0.00
	5	0.00	0.76	0.00	0.00	0.00	0.00
	6	0.00	0.76	0.00	0.00	0.00	0.00
	7	0.00	0.77	0.00	0.00	0.00	0.00
	8	0.00	0.76	0.00	0.00	0.00	0.00
	9	0.00	0.47	0.00	0.00	0.00	0.00
	10	0.00	0.63	0.00	0.00	0.00	0.00
	11	0.00	0.61	0.00	0.00	0.00	0.00
	12	0.00	0.65	0.00	0.00	0.00	0.00
	13	0.00	0.06	0.00	0.00	0.00	0.00
	14	0.00	0.32	0.00	0.00	0.00	0.00
	15	0.00	0.28	0.00	0.00	0.00	0.00
	16	0.00	0.34	0.00	0.00	0.00	0.00
	17	0.00	0.76	0.00	0.00	0.00	0.00
	18	0.00	0.76	0.00	0.00	0.00	0.00
	19	0.00	0.81	0.00	0.00	0.00	0.00
	20	0.00	0.71	0.00	0.00	0.00	0.00
	21	0.00	0.49	0.00	0.00	0.00	0.00
	22	0.00	0.49	0.00	0.00	0.00	0.00
	23	0.00	0.53	0.00	0.00	0.00	0.00
	24	0.00	0.45	0.00	0.00	0.00	0.00
123	1	0.00	0.79	0.00	0.00	0.00	0.00
	2	0.00	0.79	0.00	0.00	0.00	0.00
	3	0.00	0.80	0.00	0.00	0.00	0.00
	4	0.00	0.79	0.00	0.00	0.00	0.00
	5	0.00	0.79	0.00	0.00	0.00	0.00
	6	0.00	0.80	0.00	0.00	0.00	0.00
	7	0.00	0.80	0.00	0.00	0.00	0.00
	8	0.00	0.80	0.00	0.00	0.00	0.00
	9	0.00	0.51	0.00	0.00	0.00	0.00
	10	0.00	0.68	0.00	0.00	0.00	0.00
	11	0.00	0.64	0.00	0.00	0.00	0.00
	12	0.00	0.68	0.00	0.00	0.00	0.00
	13	0.00	0.09	0.00	0.00	0.00	0.00
	14	0.00	0.35	0.00	0.00	0.00	0.00
	15	0.00	0.30	0.00	0.00	0.00	0.00
	16	0.00	0.36	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	17	0.00	0.80	0.00	0.00	0.00	0.00
	18	0.00	0.80	0.00	0.00	0.00	0.00
	19	0.00	0.85	0.00	0.00	0.00	0.00
	20	0.00	0.75	0.00	0.00	0.00	0.00
	21	0.00	0.51	0.00	0.00	0.00	0.00
	22	0.00	0.51	0.00	0.00	0.00	0.00
	23	0.00	0.55	0.00	0.00	0.00	0.00
	24	0.00	0.47	0.00	0.00	0.00	0.00
124	1	0.00	0.83	0.00	0.00	0.00	0.00
	2	0.00	0.82	0.00	0.00	0.00	0.00
	3	0.00	0.83	0.00	0.00	0.00	0.00
	4	0.00	0.83	0.00	0.00	0.00	0.00
	5	0.00	0.83	0.00	0.00	0.00	0.00
	6	0.00	0.83	0.00	0.00	0.00	0.00
	7	0.00	0.84	0.00	0.00	0.00	0.00
	8	0.00	0.84	0.00	0.00	0.00	0.00
	9	0.00	0.55	0.00	0.00	0.00	0.00
	10	0.00	0.72	0.00	0.00	0.00	0.00
	11	0.00	0.67	0.00	0.00	0.00	0.00
	12	0.00	0.72	0.00	0.00	0.00	0.00
	13	0.00	0.12	0.00	0.00	0.00	0.00
	14	0.00	0.39	0.00	0.00	0.00	0.00
	15	0.00	0.32	0.00	0.00	0.00	0.00
	16	0.00	0.38	0.00	0.00	0.00	0.00
	17	0.00	0.84	0.00	0.00	0.00	0.00
	18	0.00	0.83	0.00	0.00	0.00	0.00
	19	0.00	0.88	0.00	0.00	0.00	0.00
	20	0.00	0.78	0.00	0.00	0.00	0.00
	21	0.00	0.54	0.00	0.00	0.00	0.00
	22	0.00	0.53	0.00	0.00	0.00	0.00
	23	0.00	0.57	0.00	0.00	0.00	0.00
	24	0.00	0.49	0.00	0.00	0.00	0.00
125	1	0.00	0.86	0.00	0.00	0.00	0.00
	2	0.00	0.85	0.00	0.00	0.00	0.00
	3	0.00	0.86	0.00	0.00	0.00	0.00
	4	0.00	0.86	0.00	0.00	0.00	0.00
	5	0.00	0.86	0.00	0.00	0.00	0.00
	6	0.00	0.87	0.00	0.00	0.00	0.00
	7	0.00	0.87	0.00	0.00	0.00	0.00
	8	0.00	0.87	0.00	0.00	0.00	0.00
	9	0.00	0.59	0.00	0.00	0.00	0.00
	10	0.00	0.77	0.00	0.00	0.00	0.00
	11	0.00	0.70	0.00	0.00	0.00	0.00
	12	0.00	0.75	0.00	0.00	0.00	0.00
	13	0.00	0.15	0.00	0.00	0.00	0.00
	14	0.00	0.42	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	15	0.00	0.34	0.00	0.00	0.00	0.00
	16	0.00	0.40	0.00	0.00	0.00	0.00
	17	0.00	0.87	0.00	0.00	0.00	0.00
	18	0.00	0.86	0.00	0.00	0.00	0.00
	19	0.00	0.91	0.00	0.00	0.00	0.00
	20	0.00	0.82	0.00	0.00	0.00	0.00
	21	0.00	0.56	0.00	0.00	0.00	0.00
	22	0.00	0.55	0.00	0.00	0.00	0.00
	23	0.00	0.59	0.00	0.00	0.00	0.00
	24	0.00	0.51	0.00	0.00	0.00	0.00
126	1	0.00	0.89	0.00	0.00	0.00	0.00
	2	0.00	0.89	0.00	0.00	0.00	0.00
	3	0.00	0.90	0.00	0.00	0.00	0.00
	4	0.00	0.89	0.00	0.00	0.00	0.00
	5	0.00	0.89	0.00	0.00	0.00	0.00
	6	0.00	0.90	0.00	0.00	0.00	0.00
	7	0.00	0.91	0.00	0.00	0.00	0.00
	8	0.00	0.90	0.00	0.00	0.00	0.00
	9	0.00	0.63	0.00	0.00	0.00	0.00
	10	0.00	0.81	0.00	0.00	0.00	0.00
	11	0.00	0.74	0.00	0.00	0.00	0.00
	12	0.00	0.79	0.00	0.00	0.00	0.00
	13	0.00	0.19	0.00	0.00	0.00	0.00
	14	0.00	0.45	0.00	0.00	0.00	0.00
	15	0.00	0.36	0.00	0.00	0.00	0.00
	16	0.00	0.42	0.00	0.00	0.00	0.00
	17	0.00	0.90	0.00	0.00	0.00	0.00
	18	0.00	0.90	0.00	0.00	0.00	0.00
	19	0.00	0.95	0.00	0.00	0.00	0.00
	20	0.00	0.85	0.00	0.00	0.00	0.00
	21	0.00	0.57	0.00	0.00	0.00	0.00
	22	0.00	0.57	0.00	0.00	0.00	0.00
	23	0.00	0.61	0.00	0.00	0.00	0.00
	24	0.00	0.53	0.00	0.00	0.00	0.00
127	1	0.00	0.92	0.00	0.00	0.00	0.00
	2	0.00	0.92	0.00	0.00	0.00	0.00
	3	0.00	0.93	0.00	0.00	0.00	0.00
	4	0.00	0.92	0.00	0.00	0.00	0.00
	5	0.00	0.93	0.00	0.00	0.00	0.00
	6	0.00	0.93	0.00	0.00	0.00	0.00
	7	0.00	0.94	0.00	0.00	0.00	0.00
	8	0.00	0.93	0.00	0.00	0.00	0.00
	9	0.00	0.67	0.00	0.00	0.00	0.00
	10	0.00	0.85	0.00	0.00	0.00	0.00
	11	0.00	0.77	0.00	0.00	0.00	0.00
	12	0.00	0.82	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	13	0.00	0.23	0.00	0.00	0.00	0.00
	14	0.00	0.49	0.00	0.00	0.00	0.00
	15	0.00	0.38	0.00	0.00	0.00	0.00
	16	0.00	0.44	0.00	0.00	0.00	0.00
	17	0.00	0.93	0.00	0.00	0.00	0.00
	18	0.00	0.93	0.00	0.00	0.00	0.00
	19	0.00	0.98	0.00	0.00	0.00	0.00
	20	0.00	0.88	0.00	0.00	0.00	0.00
	21	0.00	0.59	0.00	0.00	0.00	0.00
	22	0.00	0.59	0.00	0.00	0.00	0.00
	23	0.00	0.63	0.00	0.00	0.00	0.00
	24	0.00	0.55	0.00	0.00	0.00	0.00
146	1	0.00	0.47	0.00	0.00	0.00	0.00
	2	0.00	0.46	0.00	0.00	0.00	0.00
	3	0.00	0.47	0.00	0.00	0.00	0.00
	4	0.00	0.47	0.00	0.00	0.00	0.00
	5	0.00	0.47	0.00	0.00	0.00	0.00
	6	0.00	0.48	0.00	0.00	0.00	0.00
	7	0.00	0.48	0.00	0.00	0.00	0.00
	8	0.00	0.48	0.00	0.00	0.00	0.00
	9	0.00	0.43	0.00	0.00	0.00	0.00
	10	0.00	0.42	0.00	0.00	0.00	0.00
	11	0.00	0.46	0.00	0.00	0.00	0.00
	12	0.00	0.45	0.00	0.00	0.00	0.00
	13	0.00	0.24	0.00	0.00	0.00	0.00
	14	0.00	0.26	0.00	0.00	0.00	0.00
	15	0.00	0.32	0.00	0.00	0.00	0.00
	16	0.00	0.31	0.00	0.00	0.00	0.00
	17	0.00	0.48	0.00	0.00	0.00	0.00
	18	0.00	0.47	0.00	0.00	0.00	0.00
	19	0.00	0.48	0.00	0.00	0.00	0.00
	20	0.00	0.46	0.00	0.00	0.00	0.00
	21	0.00	0.34	0.00	0.00	0.00	0.00
	22	0.00	0.34	0.00	0.00	0.00	0.00
	23	0.00	0.35	0.00	0.00	0.00	0.00
	24	0.00	0.33	0.00	0.00	0.00	0.00
147	1	0.00	0.50	0.00	0.00	0.00	0.00
	2	0.00	0.49	0.00	0.00	0.00	0.00
	3	0.00	0.50	0.00	0.00	0.00	0.00
	4	0.00	0.50	0.00	0.00	0.00	0.00
	5	0.00	0.50	0.00	0.00	0.00	0.00
	6	0.00	0.51	0.00	0.00	0.00	0.00
	7	0.00	0.51	0.00	0.00	0.00	0.00
	8	0.00	0.51	0.00	0.00	0.00	0.00
	9	0.00	0.41	0.00	0.00	0.00	0.00
	10	0.00	0.43	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	11	0.00	0.46	0.00	0.00	0.00	0.00
	12	0.00	0.46	0.00	0.00	0.00	0.00
	13	0.00	0.18	0.00	0.00	0.00	0.00
	14	0.00	0.25	0.00	0.00	0.00	0.00
	15	0.00	0.30	0.00	0.00	0.00	0.00
	16	0.00	0.30	0.00	0.00	0.00	0.00
	17	0.00	0.51	0.00	0.00	0.00	0.00
	18	0.00	0.50	0.00	0.00	0.00	0.00
	19	0.00	0.52	0.00	0.00	0.00	0.00
	20	0.00	0.49	0.00	0.00	0.00	0.00
	21	0.00	0.35	0.00	0.00	0.00	0.00
	22	0.00	0.35	0.00	0.00	0.00	0.00
	23	0.00	0.37	0.00	0.00	0.00	0.00
	24	0.00	0.34	0.00	0.00	0.00	0.00
148	1	0.00	0.53	0.00	0.00	0.00	0.00
	2	0.00	0.52	0.00	0.00	0.00	0.00
	3	0.00	0.53	0.00	0.00	0.00	0.00
	4	0.00	0.53	0.00	0.00	0.00	0.00
	5	0.00	0.53	0.00	0.00	0.00	0.00
	6	0.00	0.53	0.00	0.00	0.00	0.00
	7	0.00	0.54	0.00	0.00	0.00	0.00
	8	0.00	0.54	0.00	0.00	0.00	0.00
	9	0.00	0.39	0.00	0.00	0.00	0.00
	10	0.00	0.43	0.00	0.00	0.00	0.00
	11	0.00	0.47	0.00	0.00	0.00	0.00
	12	0.00	0.47	0.00	0.00	0.00	0.00
	13	0.00	0.12	0.00	0.00	0.00	0.00
	14	0.00	0.23	0.00	0.00	0.00	0.00
	15	0.00	0.28	0.00	0.00	0.00	0.00
	16	0.00	0.29	0.00	0.00	0.00	0.00
	17	0.00	0.54	0.00	0.00	0.00	0.00
	18	0.00	0.53	0.00	0.00	0.00	0.00
	19	0.00	0.56	0.00	0.00	0.00	0.00
	20	0.00	0.51	0.00	0.00	0.00	0.00
	21	0.00	0.37	0.00	0.00	0.00	0.00
	22	0.00	0.36	0.00	0.00	0.00	0.00
	23	0.00	0.38	0.00	0.00	0.00	0.00
	24	0.00	0.35	0.00	0.00	0.00	0.00
149	1	0.00	0.56	0.00	0.00	0.00	0.00
	2	0.00	0.55	0.00	0.00	0.00	0.00
	3	0.00	0.56	0.00	0.00	0.00	0.00
	4	0.00	0.56	0.00	0.00	0.00	0.00
	5	0.00	0.56	0.00	0.00	0.00	0.00
	6	0.00	0.56	0.00	0.00	0.00	0.00
	7	0.00	0.57	0.00	0.00	0.00	0.00
	8	0.00	0.56	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	9	0.00	0.37	0.00	0.00	0.00	0.00
	10	0.00	0.44	0.00	0.00	0.00	0.00
	11	0.00	0.47	0.00	0.00	0.00	0.00
	12	0.00	0.48	0.00	0.00	0.00	0.00
	13	0.00	0.07	0.00	0.00	0.00	0.00
	14	0.00	0.22	0.00	0.00	0.00	0.00
	15	0.00	0.26	0.00	0.00	0.00	0.00
	16	0.00	0.28	0.00	0.00	0.00	0.00
	17	0.00	0.56	0.00	0.00	0.00	0.00
	18	0.00	0.56	0.00	0.00	0.00	0.00
	19	0.00	0.59	0.00	0.00	0.00	0.00
	20	0.00	0.53	0.00	0.00	0.00	0.00
	21	0.00	0.38	0.00	0.00	0.00	0.00
	22	0.00	0.38	0.00	0.00	0.00	0.00
	23	0.00	0.40	0.00	0.00	0.00	0.00
	24	0.00	0.35	0.00	0.00	0.00	0.00
150	1	0.00	0.58	0.00	0.00	0.00	0.00
	2	0.00	0.57	0.00	0.00	0.00	0.00
	3	0.00	0.58	0.00	0.00	0.00	0.00
	4	0.00	0.58	0.00	0.00	0.00	0.00
	5	0.00	0.58	0.00	0.00	0.00	0.00
	6	0.00	0.59	0.00	0.00	0.00	0.00
	7	0.00	0.59	0.00	0.00	0.00	0.00
	8	0.00	0.59	0.00	0.00	0.00	0.00
	9	0.00	0.35	0.00	0.00	0.00	0.00
	10	0.00	0.45	0.00	0.00	0.00	0.00
	11	0.00	0.48	0.00	0.00	0.00	0.00
	12	0.00	0.49	0.00	0.00	0.00	0.00
	13	0.00	0.01	0.00	0.00	0.00	0.00
	14	0.00	0.21	0.00	0.00	0.00	0.00
	15	0.00	0.24	0.00	0.00	0.00	0.00
	16	0.00	0.27	0.00	0.00	0.00	0.00
	17	0.00	0.59	0.00	0.00	0.00	0.00
	18	0.00	0.58	0.00	0.00	0.00	0.00
	19	0.00	0.63	0.00	0.00	0.00	0.00
	20	0.00	0.55	0.00	0.00	0.00	0.00
	21	0.00	0.39	0.00	0.00	0.00	0.00
	22	0.00	0.39	0.00	0.00	0.00	0.00
	23	0.00	0.42	0.00	0.00	0.00	0.00
	24	0.00	0.36	0.00	0.00	0.00	0.00
154	1	0.00	0.38	0.00	0.00	0.00	0.00
	2	0.00	0.37	0.00	0.00	0.00	0.00
	3	0.00	0.38	0.00	0.00	0.00	0.00
	4	0.00	0.38	0.00	0.00	0.00	0.00
	5	0.00	0.38	0.00	0.00	0.00	0.00
	6	0.00	0.38	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	7	0.00	0.38	0.00	0.00	0.00	0.00
	8	0.00	0.38	0.00	0.00	0.00	0.00
	9	0.00	0.47	0.00	0.00	0.00	0.00
	10	0.00	0.38	0.00	0.00	0.00	0.00
	11	0.00	0.43	0.00	0.00	0.00	0.00
	12	0.00	0.40	0.00	0.00	0.00	0.00
	13	0.00	0.39	0.00	0.00	0.00	0.00
	14	0.00	0.30	0.00	0.00	0.00	0.00
	15	0.00	0.36	0.00	0.00	0.00	0.00
	16	0.00	0.33	0.00	0.00	0.00	0.00
	17	0.00	0.38	0.00	0.00	0.00	0.00
	18	0.00	0.38	0.00	0.00	0.00	0.00
	19	0.00	0.37	0.00	0.00	0.00	0.00
	20	0.00	0.39	0.00	0.00	0.00	0.00
	21	0.00	0.29	0.00	0.00	0.00	0.00
	22	0.00	0.29	0.00	0.00	0.00	0.00
	23	0.00	0.28	0.00	0.00	0.00	0.00
	24	0.00	0.30	0.00	0.00	0.00	0.00
155	1	0.00	0.41	0.00	0.00	0.00	0.00
	2	0.00	0.40	0.00	0.00	0.00	0.00
	3	0.00	0.41	0.00	0.00	0.00	0.00
	4	0.00	0.41	0.00	0.00	0.00	0.00
	5	0.00	0.41	0.00	0.00	0.00	0.00
	6	0.00	0.41	0.00	0.00	0.00	0.00
	7	0.00	0.41	0.00	0.00	0.00	0.00
	8	0.00	0.41	0.00	0.00	0.00	0.00
	9	0.00	0.46	0.00	0.00	0.00	0.00
	10	0.00	0.40	0.00	0.00	0.00	0.00
	11	0.00	0.44	0.00	0.00	0.00	0.00
	12	0.00	0.42	0.00	0.00	0.00	0.00
	13	0.00	0.34	0.00	0.00	0.00	0.00
	14	0.00	0.29	0.00	0.00	0.00	0.00
	15	0.00	0.35	0.00	0.00	0.00	0.00
	16	0.00	0.32	0.00	0.00	0.00	0.00
	17	0.00	0.41	0.00	0.00	0.00	0.00
	18	0.00	0.41	0.00	0.00	0.00	0.00
	19	0.00	0.41	0.00	0.00	0.00	0.00
	20	0.00	0.42	0.00	0.00	0.00	0.00
	21	0.00	0.31	0.00	0.00	0.00	0.00
	22	0.00	0.31	0.00	0.00	0.00	0.00
	23	0.00	0.30	0.00	0.00	0.00	0.00
	24	0.00	0.31	0.00	0.00	0.00	0.00
156	1	0.00	0.44	0.00	0.00	0.00	0.00
	2	0.00	0.43	0.00	0.00	0.00	0.00
	3	0.00	0.44	0.00	0.00	0.00	0.00
	4	0.00	0.44	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	5	0.00	0.44	0.00	0.00	0.00	0.00
	6	0.00	0.44	0.00	0.00	0.00	0.00
	7	0.00	0.44	0.00	0.00	0.00	0.00
	8	0.00	0.44	0.00	0.00	0.00	0.00
	9	0.00	0.45	0.00	0.00	0.00	0.00
	10	0.00	0.41	0.00	0.00	0.00	0.00
	11	0.00	0.45	0.00	0.00	0.00	0.00
	12	0.00	0.43	0.00	0.00	0.00	0.00
	13	0.00	0.29	0.00	0.00	0.00	0.00
	14	0.00	0.28	0.00	0.00	0.00	0.00
	15	0.00	0.33	0.00	0.00	0.00	0.00
	16	0.00	0.31	0.00	0.00	0.00	0.00
	17	0.00	0.44	0.00	0.00	0.00	0.00
	18	0.00	0.44	0.00	0.00	0.00	0.00
	19	0.00	0.45	0.00	0.00	0.00	0.00
	20	0.00	0.44	0.00	0.00	0.00	0.00
	21	0.00	0.32	0.00	0.00	0.00	0.00
	22	0.00	0.32	0.00	0.00	0.00	0.00
	23	0.00	0.32	0.00	0.00	0.00	0.00
	24	0.00	0.32	0.00	0.00	0.00	0.00
157	1	0.00	0.60	0.00	0.00	0.00	0.00
	2	0.00	0.60	0.00	0.00	0.00	0.00
	3	0.00	0.61	0.00	0.00	0.00	0.00
	4	0.00	0.60	0.00	0.00	0.00	0.00
	5	0.00	0.61	0.00	0.00	0.00	0.00
	6	0.00	0.61	0.00	0.00	0.00	0.00
	7	0.00	0.62	0.00	0.00	0.00	0.00
	8	0.00	0.61	0.00	0.00	0.00	0.00
	9	0.00	0.34	0.00	0.00	0.00	0.00
	10	0.00	0.45	0.00	0.00	0.00	0.00
	11	0.00	0.48	0.00	0.00	0.00	0.00
	12	0.00	0.50	0.00	0.00	0.00	0.00
	13	0.00	0.00	0.00	0.00	0.00	0.00
	14	0.00	0.19	0.00	0.00	0.00	0.00
	15	0.00	0.22	0.00	0.00	0.00	0.00
	16	0.00	0.26	0.00	0.00	0.00	0.00
	17	0.00	0.61	0.00	0.00	0.00	0.00
	18	0.00	0.61	0.00	0.00	0.00	0.00
	19	0.00	0.66	0.00	0.00	0.00	0.00
	20	0.00	0.56	0.00	0.00	0.00	0.00
	21	0.00	0.40	0.00	0.00	0.00	0.00
	22	0.00	0.40	0.00	0.00	0.00	0.00
	23	0.00	0.43	0.00	0.00	0.00	0.00
	24	0.00	0.36	0.00	0.00	0.00	0.00
160	1	0.00	0.78	0.00	0.00	0.00	0.00
	2	0.00	0.77	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	3	0.00	0.78	0.00	0.00	0.00	0.00
	4	0.00	0.78	0.00	0.00	0.00	0.00
	5	0.00	0.78	0.00	0.00	0.00	0.00
	6	0.00	0.78	0.00	0.00	0.00	0.00
	7	0.00	0.79	0.00	0.00	0.00	0.00
	8	0.00	0.78	0.00	0.00	0.00	0.00
	9	0.00	0.75	0.00	0.00	0.00	0.00
	10	0.00	0.82	0.00	0.00	0.00	0.00
	11	0.00	0.73	0.00	0.00	0.00	0.00
	12	0.00	0.76	0.00	0.00	0.00	0.00
	13	0.00	0.50	0.00	0.00	0.00	0.00
	14	0.00	0.57	0.00	0.00	0.00	0.00
	15	0.00	0.46	0.00	0.00	0.00	0.00
	16	0.00	0.48	0.00	0.00	0.00	0.00
	17	0.00	0.78	0.00	0.00	0.00	0.00
	18	0.00	0.78	0.00	0.00	0.00	0.00
	19	0.00	0.79	0.00	0.00	0.00	0.00
	20	0.00	0.77	0.00	0.00	0.00	0.00
	21	0.00	0.52	0.00	0.00	0.00	0.00
	22	0.00	0.52	0.00	0.00	0.00	0.00
	23	0.00	0.53	0.00	0.00	0.00	0.00
	24	0.00	0.52	0.00	0.00	0.00	0.00
161	1	0.00	0.82	0.00	0.00	0.00	0.00
	2	0.00	0.81	0.00	0.00	0.00	0.00
	3	0.00	0.82	0.00	0.00	0.00	0.00
	4	0.00	0.82	0.00	0.00	0.00	0.00
	5	0.00	0.82	0.00	0.00	0.00	0.00
	6	0.00	0.82	0.00	0.00	0.00	0.00
	7	0.00	0.83	0.00	0.00	0.00	0.00
	8	0.00	0.82	0.00	0.00	0.00	0.00
	9	0.00	0.74	0.00	0.00	0.00	0.00
	10	0.00	0.84	0.00	0.00	0.00	0.00
	11	0.00	0.75	0.00	0.00	0.00	0.00
	12	0.00	0.78	0.00	0.00	0.00	0.00
	13	0.00	0.45	0.00	0.00	0.00	0.00
	14	0.00	0.56	0.00	0.00	0.00	0.00
	15	0.00	0.45	0.00	0.00	0.00	0.00
	16	0.00	0.48	0.00	0.00	0.00	0.00
	17	0.00	0.82	0.00	0.00	0.00	0.00
	18	0.00	0.82	0.00	0.00	0.00	0.00
	19	0.00	0.84	0.00	0.00	0.00	0.00
	20	0.00	0.81	0.00	0.00	0.00	0.00
	21	0.00	0.54	0.00	0.00	0.00	0.00
	22	0.00	0.54	0.00	0.00	0.00	0.00
	23	0.00	0.56	0.00	0.00	0.00	0.00
	24	0.00	0.53	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
162	1	0.00	0.86	0.00	0.00	0.00	0.00
	2	0.00	0.85	0.00	0.00	0.00	0.00
	3	0.00	0.86	0.00	0.00	0.00	0.00
	4	0.00	0.86	0.00	0.00	0.00	0.00
	5	0.00	0.86	0.00	0.00	0.00	0.00
	6	0.00	0.86	0.00	0.00	0.00	0.00
	7	0.00	0.87	0.00	0.00	0.00	0.00
	8	0.00	0.86	0.00	0.00	0.00	0.00
	9	0.00	0.73	0.00	0.00	0.00	0.00
	10	0.00	0.85	0.00	0.00	0.00	0.00
	11	0.00	0.76	0.00	0.00	0.00	0.00
	12	0.00	0.80	0.00	0.00	0.00	0.00
	13	0.00	0.40	0.00	0.00	0.00	0.00
	14	0.00	0.55	0.00	0.00	0.00	0.00
	15	0.00	0.43	0.00	0.00	0.00	0.00
	16	0.00	0.48	0.00	0.00	0.00	0.00
	17	0.00	0.86	0.00	0.00	0.00	0.00
	18	0.00	0.86	0.00	0.00	0.00	0.00
	19	0.00	0.89	0.00	0.00	0.00	0.00
	20	0.00	0.84	0.00	0.00	0.00	0.00
	21	0.00	0.56	0.00	0.00	0.00	0.00
	22	0.00	0.56	0.00	0.00	0.00	0.00
	23	0.00	0.58	0.00	0.00	0.00	0.00
	24	0.00	0.54	0.00	0.00	0.00	0.00
163	1	0.00	0.89	0.00	0.00	0.00	0.00
	2	0.00	0.89	0.00	0.00	0.00	0.00
	3	0.00	0.90	0.00	0.00	0.00	0.00
	4	0.00	0.89	0.00	0.00	0.00	0.00
	5	0.00	0.89	0.00	0.00	0.00	0.00
	6	0.00	0.90	0.00	0.00	0.00	0.00
	7	0.00	0.90	0.00	0.00	0.00	0.00
	8	0.00	0.90	0.00	0.00	0.00	0.00
	9	0.00	0.72	0.00	0.00	0.00	0.00
	10	0.00	0.87	0.00	0.00	0.00	0.00
	11	0.00	0.78	0.00	0.00	0.00	0.00
	12	0.00	0.82	0.00	0.00	0.00	0.00
	13	0.00	0.35	0.00	0.00	0.00	0.00
	14	0.00	0.54	0.00	0.00	0.00	0.00
	15	0.00	0.42	0.00	0.00	0.00	0.00
	16	0.00	0.47	0.00	0.00	0.00	0.00
	17	0.00	0.90	0.00	0.00	0.00	0.00
	18	0.00	0.90	0.00	0.00	0.00	0.00
	19	0.00	0.93	0.00	0.00	0.00	0.00
	20	0.00	0.86	0.00	0.00	0.00	0.00
	21	0.00	0.58	0.00	0.00	0.00	0.00
	22	0.00	0.58	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	23	0.00	0.60	0.00	0.00	0.00	0.00
	24	0.00	0.55	0.00	0.00	0.00	0.00
164	1	0.00	0.93	0.00	0.00	0.00	0.00
	2	0.00	0.92	0.00	0.00	0.00	0.00
	3	0.00	0.93	0.00	0.00	0.00	0.00
	4	0.00	0.92	0.00	0.00	0.00	0.00
	5	0.00	0.93	0.00	0.00	0.00	0.00
	6	0.00	0.93	0.00	0.00	0.00	0.00
	7	0.00	0.94	0.00	0.00	0.00	0.00
	8	0.00	0.93	0.00	0.00	0.00	0.00
	9	0.00	0.71	0.00	0.00	0.00	0.00
	10	0.00	0.88	0.00	0.00	0.00	0.00
	11	0.00	0.79	0.00	0.00	0.00	0.00
	12	0.00	0.84	0.00	0.00	0.00	0.00
	13	0.00	0.30	0.00	0.00	0.00	0.00
	14	0.00	0.53	0.00	0.00	0.00	0.00
	15	0.00	0.41	0.00	0.00	0.00	0.00
	16	0.00	0.47	0.00	0.00	0.00	0.00
	17	0.00	0.93	0.00	0.00	0.00	0.00
	18	0.00	0.93	0.00	0.00	0.00	0.00
	19	0.00	0.97	0.00	0.00	0.00	0.00
	20	0.00	0.89	0.00	0.00	0.00	0.00
	21	0.00	0.60	0.00	0.00	0.00	0.00
	22	0.00	0.59	0.00	0.00	0.00	0.00
	23	0.00	0.63	0.00	0.00	0.00	0.00
	24	0.00	0.56	0.00	0.00	0.00	0.00
168	1	0.00	0.67	0.00	0.00	0.00	0.00
	2	0.00	0.65	0.00	0.00	0.00	0.00
	3	0.00	0.66	0.00	0.00	0.00	0.00
	4	0.00	0.67	0.00	0.00	0.00	0.00
	5	0.00	0.66	0.00	0.00	0.00	0.00
	6	0.00	0.66	0.00	0.00	0.00	0.00
	7	0.00	0.66	0.00	0.00	0.00	0.00
	8	0.00	0.66	0.00	0.00	0.00	0.00
	9	0.00	0.78	0.00	0.00	0.00	0.00
	10	0.00	0.76	0.00	0.00	0.00	0.00
	11	0.00	0.69	0.00	0.00	0.00	0.00
	12	0.00	0.69	0.00	0.00	0.00	0.00
	13	0.00	0.63	0.00	0.00	0.00	0.00
	14	0.00	0.59	0.00	0.00	0.00	0.00
	15	0.00	0.49	0.00	0.00	0.00	0.00
	16	0.00	0.49	0.00	0.00	0.00	0.00
	17	0.00	0.66	0.00	0.00	0.00	0.00
	18	0.00	0.66	0.00	0.00	0.00	0.00
	19	0.00	0.65	0.00	0.00	0.00	0.00
	20	0.00	0.68	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	21	0.00	0.46	0.00	0.00	0.00	0.00
	22	0.00	0.46	0.00	0.00	0.00	0.00
	23	0.00	0.45	0.00	0.00	0.00	0.00
	24	0.00	0.47	0.00	0.00	0.00	0.00
169	1	0.00	0.71	0.00	0.00	0.00	0.00
	2	0.00	0.69	0.00	0.00	0.00	0.00
	3	0.00	0.70	0.00	0.00	0.00	0.00
	4	0.00	0.70	0.00	0.00	0.00	0.00
	5	0.00	0.70	0.00	0.00	0.00	0.00
	6	0.00	0.70	0.00	0.00	0.00	0.00
	7	0.00	0.70	0.00	0.00	0.00	0.00
	8	0.00	0.70	0.00	0.00	0.00	0.00
	9	0.00	0.77	0.00	0.00	0.00	0.00
	10	0.00	0.78	0.00	0.00	0.00	0.00
	11	0.00	0.70	0.00	0.00	0.00	0.00
	12	0.00	0.71	0.00	0.00	0.00	0.00
	13	0.00	0.59	0.00	0.00	0.00	0.00
	14	0.00	0.58	0.00	0.00	0.00	0.00
	15	0.00	0.48	0.00	0.00	0.00	0.00
	16	0.00	0.49	0.00	0.00	0.00	0.00
	17	0.00	0.70	0.00	0.00	0.00	0.00
	18	0.00	0.70	0.00	0.00	0.00	0.00
	19	0.00	0.70	0.00	0.00	0.00	0.00
	20	0.00	0.71	0.00	0.00	0.00	0.00
	21	0.00	0.48	0.00	0.00	0.00	0.00
	22	0.00	0.48	0.00	0.00	0.00	0.00
	23	0.00	0.48	0.00	0.00	0.00	0.00
	24	0.00	0.49	0.00	0.00	0.00	0.00
170	1	0.00	0.74	0.00	0.00	0.00	0.00
	2	0.00	0.73	0.00	0.00	0.00	0.00
	3	0.00	0.74	0.00	0.00	0.00	0.00
	4	0.00	0.74	0.00	0.00	0.00	0.00
	5	0.00	0.74	0.00	0.00	0.00	0.00
	6	0.00	0.74	0.00	0.00	0.00	0.00
	7	0.00	0.74	0.00	0.00	0.00	0.00
	8	0.00	0.74	0.00	0.00	0.00	0.00
	9	0.00	0.76	0.00	0.00	0.00	0.00
	10	0.00	0.80	0.00	0.00	0.00	0.00
	11	0.00	0.72	0.00	0.00	0.00	0.00
	12	0.00	0.73	0.00	0.00	0.00	0.00
	13	0.00	0.54	0.00	0.00	0.00	0.00
	14	0.00	0.58	0.00	0.00	0.00	0.00
	15	0.00	0.47	0.00	0.00	0.00	0.00
	16	0.00	0.49	0.00	0.00	0.00	0.00
	17	0.00	0.74	0.00	0.00	0.00	0.00
	18	0.00	0.74	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	19	0.00	0.75	0.00	0.00	0.00	0.00
	20	0.00	0.74	0.00	0.00	0.00	0.00
	21	0.00	0.50	0.00	0.00	0.00	0.00
	22	0.00	0.50	0.00	0.00	0.00	0.00
	23	0.00	0.50	0.00	0.00	0.00	0.00
	24	0.00	0.50	0.00	0.00	0.00	0.00
171	1	0.00	0.96	0.00	0.00	0.00	0.00
	2	0.00	0.95	0.00	0.00	0.00	0.00
	3	0.00	0.96	0.00	0.00	0.00	0.00
	4	0.00	0.95	0.00	0.00	0.00	0.00
	5	0.00	0.96	0.00	0.00	0.00	0.00
	6	0.00	0.96	0.00	0.00	0.00	0.00
	7	0.00	0.97	0.00	0.00	0.00	0.00
	8	0.00	0.96	0.00	0.00	0.00	0.00
	9	0.00	0.70	0.00	0.00	0.00	0.00
	10	0.00	0.90	0.00	0.00	0.00	0.00
	11	0.00	0.80	0.00	0.00	0.00	0.00
	12	0.00	0.86	0.00	0.00	0.00	0.00
	13	0.00	0.26	0.00	0.00	0.00	0.00
	14	0.00	0.52	0.00	0.00	0.00	0.00
	15	0.00	0.40	0.00	0.00	0.00	0.00
	16	0.00	0.47	0.00	0.00	0.00	0.00
	17	0.00	0.96	0.00	0.00	0.00	0.00
	18	0.00	0.96	0.00	0.00	0.00	0.00
	19	0.00	1.01	0.00	0.00	0.00	0.00
	20	0.00	0.92	0.00	0.00	0.00	0.00
	21	0.00	0.61	0.00	0.00	0.00	0.00
	22	0.00	0.61	0.00	0.00	0.00	0.00
	23	0.00	0.64	0.00	0.00	0.00	0.00
	24	0.00	0.57	0.00	0.00	0.00	0.00

********** END OF LATEST ANALYSIS RESULT **********

773. LOAD LIST 101 TO 127
774. START CONCRETE DESIGN

```
775. CODE ACI
776. CLB 0.05 MEMB 101
777. CLS 0.05 ALL
778. CLT 0.05 MEMB 101
779. FC 3567 ALL
780. FYMAIN 42813 ALL
781. FYSEC 42813 ALL
782. MAXMAIN 32 ALL
783. MINMAIN 12 ALL
784. CLB 0.075 MEMB 5 TO 36 57 TO 68 89 TO 100 102 TO 109 126 TO 129 133 TO 136 -
785. 139 TO 142 146 TO 349
786. CLT 0.075 MEMB 5 TO 36 57 TO 68 89 TO 100 102 TO 109 126 TO 129 133 TO 136 -
787. 139 TO 142 146 TO 349
788. CLT 0.075 MEMB 5 TO 36 57 TO 68 89 TO 100 102 TO 109 126 TO 129 133 TO 136 -
789. 139 TO 142 146 TO 349
790. DESIGN COLUMN 101
```

==

COLUMN NO. 101 DESIGN PER ACI 318-08 - AXIAL + BENDING

FY - 419.9 FC - 35.0 MPA, SQRE SIZE - 850.0 X 850.0 MMS, TIED
AREA OF STEEL REQUIRED = 16097.3 SQ. MM

BAR CONFIGURATION	REINF PCT.	LOAD	LOCATION	PHI
36 - 25 MM	2.446	116	END	0.900

(PROVIDE EQUAL NUMBER OF BARS ON EACH FACE)
TIE BAR NUMBER 12 SPACING 256.00 MM

**********END OF COLUMN DESIGN RESULTS**********

791. END CONCRETE DESIGN
792. FINISH

********** END OF THE STAAD.Pro RUN **********

**** DATE= MAR 31,2020 TIME= 14:31:56 ****

Global Project ID	**900707**
Delivery Type	**ENGINEERING PROCUREMENT CONSTRUCTION**
Project Name	**MANSOURAH MASSARAH GOLD PROJECT**
Customer	**MA'ADEN GOLD AND BASE METALS (MA'ADEN)**
Project Country	**KINGDOM OF SAUDI ARABIA**

Ma'aden Revision No:	A01	A02	C01	**D01**			Outotec / L&T Revision No.:	0	1	2	3	
Date	10-03-2020	02-04-2020	30-04-2020	**17-11-2023**			Date	10-03-2020	02-04-2020	30-04-2020	17-11-2023	
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 27.03.20 AND REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	**AS BUILT**			Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 27.03.20 AND REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT	
Prepared By	SHD	SHD	SHD	**SHD**			Prepared By	SHD	SHD	SHD	SHD	
Checked	SGC	SGC	SGC	SGC			Checked	SGC	SGC	SGC	SGC	
Approved	PRI	PRI	PRI	PRI			Approved	PRI	PRI	PRI	PRI	

ATTACHMENT 3 STAAD INPUT & OUTPUT FILE OF FOUNDATION MKD. F4

```
**************************************************
*                                                *
*           STAAD.Pro V8i SELECTseries5           *
*           Version  20.07.10.64                 *
*           Proprietary Program of               *
*           Bentley Systems, Inc.                *
*           Date=    MAR 31, 2020                *
*           Time=    14:27: 1                    *
*                                                *
*      USER ID: LNT ECC DIV                      *
**************************************************
```

```
     1. STAAD SPACE
INPUT FILE: MD-216-3350-EG-CV-CAL-1226_F4_REVISED.STD
     2. START JOB INFORMATION
     3. ENGINEER DATE 16-DEC-19
     4. END JOB INFORMATION
     5. INPUT WIDTH 79
     7. UNIT METER MTON
     8. JOINT COORDINATES
     9. 1 0 0 0; 2 0 9.35 0.25; 3 0 0 1; 5 1 0 0; 6 1 0 1; 8 -1 0 0; 9 -1 0 1
    10. 11 -0.75 0 0; 12 -0.75 0 0.25; 13 -1 0 0.25; 14 -0.5 0 0; 15 -0.5 0 0.25
    11. 16 -0.25 0 0; 17 -0.25 0 0.25; 18 0 0 0.25; 19 -0.75 0 0.5; 20 -1 0 0.5
    12. 21 -0.5 0 0.5; 22 -0.25 0 0.5; 23 0 0 0.5; 24 -0.75 0 0.75; 25 -1 0 0.75
    13. 26 -0.5 0 0.75; 27 -0.25 0 0.75; 28 0 0 0.75; 29 -0.75 0 1; 30 -0.5 0 1
    14. 31 -0.25 0 1; 32 0.25 0 0; 33 0.25 0 0.25; 34 0.5 0 0; 35 0.5 0 0.25
    15. 36 0.75 0 0; 37 0.75 0 0.25; 38 1 0 0.25; 39 0.25 0 0.5; 40 0.5 0 0.5
    16. 41 0.75 0 0.5; 42 1 0 0.5; 43 0.25 0 0.75; 44 0.5 0 0.75; 45 0.75 0 0.75
    17. 46 1 0 0.75; 47 0.25 0 1; 48 0.5 0 1; 49 0.75 0 1; 63 -0.75 0 -1.25
    18. 64 -1 0 -1.25; 65 -0.5 0 -1.25; 66 -0.25 0 -1.25; 67 0 0 -1.25; 68 -0.75 0 -1.
    19. 69 -1 0 -1; 70 -0.5 0 -1; 71 -0.25 0 -1; 72 0 0 -1; 73 -0.75 0 -0.75
    20. 74 -1 0 -0.75; 75 -0.5 0 -0.75; 76 -0.25 0 -0.75; 77 0 0 -0.75
    21. 78 -0.75 0 -0.5; 79 -1 0 -0.5; 80 -0.5 0 -0.5; 81 -0.25 0 -0.5; 82 0 0 -0.5
    22. 83 -0.75 0 -0.25; 84 -1 0 -0.25; 85 -0.5 0 -0.25; 86 -0.25 0 -0.25
    23. 87 0 0 -0.25; 99 0.25 0 -1.25; 100 0.5 0 -1.25; 101 0.75 0 -1.25
    24. 102 1 0 -1.25; 103 0.25 0 -1; 104 0.5 0 -1; 105 0.75 0 -1; 106 1 0 -1.
    25. 107 0.25 0 -0.75; 108 0.5 0 -0.75; 109 0.75 0 -0.75; 110 1 0 -0.75
    26. 111 0.25 0 -0.5; 112 0.5 0 -0.5; 113 0.75 0 -0.5; 114 1 0 -0.5
    27. 115 0.25 0 -0.25; 116 0.5 0 -0.25; 117 0.75 0 -0.25; 118 1 0 -0.25
    28. 119 -0.75 0 1.25; 120 -1 0 1.25; 121 -0.5 0 1.25; 122 -0.25 0 1.25
    29. 123 0 0 1.25; 124 0.25 0 1.25; 125 0.5 0 1.25; 126 0.75 0 1.25; 127 1 0 1.25
    30. 128 -0.75 0 1.5; 129 -1 0 1.5; 130 -0.5 0 1.5; 131 -0.25 0 1.5; 132 0 0 1.5
    31. 133 0.25 0 1.5; 134 0.5 0 1.5; 135 0.75 0 1.5; 136 1 0 1.5; 137 -0.75 0 1.75
    32. 138 -1 0 1.75; 139 -0.5 0 1.75; 140 -0.25 0 1.75; 141 0 0 1.75
    33. 142 0.25 0 1.75; 143 0.5 0 1.75; 144 0.75 0 1.75; 145 1 0 1.75; 146 -1.25 0 0
    34. 147 -1.25 0 0.25; 148 -1.25 0 0.5; 149 -1.25 0 0.75; 150 -1.25 0 1
    35. 152 -1.25 0 -1.25; 153 -1.25 0 -1; 154 -1.25 0 -0.75; 155 -1.25 0 -0.5
    36. 156 -1.25 0 -0.25; 157 -1.25 0 1.25; 158 -1.25 0 1.5; 159 -1.25 0 1.75
    37. 160 1.25 0 0; 161 1.25 0 0.25; 162 1.25 0 0.5; 163 1.25 0 0.75; 164 1.25 0 1
    38. 166 1.25 0 -1.25; 167 1.25 0 -1; 168 1.25 0 -0.75; 169 1.25 0 -0.5
    39. 170 1.25 0 -0.25; 171 1.25 0 1.25; 172 1.25 0 1.5; 173 1.25 0 1.75
```

40. 174 -0.75 0 2; 175 -1 0 2; 176 -0.5 0 2; 177 -0.25 0 2; 178 0 0 2
41. 179 0.25 0 2; 180 0.5 0 2; 181 0.75 0 2; 182 1 0 2; 183 -1.25 0 2
42. 184 1.25 0 2; 185 -1 0 -1.5; 186 -0.75 0 -1.5; 187 -0.5 0 -1.5
43. 188 -0.25 0 -1.5; 189 0 0 -1.5; 190 0.25 0 -1.5; 191 0.5 0 -1.5
44. 192 0.75 0 -1.5; 193 1 0 -1.5; 194 -1.25 0 -1.5; 195 1.25 0 -1.5; 196 -1.5 0 0
45. 197 -1.5 0 0.25; 198 -1.5 0 0.5; 199 -1.5 0 0.75; 200 -1.5 0 1
46. 201 -1.5 0 -1.25; 202 -1.5 0 -1; 203 -1.5 0 -0.75; 204 -1.5 0 -0.5
47. 205 -1.5 0 -0.25; 206 -1.5 0 1.25; 207 -1.5 0 1.5; 208 -1.5 0 1.75
48. 209 -1.5 0 2; 210 -1.5 0 -1.5; 211 1.5 0 0; 212 1.5 0 0.25; 213 1.5 0 0.5
49. 214 1.5 0 0.75; 215 1.5 0 1; 216 1.5 0 -1.25; 217 1.5 0 -1; 218 1.5 0 -0.75
50. 219 1.5 0 -0.5; 220 1.5 0 -0.25; 221 1.5 0 1.25; 222 1.5 0 1.5; 223 1.5 0 1.75
51. 224 1.5 0 2; 225 1.5 0 -1.5; 226 -1 0 -1.75; 227 -0.75 0 -1.75
52. 228 -0.5 0 -1.75; 229 -0.25 0 -1.75; 230 0 0 -1.75; 231 0.25 0 -1.75
53. 232 0.5 0 -1.75; 233 0.75 0 -1.75; 234 1 0 -1.75; 235 -1.25 0 -1.75
54. 236 1.25 0 -1.75; 237 -1 0 -2; 238 -0.75 0 -2; 239 -0.5 0 -2; 240 -0.25 0 -2
55. 241 0 0 -2; 242 0.25 0 -2; 243 0.5 0 -2; 244 0.75 0 -2; 245 1 0 -2
56. 246 -1.25 0 -2; 247 1.25 0 -2; 248 -1.5 0 -1.75; 249 -1.5 0 -2
57. 250 1.5 0 -1.75; 251 1.5 0 -2; 252 -0.75 0 2.25; 253 -1 0 2.25
58. 254 -0.5 0 2.25; 255 -0.25 0 2.25; 256 0 0 2.25; 257 0.25 0 2.25
59. 258 0.5 0 2.25; 259 0.75 0 2.25; 260 1 0 2.25; 261 -1.25 0 2.25
60. 262 1.25 0 2.25; 263 -0.75 0 2.5; 264 -1 0 2.5; 265 -0.5 0 2.5
61. 266 -0.25 0 2.5; 267 0 0 2.5; 268 0.25 0 2.5; 269 0.5 0 2.5; 270 0.75 0 2.5
62. 271 1 0 2.5; 272 -1.25 0 2.5; 273 1.25 0 2.5; 274 -1.5 0 2.5; 275 -1.5 0 2.25
63. 276 1.5 0 2.5; 277 1.5 0 2.25; 278 -2 0 0; 279 -1.75 0 0; 280 -1.75 0 0.25
64. 281 -2 0 0.25; 282 -1.75 0 0.5; 283 -2 0 0.5; 284 -1.75 0 0.75; 285 -2 0 0.75
65. 286 -1.75 0 1; 287 -2 0 1; 288 -2 0 -1.25; 289 -1.75 0 -1.25; 290 -1.75 0 -1.
66. 291 -2 0 -1; 292 -1.75 0 -0.75; 293 -2 0 -0.75; 294 -1.75 0 -0.5
67. 295 -2 0 -0.5; 296 -1.75 0 -0.25; 297 -2 0 -0.25; 298 -1.75 0 1.25
68. 299 -2 0 1.25; 300 -1.75 0 1.5; 301 -2 0 1.5; 302 -1.75 0 1.75; 303 -2 0 1.75
69. 304 -2.25 0 0; 305 -2.25 0 0.25; 306 -2.25 0 0.5; 307 -2.25 0 0.75
70. 308 -2.25 0 1; 309 -2.25 0 -1.25; 310 -2.25 0 -1; 311 -2.25 0 -0.75
71. 312 -2.25 0 -0.5; 313 -2.25 0 -0.25; 314 -2.25 0 1.25; 315 -2.25 0 1.5
72. 316 -2.25 0 1.75; 317 -1.75 0 2; 318 -2 0 2; 319 -2.25 0 2; 320 -2 0 -1.5
73. 321 -1.75 0 -1.5; 322 -2.25 0 -1.5; 338 -2 0 -1.75; 339 -1.75 0 -1.75
74. 340 -2.25 0 -1.75; 341 -2 0 -2; 342 -1.75 0 -2; 343 -2.25 0 -2
75. 346 -1.75 0 2.25; 347 -2 0 2.25; 348 -2.25 0 2.25; 349 -1.75 0 2.5
76. 350 -2 0 2.5; 351 -2.25 0 2.5; 354 1.75 0 0; 355 1.75 0 0.25; 356 2 0 0
77. 357 2 0 0.25; 358 1.75 0 0.5; 359 2 0 0.5; 360 1.75 0 0.75; 361 2 0 0.75
78. 362 1.75 0 1; 363 2 0 1; 364 1.75 0 -1.25; 365 1.75 0 -1; 366 2 0 -1.25
79. 367 2 0 -1; 368 1.75 0 -0.75; 369 2 0 -0.75; 370 1.75 0 -0.5; 371 2 0 -0.5
80. 372 1.75 0 -0.25; 373 2 0 -0.25; 374 1.75 0 1.25; 375 2 0 1.25; 376 1.75 0 1.5
81. 377 2 0 1.5; 378 1.75 0 1.75; 379 2 0 1.75; 380 2.25 0 0; 381 2.25 0 0.25
82. 382 2.25 0 0.5; 383 2.25 0 0.75; 384 2.25 0 1; 385 2.25 0 -1.25; 386 2.25 0 -1.
83. 387 2.25 0 -0.75; 388 2.25 0 -0.5; 389 2.25 0 -0.25; 390 2.25 0 1.25
84. 391 2.25 0 1.5; 392 2.25 0 1.75; 393 1.75 0 2; 394 2 0 2; 395 2.25 0 2
85. 396 1.75 0 -1.5; 397 2 0 -1.5; 398 2.25 0 -1.5; 414 1.75 0 -1.75
86. 415 2 0 -1.75; 416 2.25 0 -1.75; 417 1.75 0 -2; 418 2 0 -2; 419 2.25 0 -2
87. 422 1.75 0 2.25; 423 2 0 2.25; 424 2.25 0 2.25; 425 1.75 0 2.5; 426 2 0 2.5
88. 427 2.25 0 2.5; 428 2.5 0 0; 429 2.5 0 0.25; 430 2.5 0 0.5; 431 2.5 0 0.75
89. 432 2.5 0 1; 433 2.5 0 -1.25; 434 2.5 0 -1; 435 2.5 0 -0.75; 436 2.5 0 -0.5
90. 437 2.5 0 -0.25; 438 2.5 0 1.25; 439 2.5 0 1.5; 440 2.5 0 1.75; 441 2.5 0 2
91. 442 2.5 0 -1.5; 443 2.5 0 -1.75; 444 2.5 0 -2; 445 2.5 0 2.25; 446 2.5 0 2.5
92. 447 -2.5 0 0; 448 -2.5 0 0.25; 449 -2.5 0 0.5; 450 -2.5 0 0.75; 451 -2.5 0 1
93. 452 -2.5 0 -1.25; 453 -2.5 0 -1; 454 -2.5 0 -0.75; 455 -2.5 0 -0.5
94. 456 -2.5 0 -0.25; 457 -2.5 0 1.25; 458 -2.5 0 1.5; 459 -2.5 0 1.75
95. 460 -2.5 0 2; 461 -2.5 0 -1.5; 462 -2.5 0 -1.75; 463 -2.5 0 -2

```
 96. 464 -2.5 0 2.25; 465 -2.5 0 2.5
 97. MEMBER INCIDENCES
 98. 101 2 18
 99. ELEMENT INCIDENCES SHELL
100. 5 8 11 12 13; 6 11 14 15 12; 7 14 16 17 15; 8 16 1 18 17; 9 13 12 19 20
101. 10 12 15 21 19; 11 15 17 22 21; 12 17 18 23 22; 13 20 19 24 25; 14 19 21 26 24
102. 15 21 22 27 26; 16 22 23 28 27; 17 25 24 29 9; 18 24 26 30 29; 19 26 27 31 30
103. 20 27 28 3 31; 21 1 32 33 18; 22 32 34 35 33; 23 34 36 37 35; 24 36 5 38 37
104. 25 18 33 39 23; 26 33 35 40 39; 27 35 37 41 40; 28 37 38 42 41; 29 23 39 43 28
105. 30 39 40 44 43; 31 40 41 45 44; 32 41 42 46 45; 33 28 43 47 3; 34 43 44 48 47
106. 35 44 45 49 48; 36 45 46 6 49; 49 64 63 68 69; 50 63 65 70 68; 51 65 66 71 70
107. 52 66 67 72 71; 53 69 68 73 74; 54 68 70 75 73; 55 70 71 76 75; 56 71 72 77 76
108. 57 74 73 78 79; 58 73 75 80 78; 59 75 76 81 80; 60 76 77 82 81; 61 79 78 83 84
109. 62 78 80 85 83; 63 80 81 86 85; 64 81 82 87 86; 65 84 83 11 8; 66 83 85 14 11
110. 67 85 86 16 14; 68 86 87 1 16; 81 67 99 103 72; 82 99 100 104 103
111. 83 100 101 105 104; 84 101 102 106 105; 85 72 103 107 77; 86 103 104 108 107
112. 87 104 105 109 108; 88 105 106 110 109; 89 77 107 111 82; 90 107 108 112 111
113. 91 108 109 113 112; 92 109 110 114 113; 93 82 111 115 87; 94 111 112 116 115
114. 95 112 113 117 116; 96 113 114 118 117; 97 87 115 32 1; 98 115 116 34 32
115. 99 116 117 36 34; 100 117 118 5 36; 102 9 29 119 120; 103 29 30 121 119
116. 104 30 31 122 121; 105 31 3 123 122; 106 3 47 124 123; 107 47 48 125 124
117. 108 48 49 126 125; 109 49 6 127 126; 110 120 119 128 129; 111 119 121 130 128
118. 112 121 122 131 130; 113 122 123 132 131; 114 123 124 133 132
119. 115 124 125 134 133; 116 125 126 135 134; 117 126 127 136 135
120. 118 129 128 137 138; 119 128 130 139 137; 120 130 131 140 139
121. 121 131 132 141 140; 122 132 133 142 141; 123 133 134 143 142
122. 124 134 135 144 143; 125 135 136 145 144; 126 146 8 13 147; 127 147 13 20 148
123. 128 148 20 25 149; 129 149 25 9 150; 131 152 64 69 153; 132 153 69 74 154
124. 133 154 74 79 155; 134 155 79 84 156; 135 156 84 8 146; 136 150 9 120 157
125. 137 157 120 129 158; 138 158 129 138 159; 139 5 160 161 38; 140 38 161 162 42
126. 141 42 162 163 46; 142 46 163 164 6; 144 102 166 167 106; 145 106 167 168 110
127. 146 110 168 169 114; 147 114 169 170 118; 148 118 170 160 5; 149 6 164 171 127
128. 150 127 171 172 136; 151 136 172 173 145; 152 138 137 174 175
129. 153 137 139 176 174; 154 139 140 177 176; 155 140 141 178 177
130. 156 141 142 179 178; 157 142 143 180 179; 158 143 144 181 180
131. 159 144 145 182 181; 160 159 138 175 183; 161 145 173 184 182
132. 162 185 186 63 64; 163 186 187 65 63; 164 187 188 66 65; 165 188 189 67 66
133. 166 189 190 99 67; 167 190 191 100 99; 168 191 192 101 100
134. 169 192 193 102 101; 170 194 185 64 152; 171 193 195 166 102
135. 172 183 209 208 159; 173 159 208 207 158; 174 158 207 206 157
136. 175 157 206 200 150; 176 150 200 199 149; 177 149 199 198 148
137. 178 148 198 197 147; 179 147 197 196 146; 180 146 196 205 156
138. 181 156 205 204 155; 182 155 204 203 154; 183 154 203 202 153
139. 184 153 202 201 152; 185 152 201 210 194; 186 184 224 223 173
140. 187 173 223 222 172; 188 172 222 221 171; 189 171 221 215 164
141. 190 164 215 214 163; 191 163 214 213 162; 192 162 213 212 161
142. 193 161 212 211 160; 194 160 211 220 170; 195 170 220 219 169
143. 196 169 219 218 168; 197 168 218 217 167; 198 167 217 216 166
144. 199 166 216 225 195; 200 226 227 186 185; 201 227 228 187 186
145. 202 228 229 188 187; 203 229 230 189 188; 204 230 231 190 189
146. 205 231 232 191 190; 206 232 233 192 191; 207 233 234 193 192
147. 208 235 226 185 194; 209 234 236 195 193; 210 237 238 227 226
148. 211 238 239 228 227; 212 239 240 229 228; 213 240 241 230 229
149. 214 241 242 231 230; 215 242 243 232 231; 216 243 244 233 232
150. 217 244 245 234 233; 218 246 237 226 235; 219 245 247 236 234
151. 220 194 210 248 235; 221 235 248 249 246; 222 195 225 250 236
```

152. 223 236 250 251 247; 224 175 174 252 253; 225 174 176 254 252
153. 226 176 177 255 254; 227 177 178 256 255; 228 178 179 257 256
154. 229 179 180 258 257; 230 180 181 259 258; 231 181 182 260 259
155. 232 183 175 253 261; 233 182 184 262 260; 234 253 252 263 264
156. 235 252 254 265 263; 236 254 255 266 265; 237 255 256 267 266
157. 238 256 257 268 267; 239 257 258 269 268; 240 258 259 270 269
158. 241 259 260 271 270; 242 261 253 264 272; 243 260 262 273 271
159. 244 272 274 275 261; 245 261 275 209 183; 246 273 276 277 262
160. 247 262 277 224 184; 248 278 279 280 281; 249 279 196 197 280
161. 250 281 280 282 283; 251 280 197 198 282; 252 283 282 284 285
162. 253 282 198 199 284; 254 285 284 286 287; 255 284 199 200 286
163. 256 288 289 290 291; 257 289 201 202 290; 258 291 290 292 293
164. 259 290 202 203 292; 260 293 292 294 295; 261 292 203 204 294
165. 262 295 294 296 297; 263 294 204 205 296; 264 297 296 279 278
166. 265 296 205 196 279; 266 287 286 298 299; 267 286 200 206 298
167. 268 299 298 300 301; 269 298 206 207 300; 270 301 300 302 303
168. 271 300 207 208 302; 272 304 278 281 305; 273 305 281 283 306
169. 274 306 283 285 307; 275 307 285 287 308; 276 309 288 291 310
170. 277 310 291 293 311; 278 311 293 295 312; 279 312 295 297 313
171. 280 313 297 278 304; 281 308 287 299 314; 282 314 299 301 315
172. 283 315 301 303 316; 284 303 302 317 318; 285 302 208 209 317
173. 286 316 303 318 319; 287 320 321 289 288; 288 321 210 201 289
174. 289 322 320 288 309; 304 338 339 321 320; 305 339 248 210 321
175. 306 340 338 320 322; 307 341 342 339 338; 308 342 249 248 339
176. 309 343 341 338 340; 312 318 317 346 347; 313 317 209 275 346
177. 314 319 318 347 348; 315 347 346 349 350; 316 346 275 274 349
178. 317 348 347 350 351; 320 211 354 355 212; 321 354 356 357 355
179. 322 212 355 358 213; 323 355 357 359 358; 324 213 358 360 214
180. 325 358 359 361 360; 326 214 360 362 215; 327 360 361 363 362
181. 328 216 364 365 217; 329 364 366 367 365; 330 217 365 368 218
182. 331 365 367 369 368; 332 218 368 370 219; 333 368 369 371 370
183. 334 219 370 372 220; 335 370 371 373 372; 336 220 372 354 211
184. 337 372 373 356 354; 338 215 362 374 221; 339 362 363 375 374
185. 340 221 374 376 222; 341 374 375 377 376; 342 222 376 378 223
186. 343 376 377 379 378; 344 356 380 381 357; 345 357 381 382 359
187. 346 359 382 383 361; 347 361 383 384 363; 348 366 385 386 367
188. 349 367 386 387 369; 350 369 387 388 371; 351 371 388 389 373
189. 352 373 389 380 356; 353 363 384 390 375; 354 375 390 391 377
190. 355 377 391 392 379; 356 223 378 393 224; 357 378 379 394 393
191. 358 379 392 395 394; 359 225 396 364 216; 360 396 397 366 364
192. 361 397 398 385 366; 376 250 414 396 225; 377 414 415 397 396
193. 378 415 416 398 397; 379 251 417 414 250; 380 417 418 415 414
194. 381 418 419 416 415; 384 224 393 422 277; 385 393 394 423 422
195. 386 394 395 424 423; 387 277 422 425 276; 388 422 423 426 425
196. 389 423 424 427 426; 390 380 428 429 381; 391 381 429 430 382
197. 392 382 430 431 383; 393 383 431 432 384; 394 385 433 434 386
198. 395 386 434 435 387; 396 387 435 436 388; 397 388 436 437 389
199. 398 389 437 428 380; 399 384 432 438 390; 400 390 438 439 391
200. 401 391 439 440 392; 402 392 440 441 395; 403 398 442 433 385
201. 404 416 443 442 398; 405 419 444 443 416; 406 395 441 445 424
202. 407 424 445 446 427; 408 447 304 305 448; 409 448 305 306 449
203. 410 449 306 307 450; 411 450 307 308 451; 412 452 309 310 453
204. 413 453 310 311 454; 414 454 311 312 455; 415 455 312 313 456
205. 416 456 313 304 447; 417 451 308 314 457; 418 457 314 315 458
206. 419 458 315 316 459; 420 459 316 319 460; 421 461 322 309 452
207. 422 462 340 322 461; 423 463 343 340 462; 424 460 319 348 464

```
208. 425 464 348 351 465
209. START GROUP DEFINITION
210. ELEMENT
211. _MAX_BM 5 6 9 10 13 14 17 TO 20 23 24 27 28 31 TO 36 49 TO 66 81 TO 96 99 -
212. 100 102 TO 129 131 TO 142 144 TO 289 304 TO 309 312 TO 317 320 TO 361 376 -
213. 377 TO 381 384 TO 425
214. _MAX_SF 49 TO 56 81 TO 88 110 TO 129 131 TO 142 144 TO 289 304 TO 309 312 -
215. 313 TO 317 320 TO 361 376 TO 381 384 TO 425
216. END GROUP DEFINITION
217. ELEMENT PROPERTY
218. 5 TO 36 49 TO 68 81 TO 100 102 TO 129 131 TO 142 144 TO 289 304 TO 309 312 -
219. 313 TO 317 320 TO 361 376 TO 381 384 TO 425 THICKNESS 0.75
220. DEFINE MATERIAL START
221. ISOTROPIC CONCRETE
222. E 2.21467E+006
223. POISSON 0.17
224. DENSITY 2.40262
225. ALPHA 1E-005
226. DAMP 0.05
227. TYPE CONCRETE
228. STRENGTH FCU 2812.28
229. END DEFINE MATERIAL
230. MEMBER PROPERTY AMERICAN
231. 101 PRIS YD 1 ZD 1
232. CONSTANTS
233. MATERIAL CONCRETE ALL
234. SUPPORTS
235. 5 TO 36 49 TO 68 81 TO 100 102 TO 129 131 TO 142 144 TO 289 304 TO 309 312 -
236. 313 TO 317 320 TO 361 376 TO 381 384 TO 424 -
237. 425 PLATE MAT DIRECT Y SUBGRADE 5400 PRINT COMPRESSION
```

JOINT	INFLUENCE AREA
1	0.062500
3	0.062500
5	0.062500
6	0.062500
8	0.062500
9	0.062500
11	0.062500
12	0.062500
13	0.062500
14	0.062500
15	0.062500
16	0.062500
17	0.062500
18	0.062500
19	0.062500
20	0.062500
21	0.062500
22	0.062500
23	0.062500
24	0.062500
25	0.062500
26	0.062500

27	0.062500
28	0.062500
29	0.062500
30	0.062500
31	0.062500
32	0.062500
33	0.062500
34	0.062500
35	0.062500
36	0.062500
37	0.062500
38	0.062500
39	0.062500
40	0.062500
41	0.062500
42	0.062500
43	0.062500
44	0.062500
45	0.062500
46	0.062500
47	0.062500
48	0.062500
49	0.062500
63	0.062500
64	0.062500
65	0.062500
66	0.062500
67	0.062500
68	0.062500
69	0.062500
70	0.062500
71	0.062500
72	0.062500
73	0.062500
74	0.062500
75	0.062500
76	0.062500
77	0.062500
78	0.062500
79	0.062500
80	0.062500
81	0.062500
82	0.062500
83	0.062500
84	0.062500
85	0.062500
86	0.062500
87	0.062500
99	0.062500
100	0.062500
101	0.062500
102	0.062500
103	0.062500
104	0.062500
105	0.062500
106	0.062500

107	0.062500
108	0.062500
109	0.062500
110	0.062500
111	0.062500
112	0.062500
113	0.062500
114	0.062500
115	0.062500
116	0.062500
117	0.062500
118	0.062500
119	0.062500
120	0.062500
121	0.062500
122	0.062500
123	0.062500
124	0.062500
125	0.062500
126	0.062500
127	0.062500
128	0.062500
129	0.062500
130	0.062500
131	0.062500
132	0.062500
133	0.062500
134	0.062500
135	0.062500
136	0.062500
137	0.062500
138	0.062500
139	0.062500
140	0.062500
141	0.062500
142	0.062500
143	0.062500
144	0.062500
145	0.062500
146	0.062500
147	0.062500
148	0.062500
149	0.062500
150	0.062500
152	0.062500
153	0.062500
154	0.062500
155	0.062500
156	0.062500
157	0.062500
158	0.062500
159	0.062500
160	0.062500
161	0.062500
162	0.062500
163	0.062500

164	0.062500
166	0.062500
167	0.062500
168	0.062500
169	0.062500
170	0.062500
171	0.062500
172	0.062500
173	0.062500
174	0.062500
175	0.062500
176	0.062500
177	0.062500
178	0.062500
179	0.062500
180	0.062500
181	0.062500
182	0.062500
183	0.062500
184	0.062500
185	0.062500
186	0.062500
187	0.062500
188	0.062500
189	0.062500
190	0.062500
191	0.062500
192	0.062500
193	0.062500
194	0.062500
195	0.062500
196	0.062500
197	0.062500
198	0.062500
199	0.062500
200	0.062500
201	0.062500
202	0.062500
203	0.062500
204	0.062500
205	0.062500
206	0.062500
207	0.062500
208	0.062500
209	0.062500
210	0.062500
211	0.062500
212	0.062500
213	0.062500
214	0.062500
215	0.062500
216	0.062500
217	0.062500
218	0.062500
219	0.062500
220	0.062500

221	0.062500
222	0.062500
223	0.062500
224	0.062500
225	0.062500
226	0.062500
227	0.062500
228	0.062500
229	0.062500
230	0.062500
231	0.062500
232	0.062500
233	0.062500
234	0.062500
235	0.062500
236	0.062500
237	0.031250
238	0.031250
239	0.031250
240	0.031250
241	0.031250
242	0.031250
243	0.031250
244	0.031250
245	0.031250
246	0.031250
247	0.031250
248	0.062500
249	0.031250
250	0.062500
251	0.031250
252	0.062500
253	0.062500
254	0.062500
255	0.062500
256	0.062500
257	0.062500
258	0.062500
259	0.062500
260	0.062500
261	0.062500
262	0.062500
263	0.031250
264	0.031250
265	0.031250
266	0.031250
267	0.031250
268	0.031250
269	0.031250
270	0.031250
271	0.031250
272	0.031250
273	0.031250
274	0.031250
275	0.062500
276	0.031250

277	0.062500
278	0.062500
279	0.062500
280	0.062500
281	0.062500
282	0.062500
283	0.062500
284	0.062500
285	0.062500
286	0.062500
287	0.062500
288	0.062500
289	0.062500
290	0.062500
291	0.062500
292	0.062500
293	0.062500
294	0.062500
295	0.062500
296	0.062500
297	0.062500
298	0.062500
299	0.062500
300	0.062500
301	0.062500
302	0.062500
303	0.062500
304	0.062500
305	0.062500
306	0.062500
307	0.062500
308	0.062500
309	0.062500
310	0.062500
311	0.062500
312	0.062500
313	0.062500
314	0.062500
315	0.062500
316	0.062500
317	0.062500
318	0.062500
319	0.062500
320	0.062500
321	0.062500
322	0.062500
338	0.062500
339	0.062500
340	0.062500
341	0.031250
342	0.031250
343	0.031250
346	0.062500
347	0.062500
348	0.062500
349	0.031250

350	0.031250
351	0.031250
354	0.062500
355	0.062500
356	0.062500
357	0.062500
358	0.062500
359	0.062500
360	0.062500
361	0.062500
362	0.062500
363	0.062500
364	0.062500
365	0.062500
366	0.062500
367	0.062500
368	0.062500
369	0.062500
370	0.062500
371	0.062500
372	0.062500
373	0.062500
374	0.062500
375	0.062500
376	0.062500
377	0.062500
378	0.062500
379	0.062500
380	0.062500
381	0.062500
382	0.062500
383	0.062500
384	0.062500
385	0.062500
386	0.062500
387	0.062500
388	0.062500
389	0.062500
390	0.062500
391	0.062500
392	0.062500
393	0.062500
394	0.062500
395	0.062500
396	0.062500
397	0.062500
398	0.062500
414	0.062500
415	0.062500
416	0.062500
417	0.031250
418	0.031250
419	0.031250
422	0.062500
423	0.062500
424	0.062500

425	0.031250
426	0.031250
427	0.031250
428	0.031250
429	0.031250
430	0.031250
431	0.031250
432	0.031250
433	0.031250
434	0.031250
435	0.031250
436	0.031250
437	0.031250
438	0.031250
439	0.031250
440	0.031250
441	0.031250
442	0.031250
443	0.031250
444	0.015625
445	0.031250
446	0.015625
447	0.031250
448	0.031250
449	0.031250
450	0.031250
451	0.031250
452	0.031250
453	0.031250
454	0.031250
455	0.031250
456	0.031250
457	0.031250
458	0.031250
459	0.031250
460	0.031250
461	0.031250
462	0.031250
463	0.015625
464	0.031250
465	0.015625
TOTAL	22.500000

```
238. **ALLOWABLE STRESS LOAD COMBS FOR BEARING PRESSURE CHECK**********************
239. LOAD 1 LOADTYPE NONE  TITLE DL+LL
240. SELFWEIGHT Y -1
241. JOINT LOAD
242. *CRITICAL SUPPORT REACTIONS FROM STORAGE SUPERSTRUCTURE NODE 1297
243. 2 FX 0.1 FY -12.7 FZ 0
244. ELEMENT LOAD
245. 5 TO 36 49 TO 68 81 TO 100 102 TO 129 131 TO 142 144 TO 289 304 TO 309 312 -
246. 313 TO 317 320 TO 361 376 TO 381 384 TO 425 PR GY -4.5
247. 5 TO 36 102 TO 129 136 TO 142 149 TO 161 172 TO 179 186 TO 193 224 TO 255 -
248. 266 TO 275 281 TO 286 312 TO 317 320 TO 327 338 TO 347 353 TO 358 -
249. 384 TO 393 399 TO 402 406 TO 411 417 TO 420 424 425 PR GY -9.6
250. ******************************
251. LOAD 2 LOADTYPE NONE  TITLE DL+LR
```

```
252. SELFWEIGHT Y -1
253. JOINT LOAD
254. 2 FX -1.1 FY -19.1 FZ 0
255. ELEMENT LOAD
256. 5 TO 36 49 TO 68 81 TO 100 102 TO 129 131 TO 142 144 TO 171 180 TO 185 194 -
257. 195 TO 243 248 TO 289 304 TO 309 312 TO 317 320 TO 361 376 TO 381 384 TO 424 -
258. 425 PR GY -4.5
259. 5 TO 36 102 TO 129 136 TO 142 149 TO 161 172 TO 179 186 TO 193 224 TO 255 -
260. 266 TO 275 281 TO 286 312 TO 317 320 TO 327 338 TO 347 353 TO 358 -
261. 384 TO 393 399 TO 402 406 TO 411 417 TO 420 424 425 PR GY -9.6
262. ******************************
263. LOAD 3 LOADTYPE NONE  TITLE DL+0.75*LL+0.75*LR+0.75CR1
264. JOINT LOAD
265. 2 FX -0.7 FY -16.9 FZ 0
266. SELFWEIGHT Y -1
267. ELEMENT LOAD
268. 5 TO 36 49 TO 68 81 TO 100 102 TO 129 131 TO 142 144 TO 171 180 TO 185 194 -
269. 195 TO 243 248 TO 289 304 TO 309 312 TO 317 320 TO 361 376 TO 381 384 TO 424 -
270. 425 PR GY -4.5
271. 5 TO 36 102 TO 129 136 TO 142 149 TO 161 172 TO 179 186 TO 193 224 TO 255 -
272. 266 TO 275 281 TO 286 312 TO 317 320 TO 327 338 TO 347 353 TO 358 -
273. 384 TO 393 399 TO 402 406 TO 411 417 TO 420 424 425 PR GY -9.6
274. ************************
275. LOAD 4 LOADTYPE NONE  TITLE DL+0.75*LL+0.75*LR+0.75CR2
276. SELFWEIGHT Y -1
277. ELEMENT LOAD
278. 5 TO 36 49 TO 68 81 TO 100 102 TO 129 131 TO 142 144 TO 171 180 TO 185 194 -
279. 195 TO 243 248 TO 289 304 TO 309 312 TO 317 320 TO 361 376 TO 381 384 TO 424 -
280. 425 PR GY -4.5
281. 5 TO 36 102 TO 129 136 TO 142 149 TO 161 172 TO 179 186 TO 193 224 TO 255 -
282. 266 TO 275 281 TO 286 312 TO 317 320 TO 327 338 TO 347 353 TO 358 -
283. 384 TO 393 399 TO 402 406 TO 411 417 TO 420 424 425 PR GY -9.6
284. JOINT LOAD
285. 2 FX -0.6 FY -29.9 FZ 0.1
286. ***************************
287. LOAD 5 LOADTYPE NONE  TITLE DL+0.75*LL+0.75*LR+0.75CR3
288. SELFWEIGHT Y -1
289. ELEMENT LOAD
290. 5 TO 36 49 TO 68 81 TO 100 102 TO 129 131 TO 142 144 TO 171 180 TO 185 194 -
291. 195 TO 243 248 TO 289 304 TO 309 312 TO 317 320 TO 361 376 TO 381 384 TO 424 -
292. 425 PR GY -4.5
293. 5 TO 36 102 TO 129 136 TO 142 149 TO 161 172 TO 179 186 TO 193 224 TO 255 -
294. 266 TO 275 281 TO 286 312 TO 317 320 TO 327 338 TO 347 353 TO 358 -
295. 384 TO 393 399 TO 402 406 TO 411 417 TO 420 424 425 PR GY -9.6
296. JOINT LOAD
297. 2 FX -0.7 FY -22.7 FZ 0
298. ***************************
299. LOAD 6 LOADTYPE NONE  TITLE DL+0.75*LL+0.75*LR+0.75CR4
300. SELFWEIGHT Y -1
301. ELEMENT LOAD
302. 5 TO 36 49 TO 68 81 TO 100 102 TO 129 131 TO 142 144 TO 171 180 TO 185 194 -
303. 195 TO 243 248 TO 289 304 TO 309 312 TO 317 320 TO 361 376 TO 381 384 TO 424 -
304. 425 PR GY -4.5
305. 5 TO 36 102 TO 129 136 TO 142 149 TO 161 172 TO 179 186 TO 193 224 TO 255 -
306. 266 TO 275 281 TO 286 312 TO 317 320 TO 327 338 TO 347 353 TO 358 -
307. 384 TO 393 399 TO 402 406 TO 411 417 TO 420 424 425 PR GY -9.6
```

```
308. JOINT LOAD
309. 2 FX -0.7 FY -16.7 FZ 0
310. ****************************
311. LOAD 7 LOADTYPE NONE  TITLE DL+0.75*LL+0.75*LR+0.75CR5
312. SELFWEIGHT Y -1
313. JOINT LOAD
314. 2 FX -0.7 FY -32 FZ 0
315. ELEMENT LOAD
316. 5 TO 36 49 TO 68 81 TO 100 102 TO 129 131 TO 142 144 TO 171 180 TO 185 194 -
317. 195 TO 243 248 TO 289 304 TO 309 312 TO 317 320 TO 361 376 TO 381 384 TO 424 -
318. 425 PR GY -4.5
319. 5 TO 36 102 TO 129 136 TO 142 149 TO 161 172 TO 179 186 TO 193 224 TO 255 -
320. 266 TO 275 281 TO 286 312 TO 317 320 TO 327 338 TO 347 353 TO 358 -
321. 384 TO 393 399 TO 402 406 TO 411 417 TO 420 424 425 PR GY -9.6
322. ****************************
323. LOAD 8 LOADTYPE NONE  TITLE DL+0.75*LL+0.75*LR+0.75CR6
324. SELFWEIGHT Y -1
325. ELEMENT LOAD
326. 5 TO 36 49 TO 68 81 TO 100 102 TO 129 131 TO 142 144 TO 171 180 TO 185 194 -
327. 195 TO 243 248 TO 289 304 TO 309 312 TO 317 320 TO 361 376 TO 381 384 TO 424 -
328. 425 PR GY -4.5
329. 5 TO 36 102 TO 129 136 TO 142 149 TO 161 172 TO 179 186 TO 193 224 TO 255 -
330. 266 TO 275 281 TO 286 312 TO 317 320 TO 327 338 TO 347 353 TO 358 -
331. 384 TO 393 399 TO 402 406 TO 411 417 TO 420 424 425 PR GY -9.6
332. JOINT LOAD
333. 2 FX -0.4 FY -24.1 FZ 0
334. *********************************
335. LOAD 9 LOADTYPE NONE  TITLE DL+0.75*(LL+LR+W(+X))
336. SELFWEIGHT Y -1
337. ELEMENT LOAD
338. 5 TO 36 49 TO 68 81 TO 100 102 TO 129 131 TO 142 144 TO 171 180 TO 185 194 -
339. 195 TO 243 248 TO 289 304 TO 309 312 TO 317 320 TO 361 376 TO 381 384 TO 424 -
340. 425 PR GY -4.5
341. 5 TO 36 102 TO 129 136 TO 142 149 TO 161 172 TO 179 186 TO 193 224 TO 255 -
342. 266 TO 275 281 TO 286 312 TO 317 320 TO 327 338 TO 347 353 TO 358 -
343. 384 TO 393 399 TO 402 406 TO 411 417 TO 420 424 425 PR GY -9.6
344. JOINT LOAD
345. 2 FX 13 FY 13.3 FZ -2
346. *********************************
347. LOAD 10 LOADTYPE NONE  TITLE DL+0.75*(LL+LR+W(-X))
348. SELFWEIGHT Y -1
349. ELEMENT LOAD
350. 5 TO 36 49 TO 68 81 TO 100 102 TO 129 131 TO 142 144 TO 171 180 TO 185 194 -
351. 195 TO 243 248 TO 289 304 TO 309 312 TO 317 320 TO 361 376 TO 381 384 TO 424 -
352. 425 PR GY -4.5
353. 5 TO 36 102 TO 129 136 TO 142 149 TO 161 172 TO 179 186 TO 193 224 TO 255 -
354. 266 TO 275 281 TO 286 312 TO 317 320 TO 327 338 TO 347 353 TO 358 -
355. 384 TO 393 399 TO 402 406 TO 411 417 TO 420 424 425 PR GY -9.6
356. JOINT LOAD
357. 2 FX 12 FY 0.3 FZ -0.1
358. *********************************
359. LOAD 11 LOADTYPE NONE  TITLE DL+0.75*(LL+LR+W(+Z))
360. SELFWEIGHT Y -1
361. ELEMENT LOAD
362. 5 TO 36 49 TO 68 81 TO 100 102 TO 129 131 TO 142 144 TO 171 180 TO 185 194 -
363. 195 TO 243 248 TO 289 304 TO 309 312 TO 317 320 TO 361 376 TO 381 384 TO 424 -
```

```
364. 425 PR GY -4.5
365. 5 TO 36 102 TO 129 136 TO 142 149 TO 161 172 TO 179 186 TO 193 224 TO 255 -
366. 266 TO 275 281 TO 286 312 TO 317 320 TO 327 338 TO 347 353 TO 358 -
367. 384 TO 393 399 TO 402 406 TO 411 417 TO 420 424 425 PR GY -9.6
368. JOINT LOAD
369. 2 FX 2.1 FY -3.9 FZ -1.4
370. ************************************
371. LOAD 12 LOADTYPE NONE  TITLE DL+0.75*(LL+LR+W(-Z))
372. SELFWEIGHT Y -1
373. ELEMENT LOAD
374. 5 TO 36 49 TO 68 81 TO 100 102 TO 129 131 TO 142 144 TO 171 180 TO 185 194 -
375. 195 TO 243 248 TO 289 304 TO 309 312 TO 317 320 TO 361 376 TO 381 384 TO 424 -
376. 425 PR GY -4.5
377. 5 TO 36 102 TO 129 136 TO 142 149 TO 161 172 TO 179 186 TO 193 224 TO 255 -
378. 266 TO 275 281 TO 286 312 TO 317 320 TO 327 338 TO 347 353 TO 358 -
379. 384 TO 393 399 TO 402 406 TO 411 417 TO 420 424 425 PR GY -9.6
380. JOINT LOAD
381. 2 FX 0.5 FY -12.9 FZ 0.4
382. ************************************
383. LOAD 13 LOADTYPE NONE  TITLE 0.6*D + 1.0W(+X)
384. SELFWEIGHT Y -1
385. ELEMENT LOAD
386. 5 TO 36 49 TO 68 81 TO 100 102 TO 129 131 TO 142 144 TO 171 180 TO 185 194 -
387. 195 TO 243 248 TO 289 304 TO 309 312 TO 317 320 TO 361 376 TO 381 384 TO 424 -
388. 425 PR GY -2.7
389. 5 TO 36 102 TO 129 136 TO 142 149 TO 161 172 TO 179 186 TO 193 224 TO 255 -
390. 266 TO 275 281 TO 286 312 TO 317 320 TO 327 338 TO 347 353 TO 358 -
391. 384 TO 393 399 TO 402 406 TO 411 417 TO 420 424 425 PR GY -5.8
392. JOINT LOAD
393. 2 FX 17.4 FY 32.4 FZ -2.6
394. ****************************************
395. LOAD 14 LOADTYPE NONE  TITLE 0.6*D + 1.0W(-X)
396. SELFWEIGHT Y -1
397. ELEMENT LOAD
398. 5 TO 36 49 TO 68 81 TO 100 102 TO 129 131 TO 142 144 TO 171 180 TO 185 194 -
399. 195 TO 243 248 TO 289 304 TO 309 312 TO 317 320 TO 361 376 TO 381 384 TO 424 -
400. 425 PR GY -2.7
401. 5 TO 36 102 TO 129 136 TO 142 149 TO 161 172 TO 179 186 TO 193 224 TO 255 -
402. 266 TO 275 281 TO 286 312 TO 317 320 TO 327 338 TO 347 353 TO 358 -
403. 384 TO 393 399 TO 402 406 TO 411 417 TO 420 424 425 PR GY -5.8
404. JOINT LOAD
405. 2 FX 16 FY 15.1 FZ -0.2
406. ****************************************************
407. LOAD 15 LOADTYPE NONE  TITLE 0.6*D + 1.0W(+Z)
408. SELFWEIGHT Y -1
409. ELEMENT LOAD
410. 5 TO 36 49 TO 68 81 TO 100 102 TO 129 131 TO 142 144 TO 171 180 TO 185 194 -
411. 195 TO 243 248 TO 289 304 TO 309 312 TO 317 320 TO 361 376 TO 381 384 TO 424 -
412. 425 PR GY -2.7
413. 5 TO 36 102 TO 129 136 TO 142 149 TO 161 172 TO 179 186 TO 193 224 TO 255 -
414. 266 TO 275 281 TO 286 312 TO 317 320 TO 327 338 TO 347 353 TO 358 -
415. 384 TO 393 399 TO 402 406 TO 411 417 TO 420 424 425 PR GY -5.8
416. JOINT LOAD
417. 2 FX 2.8 FY 9.5 FZ -1.9
418. ****************************************************
419. LOAD 16 LOADTYPE NONE  TITLE 0.6*D + 1.0W(-Z)
```

```
420. SELFWEIGHT Y -1
421. ELEMENT LOAD
422. 5 TO 36 49 TO 68 81 TO 100 102 TO 129 131 TO 142 144 TO 171 180 TO 185 194 -
423. 195 TO 243 248 TO 289 304 TO 309 312 TO 317 320 TO 361 376 TO 381 384 TO 424 -
424. 425 PR GY -2.7
425. 5 TO 36 102 TO 129 136 TO 142 149 TO 161 172 TO 179 186 TO 193 224 TO 255 -
426. 266 TO 275 281 TO 286 312 TO 317 320 TO 327 338 TO 347 353 TO 358 -
427. 384 TO 393 399 TO 402 406 TO 411 417 TO 420 424 425 PR GY -5.8
428. JOINT LOAD
429. 2 FX 0.7 FY -2.5 FZ 0.5
430. ******************************************************
431. LOAD 17 LOADTYPE NONE  TITLE DL+0.75*(LL+LR+0.7E(+X))
432. SELFWEIGHT Y -1
433. ELEMENT LOAD
434. 5 TO 36 49 TO 68 81 TO 100 102 TO 129 131 TO 142 144 TO 171 180 TO 185 194 -
435. 195 TO 243 248 TO 289 304 TO 309 312 TO 317 320 TO 361 376 TO 381 384 TO 424 -
436. 425 PR GY -4.5
437. 5 TO 36 102 TO 129 136 TO 142 149 TO 161 172 TO 179 186 TO 193 224 TO 255 -
438. 266 TO 275 281 TO 286 312 TO 317 320 TO 327 338 TO 347 353 TO 358 -
439. 384 TO 393 399 TO 402 406 TO 411 417 TO 420 424 425 PR GY -9.6
440. JOINT LOAD
441. 2 FX 2.4 FY -11.4 FZ 0
442. ******************************************************
443. LOAD 18 LOADTYPE NONE  TITLE DL+0.75*(LL+LR+0.7E(-X))
444. SELFWEIGHT Y -1
445. ELEMENT LOAD
446. 5 TO 36 49 TO 68 81 TO 100 102 TO 129 131 TO 142 144 TO 171 180 TO 185 194 -
447. 195 TO 243 248 TO 289 304 TO 309 312 TO 317 320 TO 361 376 TO 381 384 TO 424 -
448. 425 PR GY -4.5
449. 5 TO 36 102 TO 129 136 TO 142 149 TO 161 172 TO 179 186 TO 193 224 TO 255 -
450. 266 TO 275 281 TO 286 312 TO 317 320 TO 327 338 TO 347 353 TO 358 -
451. 384 TO 393 399 TO 402 406 TO 411 417 TO 420 424 425 PR GY -9.6
452. JOINT LOAD
453. 2 FX -3.1 FY -22.6 FZ 0
454. ******************************************************
455. LOAD 19 LOADTYPE NONE  TITLE DL+0.75*(LL+LR+0.7E(+Z))
456. SELFWEIGHT Y -1
457. ELEMENT LOAD
458. 5 TO 36 49 TO 68 81 TO 100 102 TO 129 131 TO 142 144 TO 171 180 TO 185 194 -
459. 195 TO 243 248 TO 289 304 TO 309 312 TO 317 320 TO 361 376 TO 381 384 TO 424 -
460. 425 PR GY -4.5
461. 5 TO 36 102 TO 129 136 TO 142 149 TO 161 172 TO 179 186 TO 193 224 TO 255 -
462. 266 TO 275 281 TO 286 312 TO 317 320 TO 327 338 TO 347 353 TO 358 -
463. 384 TO 393 399 TO 402 406 TO 411 417 TO 420 424 425 PR GY -9.6
464. JOINT LOAD
465. 2 FX -0.4 FY -17.3 FZ 0
466. ******************************************************
467. LOAD 20 LOADTYPE NONE  TITLE DL+0.75*(LL+LR+0.7E(-Z))
468. SELFWEIGHT Y -1
469. ELEMENT LOAD
470. 5 TO 36 49 TO 68 81 TO 100 102 TO 129 131 TO 142 144 TO 171 180 TO 185 194 -
471. 195 TO 243 248 TO 289 304 TO 309 312 TO 317 320 TO 361 376 TO 381 384 TO 424 -
472. 425 PR GY -4.5
473. 5 TO 36 102 TO 129 136 TO 142 149 TO 161 172 TO 179 186 TO 193 224 TO 255 -
474. 266 TO 275 281 TO 286 312 TO 317 320 TO 327 338 TO 347 353 TO 358 -
475. 384 TO 393 399 TO 402 406 TO 411 417 TO 420 424 425 PR GY -9.6
```

```
476. JOINT LOAD
477. 2 FX -0.2 FY -16.7 FZ 0
478. ******************************************************
479. LOAD 21 LOADTYPE NONE  TITLE 0.6*D + 0.7E(+X)
480. SELFWEIGHT Y -1
481. ELEMENT LOAD
482. 5 TO 36 49 TO 68 81 TO 100 102 TO 129 131 TO 142 144 TO 171 180 TO 185 194 -
483. 195 TO 243 248 TO 289 304 TO 309 312 TO 317 320 TO 361 376 TO 381 384 TO 424 -
484. 425 PR GY -2.7
485. 5 TO 36 102 TO 129 136 TO 142 149 TO 161 172 TO 179 186 TO 193 224 TO 255 -
486. 266 TO 275 281 TO 286 312 TO 317 320 TO 327 338 TO 347 353 TO 358 -
487. 384 TO 393 399 TO 402 406 TO 411 417 TO 420 424 425 PR GY -5.76
488. JOINT LOAD
489. 2 FX 1.9 FY -3.4 FZ 0
490. ******************************************************
491. LOAD 22 LOADTYPE NONE  TITLE 0.6*D + 0.7E(-X)
492. SELFWEIGHT Y -1
493. ELEMENT LOAD
494. 5 TO 36 49 TO 68 81 TO 100 102 TO 129 131 TO 142 144 TO 171 180 TO 185 194 -
495. 195 TO 243 248 TO 289 304 TO 309 312 TO 317 320 TO 361 376 TO 381 384 TO 424 -
496. 425 PR GY -2.7
497. 5 TO 36 102 TO 129 136 TO 142 149 TO 161 172 TO 179 186 TO 193 224 TO 255 -
498. 266 TO 275 281 TO 286 312 TO 317 320 TO 327 338 TO 347 353 TO 358 -
499. 384 TO 393 399 TO 402 406 TO 411 417 TO 420 424 425 PR GY -5.76
500. JOINT LOAD
501. 2 FX -2.7 FY -12.7 FZ 0
502. ******************************************************
503. LOAD 23 LOADTYPE NONE  TITLE 0.6*D + 0.7E(+Z)
504. SELFWEIGHT Y -1
505. ELEMENT LOAD
506. 5 TO 36 49 TO 68 81 TO 100 102 TO 129 131 TO 142 144 TO 171 180 TO 185 194 -
507. 195 TO 243 248 TO 289 304 TO 309 312 TO 317 320 TO 361 376 TO 381 384 TO 424 -
508. 425 PR GY -2.7
509. 5 TO 36 102 TO 129 136 TO 142 149 TO 161 172 TO 179 186 TO 193 224 TO 255 -
510. 266 TO 275 281 TO 286 312 TO 317 320 TO 327 338 TO 347 353 TO 358 -
511. 384 TO 393 399 TO 402 406 TO 411 417 TO 420 424 425 PR GY -5.76
512. JOINT LOAD
513. 2 FX -0.5 FY -8.3 FZ 0
514. ******************************************************
515. LOAD 24 LOADTYPE NONE  TITLE 0.6*D + 0.7E(-Z)
516. SELFWEIGHT Y -1
517. ELEMENT LOAD
518. 5 TO 36 49 TO 68 81 TO 100 102 TO 129 131 TO 142 144 TO 171 180 TO 185 194 -
519. 195 TO 243 248 TO 289 304 TO 309 312 TO 317 320 TO 361 376 TO 381 384 TO 424 -
520. 425 PR GY -2.7
521. 5 TO 36 102 TO 129 136 TO 142 149 TO 161 172 TO 179 186 TO 193 224 TO 255 -
522. 266 TO 275 281 TO 286 312 TO 317 320 TO 327 338 TO 347 353 TO 358 -
523. 384 TO 393 399 TO 402 406 TO 411 417 TO 420 424 425 PR GY -5.76
524. JOINT LOAD
525. 2 FX -0.3 FY -7.8 FZ 0
526. ******************************************************************
527. **STRENGTH LOAD COMBS FOR DESIGN OF FOUNDATION**********************************
528. LOAD 101 LOADTYPE NONE  TITLE 1.4(DL+LL)
529. SELFWEIGHT Y -1
530. JOINT LOAD
531. *CRITICAL SUPPORT REACTIONS FROM STORAGE SUPERSTRUCTURE NODE 1297
```

```
532. 2 FX 0.1 FY -17.8 FZ 0
533. ELEMENT LOAD
534. 5 TO 36 49 TO 68 81 TO 100 102 TO 129 131 TO 142 144 TO 171 180 TO 185 194 -
535. 195 TO 243 248 TO 289 304 TO 309 312 TO 317 320 TO 361 376 TO 381 384 TO 424 -
536. 425 PR GY -6.3
537. 5 TO 36 102 TO 129 136 TO 142 149 TO 161 172 TO 179 186 TO 193 224 TO 255 -
538. 266 TO 275 281 TO 286 312 TO 317 320 TO 327 338 TO 347 353 TO 358 -
539. 384 TO 393 399 TO 402 406 TO 411 417 TO 420 424 425 PR GY -13.5
540. ******************************
541. LOAD 102 LOADTYPE NONE  TITLE 1.2DL+1.6LL + 0.5LR + 1.6 CR1
542. SELFWEIGHT Y -1
543. JOINT LOAD
544. 2 FX -0.5 FY -17.4 FZ 0
545. ELEMENT LOAD
546. 5 TO 36 49 TO 68 81 TO 100 102 TO 129 131 TO 142 144 TO 171 180 TO 185 194 -
547. 195 TO 243 248 TO 289 304 TO 309 312 TO 317 320 TO 361 376 TO 381 384 TO 424 -
548. 425 PR GY -5.4
549. 5 TO 36 102 TO 129 136 TO 142 149 TO 161 172 TO 179 186 TO 193 224 TO 255 -
550. 266 TO 275 281 TO 286 312 TO 317 320 TO 327 338 TO 347 353 TO 358 -
551. 384 TO 393 399 TO 402 406 TO 411 417 TO 420 424 425 PR GY -11.5
552. ******************************
553. LOAD 103 LOADTYPE NONE  TITLE 1.2DL+1.6LL + 0.5LR + 1.6 CR2
554. JOINT LOAD
555. 2 FX -0.3 FY -45.1 FZ 0.1
556. SELFWEIGHT Y -1
557. ELEMENT LOAD
558. 5 TO 36 49 TO 68 81 TO 100 102 TO 129 131 TO 142 144 TO 171 180 TO 185 194 -
559. 195 TO 243 248 TO 289 304 TO 309 312 TO 317 320 TO 361 376 TO 381 384 TO 424 -
560. 425 PR GY -5.4
561. 5 TO 36 102 TO 129 136 TO 142 149 TO 161 172 TO 179 186 TO 193 224 TO 255 -
562. 266 TO 275 281 TO 286 312 TO 317 320 TO 327 338 TO 347 353 TO 358 -
563. 384 TO 393 399 TO 402 406 TO 411 417 TO 420 424 425 PR GY -11.5
564. ************************
565. LOAD 104 LOADTYPE NONE  TITLE 1.2DL+1.6LL + 0.5LR + 1.6 CR3
566. SELFWEIGHT Y -1
567. ELEMENT LOAD
568. 5 TO 36 49 TO 68 81 TO 100 102 TO 129 131 TO 142 144 TO 171 180 TO 185 194 -
569. 195 TO 243 248 TO 289 304 TO 309 312 TO 317 320 TO 361 376 TO 381 384 TO 424 -
570. 425 PR GY -5.4
571. 5 TO 36 102 TO 129 136 TO 142 149 TO 161 172 TO 179 186 TO 193 224 TO 255 -
572. 266 TO 275 281 TO 286 312 TO 317 320 TO 327 338 TO 347 353 TO 358 -
573. 384 TO 393 399 TO 402 406 TO 411 417 TO 420 424 425 PR GY -11.5
574. JOINT LOAD
575. 2 FX -0.5 FY -29.6 FZ 0
576. ****************************
577. LOAD 105 LOADTYPE NONE  TITLE 1.2DL+1.6LL + 0.5LR + 1.6 CR4
578. SELFWEIGHT Y -1
579. ELEMENT LOAD
580. 5 TO 36 49 TO 68 81 TO 100 102 TO 129 131 TO 142 144 TO 171 180 TO 185 194 -
581. 195 TO 243 248 TO 289 304 TO 309 312 TO 317 320 TO 361 376 TO 381 384 TO 424 -
582. 425 PR GY -5.4
583. 5 TO 36 102 TO 129 136 TO 142 149 TO 161 172 TO 179 186 TO 193 224 TO 255 -
584. 266 TO 275 281 TO 286 312 TO 317 320 TO 327 338 TO 347 353 TO 358 -
585. 384 TO 393 399 TO 402 406 TO 411 417 TO 420 424 425 PR GY -11.5
586. JOINT LOAD
587. 2 FX -0.4 FY -16.9 FZ 0
```

```
588. ****************************
589. LOAD 106 LOADTYPE NONE  TITLE 1.2DL+1.6LL + 0.5LR + 1.6 CR5
590. SELFWEIGHT Y -1
591. ELEMENT LOAD
592. 5 TO 36 49 TO 68 81 TO 100 102 TO 129 131 TO 142 144 TO 171 180 TO 185 194 -
593. 195 TO 243 248 TO 289 304 TO 309 312 TO 317 320 TO 361 376 TO 381 384 TO 424 -
594. 425 PR GY -5.4
595. 5 TO 36 102 TO 129 136 TO 142 149 TO 161 172 TO 179 186 TO 193 224 TO 255 -
596. 266 TO 275 281 TO 286 312 TO 317 320 TO 327 338 TO 347 353 TO 358 -
597. 384 TO 393 399 TO 402 406 TO 411 417 TO 420 424 425 PR GY -11.5
598. JOINT LOAD
599. 2 FX -0.5 FY -49.5 FZ 0
600. ***************************
601. LOAD 107 LOADTYPE NONE  TITLE 1.2DL+1.6LL + 0.5LR + 1.6 CR6
602. SELFWEIGHT Y -1
603. JOINT LOAD
604. 2 FX 0.1 FY -32.8 FZ 0
605. ELEMENT LOAD
606. 5 TO 36 49 TO 68 81 TO 100 102 TO 129 131 TO 142 144 TO 171 180 TO 185 194 -
607. 195 TO 243 248 TO 289 304 TO 309 312 TO 317 320 TO 361 376 TO 381 384 TO 424 -
608. 425 PR GY -5.4
609. 5 TO 36 102 TO 129 136 TO 142 149 TO 161 172 TO 179 186 TO 193 224 TO 255 -
610. 266 TO 275 281 TO 286 312 TO 317 320 TO 327 338 TO 347 353 TO 358 -
611. 384 TO 393 399 TO 402 406 TO 411 417 TO 420 424 425 PR GY -11.5
612. ****************************
613. LOAD 108 LOADTYPE NONE  TITLE 1.2DL+1.6LR+0.5W(+X)
614. SELFWEIGHT Y -1
615. ELEMENT LOAD
616. 5 TO 36 49 TO 68 81 TO 100 102 TO 129 131 TO 142 144 TO 171 180 TO 185 194 -
617. 195 TO 243 248 TO 289 304 TO 309 312 TO 317 320 TO 361 376 TO 381 384 TO 424 -
618. 425 PR GY -5.4
619. 5 TO 36 102 TO 129 136 TO 142 149 TO 161 172 TO 179 186 TO 193 224 TO 255 -
620. 266 TO 275 281 TO 286 312 TO 317 320 TO 327 338 TO 347 353 TO 358 -
621. 384 TO 393 399 TO 402 406 TO 411 417 TO 420 424 425 PR GY -11.5
622. JOINT LOAD
623. 2 FX 7.5 FY -4.9 FZ -1.3
624. *********************************
625. LOAD 109 LOADTYPE NONE  TITLE 1.2DL+1.6LR+0.5W(-X)
626. SELFWEIGHT Y -1
627. ELEMENT LOAD
628. 5 TO 36 49 TO 68 81 TO 100 102 TO 129 131 TO 142 144 TO 171 180 TO 185 194 -
629. 195 TO 243 248 TO 289 304 TO 309 312 TO 317 320 TO 361 376 TO 381 384 TO 424 -
630. 425 PR GY -5.4
631. 5 TO 36 102 TO 129 136 TO 142 149 TO 161 172 TO 179 186 TO 193 224 TO 255 -
632. 266 TO 275 281 TO 286 312 TO 317 320 TO 327 338 TO 347 353 TO 358 -
633. 384 TO 393 399 TO 402 406 TO 411 417 TO 420 424 425 PR GY -11.5
634. JOINT LOAD
635. 2 FX 6.8 FY -13.5 FZ -0.1
636. *********************************
637. LOAD 110 LOADTYPE NONE  TITLE 1.2DL+1.6LR+0.5W(+Z)
638. SELFWEIGHT Y -1
639. ELEMENT LOAD
640. 5 TO 36 49 TO 68 81 TO 100 102 TO 129 131 TO 142 144 TO 171 180 TO 185 194 -
641. 195 TO 243 248 TO 289 304 TO 309 312 TO 317 320 TO 361 376 TO 381 384 TO 424 -
642. 425 PR GY -5.4
643. 5 TO 36 102 TO 129 136 TO 142 149 TO 161 172 TO 179 186 TO 193 224 TO 255 -
```

```
644. 266 TO 275 281 TO 286 312 TO 317 320 TO 327 338 TO 347 353 TO 358 -
645. 384 TO 393 399 TO 402 406 TO 411 417 TO 420 424 425 PR GY -11.5
646. JOINT LOAD
647. 2 FX 0.2 FY -16.3 FZ -0.9
648. *********************************
649. LOAD 111 LOADTYPE NONE  TITLE 1.2DL+1.6LR+0.5W(-Z)
650. SELFWEIGHT Y -1
651. ELEMENT LOAD
652. 5 TO 36 49 TO 68 81 TO 100 102 TO 129 131 TO 142 144 TO 171 180 TO 185 194 -
653. 195 TO 243 248 TO 289 304 TO 309 312 TO 317 320 TO 361 376 TO 381 384 TO 424 -
654. 425 PR GY -5.4
655. 5 TO 36 102 TO 129 136 TO 142 149 TO 161 172 TO 179 186 TO 193 224 TO 255 -
656. 266 TO 275 281 TO 286 312 TO 317 320 TO 327 338 TO 347 353 TO 358 -
657. 384 TO 393 399 TO 402 406 TO 411 417 TO 420 424 425 PR GY -11.5
658. JOINT LOAD
659. 2 FX -0.9 FY -22.3 FZ 0.3
660. *************************************
661. LOAD 112 LOADTYPE NONE  TITLE 1.2DL+1.0L+0.5LR+1.6W(+X)
662. SELFWEIGHT Y -1
663. ELEMENT LOAD
664. 5 TO 36 49 TO 68 81 TO 100 102 TO 129 131 TO 142 144 TO 171 180 TO 185 194 -
665. 195 TO 243 248 TO 289 304 TO 309 312 TO 317 320 TO 361 376 TO 381 384 TO 424 -
666. 425 PR GY -5.4
667. 5 TO 36 102 TO 129 136 TO 142 149 TO 161 172 TO 179 186 TO 193 224 TO 255 -
668. 266 TO 275 281 TO 286 312 TO 317 320 TO 327 338 TO 347 353 TO 358 -
669. 384 TO 393 399 TO 402 406 TO 411 417 TO 420 424 425 PR GY -11.5
670. JOINT LOAD
671. 2 FX 28.2 FY 46.5 FZ -4.2
672. *************************************
673. LOAD 113 LOADTYPE NONE  TITLE 1.2DL+1.0L+0.5LR+1.6W(-X)
674. SELFWEIGHT Y -1
675. ELEMENT LOAD
676. 5 TO 36 49 TO 68 81 TO 100 102 TO 129 131 TO 142 144 TO 171 180 TO 185 194 -
677. 195 TO 243 248 TO 289 304 TO 309 312 TO 317 320 TO 361 376 TO 381 384 TO 424 -
678. 425 PR GY -5.4
679. 5 TO 36 102 TO 129 136 TO 142 149 TO 161 172 TO 179 186 TO 193 224 TO 255 -
680. 266 TO 275 281 TO 286 312 TO 317 320 TO 327 338 TO 347 353 TO 358 -
681. 384 TO 393 399 TO 402 406 TO 411 417 TO 420 424 425 PR GY -11.5
682. JOINT LOAD
683. 2 FX 26.1 FY 18.8 FZ -0.2
684. *****************************************
685. LOAD 114 LOADTYPE NONE  TITLE 1.2DL+1.0L+0.5LR+1.6W(+Z)
686. SELFWEIGHT Y -1
687. ELEMENT LOAD
688. 5 TO 36 49 TO 68 81 TO 100 102 TO 129 131 TO 142 144 TO 171 180 TO 185 194 -
689. 195 TO 243 248 TO 289 304 TO 309 312 TO 317 320 TO 361 376 TO 381 384 TO 424 -
690. 425 PR GY -5.4
691. 5 TO 36 102 TO 129 136 TO 142 149 TO 161 172 TO 179 186 TO 193 224 TO 255 -
692. 266 TO 275 281 TO 286 312 TO 317 320 TO 327 338 TO 347 353 TO 358 -
693. 384 TO 393 399 TO 402 406 TO 411 417 TO 420 424 425 PR GY -11.5
694. JOINT LOAD
695. 2 FX 4.9 FY 9.9 FZ -3.1
696. *****************************************************
697. LOAD 115 LOADTYPE NONE  TITLE 1.2DL+1.0L+0.5LR+1.6W(-Z)
698. SELFWEIGHT Y -1
699. ELEMENT LOAD
```

```
700. 5 TO 36 49 TO 68 81 TO 100 102 TO 129 131 TO 142 144 TO 171 180 TO 185 194 -
701. 195 TO 243 248 TO 289 304 TO 309 312 TO 317 320 TO 361 376 TO 381 384 TO 424 -
702. 425 PR GY -5.4
703. 5 TO 36 102 TO 129 136 TO 142 149 TO 161 172 TO 179 186 TO 193 224 TO 255 -
704. 266 TO 275 281 TO 286 312 TO 317 320 TO 327 338 TO 347 353 TO 358 -
705. 384 TO 393 399 TO 402 406 TO 411 417 TO 420 424 425 PR GY -11.5
706. JOINT LOAD
707. 2 FX 1.5 FY -9.4 FZ 0.8
708. ******************************************************
709. LOAD 116 LOADTYPE NONE  TITLE 0.9D + 1.6W(+X)
710. SELFWEIGHT Y -1
711. ELEMENT LOAD
712. 5 TO 36 49 TO 68 81 TO 100 102 TO 129 131 TO 142 144 TO 171 180 TO 185 194 -
713. 195 TO 243 248 TO 289 304 TO 309 312 TO 317 320 TO 361 376 TO 381 384 TO 424 -
714. 425 PR GY -4
715. 5 TO 36 102 TO 129 136 TO 142 149 TO 161 172 TO 179 186 TO 193 224 TO 255 -
716. 266 TO 275 281 TO 286 312 TO 317 320 TO 327 338 TO 347 353 TO 358 -
717. 384 TO 393 399 TO 402 406 TO 411 417 TO 420 424 425 PR GY -8.64
718. JOINT LOAD
719. 2 FX 27.8 FY 52.6 FZ -4.2
720. ******************************************************
721. LOAD 117 LOADTYPE NONE  TITLE 0.9D + 1.6W(-X)
722. SELFWEIGHT Y -1
723. ELEMENT LOAD
724. 5 TO 36 49 TO 68 81 TO 100 102 TO 129 131 TO 142 144 TO 171 180 TO 185 194 -
725. 195 TO 243 248 TO 289 304 TO 309 312 TO 317 320 TO 361 376 TO 381 384 TO 424 -
726. 425 PR GY -4
727. 5 TO 36 102 TO 129 136 TO 142 149 TO 161 172 TO 179 186 TO 193 224 TO 255 -
728. 266 TO 275 281 TO 286 312 TO 317 320 TO 327 338 TO 347 353 TO 358 -
729. 384 TO 393 399 TO 402 406 TO 411 417 TO 420 424 425 PR GY -8.64
730. JOINT LOAD
731. 2 FX 25.7 FY 24.9 FZ -0.2
732. ******************************************************
733. LOAD 118 LOADTYPE NONE  TITLE 0.9D + 1.6W(+Z)
734. SELFWEIGHT Y -1
735. ELEMENT LOAD
736. 5 TO 36 49 TO 68 81 TO 100 102 TO 129 131 TO 142 144 TO 171 180 TO 185 194 -
737. 195 TO 243 248 TO 289 304 TO 309 312 TO 317 320 TO 361 376 TO 381 384 TO 424 -
738. 425 PR GY -4
739. 5 TO 36 102 TO 129 136 TO 142 149 TO 161 172 TO 179 186 TO 193 224 TO 255 -
740. 266 TO 275 281 TO 286 312 TO 317 320 TO 327 338 TO 347 353 TO 358 -
741. 384 TO 393 399 TO 402 406 TO 411 417 TO 420 424 425 PR GY -8.64
742. JOINT LOAD
743. 2 FX 4.5 FY 16 FZ -3.1
744. ******************************************************
745. LOAD 119 LOADTYPE NONE  TITLE 0.9D + 1.6W(-Z)
746. SELFWEIGHT Y -1
747. ELEMENT LOAD
748. 5 TO 36 49 TO 68 81 TO 100 102 TO 129 131 TO 142 144 TO 171 180 TO 185 194 -
749. 195 TO 243 248 TO 289 304 TO 309 312 TO 317 320 TO 361 376 TO 381 384 TO 424 -
750. 425 PR GY -4
751. 5 TO 36 102 TO 129 136 TO 142 149 TO 161 172 TO 179 186 TO 193 224 TO 255 -
752. 266 TO 275 281 TO 286 312 TO 317 320 TO 327 338 TO 347 353 TO 358 -
753. 384 TO 393 399 TO 402 406 TO 411 417 TO 420 424 425 PR GY -8.64
754. JOINT LOAD
755. 2 FX 1.1 FY -3.3 FZ 0.8
```

```
756. ******************************************************
757. LOAD 120 LOADTYPE NONE  TITLE 1.2DL+1.0L+1.0E(+X)
758. SELFWEIGHT Y -1
759. ELEMENT LOAD
760. 5 TO 36 49 TO 68 81 TO 100 102 TO 129 131 TO 142 144 TO 171 180 TO 185 194 -
761. 195 TO 243 248 TO 289 304 TO 309 312 TO 317 320 TO 361 376 TO 381 384 TO 424 -
762. 425 PR GY -5.4
763. 5 TO 36 102 TO 129 136 TO 142 149 TO 161 172 TO 179 186 TO 193 224 TO 255 -
764. 266 TO 275 281 TO 286 312 TO 317 320 TO 327 338 TO 347 353 TO 358 -
765. 384 TO 393 399 TO 402 406 TO 411 417 TO 420 424 425 PR GY -11.5
766. JOINT LOAD
767. 2 FX 5.1 FY -4.8 FZ 0
768. ******************************************************
769. LOAD 121 LOADTYPE NONE  TITLE 1.2DL+1.0L+1.0E(-X)
770. SELFWEIGHT Y -1
771. ELEMENT LOAD
772. 5 TO 36 49 TO 68 81 TO 100 102 TO 129 131 TO 142 144 TO 171 180 TO 185 194 -
773. 195 TO 243 248 TO 289 304 TO 309 312 TO 317 320 TO 361 376 TO 381 384 TO 424 -
774. 425 PR GY -5.4
775. 5 TO 36 102 TO 129 136 TO 142 149 TO 161 172 TO 179 186 TO 193 224 TO 255 -
776. 266 TO 275 281 TO 286 312 TO 317 320 TO 327 338 TO 347 353 TO 358 -
777. 384 TO 393 399 TO 402 406 TO 411 417 TO 420 424 425 PR GY -11.5
778. JOINT LOAD
779. 2 FX -5.3 FY -26 FZ 0
780. ******************************************************
781. LOAD 122 LOADTYPE NONE  TITLE 1.2DL+1.0L+1.0E(+Z)
782. SELFWEIGHT Y -1
783. ELEMENT LOAD
784. 5 TO 36 49 TO 68 81 TO 100 102 TO 129 131 TO 142 144 TO 171 180 TO 185 194 -
785. 195 TO 243 248 TO 289 304 TO 309 312 TO 317 320 TO 361 376 TO 381 384 TO 424 -
786. 425 PR GY -5.4
787. 5 TO 36 102 TO 129 136 TO 142 149 TO 161 172 TO 179 186 TO 193 224 TO 255 -
788. 266 TO 275 281 TO 286 312 TO 317 320 TO 327 338 TO 347 353 TO 358 -
789. 384 TO 393 399 TO 402 406 TO 411 417 TO 420 424 425 PR GY -11.5
790. JOINT LOAD
791. 2 FX -0.3 FY -16 FZ 0
792. ******************************************************
793. LOAD 123 LOADTYPE NONE  TITLE 1.2DL+1.0L+1.0E(-Z)
794. SELFWEIGHT Y -1
795. ELEMENT LOAD
796. 5 TO 36 49 TO 68 81 TO 100 102 TO 129 131 TO 142 144 TO 171 180 TO 185 194 -
797. 195 TO 243 248 TO 289 304 TO 309 312 TO 317 320 TO 361 376 TO 381 384 TO 424 -
798. 425 PR GY -5.4
799. 5 TO 36 102 TO 129 136 TO 142 149 TO 161 172 TO 179 186 TO 193 224 TO 255 -
800. 266 TO 275 281 TO 286 312 TO 317 320 TO 327 338 TO 347 353 TO 358 -
801. 384 TO 393 399 TO 402 406 TO 411 417 TO 420 424 425 PR GY -11.5
802. JOINT LOAD
803. 2 FX 0.1 FY -14.8 FZ 0
804. ******************************************************
805. LOAD 124 LOADTYPE NONE  TITLE 0.9D + 1.0E(+X)
806. SELFWEIGHT Y -1
807. ELEMENT LOAD
808. 5 TO 36 49 TO 68 81 TO 100 102 TO 129 131 TO 142 144 TO 171 180 TO 185 194 -
809. 195 TO 243 248 TO 289 304 TO 309 312 TO 317 320 TO 361 376 TO 381 384 TO 424 -
810. 425 PR GY -4.1
811. 5 TO 36 102 TO 129 136 TO 142 149 TO 161 172 TO 179 186 TO 193 224 TO 255 -
```

```
812. 266 TO 275 281 TO 286 312 TO 317 320 TO 327 338 TO 347 353 TO 358 -
813. 384 TO 393 399 TO 402 406 TO 411 417 TO 420 424 425 PR GY -8.64
814. JOINT LOAD
815. 2 FX 2.5 FY -5.6 FZ 0
816. ******************************************************************
817. LOAD 125 LOADTYPE NONE  TITLE 0.9D + 1.0E(-X)
818. SELFWEIGHT Y -1
819. ELEMENT LOAD
820. 5 TO 36 49 TO 68 81 TO 100 102 TO 129 131 TO 142 144 TO 171 180 TO 185 194 -
821. 195 TO 243 248 TO 289 304 TO 309 312 TO 317 320 TO 361 376 TO 381 384 TO 424 -
822. 425 PR GY -4.1
823. 5 TO 36 102 TO 129 136 TO 142 149 TO 161 172 TO 179 186 TO 193 224 TO 255 -
824. 266 TO 275 281 TO 286 312 TO 317 320 TO 327 338 TO 347 353 TO 358 -
825. 384 TO 393 399 TO 402 406 TO 411 417 TO 420 424 425 PR GY -8.64
826. JOINT LOAD
827. 2 FX -4.1 FY -18.9 FZ 0
828. **********************************
829. LOAD 126 LOADTYPE NONE  TITLE 0.9D + 1.0E(+Z)
830. SELFWEIGHT Y -1
831. ELEMENT LOAD
832. 5 TO 36 49 TO 68 81 TO 100 102 TO 129 131 TO 142 144 TO 171 180 TO 185 194 -
833. 195 TO 243 248 TO 289 304 TO 309 312 TO 317 320 TO 361 376 TO 381 384 TO 424 -
834. 425 PR GY -4.1
835. 5 TO 36 102 TO 129 136 TO 142 149 TO 161 172 TO 179 186 TO 193 224 TO 255 -
836. 266 TO 275 281 TO 286 312 TO 317 320 TO 327 338 TO 347 353 TO 358 -
837. 384 TO 393 399 TO 402 406 TO 411 417 TO 420 424 425 PR GY -8.64
838. JOINT LOAD
839. 2 FX -0.9 FY -12.6 FZ 0
840. **********************************
841. LOAD 127 LOADTYPE NONE  TITLE 0.9D + 1.0E(-Z)
842. SELFWEIGHT Y -1
843. ELEMENT LOAD
844. 5 TO 36 49 TO 68 81 TO 100 102 TO 129 131 TO 142 144 TO 171 180 TO 185 194 -
845. 195 TO 243 248 TO 289 304 TO 309 312 TO 317 320 TO 361 376 TO 381 384 TO 424 -
846. 425 PR GY -4.1
847. 5 TO 36 102 TO 129 136 TO 142 149 TO 161 172 TO 179 186 TO 193 224 TO 255 -
848. 266 TO 275 281 TO 286 312 TO 317 320 TO 327 338 TO 347 353 TO 358 -
849. 384 TO 393 399 TO 402 406 TO 411 417 TO 420 424 425 PR GY -8.64
850. JOINT LOAD
851. 2 FX -0.7 FY -11.9 FZ 0
852. **********************************
853. PERFORM ANALYSIS
```

P R O B L E M S T A T I S T I C S

NUMBER OF JOINTS	**400**	**NUMBER OF MEMBERS**	**1**
NUMBER OF PLATES	**360**	**NUMBER OF SOLIDS**	**0**
NUMBER OF SURFACES	**0**	**NUMBER OF SUPPORTS**	**399**

SOLVER USED IS THE OUT-OF-CORE BASIC SOLVER

ORIGINAL/FINAL BAND-WIDTH= 162/ 32/ 102 DOF
TOTAL PRIMARY LOAD CASES = 51, TOTAL DEGREES OF FREEDOM = 1203
TOTAL LOAD COMBINATION CASES = 0 SO FAR.
SIZE OF STIFFNESS MATRIX = 123 DOUBLE KILO-WORDS
REQRD/AVAIL. DISK SPACE = 16.0/ 165071.3 MB

**NOTE-Tension/Compression converged after 1 iterations, Case= 1

**NOTE-Tension/Compression converged after 1 iterations, Case= 2

**NOTE-Tension/Compression converged after 1 iterations, Case= 3

**NOTE-Tension/Compression converged after 1 iterations, Case= 4

**NOTE-Tension/Compression converged after 1 iterations, Case= 5

**NOTE-Tension/Compression converged after 1 iterations, Case= 6

**NOTE-Tension/Compression converged after 1 iterations, Case= 7

**NOTE-Tension/Compression converged after 1 iterations, Case= 8

**START ITERATION NO. 2

**NOTE-Tension/Compression converged after 2 iterations, Case= 9

**START ITERATION NO. 2

**NOTE-Tension/Compression converged after 2 iterations, Case= 10

**NOTE-Tension/Compression converged after 1 iterations, Case= 11

**NOTE-Tension/Compression converged after 1 iterations, Case= 12

**START ITERATION NO. 2
**START ITERATION NO. 3
**START ITERATION NO. 4

**NOTE-Tension/Compression converged after 4 iterations, Case= 13

**START ITERATION NO. 2
**START ITERATION NO. 3
**START ITERATION NO. 4

**NOTE-Tension/Compression converged after 4 iterations, Case= 14

**NOTE-Tension/Compression converged after 1 iterations, Case= 15

**NOTE-Tension/Compression converged after 1 iterations, Case= 16

**NOTE-Tension/Compression converged after 1 iterations, Case= 17

**NOTE-Tension/Compression converged after 1 iterations, Case= 18

**NOTE-Tension/Compression converged after 1 iterations, Case= 19

**NOTE-Tension/Compression converged after 1 iterations, Case= 20

**NOTE-Tension/Compression converged after 1 iterations, Case= 21

**NOTE-Tension/Compression converged after 1 iterations, Case= 22

**NOTE-Tension/Compression converged after 1 iterations, Case= 23

**NOTE-Tension/Compression converged after 1 iterations, Case= 24

**NOTE-Tension/Compression converged after 1 iterations, Case= 101

**NOTE-Tension/Compression converged after 1 iterations, Case= 102

**NOTE-Tension/Compression converged after 1 iterations, Case= 103

**NOTE-Tension/Compression converged after 1 iterations, Case= 104

**NOTE-Tension/Compression converged after 1 iterations, Case= 105

**NOTE-Tension/Compression converged after 1 iterations, Case= 106

**NOTE-Tension/Compression converged after 1 iterations, Case= 107

**NOTE-Tension/Compression converged after 1 iterations, Case= 108

**NOTE-Tension/Compression converged after 1 iterations, Case= 109

**NOTE-Tension/Compression converged after 1 iterations, Case= 110

**NOTE-Tension/Compression converged after 1 iterations, Case= 111

**START ITERATION NO. 2
**START ITERATION NO. 3
**START ITERATION NO. 4

**NOTE-Tension/Compression converged after 4 iterations, Case= 112

**START ITERATION NO. 3
**START ITERATION NO. 4

**NOTE-Tension/Compression converged after 4 iterations, Case= 113

**NOTE-Tension/Compression converged after 1 iterations, Case= 114

**NOTE-Tension/Compression converged after 1 iterations, Case= 115

**START ITERATION NO. 2
**START ITERATION NO. 3
**START ITERATION NO. 4

**NOTE-Tension/Compression converged after 4 iterations, Case= 116

**START ITERATION NO. 2
**START ITERATION NO. 3
**START ITERATION NO. 4

**NOTE-Tension/Compression converged after 4 iterations, Case= 117

**NOTE-Tension/Compression converged after 1 iterations, Case= 118

**NOTE-Tension/Compression converged after 1 iterations, Case= 119

**NOTE-Tension/Compression converged after 1 iterations, Case= 120

**NOTE-Tension/Compression converged after 1 iterations, Case= 121

**NOTE-Tension/Compression converged after 1 iterations, Case= 122

**NOTE-Tension/Compression converged after 1 iterations, Case= 123

**NOTE-Tension/Compression converged after 1 iterations, Case= 124

**NOTE-Tension/Compression converged after 1 iterations, Case= 125

**NOTE-Tension/Compression converged after 1 iterations, Case= 126

**NOTE-Tension/Compression converged after 1 iterations, Case= 127

```
854. LOAD LIST 1 TO 24
855. PRINT SUPPORT REACTION LIST 1 TO 3 5 6 8 9 11 TO 49 63 TO 87 99 TO 150 152 -
856. 153 TO 164 166 TO 225
```

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
1	1	0.00	0.80	0.00	0.00	0.00	0.00
	2	0.00	0.81	0.00	0.00	0.00	0.00
	3	0.00	0.80	0.00	0.00	0.00	0.00
	4	0.00	0.85	0.00	0.00	0.00	0.00
	5	0.00	0.82	0.00	0.00	0.00	0.00
	6	0.00	0.80	0.00	0.00	0.00	0.00
	7	0.00	0.86	0.00	0.00	0.00	0.00
	8	0.00	0.83	0.00	0.00	0.00	0.00
	9	0.00	0.71	0.00	0.00	0.00	0.00
	10	0.00	0.74	0.00	0.00	0.00	0.00
	11	0.00	0.77	0.00	0.00	0.00	0.00
	12	0.00	0.79	0.00	0.00	0.00	0.00
	13	0.00	0.41	0.00	0.00	0.00	0.00
	14	0.00	0.46	0.00	0.00	0.00	0.00
	15	0.00	0.50	0.00	0.00	0.00	0.00
	16	0.00	0.53	0.00	0.00	0.00	0.00
	17	0.00	0.78	0.00	0.00	0.00	0.00
	18	0.00	0.82	0.00	0.00	0.00	0.00
	19	0.00	0.81	0.00	0.00	0.00	0.00
	20	0.00	0.80	0.00	0.00	0.00	0.00
	21	0.00	0.54	0.00	0.00	0.00	0.00
	22	0.00	0.57	0.00	0.00	0.00	0.00
	23	0.00	0.55	0.00	0.00	0.00	0.00
	24	0.00	0.55	0.00	0.00	0.00	0.00
3	1	0.00	0.99	0.00	0.00	0.00	0.00
	2	0.00	0.99	0.00	0.00	0.00	0.00
	3	0.00	0.98	0.00	0.00	0.00	0.00
	4	0.00	1.03	0.00	0.00	0.00	0.00
	5	0.00	1.00	0.00	0.00	0.00	0.00
	6	0.00	0.98	0.00	0.00	0.00	0.00
	7	0.00	1.03	0.00	0.00	0.00	0.00
	8	0.00	1.01	0.00	0.00	0.00	0.00
	9	0.00	0.86	0.00	0.00	0.00	0.00
	10	0.00	0.93	0.00	0.00	0.00	0.00
	11	0.00	0.92	0.00	0.00	0.00	0.00
	12	0.00	0.98	0.00	0.00	0.00	0.00
	13	0.00	0.49	0.00	0.00	0.00	0.00
	14	0.00	0.58	0.00	0.00	0.00	0.00
	15	0.00	0.58	0.00	0.00	0.00	0.00
	16	0.00	0.65	0.00	0.00	0.00	0.00
	17	0.00	0.97	0.00	0.00	0.00	0.00
	18	0.00	1.00	0.00	0.00	0.00	0.00
	19	0.00	0.98	0.00	0.00	0.00	0.00
	20	0.00	0.98	0.00	0.00	0.00	0.00
	21	0.00	0.64	0.00	0.00	0.00	0.00
	22	0.00	0.67	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	23	0.00	0.66	0.00	0.00	0.00	0.00
	24	0.00	0.66	0.00	0.00	0.00	0.00
5	1	0.00	0.79	0.00	0.00	0.00	0.00
	2	0.00	0.78	0.00	0.00	0.00	0.00
	3	0.00	0.78	0.00	0.00	0.00	0.00
	4	0.00	0.82	0.00	0.00	0.00	0.00
	5	0.00	0.80	0.00	0.00	0.00	0.00
	6	0.00	0.78	0.00	0.00	0.00	0.00
	7	0.00	0.83	0.00	0.00	0.00	0.00
	8	0.00	0.81	0.00	0.00	0.00	0.00
	9	0.00	0.89	0.00	0.00	0.00	0.00
	10	0.00	0.91	0.00	0.00	0.00	0.00
	11	0.00	0.78	0.00	0.00	0.00	0.00
	12	0.00	0.78	0.00	0.00	0.00	0.00
	13	0.00	0.67	0.00	0.00	0.00	0.00
	14	0.00	0.70	0.00	0.00	0.00	0.00
	15	0.00	0.53	0.00	0.00	0.00	0.00
	16	0.00	0.53	0.00	0.00	0.00	0.00
	17	0.00	0.81	0.00	0.00	0.00	0.00
	18	0.00	0.76	0.00	0.00	0.00	0.00
	19	0.00	0.79	0.00	0.00	0.00	0.00
	20	0.00	0.79	0.00	0.00	0.00	0.00
	21	0.00	0.55	0.00	0.00	0.00	0.00
	22	0.00	0.52	0.00	0.00	0.00	0.00
	23	0.00	0.53	0.00	0.00	0.00	0.00
	24	0.00	0.54	0.00	0.00	0.00	0.00
6	1	0.00	0.98	0.00	0.00	0.00	0.00
	2	0.00	0.97	0.00	0.00	0.00	0.00
	3	0.00	0.96	0.00	0.00	0.00	0.00
	4	0.00	1.01	0.00	0.00	0.00	0.00
	5	0.00	0.98	0.00	0.00	0.00	0.00
	6	0.00	0.96	0.00	0.00	0.00	0.00
	7	0.00	1.01	0.00	0.00	0.00	0.00
	8	0.00	0.99	0.00	0.00	0.00	0.00
	9	0.00	1.03	0.00	0.00	0.00	0.00
	10	0.00	1.08	0.00	0.00	0.00	0.00
	11	0.00	0.95	0.00	0.00	0.00	0.00
	12	0.00	0.97	0.00	0.00	0.00	0.00
	13	0.00	0.74	0.00	0.00	0.00	0.00
	14	0.00	0.80	0.00	0.00	0.00	0.00
	15	0.00	0.61	0.00	0.00	0.00	0.00
	16	0.00	0.65	0.00	0.00	0.00	0.00
	17	0.00	0.99	0.00	0.00	0.00	0.00
	18	0.00	0.95	0.00	0.00	0.00	0.00
	19	0.00	0.97	0.00	0.00	0.00	0.00
	20	0.00	0.97	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	21	0.00	0.66	0.00	0.00	0.00	0.00
	22	0.00	0.63	0.00	0.00	0.00	0.00
	23	0.00	0.64	0.00	0.00	0.00	0.00
	24	0.00	0.65	0.00	0.00	0.00	0.00
8	1	0.00	0.79	0.00	0.00	0.00	0.00
	2	0.00	0.81	0.00	0.00	0.00	0.00
	3	0.00	0.80	0.00	0.00	0.00	0.00
	4	0.00	0.84	0.00	0.00	0.00	0.00
	5	0.00	0.82	0.00	0.00	0.00	0.00
	6	0.00	0.80	0.00	0.00	0.00	0.00
	7	0.00	0.85	0.00	0.00	0.00	0.00
	8	0.00	0.82	0.00	0.00	0.00	0.00
	9	0.00	0.52	0.00	0.00	0.00	0.00
	10	0.00	0.57	0.00	0.00	0.00	0.00
	11	0.00	0.73	0.00	0.00	0.00	0.00
	12	0.00	0.77	0.00	0.00	0.00	0.00
	13	0.00	0.15	0.00	0.00	0.00	0.00
	14	0.00	0.23	0.00	0.00	0.00	0.00
	15	0.00	0.46	0.00	0.00	0.00	0.00
	16	0.00	0.51	0.00	0.00	0.00	0.00
	17	0.00	0.74	0.00	0.00	0.00	0.00
	18	0.00	0.85	0.00	0.00	0.00	0.00
	19	0.00	0.80	0.00	0.00	0.00	0.00
	20	0.00	0.79	0.00	0.00	0.00	0.00
	21	0.00	0.50	0.00	0.00	0.00	0.00
	22	0.00	0.59	0.00	0.00	0.00	0.00
	23	0.00	0.55	0.00	0.00	0.00	0.00
	24	0.00	0.54	0.00	0.00	0.00	0.00
9	1	0.00	0.98	0.00	0.00	0.00	0.00
	2	0.00	1.00	0.00	0.00	0.00	0.00
	3	0.00	0.98	0.00	0.00	0.00	0.00
	4	0.00	1.02	0.00	0.00	0.00	0.00
	5	0.00	1.00	0.00	0.00	0.00	0.00
	6	0.00	0.98	0.00	0.00	0.00	0.00
	7	0.00	1.03	0.00	0.00	0.00	0.00
	8	0.00	1.00	0.00	0.00	0.00	0.00
	9	0.00	0.68	0.00	0.00	0.00	0.00
	10	0.00	0.76	0.00	0.00	0.00	0.00
	11	0.00	0.89	0.00	0.00	0.00	0.00
	12	0.00	0.96	0.00	0.00	0.00	0.00
	13	0.00	0.24	0.00	0.00	0.00	0.00
	14	0.00	0.35	0.00	0.00	0.00	0.00
	15	0.00	0.54	0.00	0.00	0.00	0.00
	16	0.00	0.63	0.00	0.00	0.00	0.00
	17	0.00	0.92	0.00	0.00	0.00	0.00
	18	0.00	1.03	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	19	0.00	0.98	0.00	0.00	0.00	0.00
	20	0.00	0.98	0.00	0.00	0.00	0.00
	21	0.00	0.61	0.00	0.00	0.00	0.00
	22	0.00	0.70	0.00	0.00	0.00	0.00
	23	0.00	0.66	0.00	0.00	0.00	0.00
	24	0.00	0.65	0.00	0.00	0.00	0.00
11	1	0.00	0.79	0.00	0.00	0.00	0.00
	2	0.00	0.81	0.00	0.00	0.00	0.00
	3	0.00	0.80	0.00	0.00	0.00	0.00
	4	0.00	0.84	0.00	0.00	0.00	0.00
	5	0.00	0.82	0.00	0.00	0.00	0.00
	6	0.00	0.80	0.00	0.00	0.00	0.00
	7	0.00	0.85	0.00	0.00	0.00	0.00
	8	0.00	0.82	0.00	0.00	0.00	0.00
	9	0.00	0.56	0.00	0.00	0.00	0.00
	10	0.00	0.60	0.00	0.00	0.00	0.00
	11	0.00	0.73	0.00	0.00	0.00	0.00
	12	0.00	0.77	0.00	0.00	0.00	0.00
	13	0.00	0.21	0.00	0.00	0.00	0.00
	14	0.00	0.28	0.00	0.00	0.00	0.00
	15	0.00	0.47	0.00	0.00	0.00	0.00
	16	0.00	0.52	0.00	0.00	0.00	0.00
	17	0.00	0.75	0.00	0.00	0.00	0.00
	18	0.00	0.85	0.00	0.00	0.00	0.00
	19	0.00	0.80	0.00	0.00	0.00	0.00
	20	0.00	0.80	0.00	0.00	0.00	0.00
	21	0.00	0.51	0.00	0.00	0.00	0.00
	22	0.00	0.59	0.00	0.00	0.00	0.00
	23	0.00	0.55	0.00	0.00	0.00	0.00
	24	0.00	0.55	0.00	0.00	0.00	0.00
12	1	0.00	0.84	0.00	0.00	0.00	0.00
	2	0.00	0.86	0.00	0.00	0.00	0.00
	3	0.00	0.85	0.00	0.00	0.00	0.00
	4	0.00	0.89	0.00	0.00	0.00	0.00
	5	0.00	0.87	0.00	0.00	0.00	0.00
	6	0.00	0.85	0.00	0.00	0.00	0.00
	7	0.00	0.90	0.00	0.00	0.00	0.00
	8	0.00	0.87	0.00	0.00	0.00	0.00
	9	0.00	0.60	0.00	0.00	0.00	0.00
	10	0.00	0.65	0.00	0.00	0.00	0.00
	11	0.00	0.78	0.00	0.00	0.00	0.00
	12	0.00	0.82	0.00	0.00	0.00	0.00
	13	0.00	0.22	0.00	0.00	0.00	0.00
	14	0.00	0.31	0.00	0.00	0.00	0.00
	15	0.00	0.49	0.00	0.00	0.00	0.00
	16	0.00	0.55	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	17	0.00	0.80	0.00	0.00	0.00	0.00
	18	0.00	0.90	0.00	0.00	0.00	0.00
	19	0.00	0.85	0.00	0.00	0.00	0.00
	20	0.00	0.84	0.00	0.00	0.00	0.00
	21	0.00	0.54	0.00	0.00	0.00	0.00
	22	0.00	0.62	0.00	0.00	0.00	0.00
	23	0.00	0.58	0.00	0.00	0.00	0.00
	24	0.00	0.58	0.00	0.00	0.00	0.00
13	1	0.00	0.84	0.00	0.00	0.00	0.00
	2	0.00	0.86	0.00	0.00	0.00	0.00
	3	0.00	0.85	0.00	0.00	0.00	0.00
	4	0.00	0.89	0.00	0.00	0.00	0.00
	5	0.00	0.87	0.00	0.00	0.00	0.00
	6	0.00	0.85	0.00	0.00	0.00	0.00
	7	0.00	0.89	0.00	0.00	0.00	0.00
	8	0.00	0.87	0.00	0.00	0.00	0.00
	9	0.00	0.56	0.00	0.00	0.00	0.00
	10	0.00	0.61	0.00	0.00	0.00	0.00
	11	0.00	0.77	0.00	0.00	0.00	0.00
	12	0.00	0.82	0.00	0.00	0.00	0.00
	13	0.00	0.17	0.00	0.00	0.00	0.00
	14	0.00	0.26	0.00	0.00	0.00	0.00
	15	0.00	0.48	0.00	0.00	0.00	0.00
	16	0.00	0.54	0.00	0.00	0.00	0.00
	17	0.00	0.79	0.00	0.00	0.00	0.00
	18	0.00	0.90	0.00	0.00	0.00	0.00
	19	0.00	0.84	0.00	0.00	0.00	0.00
	20	0.00	0.84	0.00	0.00	0.00	0.00
	21	0.00	0.53	0.00	0.00	0.00	0.00
	22	0.00	0.62	0.00	0.00	0.00	0.00
	23	0.00	0.58	0.00	0.00	0.00	0.00
	24	0.00	0.57	0.00	0.00	0.00	0.00
14	1	0.00	0.80	0.00	0.00	0.00	0.00
	2	0.00	0.81	0.00	0.00	0.00	0.00
	3	0.00	0.80	0.00	0.00	0.00	0.00
	4	0.00	0.85	0.00	0.00	0.00	0.00
	5	0.00	0.82	0.00	0.00	0.00	0.00
	6	0.00	0.80	0.00	0.00	0.00	0.00
	7	0.00	0.85	0.00	0.00	0.00	0.00
	8	0.00	0.83	0.00	0.00	0.00	0.00
	9	0.00	0.60	0.00	0.00	0.00	0.00
	10	0.00	0.65	0.00	0.00	0.00	0.00
	11	0.00	0.74	0.00	0.00	0.00	0.00
	12	0.00	0.78	0.00	0.00	0.00	0.00
	13	0.00	0.26	0.00	0.00	0.00	0.00
	14	0.00	0.33	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	15	0.00	0.48	0.00	0.00	0.00	0.00
	16	0.00	0.52	0.00	0.00	0.00	0.00
	17	0.00	0.76	0.00	0.00	0.00	0.00
	18	0.00	0.84	0.00	0.00	0.00	0.00
	19	0.00	0.80	0.00	0.00	0.00	0.00
	20	0.00	0.80	0.00	0.00	0.00	0.00
	21	0.00	0.52	0.00	0.00	0.00	0.00
	22	0.00	0.58	0.00	0.00	0.00	0.00
	23	0.00	0.55	0.00	0.00	0.00	0.00
	24	0.00	0.55	0.00	0.00	0.00	0.00
15	1	0.00	0.85	0.00	0.00	0.00	0.00
	2	0.00	0.86	0.00	0.00	0.00	0.00
	3	0.00	0.85	0.00	0.00	0.00	0.00
	4	0.00	0.90	0.00	0.00	0.00	0.00
	5	0.00	0.87	0.00	0.00	0.00	0.00
	6	0.00	0.85	0.00	0.00	0.00	0.00
	7	0.00	0.90	0.00	0.00	0.00	0.00
	8	0.00	0.87	0.00	0.00	0.00	0.00
	9	0.00	0.64	0.00	0.00	0.00	0.00
	10	0.00	0.69	0.00	0.00	0.00	0.00
	11	0.00	0.79	0.00	0.00	0.00	0.00
	12	0.00	0.83	0.00	0.00	0.00	0.00
	13	0.00	0.28	0.00	0.00	0.00	0.00
	14	0.00	0.36	0.00	0.00	0.00	0.00
	15	0.00	0.50	0.00	0.00	0.00	0.00
	16	0.00	0.55	0.00	0.00	0.00	0.00
	17	0.00	0.81	0.00	0.00	0.00	0.00
	18	0.00	0.89	0.00	0.00	0.00	0.00
	19	0.00	0.85	0.00	0.00	0.00	0.00
	20	0.00	0.85	0.00	0.00	0.00	0.00
	21	0.00	0.55	0.00	0.00	0.00	0.00
	22	0.00	0.61	0.00	0.00	0.00	0.00
	23	0.00	0.58	0.00	0.00	0.00	0.00
	24	0.00	0.58	0.00	0.00	0.00	0.00
16	1	0.00	0.80	0.00	0.00	0.00	0.00
	2	0.00	0.82	0.00	0.00	0.00	0.00
	3	0.00	0.81	0.00	0.00	0.00	0.00
	4	0.00	0.85	0.00	0.00	0.00	0.00
	5	0.00	0.83	0.00	0.00	0.00	0.00
	6	0.00	0.81	0.00	0.00	0.00	0.00
	7	0.00	0.86	0.00	0.00	0.00	0.00
	8	0.00	0.83	0.00	0.00	0.00	0.00
	9	0.00	0.65	0.00	0.00	0.00	0.00
	10	0.00	0.69	0.00	0.00	0.00	0.00
	11	0.00	0.76	0.00	0.00	0.00	0.00
	12	0.00	0.78	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	13	0.00	0.33	0.00	0.00	0.00	0.00
	14	0.00	0.39	0.00	0.00	0.00	0.00
	15	0.00	0.49	0.00	0.00	0.00	0.00
	16	0.00	0.53	0.00	0.00	0.00	0.00
	17	0.00	0.77	0.00	0.00	0.00	0.00
	18	0.00	0.84	0.00	0.00	0.00	0.00
	19	0.00	0.81	0.00	0.00	0.00	0.00
	20	0.00	0.80	0.00	0.00	0.00	0.00
	21	0.00	0.53	0.00	0.00	0.00	0.00
	22	0.00	0.58	0.00	0.00	0.00	0.00
	23	0.00	0.55	0.00	0.00	0.00	0.00
	24	0.00	0.55	0.00	0.00	0.00	0.00
17	1	0.00	0.85	0.00	0.00	0.00	0.00
	2	0.00	0.86	0.00	0.00	0.00	0.00
	3	0.00	0.85	0.00	0.00	0.00	0.00
	4	0.00	0.90	0.00	0.00	0.00	0.00
	5	0.00	0.88	0.00	0.00	0.00	0.00
	6	0.00	0.85	0.00	0.00	0.00	0.00
	7	0.00	0.91	0.00	0.00	0.00	0.00
	8	0.00	0.88	0.00	0.00	0.00	0.00
	9	0.00	0.69	0.00	0.00	0.00	0.00
	10	0.00	0.74	0.00	0.00	0.00	0.00
	11	0.00	0.80	0.00	0.00	0.00	0.00
	12	0.00	0.84	0.00	0.00	0.00	0.00
	13	0.00	0.35	0.00	0.00	0.00	0.00
	14	0.00	0.42	0.00	0.00	0.00	0.00
	15	0.00	0.51	0.00	0.00	0.00	0.00
	16	0.00	0.56	0.00	0.00	0.00	0.00
	17	0.00	0.82	0.00	0.00	0.00	0.00
	18	0.00	0.89	0.00	0.00	0.00	0.00
	19	0.00	0.85	0.00	0.00	0.00	0.00
	20	0.00	0.85	0.00	0.00	0.00	0.00
	21	0.00	0.56	0.00	0.00	0.00	0.00
	22	0.00	0.61	0.00	0.00	0.00	0.00
	23	0.00	0.58	0.00	0.00	0.00	0.00
	24	0.00	0.58	0.00	0.00	0.00	0.00
18	1	-0.10	0.86	0.00	0.00	0.00	0.00
	2	1.10	0.87	0.00	0.00	0.00	0.00
	3	0.70	0.86	0.00	0.00	0.00	0.00
	4	0.60	0.91	-0.10	0.00	0.00	0.00
	5	0.70	0.88	0.00	0.00	0.00	0.00
	6	0.70	0.86	0.00	0.00	0.00	0.00
	7	0.70	0.92	0.00	0.00	0.00	0.00
	8	0.40	0.89	0.00	0.00	0.00	0.00
	9	-13.00	0.75	2.00	0.00	0.00	0.00
	10	-12.00	0.80	0.10	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	11	-2.10	0.81	1.40	0.00	0.00	0.00
	12	-0.50	0.84	-0.40	0.00	0.00	0.00
	13	-17.40	0.43	2.60	0.00	0.00	0.00
	14	-16.00	0.50	0.20	0.00	0.00	0.00
	15	-2.80	0.52	1.90	0.00	0.00	0.00
	16	-0.70	0.57	-0.50	0.00	0.00	0.00
	17	-2.40	0.84	0.00	0.00	0.00	0.00
	18	3.10	0.88	0.00	0.00	0.00	0.00
	19	0.40	0.86	0.00	0.00	0.00	0.00
	20	0.20	0.86	0.00	0.00	0.00	0.00
	21	-1.90	0.57	0.00	0.00	0.00	0.00
	22	2.70	0.60	0.00	0.00	0.00	0.00
	23	0.50	0.59	0.00	0.00	0.00	0.00
	24	0.30	0.59	0.00	0.00	0.00	0.00
19	1	0.00	0.89	0.00	0.00	0.00	0.00
	2	0.00	0.91	0.00	0.00	0.00	0.00
	3	0.00	0.90	0.00	0.00	0.00	0.00
	4	0.00	0.94	0.00	0.00	0.00	0.00
	5	0.00	0.92	0.00	0.00	0.00	0.00
	6	0.00	0.90	0.00	0.00	0.00	0.00
	7	0.00	0.95	0.00	0.00	0.00	0.00
	8	0.00	0.92	0.00	0.00	0.00	0.00
	9	0.00	0.64	0.00	0.00	0.00	0.00
	10	0.00	0.70	0.00	0.00	0.00	0.00
	11	0.00	0.82	0.00	0.00	0.00	0.00
	12	0.00	0.87	0.00	0.00	0.00	0.00
	13	0.00	0.24	0.00	0.00	0.00	0.00
	14	0.00	0.34	0.00	0.00	0.00	0.00
	15	0.00	0.51	0.00	0.00	0.00	0.00
	16	0.00	0.58	0.00	0.00	0.00	0.00
	17	0.00	0.84	0.00	0.00	0.00	0.00
	18	0.00	0.94	0.00	0.00	0.00	0.00
	19	0.00	0.89	0.00	0.00	0.00	0.00
	20	0.00	0.89	0.00	0.00	0.00	0.00
	21	0.00	0.56	0.00	0.00	0.00	0.00
	22	0.00	0.65	0.00	0.00	0.00	0.00
	23	0.00	0.61	0.00	0.00	0.00	0.00
	24	0.00	0.60	0.00	0.00	0.00	0.00
20	1	0.00	0.89	0.00	0.00	0.00	0.00
	2	0.00	0.91	0.00	0.00	0.00	0.00
	3	0.00	0.89	0.00	0.00	0.00	0.00
	4	0.00	0.93	0.00	0.00	0.00	0.00
	5	0.00	0.91	0.00	0.00	0.00	0.00
	6	0.00	0.89	0.00	0.00	0.00	0.00
	7	0.00	0.94	0.00	0.00	0.00	0.00
	8	0.00	0.91	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	9	0.00	0.60	0.00	0.00	0.00	0.00
	10	0.00	0.66	0.00	0.00	0.00	0.00
	11	0.00	0.81	0.00	0.00	0.00	0.00
	12	0.00	0.87	0.00	0.00	0.00	0.00
	13	0.00	0.19	0.00	0.00	0.00	0.00
	14	0.00	0.29	0.00	0.00	0.00	0.00
	15	0.00	0.50	0.00	0.00	0.00	0.00
	16	0.00	0.57	0.00	0.00	0.00	0.00
	17	0.00	0.83	0.00	0.00	0.00	0.00
	18	0.00	0.95	0.00	0.00	0.00	0.00
	19	0.00	0.89	0.00	0.00	0.00	0.00
	20	0.00	0.89	0.00	0.00	0.00	0.00
	21	0.00	0.56	0.00	0.00	0.00	0.00
	22	0.00	0.65	0.00	0.00	0.00	0.00
	23	0.00	0.60	0.00	0.00	0.00	0.00
	24	0.00	0.60	0.00	0.00	0.00	0.00
21	1	0.00	0.90	0.00	0.00	0.00	0.00
	2	0.00	0.91	0.00	0.00	0.00	0.00
	3	0.00	0.90	0.00	0.00	0.00	0.00
	4	0.00	0.94	0.00	0.00	0.00	0.00
	5	0.00	0.92	0.00	0.00	0.00	0.00
	6	0.00	0.90	0.00	0.00	0.00	0.00
	7	0.00	0.95	0.00	0.00	0.00	0.00
	8	0.00	0.92	0.00	0.00	0.00	0.00
	9	0.00	0.68	0.00	0.00	0.00	0.00
	10	0.00	0.74	0.00	0.00	0.00	0.00
	11	0.00	0.83	0.00	0.00	0.00	0.00
	12	0.00	0.88	0.00	0.00	0.00	0.00
	13	0.00	0.30	0.00	0.00	0.00	0.00
	14	0.00	0.39	0.00	0.00	0.00	0.00
	15	0.00	0.52	0.00	0.00	0.00	0.00
	16	0.00	0.58	0.00	0.00	0.00	0.00
	17	0.00	0.86	0.00	0.00	0.00	0.00
	18	0.00	0.94	0.00	0.00	0.00	0.00
	19	0.00	0.90	0.00	0.00	0.00	0.00
	20	0.00	0.89	0.00	0.00	0.00	0.00
	21	0.00	0.57	0.00	0.00	0.00	0.00
	22	0.00	0.64	0.00	0.00	0.00	0.00
	23	0.00	0.61	0.00	0.00	0.00	0.00
	24	0.00	0.61	0.00	0.00	0.00	0.00
22	1	0.00	0.90	0.00	0.00	0.00	0.00
	2	0.00	0.91	0.00	0.00	0.00	0.00
	3	0.00	0.90	0.00	0.00	0.00	0.00
	4	0.00	0.95	0.00	0.00	0.00	0.00
	5	0.00	0.92	0.00	0.00	0.00	0.00
	6	0.00	0.90	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	7	0.00	0.95	0.00	0.00	0.00	0.00
	8	0.00	0.92	0.00	0.00	0.00	0.00
	9	0.00	0.73	0.00	0.00	0.00	0.00
	10	0.00	0.78	0.00	0.00	0.00	0.00
	11	0.00	0.84	0.00	0.00	0.00	0.00
	12	0.00	0.88	0.00	0.00	0.00	0.00
	13	0.00	0.37	0.00	0.00	0.00	0.00
	14	0.00	0.45	0.00	0.00	0.00	0.00
	15	0.00	0.53	0.00	0.00	0.00	0.00
	16	0.00	0.59	0.00	0.00	0.00	0.00
	17	0.00	0.87	0.00	0.00	0.00	0.00
	18	0.00	0.93	0.00	0.00	0.00	0.00
	19	0.00	0.90	0.00	0.00	0.00	0.00
	20	0.00	0.90	0.00	0.00	0.00	0.00
	21	0.00	0.58	0.00	0.00	0.00	0.00
	22	0.00	0.64	0.00	0.00	0.00	0.00
	23	0.00	0.61	0.00	0.00	0.00	0.00
	24	0.00	0.61	0.00	0.00	0.00	0.00
23	1	0.00	0.90	0.00	0.00	0.00	0.00
	2	0.00	0.91	0.00	0.00	0.00	0.00
	3	0.00	0.90	0.00	0.00	0.00	0.00
	4	0.00	0.94	0.00	0.00	0.00	0.00
	5	0.00	0.92	0.00	0.00	0.00	0.00
	6	0.00	0.90	0.00	0.00	0.00	0.00
	7	0.00	0.95	0.00	0.00	0.00	0.00
	8	0.00	0.92	0.00	0.00	0.00	0.00
	9	0.00	0.78	0.00	0.00	0.00	0.00
	10	0.00	0.84	0.00	0.00	0.00	0.00
	11	0.00	0.85	0.00	0.00	0.00	0.00
	12	0.00	0.89	0.00	0.00	0.00	0.00
	13	0.00	0.45	0.00	0.00	0.00	0.00
	14	0.00	0.52	0.00	0.00	0.00	0.00
	15	0.00	0.54	0.00	0.00	0.00	0.00
	16	0.00	0.59	0.00	0.00	0.00	0.00
	17	0.00	0.88	0.00	0.00	0.00	0.00
	18	0.00	0.92	0.00	0.00	0.00	0.00
	19	0.00	0.90	0.00	0.00	0.00	0.00
	20	0.00	0.90	0.00	0.00	0.00	0.00
	21	0.00	0.59	0.00	0.00	0.00	0.00
	22	0.00	0.62	0.00	0.00	0.00	0.00
	23	0.00	0.61	0.00	0.00	0.00	0.00
	24	0.00	0.61	0.00	0.00	0.00	0.00
24	1	0.00	0.94	0.00	0.00	0.00	0.00
	2	0.00	0.95	0.00	0.00	0.00	0.00
	3	0.00	0.94	0.00	0.00	0.00	0.00
	4	0.00	0.98	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	5	0.00	0.96	0.00	0.00	0.00	0.00
	6	0.00	0.94	0.00	0.00	0.00	0.00
	7	0.00	0.99	0.00	0.00	0.00	0.00
	8	0.00	0.96	0.00	0.00	0.00	0.00
	9	0.00	0.68	0.00	0.00	0.00	0.00
	10	0.00	0.75	0.00	0.00	0.00	0.00
	11	0.00	0.86	0.00	0.00	0.00	0.00
	12	0.00	0.92	0.00	0.00	0.00	0.00
	13	0.00	0.27	0.00	0.00	0.00	0.00
	14	0.00	0.37	0.00	0.00	0.00	0.00
	15	0.00	0.53	0.00	0.00	0.00	0.00
	16	0.00	0.61	0.00	0.00	0.00	0.00
	17	0.00	0.89	0.00	0.00	0.00	0.00
	18	0.00	0.99	0.00	0.00	0.00	0.00
	19	0.00	0.94	0.00	0.00	0.00	0.00
	20	0.00	0.94	0.00	0.00	0.00	0.00
	21	0.00	0.59	0.00	0.00	0.00	0.00
	22	0.00	0.67	0.00	0.00	0.00	0.00
	23	0.00	0.63	0.00	0.00	0.00	0.00
	24	0.00	0.63	0.00	0.00	0.00	0.00
25	1	0.00	0.94	0.00	0.00	0.00	0.00
	2	0.00	0.95	0.00	0.00	0.00	0.00
	3	0.00	0.94	0.00	0.00	0.00	0.00
	4	0.00	0.98	0.00	0.00	0.00	0.00
	5	0.00	0.96	0.00	0.00	0.00	0.00
	6	0.00	0.94	0.00	0.00	0.00	0.00
	7	0.00	0.99	0.00	0.00	0.00	0.00
	8	0.00	0.96	0.00	0.00	0.00	0.00
	9	0.00	0.64	0.00	0.00	0.00	0.00
	10	0.00	0.71	0.00	0.00	0.00	0.00
	11	0.00	0.85	0.00	0.00	0.00	0.00
	12	0.00	0.91	0.00	0.00	0.00	0.00
	13	0.00	0.22	0.00	0.00	0.00	0.00
	14	0.00	0.32	0.00	0.00	0.00	0.00
	15	0.00	0.52	0.00	0.00	0.00	0.00
	16	0.00	0.60	0.00	0.00	0.00	0.00
	17	0.00	0.88	0.00	0.00	0.00	0.00
	18	0.00	0.99	0.00	0.00	0.00	0.00
	19	0.00	0.94	0.00	0.00	0.00	0.00
	20	0.00	0.93	0.00	0.00	0.00	0.00
	21	0.00	0.58	0.00	0.00	0.00	0.00
	22	0.00	0.68	0.00	0.00	0.00	0.00
	23	0.00	0.63	0.00	0.00	0.00	0.00
	24	0.00	0.63	0.00	0.00	0.00	0.00
26	1	0.00	0.94	0.00	0.00	0.00	0.00
	2	0.00	0.95	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	3	0.00	0.94	0.00	0.00	0.00	0.00
	4	0.00	0.99	0.00	0.00	0.00	0.00
	5	0.00	0.96	0.00	0.00	0.00	0.00
	6	0.00	0.94	0.00	0.00	0.00	0.00
	7	0.00	0.99	0.00	0.00	0.00	0.00
	8	0.00	0.96	0.00	0.00	0.00	0.00
	9	0.00	0.72	0.00	0.00	0.00	0.00
	10	0.00	0.79	0.00	0.00	0.00	0.00
	11	0.00	0.87	0.00	0.00	0.00	0.00
	12	0.00	0.92	0.00	0.00	0.00	0.00
	13	0.00	0.33	0.00	0.00	0.00	0.00
	14	0.00	0.43	0.00	0.00	0.00	0.00
	15	0.00	0.54	0.00	0.00	0.00	0.00
	16	0.00	0.61	0.00	0.00	0.00	0.00
	17	0.00	0.90	0.00	0.00	0.00	0.00
	18	0.00	0.98	0.00	0.00	0.00	0.00
	19	0.00	0.94	0.00	0.00	0.00	0.00
	20	0.00	0.94	0.00	0.00	0.00	0.00
	21	0.00	0.60	0.00	0.00	0.00	0.00
	22	0.00	0.67	0.00	0.00	0.00	0.00
	23	0.00	0.63	0.00	0.00	0.00	0.00
	24	0.00	0.63	0.00	0.00	0.00	0.00
27	1	0.00	0.95	0.00	0.00	0.00	0.00
	2	0.00	0.95	0.00	0.00	0.00	0.00
	3	0.00	0.94	0.00	0.00	0.00	0.00
	4	0.00	0.99	0.00	0.00	0.00	0.00
	5	0.00	0.96	0.00	0.00	0.00	0.00
	6	0.00	0.94	0.00	0.00	0.00	0.00
	7	0.00	0.99	0.00	0.00	0.00	0.00
	8	0.00	0.97	0.00	0.00	0.00	0.00
	9	0.00	0.77	0.00	0.00	0.00	0.00
	10	0.00	0.83	0.00	0.00	0.00	0.00
	11	0.00	0.88	0.00	0.00	0.00	0.00
	12	0.00	0.93	0.00	0.00	0.00	0.00
	13	0.00	0.39	0.00	0.00	0.00	0.00
	14	0.00	0.49	0.00	0.00	0.00	0.00
	15	0.00	0.55	0.00	0.00	0.00	0.00
	16	0.00	0.62	0.00	0.00	0.00	0.00
	17	0.00	0.91	0.00	0.00	0.00	0.00
	18	0.00	0.97	0.00	0.00	0.00	0.00
	19	0.00	0.94	0.00	0.00	0.00	0.00
	20	0.00	0.94	0.00	0.00	0.00	0.00
	21	0.00	0.61	0.00	0.00	0.00	0.00
	22	0.00	0.66	0.00	0.00	0.00	0.00
	23	0.00	0.64	0.00	0.00	0.00	0.00
	24	0.00	0.63	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
28	1	0.00	0.95	0.00	0.00	0.00	0.00
	2	0.00	0.95	0.00	0.00	0.00	0.00
	3	0.00	0.94	0.00	0.00	0.00	0.00
	4	0.00	0.99	0.00	0.00	0.00	0.00
	5	0.00	0.96	0.00	0.00	0.00	0.00
	6	0.00	0.94	0.00	0.00	0.00	0.00
	7	0.00	0.99	0.00	0.00	0.00	0.00
	8	0.00	0.97	0.00	0.00	0.00	0.00
	9	0.00	0.82	0.00	0.00	0.00	0.00
	10	0.00	0.88	0.00	0.00	0.00	0.00
	11	0.00	0.88	0.00	0.00	0.00	0.00
	12	0.00	0.93	0.00	0.00	0.00	0.00
	13	0.00	0.47	0.00	0.00	0.00	0.00
	14	0.00	0.55	0.00	0.00	0.00	0.00
	15	0.00	0.56	0.00	0.00	0.00	0.00
	16	0.00	0.62	0.00	0.00	0.00	0.00
	17	0.00	0.92	0.00	0.00	0.00	0.00
	18	0.00	0.96	0.00	0.00	0.00	0.00
	19	0.00	0.94	0.00	0.00	0.00	0.00
	20	0.00	0.94	0.00	0.00	0.00	0.00
	21	0.00	0.62	0.00	0.00	0.00	0.00
	22	0.00	0.65	0.00	0.00	0.00	0.00
	23	0.00	0.63	0.00	0.00	0.00	0.00
	24	0.00	0.63	0.00	0.00	0.00	0.00
29	1	0.00	0.99	0.00	0.00	0.00	0.00
	2	0.00	1.00	0.00	0.00	0.00	0.00
	3	0.00	0.98	0.00	0.00	0.00	0.00
	4	0.00	1.03	0.00	0.00	0.00	0.00
	5	0.00	1.00	0.00	0.00	0.00	0.00
	6	0.00	0.98	0.00	0.00	0.00	0.00
	7	0.00	1.03	0.00	0.00	0.00	0.00
	8	0.00	1.00	0.00	0.00	0.00	0.00
	9	0.00	0.72	0.00	0.00	0.00	0.00
	10	0.00	0.80	0.00	0.00	0.00	0.00
	11	0.00	0.90	0.00	0.00	0.00	0.00
	12	0.00	0.96	0.00	0.00	0.00	0.00
	13	0.00	0.30	0.00	0.00	0.00	0.00
	14	0.00	0.40	0.00	0.00	0.00	0.00
	15	0.00	0.55	0.00	0.00	0.00	0.00
	16	0.00	0.64	0.00	0.00	0.00	0.00
	17	0.00	0.93	0.00	0.00	0.00	0.00
	18	0.00	1.03	0.00	0.00	0.00	0.00
	19	0.00	0.98	0.00	0.00	0.00	0.00
	20	0.00	0.98	0.00	0.00	0.00	0.00
	21	0.00	0.62	0.00	0.00	0.00	0.00
	22	0.00	0.70	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	23	0.00	0.66	0.00	0.00	0.00	0.00
	24	0.00	0.66	0.00	0.00	0.00	0.00
30	1	0.00	0.99	0.00	0.00	0.00	0.00
	2	0.00	1.00	0.00	0.00	0.00	0.00
	3	0.00	0.99	0.00	0.00	0.00	0.00
	4	0.00	1.03	0.00	0.00	0.00	0.00
	5	0.00	1.00	0.00	0.00	0.00	0.00
	6	0.00	0.98	0.00	0.00	0.00	0.00
	7	0.00	1.03	0.00	0.00	0.00	0.00
	8	0.00	1.01	0.00	0.00	0.00	0.00
	9	0.00	0.76	0.00	0.00	0.00	0.00
	10	0.00	0.84	0.00	0.00	0.00	0.00
	11	0.00	0.91	0.00	0.00	0.00	0.00
	12	0.00	0.97	0.00	0.00	0.00	0.00
	13	0.00	0.36	0.00	0.00	0.00	0.00
	14	0.00	0.46	0.00	0.00	0.00	0.00
	15	0.00	0.56	0.00	0.00	0.00	0.00
	16	0.00	0.64	0.00	0.00	0.00	0.00
	17	0.00	0.95	0.00	0.00	0.00	0.00
	18	0.00	1.02	0.00	0.00	0.00	0.00
	19	0.00	0.98	0.00	0.00	0.00	0.00
	20	0.00	0.98	0.00	0.00	0.00	0.00
	21	0.00	0.63	0.00	0.00	0.00	0.00
	22	0.00	0.69	0.00	0.00	0.00	0.00
	23	0.00	0.66	0.00	0.00	0.00	0.00
	24	0.00	0.66	0.00	0.00	0.00	0.00
31	1	0.00	0.99	0.00	0.00	0.00	0.00
	2	0.00	0.99	0.00	0.00	0.00	0.00
	3	0.00	0.99	0.00	0.00	0.00	0.00
	4	0.00	1.03	0.00	0.00	0.00	0.00
	5	0.00	1.00	0.00	0.00	0.00	0.00
	6	0.00	0.98	0.00	0.00	0.00	0.00
	7	0.00	1.03	0.00	0.00	0.00	0.00
	8	0.00	1.01	0.00	0.00	0.00	0.00
	9	0.00	0.81	0.00	0.00	0.00	0.00
	10	0.00	0.88	0.00	0.00	0.00	0.00
	11	0.00	0.91	0.00	0.00	0.00	0.00
	12	0.00	0.97	0.00	0.00	0.00	0.00
	13	0.00	0.42	0.00	0.00	0.00	0.00
	14	0.00	0.52	0.00	0.00	0.00	0.00
	15	0.00	0.57	0.00	0.00	0.00	0.00
	16	0.00	0.65	0.00	0.00	0.00	0.00
	17	0.00	0.96	0.00	0.00	0.00	0.00
	18	0.00	1.01	0.00	0.00	0.00	0.00
	19	0.00	0.99	0.00	0.00	0.00	0.00
	20	0.00	0.98	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	21	0.00	0.63	0.00	0.00	0.00	0.00
	22	0.00	0.68	0.00	0.00	0.00	0.00
	23	0.00	0.66	0.00	0.00	0.00	0.00
	24	0.00	0.66	0.00	0.00	0.00	0.00
32	1	0.00	0.80	0.00	0.00	0.00	0.00
	2	0.00	0.81	0.00	0.00	0.00	0.00
	3	0.00	0.80	0.00	0.00	0.00	0.00
	4	0.00	0.84	0.00	0.00	0.00	0.00
	5	0.00	0.82	0.00	0.00	0.00	0.00
	6	0.00	0.80	0.00	0.00	0.00	0.00
	7	0.00	0.85	0.00	0.00	0.00	0.00
	8	0.00	0.83	0.00	0.00	0.00	0.00
	9	0.00	0.77	0.00	0.00	0.00	0.00
	10	0.00	0.80	0.00	0.00	0.00	0.00
	11	0.00	0.77	0.00	0.00	0.00	0.00
	12	0.00	0.79	0.00	0.00	0.00	0.00
	13	0.00	0.49	0.00	0.00	0.00	0.00
	14	0.00	0.54	0.00	0.00	0.00	0.00
	15	0.00	0.51	0.00	0.00	0.00	0.00
	16	0.00	0.53	0.00	0.00	0.00	0.00
	17	0.00	0.79	0.00	0.00	0.00	0.00
	18	0.00	0.81	0.00	0.00	0.00	0.00
	19	0.00	0.80	0.00	0.00	0.00	0.00
	20	0.00	0.80	0.00	0.00	0.00	0.00
	21	0.00	0.54	0.00	0.00	0.00	0.00
	22	0.00	0.55	0.00	0.00	0.00	0.00
	23	0.00	0.55	0.00	0.00	0.00	0.00
	24	0.00	0.55	0.00	0.00	0.00	0.00
33	1	0.00	0.85	0.00	0.00	0.00	0.00
	2	0.00	0.85	0.00	0.00	0.00	0.00
	3	0.00	0.85	0.00	0.00	0.00	0.00
	4	0.00	0.89	0.00	0.00	0.00	0.00
	5	0.00	0.87	0.00	0.00	0.00	0.00
	6	0.00	0.85	0.00	0.00	0.00	0.00
	7	0.00	0.90	0.00	0.00	0.00	0.00
	8	0.00	0.87	0.00	0.00	0.00	0.00
	9	0.00	0.81	0.00	0.00	0.00	0.00
	10	0.00	0.85	0.00	0.00	0.00	0.00
	11	0.00	0.82	0.00	0.00	0.00	0.00
	12	0.00	0.84	0.00	0.00	0.00	0.00
	13	0.00	0.51	0.00	0.00	0.00	0.00
	14	0.00	0.57	0.00	0.00	0.00	0.00
	15	0.00	0.53	0.00	0.00	0.00	0.00
	16	0.00	0.57	0.00	0.00	0.00	0.00
	17	0.00	0.84	0.00	0.00	0.00	0.00
	18	0.00	0.86	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	19	0.00	0.85	0.00	0.00	0.00	0.00
	20	0.00	0.85	0.00	0.00	0.00	0.00
	21	0.00	0.57	0.00	0.00	0.00	0.00
	22	0.00	0.58	0.00	0.00	0.00	0.00
	23	0.00	0.58	0.00	0.00	0.00	0.00
	24	0.00	0.58	0.00	0.00	0.00	0.00
34	1	0.00	0.80	0.00	0.00	0.00	0.00
	2	0.00	0.80	0.00	0.00	0.00	0.00
	3	0.00	0.79	0.00	0.00	0.00	0.00
	4	0.00	0.84	0.00	0.00	0.00	0.00
	5	0.00	0.81	0.00	0.00	0.00	0.00
	6	0.00	0.79	0.00	0.00	0.00	0.00
	7	0.00	0.84	0.00	0.00	0.00	0.00
	8	0.00	0.82	0.00	0.00	0.00	0.00
	9	0.00	0.81	0.00	0.00	0.00	0.00
	10	0.00	0.84	0.00	0.00	0.00	0.00
	11	0.00	0.78	0.00	0.00	0.00	0.00
	12	0.00	0.79	0.00	0.00	0.00	0.00
	13	0.00	0.56	0.00	0.00	0.00	0.00
	14	0.00	0.60	0.00	0.00	0.00	0.00
	15	0.00	0.52	0.00	0.00	0.00	0.00
	16	0.00	0.53	0.00	0.00	0.00	0.00
	17	0.00	0.80	0.00	0.00	0.00	0.00
	18	0.00	0.79	0.00	0.00	0.00	0.00
	19	0.00	0.80	0.00	0.00	0.00	0.00
	20	0.00	0.80	0.00	0.00	0.00	0.00
	21	0.00	0.55	0.00	0.00	0.00	0.00
	22	0.00	0.54	0.00	0.00	0.00	0.00
	23	0.00	0.54	0.00	0.00	0.00	0.00
	24	0.00	0.54	0.00	0.00	0.00	0.00
35	1	0.00	0.85	0.00	0.00	0.00	0.00
	2	0.00	0.85	0.00	0.00	0.00	0.00
	3	0.00	0.84	0.00	0.00	0.00	0.00
	4	0.00	0.89	0.00	0.00	0.00	0.00
	5	0.00	0.86	0.00	0.00	0.00	0.00
	6	0.00	0.84	0.00	0.00	0.00	0.00
	7	0.00	0.89	0.00	0.00	0.00	0.00
	8	0.00	0.87	0.00	0.00	0.00	0.00
	9	0.00	0.85	0.00	0.00	0.00	0.00
	10	0.00	0.89	0.00	0.00	0.00	0.00
	11	0.00	0.82	0.00	0.00	0.00	0.00
	12	0.00	0.84	0.00	0.00	0.00	0.00
	13	0.00	0.58	0.00	0.00	0.00	0.00
	14	0.00	0.63	0.00	0.00	0.00	0.00
	15	0.00	0.54	0.00	0.00	0.00	0.00
	16	0.00	0.56	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	17	0.00	0.85	0.00	0.00	0.00	0.00
	18	0.00	0.84	0.00	0.00	0.00	0.00
	19	0.00	0.85	0.00	0.00	0.00	0.00
	20	0.00	0.84	0.00	0.00	0.00	0.00
	21	0.00	0.58	0.00	0.00	0.00	0.00
	22	0.00	0.57	0.00	0.00	0.00	0.00
	23	0.00	0.57	0.00	0.00	0.00	0.00
	24	0.00	0.57	0.00	0.00	0.00	0.00
36	1	0.00	0.80	0.00	0.00	0.00	0.00
	2	0.00	0.79	0.00	0.00	0.00	0.00
	3	0.00	0.79	0.00	0.00	0.00	0.00
	4	0.00	0.83	0.00	0.00	0.00	0.00
	5	0.00	0.81	0.00	0.00	0.00	0.00
	6	0.00	0.79	0.00	0.00	0.00	0.00
	7	0.00	0.84	0.00	0.00	0.00	0.00
	8	0.00	0.81	0.00	0.00	0.00	0.00
	9	0.00	0.85	0.00	0.00	0.00	0.00
	10	0.00	0.87	0.00	0.00	0.00	0.00
	11	0.00	0.78	0.00	0.00	0.00	0.00
	12	0.00	0.79	0.00	0.00	0.00	0.00
	13	0.00	0.62	0.00	0.00	0.00	0.00
	14	0.00	0.65	0.00	0.00	0.00	0.00
	15	0.00	0.53	0.00	0.00	0.00	0.00
	16	0.00	0.53	0.00	0.00	0.00	0.00
	17	0.00	0.80	0.00	0.00	0.00	0.00
	18	0.00	0.78	0.00	0.00	0.00	0.00
	19	0.00	0.79	0.00	0.00	0.00	0.00
	20	0.00	0.79	0.00	0.00	0.00	0.00
	21	0.00	0.55	0.00	0.00	0.00	0.00
	22	0.00	0.53	0.00	0.00	0.00	0.00
	23	0.00	0.54	0.00	0.00	0.00	0.00
	24	0.00	0.54	0.00	0.00	0.00	0.00
37	1	0.00	0.85	0.00	0.00	0.00	0.00
	2	0.00	0.84	0.00	0.00	0.00	0.00
	3	0.00	0.83	0.00	0.00	0.00	0.00
	4	0.00	0.88	0.00	0.00	0.00	0.00
	5	0.00	0.85	0.00	0.00	0.00	0.00
	6	0.00	0.83	0.00	0.00	0.00	0.00
	7	0.00	0.88	0.00	0.00	0.00	0.00
	8	0.00	0.86	0.00	0.00	0.00	0.00
	9	0.00	0.89	0.00	0.00	0.00	0.00
	10	0.00	0.92	0.00	0.00	0.00	0.00
	11	0.00	0.82	0.00	0.00	0.00	0.00
	12	0.00	0.84	0.00	0.00	0.00	0.00
	13	0.00	0.64	0.00	0.00	0.00	0.00
	14	0.00	0.68	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	15	0.00	0.55	0.00	0.00	0.00	0.00
	16	0.00	0.56	0.00	0.00	0.00	0.00
	17	0.00	0.85	0.00	0.00	0.00	0.00
	18	0.00	0.83	0.00	0.00	0.00	0.00
	19	0.00	0.84	0.00	0.00	0.00	0.00
	20	0.00	0.84	0.00	0.00	0.00	0.00
	21	0.00	0.58	0.00	0.00	0.00	0.00
	22	0.00	0.56	0.00	0.00	0.00	0.00
	23	0.00	0.57	0.00	0.00	0.00	0.00
	24	0.00	0.57	0.00	0.00	0.00	0.00
38	1	0.00	0.84	0.00	0.00	0.00	0.00
	2	0.00	0.83	0.00	0.00	0.00	0.00
	3	0.00	0.83	0.00	0.00	0.00	0.00
	4	0.00	0.87	0.00	0.00	0.00	0.00
	5	0.00	0.85	0.00	0.00	0.00	0.00
	6	0.00	0.83	0.00	0.00	0.00	0.00
	7	0.00	0.87	0.00	0.00	0.00	0.00
	8	0.00	0.85	0.00	0.00	0.00	0.00
	9	0.00	0.93	0.00	0.00	0.00	0.00
	10	0.00	0.95	0.00	0.00	0.00	0.00
	11	0.00	0.83	0.00	0.00	0.00	0.00
	12	0.00	0.83	0.00	0.00	0.00	0.00
	13	0.00	0.69	0.00	0.00	0.00	0.00
	14	0.00	0.73	0.00	0.00	0.00	0.00
	15	0.00	0.56	0.00	0.00	0.00	0.00
	16	0.00	0.56	0.00	0.00	0.00	0.00
	17	0.00	0.85	0.00	0.00	0.00	0.00
	18	0.00	0.81	0.00	0.00	0.00	0.00
	19	0.00	0.83	0.00	0.00	0.00	0.00
	20	0.00	0.83	0.00	0.00	0.00	0.00
	21	0.00	0.58	0.00	0.00	0.00	0.00
	22	0.00	0.55	0.00	0.00	0.00	0.00
	23	0.00	0.56	0.00	0.00	0.00	0.00
	24	0.00	0.56	0.00	0.00	0.00	0.00
39	1	0.00	0.90	0.00	0.00	0.00	0.00
	2	0.00	0.90	0.00	0.00	0.00	0.00
	3	0.00	0.89	0.00	0.00	0.00	0.00
	4	0.00	0.94	0.00	0.00	0.00	0.00
	5	0.00	0.91	0.00	0.00	0.00	0.00
	6	0.00	0.89	0.00	0.00	0.00	0.00
	7	0.00	0.95	0.00	0.00	0.00	0.00
	8	0.00	0.92	0.00	0.00	0.00	0.00
	9	0.00	0.84	0.00	0.00	0.00	0.00
	10	0.00	0.89	0.00	0.00	0.00	0.00
	11	0.00	0.85	0.00	0.00	0.00	0.00
	12	0.00	0.89	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	13	0.00	0.53	0.00	0.00	0.00	0.00
	14	0.00	0.60	0.00	0.00	0.00	0.00
	15	0.00	0.55	0.00	0.00	0.00	0.00
	16	0.00	0.60	0.00	0.00	0.00	0.00
	17	0.00	0.89	0.00	0.00	0.00	0.00
	18	0.00	0.90	0.00	0.00	0.00	0.00
	19	0.00	0.90	0.00	0.00	0.00	0.00
	20	0.00	0.90	0.00	0.00	0.00	0.00
	21	0.00	0.60	0.00	0.00	0.00	0.00
	22	0.00	0.61	0.00	0.00	0.00	0.00
	23	0.00	0.61	0.00	0.00	0.00	0.00
	24	0.00	0.61	0.00	0.00	0.00	0.00
40	1	0.00	0.90	0.00	0.00	0.00	0.00
	2	0.00	0.89	0.00	0.00	0.00	0.00
	3	0.00	0.89	0.00	0.00	0.00	0.00
	4	0.00	0.93	0.00	0.00	0.00	0.00
	5	0.00	0.91	0.00	0.00	0.00	0.00
	6	0.00	0.89	0.00	0.00	0.00	0.00
	7	0.00	0.94	0.00	0.00	0.00	0.00
	8	0.00	0.91	0.00	0.00	0.00	0.00
	9	0.00	0.89	0.00	0.00	0.00	0.00
	10	0.00	0.93	0.00	0.00	0.00	0.00
	11	0.00	0.86	0.00	0.00	0.00	0.00
	12	0.00	0.89	0.00	0.00	0.00	0.00
	13	0.00	0.59	0.00	0.00	0.00	0.00
	14	0.00	0.65	0.00	0.00	0.00	0.00
	15	0.00	0.56	0.00	0.00	0.00	0.00
	16	0.00	0.60	0.00	0.00	0.00	0.00
	17	0.00	0.89	0.00	0.00	0.00	0.00
	18	0.00	0.89	0.00	0.00	0.00	0.00
	19	0.00	0.89	0.00	0.00	0.00	0.00
	20	0.00	0.89	0.00	0.00	0.00	0.00
	21	0.00	0.60	0.00	0.00	0.00	0.00
	22	0.00	0.60	0.00	0.00	0.00	0.00
	23	0.00	0.60	0.00	0.00	0.00	0.00
	24	0.00	0.60	0.00	0.00	0.00	0.00
41	1	0.00	0.89	0.00	0.00	0.00	0.00
	2	0.00	0.88	0.00	0.00	0.00	0.00
	3	0.00	0.88	0.00	0.00	0.00	0.00
	4	0.00	0.92	0.00	0.00	0.00	0.00
	5	0.00	0.90	0.00	0.00	0.00	0.00
	6	0.00	0.88	0.00	0.00	0.00	0.00
	7	0.00	0.93	0.00	0.00	0.00	0.00
	8	0.00	0.91	0.00	0.00	0.00	0.00
	9	0.00	0.93	0.00	0.00	0.00	0.00
	10	0.00	0.97	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	11	0.00	0.86	0.00	0.00	0.00	0.00
	12	0.00	0.88	0.00	0.00	0.00	0.00
	13	0.00	0.65	0.00	0.00	0.00	0.00
	14	0.00	0.71	0.00	0.00	0.00	0.00
	15	0.00	0.57	0.00	0.00	0.00	0.00
	16	0.00	0.59	0.00	0.00	0.00	0.00
	17	0.00	0.90	0.00	0.00	0.00	0.00
	18	0.00	0.87	0.00	0.00	0.00	0.00
	19	0.00	0.89	0.00	0.00	0.00	0.00
	20	0.00	0.89	0.00	0.00	0.00	0.00
	21	0.00	0.61	0.00	0.00	0.00	0.00
	22	0.00	0.59	0.00	0.00	0.00	0.00
	23	0.00	0.60	0.00	0.00	0.00	0.00
	24	0.00	0.60	0.00	0.00	0.00	0.00
42	1	0.00	0.89	0.00	0.00	0.00	0.00
	2	0.00	0.88	0.00	0.00	0.00	0.00
	3	0.00	0.87	0.00	0.00	0.00	0.00
	4	0.00	0.92	0.00	0.00	0.00	0.00
	5	0.00	0.89	0.00	0.00	0.00	0.00
	6	0.00	0.87	0.00	0.00	0.00	0.00
	7	0.00	0.92	0.00	0.00	0.00	0.00
	8	0.00	0.90	0.00	0.00	0.00	0.00
	9	0.00	0.97	0.00	0.00	0.00	0.00
	10	0.00	1.00	0.00	0.00	0.00	0.00
	11	0.00	0.87	0.00	0.00	0.00	0.00
	12	0.00	0.88	0.00	0.00	0.00	0.00
	13	0.00	0.71	0.00	0.00	0.00	0.00
	14	0.00	0.75	0.00	0.00	0.00	0.00
	15	0.00	0.58	0.00	0.00	0.00	0.00
	16	0.00	0.59	0.00	0.00	0.00	0.00
	17	0.00	0.90	0.00	0.00	0.00	0.00
	18	0.00	0.86	0.00	0.00	0.00	0.00
	19	0.00	0.88	0.00	0.00	0.00	0.00
	20	0.00	0.88	0.00	0.00	0.00	0.00
	21	0.00	0.61	0.00	0.00	0.00	0.00
	22	0.00	0.57	0.00	0.00	0.00	0.00
	23	0.00	0.59	0.00	0.00	0.00	0.00
	24	0.00	0.59	0.00	0.00	0.00	0.00
43	1	0.00	0.95	0.00	0.00	0.00	0.00
	2	0.00	0.94	0.00	0.00	0.00	0.00
	3	0.00	0.94	0.00	0.00	0.00	0.00
	4	0.00	0.98	0.00	0.00	0.00	0.00
	5	0.00	0.96	0.00	0.00	0.00	0.00
	6	0.00	0.94	0.00	0.00	0.00	0.00
	7	0.00	0.99	0.00	0.00	0.00	0.00
	8	0.00	0.96	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	9	0.00	0.87	0.00	0.00	0.00	0.00
	10	0.00	0.93	0.00	0.00	0.00	0.00
	11	0.00	0.89	0.00	0.00	0.00	0.00
	12	0.00	0.93	0.00	0.00	0.00	0.00
	13	0.00	0.54	0.00	0.00	0.00	0.00
	14	0.00	0.62	0.00	0.00	0.00	0.00
	15	0.00	0.57	0.00	0.00	0.00	0.00
	16	0.00	0.62	0.00	0.00	0.00	0.00
	17	0.00	0.93	0.00	0.00	0.00	0.00
	18	0.00	0.95	0.00	0.00	0.00	0.00
	19	0.00	0.94	0.00	0.00	0.00	0.00
	20	0.00	0.94	0.00	0.00	0.00	0.00
	21	0.00	0.62	0.00	0.00	0.00	0.00
	22	0.00	0.64	0.00	0.00	0.00	0.00
	23	0.00	0.63	0.00	0.00	0.00	0.00
	24	0.00	0.63	0.00	0.00	0.00	0.00
44	1	0.00	0.94	0.00	0.00	0.00	0.00
	2	0.00	0.94	0.00	0.00	0.00	0.00
	3	0.00	0.93	0.00	0.00	0.00	0.00
	4	0.00	0.98	0.00	0.00	0.00	0.00
	5	0.00	0.95	0.00	0.00	0.00	0.00
	6	0.00	0.93	0.00	0.00	0.00	0.00
	7	0.00	0.98	0.00	0.00	0.00	0.00
	8	0.00	0.96	0.00	0.00	0.00	0.00
	9	0.00	0.92	0.00	0.00	0.00	0.00
	10	0.00	0.97	0.00	0.00	0.00	0.00
	11	0.00	0.90	0.00	0.00	0.00	0.00
	12	0.00	0.93	0.00	0.00	0.00	0.00
	13	0.00	0.61	0.00	0.00	0.00	0.00
	14	0.00	0.68	0.00	0.00	0.00	0.00
	15	0.00	0.58	0.00	0.00	0.00	0.00
	16	0.00	0.62	0.00	0.00	0.00	0.00
	17	0.00	0.94	0.00	0.00	0.00	0.00
	18	0.00	0.93	0.00	0.00	0.00	0.00
	19	0.00	0.94	0.00	0.00	0.00	0.00
	20	0.00	0.94	0.00	0.00	0.00	0.00
	21	0.00	0.63	0.00	0.00	0.00	0.00
	22	0.00	0.62	0.00	0.00	0.00	0.00
	23	0.00	0.63	0.00	0.00	0.00	0.00
	24	0.00	0.63	0.00	0.00	0.00	0.00
45	1	0.00	0.94	0.00	0.00	0.00	0.00
	2	0.00	0.93	0.00	0.00	0.00	0.00
	3	0.00	0.93	0.00	0.00	0.00	0.00
	4	0.00	0.97	0.00	0.00	0.00	0.00
	5	0.00	0.94	0.00	0.00	0.00	0.00
	6	0.00	0.93	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	7	0.00	0.97	0.00	0.00	0.00	0.00
	8	0.00	0.95	0.00	0.00	0.00	0.00
	9	0.00	0.96	0.00	0.00	0.00	0.00
	10	0.00	1.01	0.00	0.00	0.00	0.00
	11	0.00	0.90	0.00	0.00	0.00	0.00
	12	0.00	0.93	0.00	0.00	0.00	0.00
	13	0.00	0.67	0.00	0.00	0.00	0.00
	14	0.00	0.73	0.00	0.00	0.00	0.00
	15	0.00	0.59	0.00	0.00	0.00	0.00
	16	0.00	0.62	0.00	0.00	0.00	0.00
	17	0.00	0.94	0.00	0.00	0.00	0.00
	18	0.00	0.92	0.00	0.00	0.00	0.00
	19	0.00	0.93	0.00	0.00	0.00	0.00
	20	0.00	0.93	0.00	0.00	0.00	0.00
	21	0.00	0.63	0.00	0.00	0.00	0.00
	22	0.00	0.61	0.00	0.00	0.00	0.00
	23	0.00	0.62	0.00	0.00	0.00	0.00
	24	0.00	0.62	0.00	0.00	0.00	0.00
46	1	0.00	0.94	0.00	0.00	0.00	0.00
	2	0.00	0.92	0.00	0.00	0.00	0.00
	3	0.00	0.92	0.00	0.00	0.00	0.00
	4	0.00	0.96	0.00	0.00	0.00	0.00
	5	0.00	0.94	0.00	0.00	0.00	0.00
	6	0.00	0.92	0.00	0.00	0.00	0.00
	7	0.00	0.97	0.00	0.00	0.00	0.00
	8	0.00	0.95	0.00	0.00	0.00	0.00
	9	0.00	1.00	0.00	0.00	0.00	0.00
	10	0.00	1.04	0.00	0.00	0.00	0.00
	11	0.00	0.91	0.00	0.00	0.00	0.00
	12	0.00	0.93	0.00	0.00	0.00	0.00
	13	0.00	0.73	0.00	0.00	0.00	0.00
	14	0.00	0.78	0.00	0.00	0.00	0.00
	15	0.00	0.59	0.00	0.00	0.00	0.00
	16	0.00	0.62	0.00	0.00	0.00	0.00
	17	0.00	0.95	0.00	0.00	0.00	0.00
	18	0.00	0.90	0.00	0.00	0.00	0.00
	19	0.00	0.93	0.00	0.00	0.00	0.00
	20	0.00	0.93	0.00	0.00	0.00	0.00
	21	0.00	0.64	0.00	0.00	0.00	0.00
	22	0.00	0.60	0.00	0.00	0.00	0.00
	23	0.00	0.62	0.00	0.00	0.00	0.00
	24	0.00	0.62	0.00	0.00	0.00	0.00
47	1	0.00	0.99	0.00	0.00	0.00	0.00
	2	0.00	0.99	0.00	0.00	0.00	0.00
	3	0.00	0.98	0.00	0.00	0.00	0.00
	4	0.00	1.02	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	5	0.00	1.00	0.00	0.00	0.00	0.00
	6	0.00	0.98	0.00	0.00	0.00	0.00
	7	0.00	1.03	0.00	0.00	0.00	0.00
	8	0.00	1.00	0.00	0.00	0.00	0.00
	9	0.00	0.91	0.00	0.00	0.00	0.00
	10	0.00	0.97	0.00	0.00	0.00	0.00
	11	0.00	0.93	0.00	0.00	0.00	0.00
	12	0.00	0.98	0.00	0.00	0.00	0.00
	13	0.00	0.56	0.00	0.00	0.00	0.00
	14	0.00	0.64	0.00	0.00	0.00	0.00
	15	0.00	0.59	0.00	0.00	0.00	0.00
	16	0.00	0.65	0.00	0.00	0.00	0.00
	17	0.00	0.97	0.00	0.00	0.00	0.00
	18	0.00	0.99	0.00	0.00	0.00	0.00
	19	0.00	0.98	0.00	0.00	0.00	0.00
	20	0.00	0.98	0.00	0.00	0.00	0.00
	21	0.00	0.65	0.00	0.00	0.00	0.00
	22	0.00	0.66	0.00	0.00	0.00	0.00
	23	0.00	0.66	0.00	0.00	0.00	0.00
	24	0.00	0.66	0.00	0.00	0.00	0.00
48	1	0.00	0.99	0.00	0.00	0.00	0.00
	2	0.00	0.98	0.00	0.00	0.00	0.00
	3	0.00	0.98	0.00	0.00	0.00	0.00
	4	0.00	1.02	0.00	0.00	0.00	0.00
	5	0.00	0.99	0.00	0.00	0.00	0.00
	6	0.00	0.97	0.00	0.00	0.00	0.00
	7	0.00	1.02	0.00	0.00	0.00	0.00
	8	0.00	1.00	0.00	0.00	0.00	0.00
	9	0.00	0.95	0.00	0.00	0.00	0.00
	10	0.00	1.01	0.00	0.00	0.00	0.00
	11	0.00	0.94	0.00	0.00	0.00	0.00
	12	0.00	0.98	0.00	0.00	0.00	0.00
	13	0.00	0.62	0.00	0.00	0.00	0.00
	14	0.00	0.70	0.00	0.00	0.00	0.00
	15	0.00	0.60	0.00	0.00	0.00	0.00
	16	0.00	0.65	0.00	0.00	0.00	0.00
	17	0.00	0.98	0.00	0.00	0.00	0.00
	18	0.00	0.98	0.00	0.00	0.00	0.00
	19	0.00	0.98	0.00	0.00	0.00	0.00
	20	0.00	0.98	0.00	0.00	0.00	0.00
	21	0.00	0.65	0.00	0.00	0.00	0.00
	22	0.00	0.65	0.00	0.00	0.00	0.00
	23	0.00	0.65	0.00	0.00	0.00	0.00
	24	0.00	0.65	0.00	0.00	0.00	0.00
49	1	0.00	0.99	0.00	0.00	0.00	0.00
	2	0.00	0.97	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	3	0.00	0.97	0.00	0.00	0.00	0.00
	4	0.00	1.01	0.00	0.00	0.00	0.00
	5	0.00	0.99	0.00	0.00	0.00	0.00
	6	0.00	0.97	0.00	0.00	0.00	0.00
	7	0.00	1.02	0.00	0.00	0.00	0.00
	8	0.00	1.00	0.00	0.00	0.00	0.00
	9	0.00	0.99	0.00	0.00	0.00	0.00
	10	0.00	1.05	0.00	0.00	0.00	0.00
	11	0.00	0.94	0.00	0.00	0.00	0.00
	12	0.00	0.98	0.00	0.00	0.00	0.00
	13	0.00	0.68	0.00	0.00	0.00	0.00
	14	0.00	0.75	0.00	0.00	0.00	0.00
	15	0.00	0.61	0.00	0.00	0.00	0.00
	16	0.00	0.65	0.00	0.00	0.00	0.00
	17	0.00	0.99	0.00	0.00	0.00	0.00
	18	0.00	0.96	0.00	0.00	0.00	0.00
	19	0.00	0.97	0.00	0.00	0.00	0.00
	20	0.00	0.97	0.00	0.00	0.00	0.00
	21	0.00	0.66	0.00	0.00	0.00	0.00
	22	0.00	0.64	0.00	0.00	0.00	0.00
	23	0.00	0.65	0.00	0.00	0.00	0.00
	24	0.00	0.65	0.00	0.00	0.00	0.00
63	1	0.00	0.53	0.00	0.00	0.00	0.00
	2	0.00	0.56	0.00	0.00	0.00	0.00
	3	0.00	0.55	0.00	0.00	0.00	0.00
	4	0.00	0.58	0.00	0.00	0.00	0.00
	5	0.00	0.57	0.00	0.00	0.00	0.00
	6	0.00	0.55	0.00	0.00	0.00	0.00
	7	0.00	0.59	0.00	0.00	0.00	0.00
	8	0.00	0.57	0.00	0.00	0.00	0.00
	9	0.00	0.38	0.00	0.00	0.00	0.00
	10	0.00	0.38	0.00	0.00	0.00	0.00
	11	0.00	0.52	0.00	0.00	0.00	0.00
	12	0.00	0.52	0.00	0.00	0.00	0.00
	13	0.00	0.13	0.00	0.00	0.00	0.00
	14	0.00	0.15	0.00	0.00	0.00	0.00
	15	0.00	0.36	0.00	0.00	0.00	0.00
	16	0.00	0.36	0.00	0.00	0.00	0.00
	17	0.00	0.50	0.00	0.00	0.00	0.00
	18	0.00	0.59	0.00	0.00	0.00	0.00
	19	0.00	0.55	0.00	0.00	0.00	0.00
	20	0.00	0.54	0.00	0.00	0.00	0.00
	21	0.00	0.36	0.00	0.00	0.00	0.00
	22	0.00	0.43	0.00	0.00	0.00	0.00
	23	0.00	0.40	0.00	0.00	0.00	0.00
	24	0.00	0.39	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
64	1	0.00	0.53	0.00	0.00	0.00	0.00
	2	0.00	0.56	0.00	0.00	0.00	0.00
	3	0.00	0.55	0.00	0.00	0.00	0.00
	4	0.00	0.58	0.00	0.00	0.00	0.00
	5	0.00	0.56	0.00	0.00	0.00	0.00
	6	0.00	0.55	0.00	0.00	0.00	0.00
	7	0.00	0.59	0.00	0.00	0.00	0.00
	8	0.00	0.56	0.00	0.00	0.00	0.00
	9	0.00	0.34	0.00	0.00	0.00	0.00
	10	0.00	0.34	0.00	0.00	0.00	0.00
	11	0.00	0.51	0.00	0.00	0.00	0.00
	12	0.00	0.51	0.00	0.00	0.00	0.00
	13	0.00	0.07	0.00	0.00	0.00	0.00
	14	0.00	0.10	0.00	0.00	0.00	0.00
	15	0.00	0.35	0.00	0.00	0.00	0.00
	16	0.00	0.35	0.00	0.00	0.00	0.00
	17	0.00	0.49	0.00	0.00	0.00	0.00
	18	0.00	0.59	0.00	0.00	0.00	0.00
	19	0.00	0.55	0.00	0.00	0.00	0.00
	20	0.00	0.54	0.00	0.00	0.00	0.00
	21	0.00	0.35	0.00	0.00	0.00	0.00
	22	0.00	0.44	0.00	0.00	0.00	0.00
	23	0.00	0.40	0.00	0.00	0.00	0.00
	24	0.00	0.39	0.00	0.00	0.00	0.00
65	1	0.00	0.53	0.00	0.00	0.00	0.00
	2	0.00	0.56	0.00	0.00	0.00	0.00
	3	0.00	0.55	0.00	0.00	0.00	0.00
	4	0.00	0.58	0.00	0.00	0.00	0.00
	5	0.00	0.57	0.00	0.00	0.00	0.00
	6	0.00	0.55	0.00	0.00	0.00	0.00
	7	0.00	0.59	0.00	0.00	0.00	0.00
	8	0.00	0.57	0.00	0.00	0.00	0.00
	9	0.00	0.42	0.00	0.00	0.00	0.00
	10	0.00	0.42	0.00	0.00	0.00	0.00
	11	0.00	0.53	0.00	0.00	0.00	0.00
	12	0.00	0.52	0.00	0.00	0.00	0.00
	13	0.00	0.19	0.00	0.00	0.00	0.00
	14	0.00	0.20	0.00	0.00	0.00	0.00
	15	0.00	0.37	0.00	0.00	0.00	0.00
	16	0.00	0.36	0.00	0.00	0.00	0.00
	17	0.00	0.51	0.00	0.00	0.00	0.00
	18	0.00	0.58	0.00	0.00	0.00	0.00
	19	0.00	0.55	0.00	0.00	0.00	0.00
	20	0.00	0.55	0.00	0.00	0.00	0.00
	21	0.00	0.37	0.00	0.00	0.00	0.00
	22	0.00	0.42	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	23	0.00	0.40	0.00	0.00	0.00	0.00
	24	0.00	0.39	0.00	0.00	0.00	0.00
66	1	0.00	0.53	0.00	0.00	0.00	0.00
	2	0.00	0.56	0.00	0.00	0.00	0.00
	3	0.00	0.55	0.00	0.00	0.00	0.00
	4	0.00	0.58	0.00	0.00	0.00	0.00
	5	0.00	0.57	0.00	0.00	0.00	0.00
	6	0.00	0.55	0.00	0.00	0.00	0.00
	7	0.00	0.59	0.00	0.00	0.00	0.00
	8	0.00	0.57	0.00	0.00	0.00	0.00
	9	0.00	0.46	0.00	0.00	0.00	0.00
	10	0.00	0.46	0.00	0.00	0.00	0.00
	11	0.00	0.53	0.00	0.00	0.00	0.00
	12	0.00	0.52	0.00	0.00	0.00	0.00
	13	0.00	0.25	0.00	0.00	0.00	0.00
	14	0.00	0.26	0.00	0.00	0.00	0.00
	15	0.00	0.38	0.00	0.00	0.00	0.00
	16	0.00	0.36	0.00	0.00	0.00	0.00
	17	0.00	0.52	0.00	0.00	0.00	0.00
	18	0.00	0.57	0.00	0.00	0.00	0.00
	19	0.00	0.55	0.00	0.00	0.00	0.00
	20	0.00	0.55	0.00	0.00	0.00	0.00
	21	0.00	0.37	0.00	0.00	0.00	0.00
	22	0.00	0.42	0.00	0.00	0.00	0.00
	23	0.00	0.40	0.00	0.00	0.00	0.00
	24	0.00	0.39	0.00	0.00	0.00	0.00
67	1	0.00	0.54	0.00	0.00	0.00	0.00
	2	0.00	0.55	0.00	0.00	0.00	0.00
	3	0.00	0.55	0.00	0.00	0.00	0.00
	4	0.00	0.58	0.00	0.00	0.00	0.00
	5	0.00	0.56	0.00	0.00	0.00	0.00
	6	0.00	0.55	0.00	0.00	0.00	0.00
	7	0.00	0.59	0.00	0.00	0.00	0.00
	8	0.00	0.57	0.00	0.00	0.00	0.00
	9	0.00	0.51	0.00	0.00	0.00	0.00
	10	0.00	0.50	0.00	0.00	0.00	0.00
	11	0.00	0.54	0.00	0.00	0.00	0.00
	12	0.00	0.52	0.00	0.00	0.00	0.00
	13	0.00	0.31	0.00	0.00	0.00	0.00
	14	0.00	0.31	0.00	0.00	0.00	0.00
	15	0.00	0.39	0.00	0.00	0.00	0.00
	16	0.00	0.36	0.00	0.00	0.00	0.00
	17	0.00	0.53	0.00	0.00	0.00	0.00
	18	0.00	0.56	0.00	0.00	0.00	0.00
	19	0.00	0.55	0.00	0.00	0.00	0.00
	20	0.00	0.55	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	21	0.00	0.38	0.00	0.00	0.00	0.00
	22	0.00	0.41	0.00	0.00	0.00	0.00
	23	0.00	0.39	0.00	0.00	0.00	0.00
	24	0.00	0.39	0.00	0.00	0.00	0.00
68	1	0.00	0.58	0.00	0.00	0.00	0.00
	2	0.00	0.61	0.00	0.00	0.00	0.00
	3	0.00	0.60	0.00	0.00	0.00	0.00
	4	0.00	0.64	0.00	0.00	0.00	0.00
	5	0.00	0.62	0.00	0.00	0.00	0.00
	6	0.00	0.60	0.00	0.00	0.00	0.00
	7	0.00	0.64	0.00	0.00	0.00	0.00
	8	0.00	0.62	0.00	0.00	0.00	0.00
	9	0.00	0.42	0.00	0.00	0.00	0.00
	10	0.00	0.43	0.00	0.00	0.00	0.00
	11	0.00	0.56	0.00	0.00	0.00	0.00
	12	0.00	0.57	0.00	0.00	0.00	0.00
	13	0.00	0.15	0.00	0.00	0.00	0.00
	14	0.00	0.18	0.00	0.00	0.00	0.00
	15	0.00	0.38	0.00	0.00	0.00	0.00
	16	0.00	0.39	0.00	0.00	0.00	0.00
	17	0.00	0.55	0.00	0.00	0.00	0.00
	18	0.00	0.64	0.00	0.00	0.00	0.00
	19	0.00	0.60	0.00	0.00	0.00	0.00
	20	0.00	0.59	0.00	0.00	0.00	0.00
	21	0.00	0.39	0.00	0.00	0.00	0.00
	22	0.00	0.46	0.00	0.00	0.00	0.00
	23	0.00	0.43	0.00	0.00	0.00	0.00
	24	0.00	0.42	0.00	0.00	0.00	0.00
69	1	0.00	0.58	0.00	0.00	0.00	0.00
	2	0.00	0.61	0.00	0.00	0.00	0.00
	3	0.00	0.60	0.00	0.00	0.00	0.00
	4	0.00	0.63	0.00	0.00	0.00	0.00
	5	0.00	0.62	0.00	0.00	0.00	0.00
	6	0.00	0.60	0.00	0.00	0.00	0.00
	7	0.00	0.64	0.00	0.00	0.00	0.00
	8	0.00	0.62	0.00	0.00	0.00	0.00
	9	0.00	0.37	0.00	0.00	0.00	0.00
	10	0.00	0.39	0.00	0.00	0.00	0.00
	11	0.00	0.55	0.00	0.00	0.00	0.00
	12	0.00	0.56	0.00	0.00	0.00	0.00
	13	0.00	0.09	0.00	0.00	0.00	0.00
	14	0.00	0.12	0.00	0.00	0.00	0.00
	15	0.00	0.37	0.00	0.00	0.00	0.00
	16	0.00	0.38	0.00	0.00	0.00	0.00
	17	0.00	0.54	0.00	0.00	0.00	0.00
	18	0.00	0.65	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	19	0.00	0.60	0.00	0.00	0.00	0.00
	20	0.00	0.59	0.00	0.00	0.00	0.00
	21	0.00	0.38	0.00	0.00	0.00	0.00
	22	0.00	0.47	0.00	0.00	0.00	0.00
	23	0.00	0.43	0.00	0.00	0.00	0.00
	24	0.00	0.42	0.00	0.00	0.00	0.00
70	1	0.00	0.59	0.00	0.00	0.00	0.00
	2	0.00	0.61	0.00	0.00	0.00	0.00
	3	0.00	0.60	0.00	0.00	0.00	0.00
	4	0.00	0.64	0.00	0.00	0.00	0.00
	5	0.00	0.62	0.00	0.00	0.00	0.00
	6	0.00	0.60	0.00	0.00	0.00	0.00
	7	0.00	0.65	0.00	0.00	0.00	0.00
	8	0.00	0.62	0.00	0.00	0.00	0.00
	9	0.00	0.46	0.00	0.00	0.00	0.00
	10	0.00	0.47	0.00	0.00	0.00	0.00
	11	0.00	0.57	0.00	0.00	0.00	0.00
	12	0.00	0.57	0.00	0.00	0.00	0.00
	13	0.00	0.21	0.00	0.00	0.00	0.00
	14	0.00	0.23	0.00	0.00	0.00	0.00
	15	0.00	0.39	0.00	0.00	0.00	0.00
	16	0.00	0.39	0.00	0.00	0.00	0.00
	17	0.00	0.56	0.00	0.00	0.00	0.00
	18	0.00	0.63	0.00	0.00	0.00	0.00
	19	0.00	0.60	0.00	0.00	0.00	0.00
	20	0.00	0.60	0.00	0.00	0.00	0.00
	21	0.00	0.40	0.00	0.00	0.00	0.00
	22	0.00	0.46	0.00	0.00	0.00	0.00
	23	0.00	0.43	0.00	0.00	0.00	0.00
	24	0.00	0.42	0.00	0.00	0.00	0.00
71	1	0.00	0.59	0.00	0.00	0.00	0.00
	2	0.00	0.61	0.00	0.00	0.00	0.00
	3	0.00	0.60	0.00	0.00	0.00	0.00
	4	0.00	0.64	0.00	0.00	0.00	0.00
	5	0.00	0.62	0.00	0.00	0.00	0.00
	6	0.00	0.60	0.00	0.00	0.00	0.00
	7	0.00	0.65	0.00	0.00	0.00	0.00
	8	0.00	0.62	0.00	0.00	0.00	0.00
	9	0.00	0.50	0.00	0.00	0.00	0.00
	10	0.00	0.51	0.00	0.00	0.00	0.00
	11	0.00	0.58	0.00	0.00	0.00	0.00
	12	0.00	0.57	0.00	0.00	0.00	0.00
	13	0.00	0.27	0.00	0.00	0.00	0.00
	14	0.00	0.29	0.00	0.00	0.00	0.00
	15	0.00	0.40	0.00	0.00	0.00	0.00
	16	0.00	0.39	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	17	0.00	0.57	0.00	0.00	0.00	0.00
	18	0.00	0.62	0.00	0.00	0.00	0.00
	19	0.00	0.60	0.00	0.00	0.00	0.00
	20	0.00	0.60	0.00	0.00	0.00	0.00
	21	0.00	0.40	0.00	0.00	0.00	0.00
	22	0.00	0.45	0.00	0.00	0.00	0.00
	23	0.00	0.43	0.00	0.00	0.00	0.00
	24	0.00	0.42	0.00	0.00	0.00	0.00
72	1	0.00	0.59	0.00	0.00	0.00	0.00
	2	0.00	0.60	0.00	0.00	0.00	0.00
	3	0.00	0.60	0.00	0.00	0.00	0.00
	4	0.00	0.64	0.00	0.00	0.00	0.00
	5	0.00	0.62	0.00	0.00	0.00	0.00
	6	0.00	0.60	0.00	0.00	0.00	0.00
	7	0.00	0.64	0.00	0.00	0.00	0.00
	8	0.00	0.62	0.00	0.00	0.00	0.00
	9	0.00	0.55	0.00	0.00	0.00	0.00
	10	0.00	0.55	0.00	0.00	0.00	0.00
	11	0.00	0.59	0.00	0.00	0.00	0.00
	12	0.00	0.58	0.00	0.00	0.00	0.00
	13	0.00	0.33	0.00	0.00	0.00	0.00
	14	0.00	0.34	0.00	0.00	0.00	0.00
	15	0.00	0.41	0.00	0.00	0.00	0.00
	16	0.00	0.40	0.00	0.00	0.00	0.00
	17	0.00	0.58	0.00	0.00	0.00	0.00
	18	0.00	0.61	0.00	0.00	0.00	0.00
	19	0.00	0.60	0.00	0.00	0.00	0.00
	20	0.00	0.60	0.00	0.00	0.00	0.00
	21	0.00	0.41	0.00	0.00	0.00	0.00
	22	0.00	0.44	0.00	0.00	0.00	0.00
	23	0.00	0.43	0.00	0.00	0.00	0.00
	24	0.00	0.42	0.00	0.00	0.00	0.00
73	1	0.00	0.64	0.00	0.00	0.00	0.00
	2	0.00	0.66	0.00	0.00	0.00	0.00
	3	0.00	0.65	0.00	0.00	0.00	0.00
	4	0.00	0.69	0.00	0.00	0.00	0.00
	5	0.00	0.67	0.00	0.00	0.00	0.00
	6	0.00	0.65	0.00	0.00	0.00	0.00
	7	0.00	0.70	0.00	0.00	0.00	0.00
	8	0.00	0.67	0.00	0.00	0.00	0.00
	9	0.00	0.45	0.00	0.00	0.00	0.00
	10	0.00	0.47	0.00	0.00	0.00	0.00
	11	0.00	0.61	0.00	0.00	0.00	0.00
	12	0.00	0.62	0.00	0.00	0.00	0.00
	13	0.00	0.16	0.00	0.00	0.00	0.00
	14	0.00	0.20	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	15	0.00	0.40	0.00	0.00	0.00	0.00
	16	0.00	0.42	0.00	0.00	0.00	0.00
	17	0.00	0.60	0.00	0.00	0.00	0.00
	18	0.00	0.69	0.00	0.00	0.00	0.00
	19	0.00	0.65	0.00	0.00	0.00	0.00
	20	0.00	0.65	0.00	0.00	0.00	0.00
	21	0.00	0.42	0.00	0.00	0.00	0.00
	22	0.00	0.49	0.00	0.00	0.00	0.00
	23	0.00	0.46	0.00	0.00	0.00	0.00
	24	0.00	0.45	0.00	0.00	0.00	0.00
74	1	0.00	0.63	0.00	0.00	0.00	0.00
	2	0.00	0.66	0.00	0.00	0.00	0.00
	3	0.00	0.65	0.00	0.00	0.00	0.00
	4	0.00	0.69	0.00	0.00	0.00	0.00
	5	0.00	0.67	0.00	0.00	0.00	0.00
	6	0.00	0.65	0.00	0.00	0.00	0.00
	7	0.00	0.69	0.00	0.00	0.00	0.00
	8	0.00	0.67	0.00	0.00	0.00	0.00
	9	0.00	0.41	0.00	0.00	0.00	0.00
	10	0.00	0.43	0.00	0.00	0.00	0.00
	11	0.00	0.60	0.00	0.00	0.00	0.00
	12	0.00	0.62	0.00	0.00	0.00	0.00
	13	0.00	0.10	0.00	0.00	0.00	0.00
	14	0.00	0.15	0.00	0.00	0.00	0.00
	15	0.00	0.39	0.00	0.00	0.00	0.00
	16	0.00	0.42	0.00	0.00	0.00	0.00
	17	0.00	0.59	0.00	0.00	0.00	0.00
	18	0.00	0.70	0.00	0.00	0.00	0.00
	19	0.00	0.65	0.00	0.00	0.00	0.00
	20	0.00	0.64	0.00	0.00	0.00	0.00
	21	0.00	0.41	0.00	0.00	0.00	0.00
	22	0.00	0.50	0.00	0.00	0.00	0.00
	23	0.00	0.46	0.00	0.00	0.00	0.00
	24	0.00	0.45	0.00	0.00	0.00	0.00
75	1	0.00	0.64	0.00	0.00	0.00	0.00
	2	0.00	0.66	0.00	0.00	0.00	0.00
	3	0.00	0.65	0.00	0.00	0.00	0.00
	4	0.00	0.69	0.00	0.00	0.00	0.00
	5	0.00	0.67	0.00	0.00	0.00	0.00
	6	0.00	0.65	0.00	0.00	0.00	0.00
	7	0.00	0.70	0.00	0.00	0.00	0.00
	8	0.00	0.67	0.00	0.00	0.00	0.00
	9	0.00	0.50	0.00	0.00	0.00	0.00
	10	0.00	0.51	0.00	0.00	0.00	0.00
	11	0.00	0.61	0.00	0.00	0.00	0.00
	12	0.00	0.62	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	13	0.00	0.22	0.00	0.00	0.00	0.00
	14	0.00	0.26	0.00	0.00	0.00	0.00
	15	0.00	0.41	0.00	0.00	0.00	0.00
	16	0.00	0.42	0.00	0.00	0.00	0.00
	17	0.00	0.61	0.00	0.00	0.00	0.00
	18	0.00	0.69	0.00	0.00	0.00	0.00
	19	0.00	0.65	0.00	0.00	0.00	0.00
	20	0.00	0.65	0.00	0.00	0.00	0.00
	21	0.00	0.43	0.00	0.00	0.00	0.00
	22	0.00	0.49	0.00	0.00	0.00	0.00
	23	0.00	0.46	0.00	0.00	0.00	0.00
	24	0.00	0.46	0.00	0.00	0.00	0.00
76	1	0.00	0.64	0.00	0.00	0.00	0.00
	2	0.00	0.66	0.00	0.00	0.00	0.00
	3	0.00	0.65	0.00	0.00	0.00	0.00
	4	0.00	0.69	0.00	0.00	0.00	0.00
	5	0.00	0.67	0.00	0.00	0.00	0.00
	6	0.00	0.65	0.00	0.00	0.00	0.00
	7	0.00	0.70	0.00	0.00	0.00	0.00
	8	0.00	0.67	0.00	0.00	0.00	0.00
	9	0.00	0.54	0.00	0.00	0.00	0.00
	10	0.00	0.55	0.00	0.00	0.00	0.00
	11	0.00	0.62	0.00	0.00	0.00	0.00
	12	0.00	0.63	0.00	0.00	0.00	0.00
	13	0.00	0.29	0.00	0.00	0.00	0.00
	14	0.00	0.31	0.00	0.00	0.00	0.00
	15	0.00	0.42	0.00	0.00	0.00	0.00
	16	0.00	0.43	0.00	0.00	0.00	0.00
	17	0.00	0.62	0.00	0.00	0.00	0.00
	18	0.00	0.68	0.00	0.00	0.00	0.00
	19	0.00	0.65	0.00	0.00	0.00	0.00
	20	0.00	0.65	0.00	0.00	0.00	0.00
	21	0.00	0.43	0.00	0.00	0.00	0.00
	22	0.00	0.48	0.00	0.00	0.00	0.00
	23	0.00	0.46	0.00	0.00	0.00	0.00
	24	0.00	0.46	0.00	0.00	0.00	0.00
77	1	0.00	0.64	0.00	0.00	0.00	0.00
	2	0.00	0.66	0.00	0.00	0.00	0.00
	3	0.00	0.65	0.00	0.00	0.00	0.00
	4	0.00	0.69	0.00	0.00	0.00	0.00
	5	0.00	0.67	0.00	0.00	0.00	0.00
	6	0.00	0.65	0.00	0.00	0.00	0.00
	7	0.00	0.70	0.00	0.00	0.00	0.00
	8	0.00	0.67	0.00	0.00	0.00	0.00
	9	0.00	0.59	0.00	0.00	0.00	0.00
	10	0.00	0.60	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	11	0.00	0.63	0.00	0.00	0.00	0.00
	12	0.00	0.63	0.00	0.00	0.00	0.00
	13	0.00	0.35	0.00	0.00	0.00	0.00
	14	0.00	0.37	0.00	0.00	0.00	0.00
	15	0.00	0.43	0.00	0.00	0.00	0.00
	16	0.00	0.43	0.00	0.00	0.00	0.00
	17	0.00	0.63	0.00	0.00	0.00	0.00
	18	0.00	0.67	0.00	0.00	0.00	0.00
	19	0.00	0.65	0.00	0.00	0.00	0.00
	20	0.00	0.65	0.00	0.00	0.00	0.00
	21	0.00	0.44	0.00	0.00	0.00	0.00
	22	0.00	0.47	0.00	0.00	0.00	0.00
	23	0.00	0.46	0.00	0.00	0.00	0.00
	24	0.00	0.46	0.00	0.00	0.00	0.00
78	1	0.00	0.69	0.00	0.00	0.00	0.00
	2	0.00	0.71	0.00	0.00	0.00	0.00
	3	0.00	0.70	0.00	0.00	0.00	0.00
	4	0.00	0.74	0.00	0.00	0.00	0.00
	5	0.00	0.72	0.00	0.00	0.00	0.00
	6	0.00	0.70	0.00	0.00	0.00	0.00
	7	0.00	0.75	0.00	0.00	0.00	0.00
	8	0.00	0.72	0.00	0.00	0.00	0.00
	9	0.00	0.49	0.00	0.00	0.00	0.00
	10	0.00	0.52	0.00	0.00	0.00	0.00
	11	0.00	0.65	0.00	0.00	0.00	0.00
	12	0.00	0.67	0.00	0.00	0.00	0.00
	13	0.00	0.18	0.00	0.00	0.00	0.00
	14	0.00	0.23	0.00	0.00	0.00	0.00
	15	0.00	0.42	0.00	0.00	0.00	0.00
	16	0.00	0.45	0.00	0.00	0.00	0.00
	17	0.00	0.65	0.00	0.00	0.00	0.00
	18	0.00	0.74	0.00	0.00	0.00	0.00
	19	0.00	0.70	0.00	0.00	0.00	0.00
	20	0.00	0.70	0.00	0.00	0.00	0.00
	21	0.00	0.45	0.00	0.00	0.00	0.00
	22	0.00	0.53	0.00	0.00	0.00	0.00
	23	0.00	0.49	0.00	0.00	0.00	0.00
	24	0.00	0.49	0.00	0.00	0.00	0.00
79	1	0.00	0.69	0.00	0.00	0.00	0.00
	2	0.00	0.71	0.00	0.00	0.00	0.00
	3	0.00	0.70	0.00	0.00	0.00	0.00
	4	0.00	0.74	0.00	0.00	0.00	0.00
	5	0.00	0.72	0.00	0.00	0.00	0.00
	6	0.00	0.70	0.00	0.00	0.00	0.00
	7	0.00	0.75	0.00	0.00	0.00	0.00
	8	0.00	0.72	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	9	0.00	0.45	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.64	0.00	0.00	0.00	0.00
	12	0.00	0.67	0.00	0.00	0.00	0.00
	13	0.00	0.12	0.00	0.00	0.00	0.00
	14	0.00	0.17	0.00	0.00	0.00	0.00
	15	0.00	0.41	0.00	0.00	0.00	0.00
	16	0.00	0.45	0.00	0.00	0.00	0.00
	17	0.00	0.64	0.00	0.00	0.00	0.00
	18	0.00	0.75	0.00	0.00	0.00	0.00
	19	0.00	0.70	0.00	0.00	0.00	0.00
	20	0.00	0.69	0.00	0.00	0.00	0.00
	21	0.00	0.44	0.00	0.00	0.00	0.00
	22	0.00	0.53	0.00	0.00	0.00	0.00
	23	0.00	0.49	0.00	0.00	0.00	0.00
	24	0.00	0.48	0.00	0.00	0.00	0.00
80	1	0.00	0.69	0.00	0.00	0.00	0.00
	2	0.00	0.71	0.00	0.00	0.00	0.00
	3	0.00	0.70	0.00	0.00	0.00	0.00
	4	0.00	0.74	0.00	0.00	0.00	0.00
	5	0.00	0.72	0.00	0.00	0.00	0.00
	6	0.00	0.70	0.00	0.00	0.00	0.00
	7	0.00	0.75	0.00	0.00	0.00	0.00
	8	0.00	0.72	0.00	0.00	0.00	0.00
	9	0.00	0.53	0.00	0.00	0.00	0.00
	10	0.00	0.56	0.00	0.00	0.00	0.00
	11	0.00	0.66	0.00	0.00	0.00	0.00
	12	0.00	0.68	0.00	0.00	0.00	0.00
	13	0.00	0.24	0.00	0.00	0.00	0.00
	14	0.00	0.28	0.00	0.00	0.00	0.00
	15	0.00	0.43	0.00	0.00	0.00	0.00
	16	0.00	0.46	0.00	0.00	0.00	0.00
	17	0.00	0.66	0.00	0.00	0.00	0.00
	18	0.00	0.74	0.00	0.00	0.00	0.00
	19	0.00	0.70	0.00	0.00	0.00	0.00
	20	0.00	0.70	0.00	0.00	0.00	0.00
	21	0.00	0.46	0.00	0.00	0.00	0.00
	22	0.00	0.52	0.00	0.00	0.00	0.00
	23	0.00	0.49	0.00	0.00	0.00	0.00
	24	0.00	0.49	0.00	0.00	0.00	0.00
81	1	0.00	0.69	0.00	0.00	0.00	0.00
	2	0.00	0.71	0.00	0.00	0.00	0.00
	3	0.00	0.70	0.00	0.00	0.00	0.00
	4	0.00	0.74	0.00	0.00	0.00	0.00
	5	0.00	0.72	0.00	0.00	0.00	0.00
	6	0.00	0.70	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	7	0.00	0.75	0.00	0.00	0.00	0.00
	8	0.00	0.72	0.00	0.00	0.00	0.00
	9	0.00	0.58	0.00	0.00	0.00	0.00
	10	0.00	0.60	0.00	0.00	0.00	0.00
	11	0.00	0.67	0.00	0.00	0.00	0.00
	12	0.00	0.68	0.00	0.00	0.00	0.00
	13	0.00	0.30	0.00	0.00	0.00	0.00
	14	0.00	0.34	0.00	0.00	0.00	0.00
	15	0.00	0.45	0.00	0.00	0.00	0.00
	16	0.00	0.46	0.00	0.00	0.00	0.00
	17	0.00	0.67	0.00	0.00	0.00	0.00
	18	0.00	0.73	0.00	0.00	0.00	0.00
	19	0.00	0.70	0.00	0.00	0.00	0.00
	20	0.00	0.70	0.00	0.00	0.00	0.00
	21	0.00	0.47	0.00	0.00	0.00	0.00
	22	0.00	0.51	0.00	0.00	0.00	0.00
	23	0.00	0.49	0.00	0.00	0.00	0.00
	24	0.00	0.49	0.00	0.00	0.00	0.00
82	1	0.00	0.70	0.00	0.00	0.00	0.00
	2	0.00	0.71	0.00	0.00	0.00	0.00
	3	0.00	0.70	0.00	0.00	0.00	0.00
	4	0.00	0.74	0.00	0.00	0.00	0.00
	5	0.00	0.72	0.00	0.00	0.00	0.00
	6	0.00	0.70	0.00	0.00	0.00	0.00
	7	0.00	0.75	0.00	0.00	0.00	0.00
	8	0.00	0.72	0.00	0.00	0.00	0.00
	9	0.00	0.63	0.00	0.00	0.00	0.00
	10	0.00	0.65	0.00	0.00	0.00	0.00
	11	0.00	0.68	0.00	0.00	0.00	0.00
	12	0.00	0.68	0.00	0.00	0.00	0.00
	13	0.00	0.37	0.00	0.00	0.00	0.00
	14	0.00	0.40	0.00	0.00	0.00	0.00
	15	0.00	0.46	0.00	0.00	0.00	0.00
	16	0.00	0.46	0.00	0.00	0.00	0.00
	17	0.00	0.68	0.00	0.00	0.00	0.00
	18	0.00	0.72	0.00	0.00	0.00	0.00
	19	0.00	0.70	0.00	0.00	0.00	0.00
	20	0.00	0.70	0.00	0.00	0.00	0.00
	21	0.00	0.47	0.00	0.00	0.00	0.00
	22	0.00	0.50	0.00	0.00	0.00	0.00
	23	0.00	0.49	0.00	0.00	0.00	0.00
	24	0.00	0.49	0.00	0.00	0.00	0.00
83	1	0.00	0.74	0.00	0.00	0.00	0.00
	2	0.00	0.76	0.00	0.00	0.00	0.00
	3	0.00	0.75	0.00	0.00	0.00	0.00
	4	0.00	0.79	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	5	0.00	0.77	0.00	0.00	0.00	0.00
	6	0.00	0.75	0.00	0.00	0.00	0.00
	7	0.00	0.80	0.00	0.00	0.00	0.00
	8	0.00	0.77	0.00	0.00	0.00	0.00
	9	0.00	0.52	0.00	0.00	0.00	0.00
	10	0.00	0.56	0.00	0.00	0.00	0.00
	11	0.00	0.69	0.00	0.00	0.00	0.00
	12	0.00	0.72	0.00	0.00	0.00	0.00
	13	0.00	0.19	0.00	0.00	0.00	0.00
	14	0.00	0.25	0.00	0.00	0.00	0.00
	15	0.00	0.44	0.00	0.00	0.00	0.00
	16	0.00	0.49	0.00	0.00	0.00	0.00
	17	0.00	0.70	0.00	0.00	0.00	0.00
	18	0.00	0.80	0.00	0.00	0.00	0.00
	19	0.00	0.75	0.00	0.00	0.00	0.00
	20	0.00	0.75	0.00	0.00	0.00	0.00
	21	0.00	0.48	0.00	0.00	0.00	0.00
	22	0.00	0.56	0.00	0.00	0.00	0.00
	23	0.00	0.52	0.00	0.00	0.00	0.00
	24	0.00	0.52	0.00	0.00	0.00	0.00
84	1	0.00	0.74	0.00	0.00	0.00	0.00
	2	0.00	0.76	0.00	0.00	0.00	0.00
	3	0.00	0.75	0.00	0.00	0.00	0.00
	4	0.00	0.79	0.00	0.00	0.00	0.00
	5	0.00	0.77	0.00	0.00	0.00	0.00
	6	0.00	0.75	0.00	0.00	0.00	0.00
	7	0.00	0.80	0.00	0.00	0.00	0.00
	8	0.00	0.77	0.00	0.00	0.00	0.00
	9	0.00	0.48	0.00	0.00	0.00	0.00
	10	0.00	0.52	0.00	0.00	0.00	0.00
	11	0.00	0.68	0.00	0.00	0.00	0.00
	12	0.00	0.72	0.00	0.00	0.00	0.00
	13	0.00	0.13	0.00	0.00	0.00	0.00
	14	0.00	0.20	0.00	0.00	0.00	0.00
	15	0.00	0.43	0.00	0.00	0.00	0.00
	16	0.00	0.48	0.00	0.00	0.00	0.00
	17	0.00	0.69	0.00	0.00	0.00	0.00
	18	0.00	0.80	0.00	0.00	0.00	0.00
	19	0.00	0.75	0.00	0.00	0.00	0.00
	20	0.00	0.74	0.00	0.00	0.00	0.00
	21	0.00	0.47	0.00	0.00	0.00	0.00
	22	0.00	0.56	0.00	0.00	0.00	0.00
	23	0.00	0.52	0.00	0.00	0.00	0.00
	24	0.00	0.51	0.00	0.00	0.00	0.00
85	1	0.00	0.74	0.00	0.00	0.00	0.00
	2	0.00	0.76	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	3	0.00	0.75	0.00	0.00	0.00	0.00
	4	0.00	0.79	0.00	0.00	0.00	0.00
	5	0.00	0.77	0.00	0.00	0.00	0.00
	6	0.00	0.75	0.00	0.00	0.00	0.00
	7	0.00	0.80	0.00	0.00	0.00	0.00
	8	0.00	0.78	0.00	0.00	0.00	0.00
	9	0.00	0.57	0.00	0.00	0.00	0.00
	10	0.00	0.60	0.00	0.00	0.00	0.00
	11	0.00	0.70	0.00	0.00	0.00	0.00
	12	0.00	0.73	0.00	0.00	0.00	0.00
	13	0.00	0.25	0.00	0.00	0.00	0.00
	14	0.00	0.31	0.00	0.00	0.00	0.00
	15	0.00	0.46	0.00	0.00	0.00	0.00
	16	0.00	0.49	0.00	0.00	0.00	0.00
	17	0.00	0.71	0.00	0.00	0.00	0.00
	18	0.00	0.79	0.00	0.00	0.00	0.00
	19	0.00	0.75	0.00	0.00	0.00	0.00
	20	0.00	0.75	0.00	0.00	0.00	0.00
	21	0.00	0.49	0.00	0.00	0.00	0.00
	22	0.00	0.55	0.00	0.00	0.00	0.00
	23	0.00	0.52	0.00	0.00	0.00	0.00
	24	0.00	0.52	0.00	0.00	0.00	0.00
86	1	0.00	0.75	0.00	0.00	0.00	0.00
	2	0.00	0.76	0.00	0.00	0.00	0.00
	3	0.00	0.75	0.00	0.00	0.00	0.00
	4	0.00	0.80	0.00	0.00	0.00	0.00
	5	0.00	0.77	0.00	0.00	0.00	0.00
	6	0.00	0.75	0.00	0.00	0.00	0.00
	7	0.00	0.80	0.00	0.00	0.00	0.00
	8	0.00	0.78	0.00	0.00	0.00	0.00
	9	0.00	0.62	0.00	0.00	0.00	0.00
	10	0.00	0.65	0.00	0.00	0.00	0.00
	11	0.00	0.71	0.00	0.00	0.00	0.00
	12	0.00	0.73	0.00	0.00	0.00	0.00
	13	0.00	0.32	0.00	0.00	0.00	0.00
	14	0.00	0.37	0.00	0.00	0.00	0.00
	15	0.00	0.47	0.00	0.00	0.00	0.00
	16	0.00	0.49	0.00	0.00	0.00	0.00
	17	0.00	0.72	0.00	0.00	0.00	0.00
	18	0.00	0.78	0.00	0.00	0.00	0.00
	19	0.00	0.75	0.00	0.00	0.00	0.00
	20	0.00	0.75	0.00	0.00	0.00	0.00
	21	0.00	0.50	0.00	0.00	0.00	0.00
	22	0.00	0.55	0.00	0.00	0.00	0.00
	23	0.00	0.52	0.00	0.00	0.00	0.00
	24	0.00	0.52	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
87	1	0.00	0.75	0.00	0.00	0.00	0.00
	2	0.00	0.76	0.00	0.00	0.00	0.00
	3	0.00	0.75	0.00	0.00	0.00	0.00
	4	0.00	0.80	0.00	0.00	0.00	0.00
	5	0.00	0.77	0.00	0.00	0.00	0.00
	6	0.00	0.75	0.00	0.00	0.00	0.00
	7	0.00	0.80	0.00	0.00	0.00	0.00
	8	0.00	0.78	0.00	0.00	0.00	0.00
	9	0.00	0.67	0.00	0.00	0.00	0.00
	10	0.00	0.69	0.00	0.00	0.00	0.00
	11	0.00	0.72	0.00	0.00	0.00	0.00
	12	0.00	0.73	0.00	0.00	0.00	0.00
	13	0.00	0.39	0.00	0.00	0.00	0.00
	14	0.00	0.43	0.00	0.00	0.00	0.00
	15	0.00	0.48	0.00	0.00	0.00	0.00
	16	0.00	0.50	0.00	0.00	0.00	0.00
	17	0.00	0.73	0.00	0.00	0.00	0.00
	18	0.00	0.77	0.00	0.00	0.00	0.00
	19	0.00	0.75	0.00	0.00	0.00	0.00
	20	0.00	0.75	0.00	0.00	0.00	0.00
	21	0.00	0.50	0.00	0.00	0.00	0.00
	22	0.00	0.54	0.00	0.00	0.00	0.00
	23	0.00	0.52	0.00	0.00	0.00	0.00
	24	0.00	0.52	0.00	0.00	0.00	0.00
99	1	0.00	0.54	0.00	0.00	0.00	0.00
	2	0.00	0.55	0.00	0.00	0.00	0.00
	3	0.00	0.54	0.00	0.00	0.00	0.00
	4	0.00	0.58	0.00	0.00	0.00	0.00
	5	0.00	0.56	0.00	0.00	0.00	0.00
	6	0.00	0.54	0.00	0.00	0.00	0.00
	7	0.00	0.59	0.00	0.00	0.00	0.00
	8	0.00	0.57	0.00	0.00	0.00	0.00
	9	0.00	0.55	0.00	0.00	0.00	0.00
	10	0.00	0.54	0.00	0.00	0.00	0.00
	11	0.00	0.55	0.00	0.00	0.00	0.00
	12	0.00	0.53	0.00	0.00	0.00	0.00
	13	0.00	0.37	0.00	0.00	0.00	0.00
	14	0.00	0.37	0.00	0.00	0.00	0.00
	15	0.00	0.40	0.00	0.00	0.00	0.00
	16	0.00	0.37	0.00	0.00	0.00	0.00
	17	0.00	0.54	0.00	0.00	0.00	0.00
	18	0.00	0.55	0.00	0.00	0.00	0.00
	19	0.00	0.55	0.00	0.00	0.00	0.00
	20	0.00	0.54	0.00	0.00	0.00	0.00
	21	0.00	0.39	0.00	0.00	0.00	0.00
	22	0.00	0.40	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	23	0.00	0.39	0.00	0.00	0.00	0.00
	24	0.00	0.39	0.00	0.00	0.00	0.00
100	1	0.00	0.53	0.00	0.00	0.00	0.00
	2	0.00	0.54	0.00	0.00	0.00	0.00
	3	0.00	0.54	0.00	0.00	0.00	0.00
	4	0.00	0.58	0.00	0.00	0.00	0.00
	5	0.00	0.56	0.00	0.00	0.00	0.00
	6	0.00	0.54	0.00	0.00	0.00	0.00
	7	0.00	0.58	0.00	0.00	0.00	0.00
	8	0.00	0.56	0.00	0.00	0.00	0.00
	9	0.00	0.59	0.00	0.00	0.00	0.00
	10	0.00	0.57	0.00	0.00	0.00	0.00
	11	0.00	0.55	0.00	0.00	0.00	0.00
	12	0.00	0.53	0.00	0.00	0.00	0.00
	13	0.00	0.43	0.00	0.00	0.00	0.00
	14	0.00	0.42	0.00	0.00	0.00	0.00
	15	0.00	0.40	0.00	0.00	0.00	0.00
	16	0.00	0.37	0.00	0.00	0.00	0.00
	17	0.00	0.54	0.00	0.00	0.00	0.00
	18	0.00	0.54	0.00	0.00	0.00	0.00
	19	0.00	0.54	0.00	0.00	0.00	0.00
	20	0.00	0.54	0.00	0.00	0.00	0.00
	21	0.00	0.39	0.00	0.00	0.00	0.00
	22	0.00	0.39	0.00	0.00	0.00	0.00
	23	0.00	0.39	0.00	0.00	0.00	0.00
	24	0.00	0.39	0.00	0.00	0.00	0.00
101	1	0.00	0.53	0.00	0.00	0.00	0.00
	2	0.00	0.54	0.00	0.00	0.00	0.00
	3	0.00	0.54	0.00	0.00	0.00	0.00
	4	0.00	0.57	0.00	0.00	0.00	0.00
	5	0.00	0.55	0.00	0.00	0.00	0.00
	6	0.00	0.54	0.00	0.00	0.00	0.00
	7	0.00	0.58	0.00	0.00	0.00	0.00
	8	0.00	0.56	0.00	0.00	0.00	0.00
	9	0.00	0.63	0.00	0.00	0.00	0.00
	10	0.00	0.61	0.00	0.00	0.00	0.00
	11	0.00	0.56	0.00	0.00	0.00	0.00
	12	0.00	0.53	0.00	0.00	0.00	0.00
	13	0.00	0.49	0.00	0.00	0.00	0.00
	14	0.00	0.47	0.00	0.00	0.00	0.00
	15	0.00	0.41	0.00	0.00	0.00	0.00
	16	0.00	0.37	0.00	0.00	0.00	0.00
	17	0.00	0.55	0.00	0.00	0.00	0.00
	18	0.00	0.53	0.00	0.00	0.00	0.00
	19	0.00	0.54	0.00	0.00	0.00	0.00
	20	0.00	0.54	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	21	0.00	0.40	0.00	0.00	0.00	0.00
	22	0.00	0.38	0.00	0.00	0.00	0.00
	23	0.00	0.39	0.00	0.00	0.00	0.00
	24	0.00	0.39	0.00	0.00	0.00	0.00
102	1	0.00	0.53	0.00	0.00	0.00	0.00
	2	0.00	0.53	0.00	0.00	0.00	0.00
	3	0.00	0.53	0.00	0.00	0.00	0.00
	4	0.00	0.57	0.00	0.00	0.00	0.00
	5	0.00	0.55	0.00	0.00	0.00	0.00
	6	0.00	0.53	0.00	0.00	0.00	0.00
	7	0.00	0.57	0.00	0.00	0.00	0.00
	8	0.00	0.55	0.00	0.00	0.00	0.00
	9	0.00	0.67	0.00	0.00	0.00	0.00
	10	0.00	0.65	0.00	0.00	0.00	0.00
	11	0.00	0.56	0.00	0.00	0.00	0.00
	12	0.00	0.53	0.00	0.00	0.00	0.00
	13	0.00	0.54	0.00	0.00	0.00	0.00
	14	0.00	0.52	0.00	0.00	0.00	0.00
	15	0.00	0.42	0.00	0.00	0.00	0.00
	16	0.00	0.37	0.00	0.00	0.00	0.00
	17	0.00	0.55	0.00	0.00	0.00	0.00
	18	0.00	0.52	0.00	0.00	0.00	0.00
	19	0.00	0.54	0.00	0.00	0.00	0.00
	20	0.00	0.54	0.00	0.00	0.00	0.00
	21	0.00	0.40	0.00	0.00	0.00	0.00
	22	0.00	0.37	0.00	0.00	0.00	0.00
	23	0.00	0.38	0.00	0.00	0.00	0.00
	24	0.00	0.38	0.00	0.00	0.00	0.00
103	1	0.00	0.59	0.00	0.00	0.00	0.00
	2	0.00	0.60	0.00	0.00	0.00	0.00
	3	0.00	0.59	0.00	0.00	0.00	0.00
	4	0.00	0.63	0.00	0.00	0.00	0.00
	5	0.00	0.61	0.00	0.00	0.00	0.00
	6	0.00	0.59	0.00	0.00	0.00	0.00
	7	0.00	0.64	0.00	0.00	0.00	0.00
	8	0.00	0.62	0.00	0.00	0.00	0.00
	9	0.00	0.59	0.00	0.00	0.00	0.00
	10	0.00	0.59	0.00	0.00	0.00	0.00
	11	0.00	0.59	0.00	0.00	0.00	0.00
	12	0.00	0.58	0.00	0.00	0.00	0.00
	13	0.00	0.39	0.00	0.00	0.00	0.00
	14	0.00	0.40	0.00	0.00	0.00	0.00
	15	0.00	0.42	0.00	0.00	0.00	0.00
	16	0.00	0.40	0.00	0.00	0.00	0.00
	17	0.00	0.59	0.00	0.00	0.00	0.00
	18	0.00	0.60	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	19	0.00	0.60	0.00	0.00	0.00	0.00
	20	0.00	0.60	0.00	0.00	0.00	0.00
	21	0.00	0.42	0.00	0.00	0.00	0.00
	22	0.00	0.43	0.00	0.00	0.00	0.00
	23	0.00	0.42	0.00	0.00	0.00	0.00
	24	0.00	0.42	0.00	0.00	0.00	0.00
104	1	0.00	0.59	0.00	0.00	0.00	0.00
	2	0.00	0.59	0.00	0.00	0.00	0.00
	3	0.00	0.59	0.00	0.00	0.00	0.00
	4	0.00	0.63	0.00	0.00	0.00	0.00
	5	0.00	0.61	0.00	0.00	0.00	0.00
	6	0.00	0.59	0.00	0.00	0.00	0.00
	7	0.00	0.64	0.00	0.00	0.00	0.00
	8	0.00	0.61	0.00	0.00	0.00	0.00
	9	0.00	0.63	0.00	0.00	0.00	0.00
	10	0.00	0.63	0.00	0.00	0.00	0.00
	11	0.00	0.60	0.00	0.00	0.00	0.00
	12	0.00	0.58	0.00	0.00	0.00	0.00
	13	0.00	0.45	0.00	0.00	0.00	0.00
	14	0.00	0.45	0.00	0.00	0.00	0.00
	15	0.00	0.43	0.00	0.00	0.00	0.00
	16	0.00	0.40	0.00	0.00	0.00	0.00
	17	0.00	0.59	0.00	0.00	0.00	0.00
	18	0.00	0.59	0.00	0.00	0.00	0.00
	19	0.00	0.59	0.00	0.00	0.00	0.00
	20	0.00	0.59	0.00	0.00	0.00	0.00
	21	0.00	0.42	0.00	0.00	0.00	0.00
	22	0.00	0.42	0.00	0.00	0.00	0.00
	23	0.00	0.42	0.00	0.00	0.00	0.00
	24	0.00	0.42	0.00	0.00	0.00	0.00
105	1	0.00	0.59	0.00	0.00	0.00	0.00
	2	0.00	0.59	0.00	0.00	0.00	0.00
	3	0.00	0.59	0.00	0.00	0.00	0.00
	4	0.00	0.62	0.00	0.00	0.00	0.00
	5	0.00	0.60	0.00	0.00	0.00	0.00
	6	0.00	0.59	0.00	0.00	0.00	0.00
	7	0.00	0.63	0.00	0.00	0.00	0.00
	8	0.00	0.61	0.00	0.00	0.00	0.00
	9	0.00	0.67	0.00	0.00	0.00	0.00
	10	0.00	0.66	0.00	0.00	0.00	0.00
	11	0.00	0.60	0.00	0.00	0.00	0.00
	12	0.00	0.58	0.00	0.00	0.00	0.00
	13	0.00	0.51	0.00	0.00	0.00	0.00
	14	0.00	0.51	0.00	0.00	0.00	0.00
	15	0.00	0.44	0.00	0.00	0.00	0.00
	16	0.00	0.40	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	17	0.00	0.60	0.00	0.00	0.00	0.00
	18	0.00	0.58	0.00	0.00	0.00	0.00
	19	0.00	0.59	0.00	0.00	0.00	0.00
	20	0.00	0.59	0.00	0.00	0.00	0.00
	21	0.00	0.43	0.00	0.00	0.00	0.00
	22	0.00	0.41	0.00	0.00	0.00	0.00
	23	0.00	0.42	0.00	0.00	0.00	0.00
	24	0.00	0.42	0.00	0.00	0.00	0.00
106	1	0.00	0.58	0.00	0.00	0.00	0.00
	2	0.00	0.58	0.00	0.00	0.00	0.00
	3	0.00	0.58	0.00	0.00	0.00	0.00
	4	0.00	0.62	0.00	0.00	0.00	0.00
	5	0.00	0.60	0.00	0.00	0.00	0.00
	6	0.00	0.58	0.00	0.00	0.00	0.00
	7	0.00	0.62	0.00	0.00	0.00	0.00
	8	0.00	0.61	0.00	0.00	0.00	0.00
	9	0.00	0.71	0.00	0.00	0.00	0.00
	10	0.00	0.70	0.00	0.00	0.00	0.00
	11	0.00	0.61	0.00	0.00	0.00	0.00
	12	0.00	0.58	0.00	0.00	0.00	0.00
	13	0.00	0.57	0.00	0.00	0.00	0.00
	14	0.00	0.56	0.00	0.00	0.00	0.00
	15	0.00	0.44	0.00	0.00	0.00	0.00
	16	0.00	0.40	0.00	0.00	0.00	0.00
	17	0.00	0.61	0.00	0.00	0.00	0.00
	18	0.00	0.57	0.00	0.00	0.00	0.00
	19	0.00	0.59	0.00	0.00	0.00	0.00
	20	0.00	0.59	0.00	0.00	0.00	0.00
	21	0.00	0.43	0.00	0.00	0.00	0.00
	22	0.00	0.40	0.00	0.00	0.00	0.00
	23	0.00	0.41	0.00	0.00	0.00	0.00
	24	0.00	0.41	0.00	0.00	0.00	0.00
107	1	0.00	0.64	0.00	0.00	0.00	0.00
	2	0.00	0.65	0.00	0.00	0.00	0.00
	3	0.00	0.65	0.00	0.00	0.00	0.00
	4	0.00	0.69	0.00	0.00	0.00	0.00
	5	0.00	0.66	0.00	0.00	0.00	0.00
	6	0.00	0.64	0.00	0.00	0.00	0.00
	7	0.00	0.69	0.00	0.00	0.00	0.00
	8	0.00	0.67	0.00	0.00	0.00	0.00
	9	0.00	0.63	0.00	0.00	0.00	0.00
	10	0.00	0.64	0.00	0.00	0.00	0.00
	11	0.00	0.64	0.00	0.00	0.00	0.00
	12	0.00	0.63	0.00	0.00	0.00	0.00
	13	0.00	0.42	0.00	0.00	0.00	0.00
	14	0.00	0.43	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	15	0.00	0.44	0.00	0.00	0.00	0.00
	16	0.00	0.43	0.00	0.00	0.00	0.00
	17	0.00	0.64	0.00	0.00	0.00	0.00
	18	0.00	0.66	0.00	0.00	0.00	0.00
	19	0.00	0.65	0.00	0.00	0.00	0.00
	20	0.00	0.65	0.00	0.00	0.00	0.00
	21	0.00	0.45	0.00	0.00	0.00	0.00
	22	0.00	0.46	0.00	0.00	0.00	0.00
	23	0.00	0.45	0.00	0.00	0.00	0.00
	24	0.00	0.45	0.00	0.00	0.00	0.00
108	1	0.00	0.64	0.00	0.00	0.00	0.00
	2	0.00	0.65	0.00	0.00	0.00	0.00
	3	0.00	0.64	0.00	0.00	0.00	0.00
	4	0.00	0.68	0.00	0.00	0.00	0.00
	5	0.00	0.66	0.00	0.00	0.00	0.00
	6	0.00	0.64	0.00	0.00	0.00	0.00
	7	0.00	0.69	0.00	0.00	0.00	0.00
	8	0.00	0.67	0.00	0.00	0.00	0.00
	9	0.00	0.68	0.00	0.00	0.00	0.00
	10	0.00	0.68	0.00	0.00	0.00	0.00
	11	0.00	0.64	0.00	0.00	0.00	0.00
	12	0.00	0.63	0.00	0.00	0.00	0.00
	13	0.00	0.48	0.00	0.00	0.00	0.00
	14	0.00	0.49	0.00	0.00	0.00	0.00
	15	0.00	0.45	0.00	0.00	0.00	0.00
	16	0.00	0.43	0.00	0.00	0.00	0.00
	17	0.00	0.65	0.00	0.00	0.00	0.00
	18	0.00	0.64	0.00	0.00	0.00	0.00
	19	0.00	0.64	0.00	0.00	0.00	0.00
	20	0.00	0.64	0.00	0.00	0.00	0.00
	21	0.00	0.45	0.00	0.00	0.00	0.00
	22	0.00	0.45	0.00	0.00	0.00	0.00
	23	0.00	0.45	0.00	0.00	0.00	0.00
	24	0.00	0.45	0.00	0.00	0.00	0.00
109	1	0.00	0.64	0.00	0.00	0.00	0.00
	2	0.00	0.64	0.00	0.00	0.00	0.00
	3	0.00	0.64	0.00	0.00	0.00	0.00
	4	0.00	0.68	0.00	0.00	0.00	0.00
	5	0.00	0.65	0.00	0.00	0.00	0.00
	6	0.00	0.64	0.00	0.00	0.00	0.00
	7	0.00	0.68	0.00	0.00	0.00	0.00
	8	0.00	0.66	0.00	0.00	0.00	0.00
	9	0.00	0.72	0.00	0.00	0.00	0.00
	10	0.00	0.72	0.00	0.00	0.00	0.00
	11	0.00	0.65	0.00	0.00	0.00	0.00
	12	0.00	0.63	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	13	0.00	0.54	0.00	0.00	0.00	0.00
	14	0.00	0.54	0.00	0.00	0.00	0.00
	15	0.00	0.46	0.00	0.00	0.00	0.00
	16	0.00	0.43	0.00	0.00	0.00	0.00
	17	0.00	0.65	0.00	0.00	0.00	0.00
	18	0.00	0.63	0.00	0.00	0.00	0.00
	19	0.00	0.64	0.00	0.00	0.00	0.00
	20	0.00	0.64	0.00	0.00	0.00	0.00
	21	0.00	0.46	0.00	0.00	0.00	0.00
	22	0.00	0.44	0.00	0.00	0.00	0.00
	23	0.00	0.45	0.00	0.00	0.00	0.00
	24	0.00	0.45	0.00	0.00	0.00	0.00
110	1	0.00	0.64	0.00	0.00	0.00	0.00
	2	0.00	0.63	0.00	0.00	0.00	0.00
	3	0.00	0.63	0.00	0.00	0.00	0.00
	4	0.00	0.67	0.00	0.00	0.00	0.00
	5	0.00	0.65	0.00	0.00	0.00	0.00
	6	0.00	0.63	0.00	0.00	0.00	0.00
	7	0.00	0.68	0.00	0.00	0.00	0.00
	8	0.00	0.66	0.00	0.00	0.00	0.00
	9	0.00	0.76	0.00	0.00	0.00	0.00
	10	0.00	0.75	0.00	0.00	0.00	0.00
	11	0.00	0.65	0.00	0.00	0.00	0.00
	12	0.00	0.63	0.00	0.00	0.00	0.00
	13	0.00	0.60	0.00	0.00	0.00	0.00
	14	0.00	0.59	0.00	0.00	0.00	0.00
	15	0.00	0.47	0.00	0.00	0.00	0.00
	16	0.00	0.44	0.00	0.00	0.00	0.00
	17	0.00	0.66	0.00	0.00	0.00	0.00
	18	0.00	0.62	0.00	0.00	0.00	0.00
	19	0.00	0.64	0.00	0.00	0.00	0.00
	20	0.00	0.64	0.00	0.00	0.00	0.00
	21	0.00	0.46	0.00	0.00	0.00	0.00
	22	0.00	0.43	0.00	0.00	0.00	0.00
	23	0.00	0.44	0.00	0.00	0.00	0.00
	24	0.00	0.44	0.00	0.00	0.00	0.00
111	1	0.00	0.69	0.00	0.00	0.00	0.00
	2	0.00	0.70	0.00	0.00	0.00	0.00
	3	0.00	0.70	0.00	0.00	0.00	0.00
	4	0.00	0.74	0.00	0.00	0.00	0.00
	5	0.00	0.72	0.00	0.00	0.00	0.00
	6	0.00	0.70	0.00	0.00	0.00	0.00
	7	0.00	0.75	0.00	0.00	0.00	0.00
	8	0.00	0.72	0.00	0.00	0.00	0.00
	9	0.00	0.68	0.00	0.00	0.00	0.00
	10	0.00	0.69	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	11	0.00	0.68	0.00	0.00	0.00	0.00
	12	0.00	0.68	0.00	0.00	0.00	0.00
	13	0.00	0.44	0.00	0.00	0.00	0.00
	14	0.00	0.46	0.00	0.00	0.00	0.00
	15	0.00	0.47	0.00	0.00	0.00	0.00
	16	0.00	0.47	0.00	0.00	0.00	0.00
	17	0.00	0.69	0.00	0.00	0.00	0.00
	18	0.00	0.71	0.00	0.00	0.00	0.00
	19	0.00	0.70	0.00	0.00	0.00	0.00
	20	0.00	0.70	0.00	0.00	0.00	0.00
	21	0.00	0.48	0.00	0.00	0.00	0.00
	22	0.00	0.49	0.00	0.00	0.00	0.00
	23	0.00	0.49	0.00	0.00	0.00	0.00
	24	0.00	0.49	0.00	0.00	0.00	0.00
112	1	0.00	0.69	0.00	0.00	0.00	0.00
	2	0.00	0.70	0.00	0.00	0.00	0.00
	3	0.00	0.69	0.00	0.00	0.00	0.00
	4	0.00	0.73	0.00	0.00	0.00	0.00
	5	0.00	0.71	0.00	0.00	0.00	0.00
	6	0.00	0.69	0.00	0.00	0.00	0.00
	7	0.00	0.74	0.00	0.00	0.00	0.00
	8	0.00	0.72	0.00	0.00	0.00	0.00
	9	0.00	0.72	0.00	0.00	0.00	0.00
	10	0.00	0.73	0.00	0.00	0.00	0.00
	11	0.00	0.69	0.00	0.00	0.00	0.00
	12	0.00	0.68	0.00	0.00	0.00	0.00
	13	0.00	0.50	0.00	0.00	0.00	0.00
	14	0.00	0.52	0.00	0.00	0.00	0.00
	15	0.00	0.48	0.00	0.00	0.00	0.00
	16	0.00	0.47	0.00	0.00	0.00	0.00
	17	0.00	0.70	0.00	0.00	0.00	0.00
	18	0.00	0.69	0.00	0.00	0.00	0.00
	19	0.00	0.70	0.00	0.00	0.00	0.00
	20	0.00	0.70	0.00	0.00	0.00	0.00
	21	0.00	0.48	0.00	0.00	0.00	0.00
	22	0.00	0.48	0.00	0.00	0.00	0.00
	23	0.00	0.48	0.00	0.00	0.00	0.00
	24	0.00	0.48	0.00	0.00	0.00	0.00
113	1	0.00	0.69	0.00	0.00	0.00	0.00
	2	0.00	0.69	0.00	0.00	0.00	0.00
	3	0.00	0.69	0.00	0.00	0.00	0.00
	4	0.00	0.73	0.00	0.00	0.00	0.00
	5	0.00	0.71	0.00	0.00	0.00	0.00
	6	0.00	0.69	0.00	0.00	0.00	0.00
	7	0.00	0.73	0.00	0.00	0.00	0.00
	8	0.00	0.71	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	9	0.00	0.76	0.00	0.00	0.00	0.00
	10	0.00	0.77	0.00	0.00	0.00	0.00
	11	0.00	0.69	0.00	0.00	0.00	0.00
	12	0.00	0.68	0.00	0.00	0.00	0.00
	13	0.00	0.57	0.00	0.00	0.00	0.00
	14	0.00	0.58	0.00	0.00	0.00	0.00
	15	0.00	0.48	0.00	0.00	0.00	0.00
	16	0.00	0.47	0.00	0.00	0.00	0.00
	17	0.00	0.70	0.00	0.00	0.00	0.00
	18	0.00	0.68	0.00	0.00	0.00	0.00
	19	0.00	0.69	0.00	0.00	0.00	0.00
	20	0.00	0.69	0.00	0.00	0.00	0.00
	21	0.00	0.49	0.00	0.00	0.00	0.00
	22	0.00	0.47	0.00	0.00	0.00	0.00
	23	0.00	0.48	0.00	0.00	0.00	0.00
	24	0.00	0.48	0.00	0.00	0.00	0.00
114	1	0.00	0.69	0.00	0.00	0.00	0.00
	2	0.00	0.68	0.00	0.00	0.00	0.00
	3	0.00	0.68	0.00	0.00	0.00	0.00
	4	0.00	0.72	0.00	0.00	0.00	0.00
	5	0.00	0.70	0.00	0.00	0.00	0.00
	6	0.00	0.68	0.00	0.00	0.00	0.00
	7	0.00	0.73	0.00	0.00	0.00	0.00
	8	0.00	0.71	0.00	0.00	0.00	0.00
	9	0.00	0.80	0.00	0.00	0.00	0.00
	10	0.00	0.80	0.00	0.00	0.00	0.00
	11	0.00	0.70	0.00	0.00	0.00	0.00
	12	0.00	0.68	0.00	0.00	0.00	0.00
	13	0.00	0.62	0.00	0.00	0.00	0.00
	14	0.00	0.63	0.00	0.00	0.00	0.00
	15	0.00	0.49	0.00	0.00	0.00	0.00
	16	0.00	0.47	0.00	0.00	0.00	0.00
	17	0.00	0.71	0.00	0.00	0.00	0.00
	18	0.00	0.67	0.00	0.00	0.00	0.00
	19	0.00	0.69	0.00	0.00	0.00	0.00
	20	0.00	0.69	0.00	0.00	0.00	0.00
	21	0.00	0.49	0.00	0.00	0.00	0.00
	22	0.00	0.46	0.00	0.00	0.00	0.00
	23	0.00	0.47	0.00	0.00	0.00	0.00
	24	0.00	0.48	0.00	0.00	0.00	0.00
115	1	0.00	0.75	0.00	0.00	0.00	0.00
	2	0.00	0.75	0.00	0.00	0.00	0.00
	3	0.00	0.75	0.00	0.00	0.00	0.00
	4	0.00	0.79	0.00	0.00	0.00	0.00
	5	0.00	0.77	0.00	0.00	0.00	0.00
	6	0.00	0.75	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	7	0.00	0.80	0.00	0.00	0.00	0.00
	8	0.00	0.77	0.00	0.00	0.00	0.00
	9	0.00	0.72	0.00	0.00	0.00	0.00
	10	0.00	0.74	0.00	0.00	0.00	0.00
	11	0.00	0.73	0.00	0.00	0.00	0.00
	12	0.00	0.74	0.00	0.00	0.00	0.00
	13	0.00	0.46	0.00	0.00	0.00	0.00
	14	0.00	0.50	0.00	0.00	0.00	0.00
	15	0.00	0.49	0.00	0.00	0.00	0.00
	16	0.00	0.50	0.00	0.00	0.00	0.00
	17	0.00	0.74	0.00	0.00	0.00	0.00
	18	0.00	0.76	0.00	0.00	0.00	0.00
	19	0.00	0.75	0.00	0.00	0.00	0.00
	20	0.00	0.75	0.00	0.00	0.00	0.00
	21	0.00	0.51	0.00	0.00	0.00	0.00
	22	0.00	0.52	0.00	0.00	0.00	0.00
	23	0.00	0.52	0.00	0.00	0.00	0.00
	24	0.00	0.52	0.00	0.00	0.00	0.00
116	1	0.00	0.75	0.00	0.00	0.00	0.00
	2	0.00	0.75	0.00	0.00	0.00	0.00
	3	0.00	0.74	0.00	0.00	0.00	0.00
	4	0.00	0.79	0.00	0.00	0.00	0.00
	5	0.00	0.76	0.00	0.00	0.00	0.00
	6	0.00	0.74	0.00	0.00	0.00	0.00
	7	0.00	0.79	0.00	0.00	0.00	0.00
	8	0.00	0.77	0.00	0.00	0.00	0.00
	9	0.00	0.77	0.00	0.00	0.00	0.00
	10	0.00	0.78	0.00	0.00	0.00	0.00
	11	0.00	0.73	0.00	0.00	0.00	0.00
	12	0.00	0.74	0.00	0.00	0.00	0.00
	13	0.00	0.53	0.00	0.00	0.00	0.00
	14	0.00	0.56	0.00	0.00	0.00	0.00
	15	0.00	0.50	0.00	0.00	0.00	0.00
	16	0.00	0.50	0.00	0.00	0.00	0.00
	17	0.00	0.75	0.00	0.00	0.00	0.00
	18	0.00	0.74	0.00	0.00	0.00	0.00
	19	0.00	0.75	0.00	0.00	0.00	0.00
	20	0.00	0.75	0.00	0.00	0.00	0.00
	21	0.00	0.52	0.00	0.00	0.00	0.00
	22	0.00	0.51	0.00	0.00	0.00	0.00
	23	0.00	0.51	0.00	0.00	0.00	0.00
	24	0.00	0.51	0.00	0.00	0.00	0.00
117	1	0.00	0.74	0.00	0.00	0.00	0.00
	2	0.00	0.74	0.00	0.00	0.00	0.00
	3	0.00	0.74	0.00	0.00	0.00	0.00
	4	0.00	0.78	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	5	0.00	0.76	0.00	0.00	0.00	0.00
	6	0.00	0.74	0.00	0.00	0.00	0.00
	7	0.00	0.79	0.00	0.00	0.00	0.00
	8	0.00	0.76	0.00	0.00	0.00	0.00
	9	0.00	0.81	0.00	0.00	0.00	0.00
	10	0.00	0.82	0.00	0.00	0.00	0.00
	11	0.00	0.74	0.00	0.00	0.00	0.00
	12	0.00	0.73	0.00	0.00	0.00	0.00
	13	0.00	0.59	0.00	0.00	0.00	0.00
	14	0.00	0.61	0.00	0.00	0.00	0.00
	15	0.00	0.51	0.00	0.00	0.00	0.00
	16	0.00	0.50	0.00	0.00	0.00	0.00
	17	0.00	0.75	0.00	0.00	0.00	0.00
	18	0.00	0.73	0.00	0.00	0.00	0.00
	19	0.00	0.74	0.00	0.00	0.00	0.00
	20	0.00	0.74	0.00	0.00	0.00	0.00
	21	0.00	0.52	0.00	0.00	0.00	0.00
	22	0.00	0.50	0.00	0.00	0.00	0.00
	23	0.00	0.51	0.00	0.00	0.00	0.00
	24	0.00	0.51	0.00	0.00	0.00	0.00
118	1	0.00	0.74	0.00	0.00	0.00	0.00
	2	0.00	0.73	0.00	0.00	0.00	0.00
	3	0.00	0.73	0.00	0.00	0.00	0.00
	4	0.00	0.77	0.00	0.00	0.00	0.00
	5	0.00	0.75	0.00	0.00	0.00	0.00
	6	0.00	0.73	0.00	0.00	0.00	0.00
	7	0.00	0.78	0.00	0.00	0.00	0.00
	8	0.00	0.76	0.00	0.00	0.00	0.00
	9	0.00	0.85	0.00	0.00	0.00	0.00
	10	0.00	0.86	0.00	0.00	0.00	0.00
	11	0.00	0.74	0.00	0.00	0.00	0.00
	12	0.00	0.73	0.00	0.00	0.00	0.00
	13	0.00	0.65	0.00	0.00	0.00	0.00
	14	0.00	0.66	0.00	0.00	0.00	0.00
	15	0.00	0.51	0.00	0.00	0.00	0.00
	16	0.00	0.50	0.00	0.00	0.00	0.00
	17	0.00	0.76	0.00	0.00	0.00	0.00
	18	0.00	0.71	0.00	0.00	0.00	0.00
	19	0.00	0.74	0.00	0.00	0.00	0.00
	20	0.00	0.74	0.00	0.00	0.00	0.00
	21	0.00	0.52	0.00	0.00	0.00	0.00
	22	0.00	0.49	0.00	0.00	0.00	0.00
	23	0.00	0.50	0.00	0.00	0.00	0.00
	24	0.00	0.51	0.00	0.00	0.00	0.00
119	1	0.00	1.03	0.00	0.00	0.00	0.00
	2	0.00	1.04	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	3	0.00	1.03	0.00	0.00	0.00	0.00
	4	0.00	1.07	0.00	0.00	0.00	0.00
	5	0.00	1.04	0.00	0.00	0.00	0.00
	6	0.00	1.03	0.00	0.00	0.00	0.00
	7	0.00	1.07	0.00	0.00	0.00	0.00
	8	0.00	1.05	0.00	0.00	0.00	0.00
	9	0.00	0.76	0.00	0.00	0.00	0.00
	10	0.00	0.84	0.00	0.00	0.00	0.00
	11	0.00	0.94	0.00	0.00	0.00	0.00
	12	0.00	1.01	0.00	0.00	0.00	0.00
	13	0.00	0.32	0.00	0.00	0.00	0.00
	14	0.00	0.44	0.00	0.00	0.00	0.00
	15	0.00	0.57	0.00	0.00	0.00	0.00
	16	0.00	0.66	0.00	0.00	0.00	0.00
	17	0.00	0.98	0.00	0.00	0.00	0.00
	18	0.00	1.07	0.00	0.00	0.00	0.00
	19	0.00	1.03	0.00	0.00	0.00	0.00
	20	0.00	1.02	0.00	0.00	0.00	0.00
	21	0.00	0.64	0.00	0.00	0.00	0.00
	22	0.00	0.72	0.00	0.00	0.00	0.00
	23	0.00	0.68	0.00	0.00	0.00	0.00
	24	0.00	0.68	0.00	0.00	0.00	0.00
120	1	0.00	1.03	0.00	0.00	0.00	0.00
	2	0.00	1.04	0.00	0.00	0.00	0.00
	3	0.00	1.03	0.00	0.00	0.00	0.00
	4	0.00	1.06	0.00	0.00	0.00	0.00
	5	0.00	1.04	0.00	0.00	0.00	0.00
	6	0.00	1.03	0.00	0.00	0.00	0.00
	7	0.00	1.07	0.00	0.00	0.00	0.00
	8	0.00	1.04	0.00	0.00	0.00	0.00
	9	0.00	0.72	0.00	0.00	0.00	0.00
	10	0.00	0.80	0.00	0.00	0.00	0.00
	11	0.00	0.93	0.00	0.00	0.00	0.00
	12	0.00	1.00	0.00	0.00	0.00	0.00
	13	0.00	0.27	0.00	0.00	0.00	0.00
	14	0.00	0.39	0.00	0.00	0.00	0.00
	15	0.00	0.56	0.00	0.00	0.00	0.00
	16	0.00	0.66	0.00	0.00	0.00	0.00
	17	0.00	0.97	0.00	0.00	0.00	0.00
	18	0.00	1.07	0.00	0.00	0.00	0.00
	19	0.00	1.02	0.00	0.00	0.00	0.00
	20	0.00	1.02	0.00	0.00	0.00	0.00
	21	0.00	0.64	0.00	0.00	0.00	0.00
	22	0.00	0.73	0.00	0.00	0.00	0.00
	23	0.00	0.68	0.00	0.00	0.00	0.00
	24	0.00	0.68	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
121	1	0.00	1.03	0.00	0.00	0.00	0.00
	2	0.00	1.04	0.00	0.00	0.00	0.00
	3	0.00	1.03	0.00	0.00	0.00	0.00
	4	0.00	1.07	0.00	0.00	0.00	0.00
	5	0.00	1.05	0.00	0.00	0.00	0.00
	6	0.00	1.03	0.00	0.00	0.00	0.00
	7	0.00	1.07	0.00	0.00	0.00	0.00
	8	0.00	1.05	0.00	0.00	0.00	0.00
	9	0.00	0.81	0.00	0.00	0.00	0.00
	10	0.00	0.88	0.00	0.00	0.00	0.00
	11	0.00	0.94	0.00	0.00	0.00	0.00
	12	0.00	1.01	0.00	0.00	0.00	0.00
	13	0.00	0.38	0.00	0.00	0.00	0.00
	14	0.00	0.49	0.00	0.00	0.00	0.00
	15	0.00	0.58	0.00	0.00	0.00	0.00
	16	0.00	0.67	0.00	0.00	0.00	0.00
	17	0.00	0.99	0.00	0.00	0.00	0.00
	18	0.00	1.06	0.00	0.00	0.00	0.00
	19	0.00	1.03	0.00	0.00	0.00	0.00
	20	0.00	1.02	0.00	0.00	0.00	0.00
	21	0.00	0.65	0.00	0.00	0.00	0.00
	22	0.00	0.71	0.00	0.00	0.00	0.00
	23	0.00	0.68	0.00	0.00	0.00	0.00
	24	0.00	0.68	0.00	0.00	0.00	0.00
122	1	0.00	1.04	0.00	0.00	0.00	0.00
	2	0.00	1.04	0.00	0.00	0.00	0.00
	3	0.00	1.03	0.00	0.00	0.00	0.00
	4	0.00	1.07	0.00	0.00	0.00	0.00
	5	0.00	1.05	0.00	0.00	0.00	0.00
	6	0.00	1.03	0.00	0.00	0.00	0.00
	7	0.00	1.07	0.00	0.00	0.00	0.00
	8	0.00	1.05	0.00	0.00	0.00	0.00
	9	0.00	0.85	0.00	0.00	0.00	0.00
	10	0.00	0.93	0.00	0.00	0.00	0.00
	11	0.00	0.95	0.00	0.00	0.00	0.00
	12	0.00	1.02	0.00	0.00	0.00	0.00
	13	0.00	0.45	0.00	0.00	0.00	0.00
	14	0.00	0.55	0.00	0.00	0.00	0.00
	15	0.00	0.59	0.00	0.00	0.00	0.00
	16	0.00	0.67	0.00	0.00	0.00	0.00
	17	0.00	1.00	0.00	0.00	0.00	0.00
	18	0.00	1.05	0.00	0.00	0.00	0.00
	19	0.00	1.03	0.00	0.00	0.00	0.00
	20	0.00	1.02	0.00	0.00	0.00	0.00
	21	0.00	0.66	0.00	0.00	0.00	0.00
	22	0.00	0.71	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	23	0.00	0.68	0.00	0.00	0.00	0.00
	24	0.00	0.68	0.00	0.00	0.00	0.00
123	1	0.00	1.04	0.00	0.00	0.00	0.00
	2	0.00	1.03	0.00	0.00	0.00	0.00
	3	0.00	1.03	0.00	0.00	0.00	0.00
	4	0.00	1.07	0.00	0.00	0.00	0.00
	5	0.00	1.04	0.00	0.00	0.00	0.00
	6	0.00	1.02	0.00	0.00	0.00	0.00
	7	0.00	1.07	0.00	0.00	0.00	0.00
	8	0.00	1.05	0.00	0.00	0.00	0.00
	9	0.00	0.90	0.00	0.00	0.00	0.00
	10	0.00	0.97	0.00	0.00	0.00	0.00
	11	0.00	0.96	0.00	0.00	0.00	0.00
	12	0.00	1.02	0.00	0.00	0.00	0.00
	13	0.00	0.51	0.00	0.00	0.00	0.00
	14	0.00	0.61	0.00	0.00	0.00	0.00
	15	0.00	0.60	0.00	0.00	0.00	0.00
	16	0.00	0.68	0.00	0.00	0.00	0.00
	17	0.00	1.01	0.00	0.00	0.00	0.00
	18	0.00	1.04	0.00	0.00	0.00	0.00
	19	0.00	1.03	0.00	0.00	0.00	0.00
	20	0.00	1.02	0.00	0.00	0.00	0.00
	21	0.00	0.67	0.00	0.00	0.00	0.00
	22	0.00	0.70	0.00	0.00	0.00	0.00
	23	0.00	0.68	0.00	0.00	0.00	0.00
	24	0.00	0.68	0.00	0.00	0.00	0.00
124	1	0.00	1.04	0.00	0.00	0.00	0.00
	2	0.00	1.03	0.00	0.00	0.00	0.00
	3	0.00	1.02	0.00	0.00	0.00	0.00
	4	0.00	1.07	0.00	0.00	0.00	0.00
	5	0.00	1.04	0.00	0.00	0.00	0.00
	6	0.00	1.02	0.00	0.00	0.00	0.00
	7	0.00	1.07	0.00	0.00	0.00	0.00
	8	0.00	1.05	0.00	0.00	0.00	0.00
	9	0.00	0.94	0.00	0.00	0.00	0.00
	10	0.00	1.01	0.00	0.00	0.00	0.00
	11	0.00	0.97	0.00	0.00	0.00	0.00
	12	0.00	1.02	0.00	0.00	0.00	0.00
	13	0.00	0.57	0.00	0.00	0.00	0.00
	14	0.00	0.67	0.00	0.00	0.00	0.00
	15	0.00	0.61	0.00	0.00	0.00	0.00
	16	0.00	0.68	0.00	0.00	0.00	0.00
	17	0.00	1.02	0.00	0.00	0.00	0.00
	18	0.00	1.03	0.00	0.00	0.00	0.00
	19	0.00	1.02	0.00	0.00	0.00	0.00
	20	0.00	1.02	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	21	0.00	0.67	0.00	0.00	0.00	0.00
	22	0.00	0.69	0.00	0.00	0.00	0.00
	23	0.00	0.68	0.00	0.00	0.00	0.00
	24	0.00	0.68	0.00	0.00	0.00	0.00
125	1	0.00	1.04	0.00	0.00	0.00	0.00
	2	0.00	1.02	0.00	0.00	0.00	0.00
	3	0.00	1.02	0.00	0.00	0.00	0.00
	4	0.00	1.06	0.00	0.00	0.00	0.00
	5	0.00	1.04	0.00	0.00	0.00	0.00
	6	0.00	1.02	0.00	0.00	0.00	0.00
	7	0.00	1.06	0.00	0.00	0.00	0.00
	8	0.00	1.04	0.00	0.00	0.00	0.00
	9	0.00	0.99	0.00	0.00	0.00	0.00
	10	0.00	1.05	0.00	0.00	0.00	0.00
	11	0.00	0.97	0.00	0.00	0.00	0.00
	12	0.00	1.02	0.00	0.00	0.00	0.00
	13	0.00	0.64	0.00	0.00	0.00	0.00
	14	0.00	0.72	0.00	0.00	0.00	0.00
	15	0.00	0.62	0.00	0.00	0.00	0.00
	16	0.00	0.68	0.00	0.00	0.00	0.00
	17	0.00	1.02	0.00	0.00	0.00	0.00
	18	0.00	1.02	0.00	0.00	0.00	0.00
	19	0.00	1.02	0.00	0.00	0.00	0.00
	20	0.00	1.02	0.00	0.00	0.00	0.00
	21	0.00	0.68	0.00	0.00	0.00	0.00
	22	0.00	0.68	0.00	0.00	0.00	0.00
	23	0.00	0.68	0.00	0.00	0.00	0.00
	24	0.00	0.68	0.00	0.00	0.00	0.00
126	1	0.00	1.03	0.00	0.00	0.00	0.00
	2	0.00	1.02	0.00	0.00	0.00	0.00
	3	0.00	1.01	0.00	0.00	0.00	0.00
	4	0.00	1.06	0.00	0.00	0.00	0.00
	5	0.00	1.03	0.00	0.00	0.00	0.00
	6	0.00	1.01	0.00	0.00	0.00	0.00
	7	0.00	1.06	0.00	0.00	0.00	0.00
	8	0.00	1.04	0.00	0.00	0.00	0.00
	9	0.00	1.03	0.00	0.00	0.00	0.00
	10	0.00	1.09	0.00	0.00	0.00	0.00
	11	0.00	0.98	0.00	0.00	0.00	0.00
	12	0.00	1.02	0.00	0.00	0.00	0.00
	13	0.00	0.70	0.00	0.00	0.00	0.00
	14	0.00	0.77	0.00	0.00	0.00	0.00
	15	0.00	0.62	0.00	0.00	0.00	0.00
	16	0.00	0.68	0.00	0.00	0.00	0.00
	17	0.00	1.03	0.00	0.00	0.00	0.00
	18	0.00	1.01	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	19	0.00	1.02	0.00	0.00	0.00	0.00
	20	0.00	1.02	0.00	0.00	0.00	0.00
	21	0.00	0.68	0.00	0.00	0.00	0.00
	22	0.00	0.66	0.00	0.00	0.00	0.00
	23	0.00	0.67	0.00	0.00	0.00	0.00
	24	0.00	0.67	0.00	0.00	0.00	0.00
127	1	0.00	1.03	0.00	0.00	0.00	0.00
	2	0.00	1.01	0.00	0.00	0.00	0.00
	3	0.00	1.01	0.00	0.00	0.00	0.00
	4	0.00	1.05	0.00	0.00	0.00	0.00
	5	0.00	1.02	0.00	0.00	0.00	0.00
	6	0.00	1.01	0.00	0.00	0.00	0.00
	7	0.00	1.05	0.00	0.00	0.00	0.00
	8	0.00	1.03	0.00	0.00	0.00	0.00
	9	0.00	1.07	0.00	0.00	0.00	0.00
	10	0.00	1.12	0.00	0.00	0.00	0.00
	11	0.00	0.98	0.00	0.00	0.00	0.00
	12	0.00	1.02	0.00	0.00	0.00	0.00
	13	0.00	0.76	0.00	0.00	0.00	0.00
	14	0.00	0.83	0.00	0.00	0.00	0.00
	15	0.00	0.63	0.00	0.00	0.00	0.00
	16	0.00	0.68	0.00	0.00	0.00	0.00
	17	0.00	1.03	0.00	0.00	0.00	0.00
	18	0.00	0.99	0.00	0.00	0.00	0.00
	19	0.00	1.01	0.00	0.00	0.00	0.00
	20	0.00	1.01	0.00	0.00	0.00	0.00
	21	0.00	0.69	0.00	0.00	0.00	0.00
	22	0.00	0.65	0.00	0.00	0.00	0.00
	23	0.00	0.67	0.00	0.00	0.00	0.00
	24	0.00	0.67	0.00	0.00	0.00	0.00
128	1	0.00	1.08	0.00	0.00	0.00	0.00
	2	0.00	1.08	0.00	0.00	0.00	0.00
	3	0.00	1.07	0.00	0.00	0.00	0.00
	4	0.00	1.11	0.00	0.00	0.00	0.00
	5	0.00	1.09	0.00	0.00	0.00	0.00
	6	0.00	1.07	0.00	0.00	0.00	0.00
	7	0.00	1.11	0.00	0.00	0.00	0.00
	8	0.00	1.09	0.00	0.00	0.00	0.00
	9	0.00	0.80	0.00	0.00	0.00	0.00
	10	0.00	0.89	0.00	0.00	0.00	0.00
	11	0.00	0.97	0.00	0.00	0.00	0.00
	12	0.00	1.05	0.00	0.00	0.00	0.00
	13	0.00	0.35	0.00	0.00	0.00	0.00
	14	0.00	0.47	0.00	0.00	0.00	0.00
	15	0.00	0.59	0.00	0.00	0.00	0.00
	16	0.00	0.69	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	17	0.00	1.02	0.00	0.00	0.00	0.00
	18	0.00	1.11	0.00	0.00	0.00	0.00
	19	0.00	1.07	0.00	0.00	0.00	0.00
	20	0.00	1.06	0.00	0.00	0.00	0.00
	21	0.00	0.67	0.00	0.00	0.00	0.00
	22	0.00	0.74	0.00	0.00	0.00	0.00
	23	0.00	0.71	0.00	0.00	0.00	0.00
	24	0.00	0.71	0.00	0.00	0.00	0.00
129	1	0.00	1.07	0.00	0.00	0.00	0.00
	2	0.00	1.08	0.00	0.00	0.00	0.00
	3	0.00	1.07	0.00	0.00	0.00	0.00
	4	0.00	1.11	0.00	0.00	0.00	0.00
	5	0.00	1.09	0.00	0.00	0.00	0.00
	6	0.00	1.07	0.00	0.00	0.00	0.00
	7	0.00	1.11	0.00	0.00	0.00	0.00
	8	0.00	1.09	0.00	0.00	0.00	0.00
	9	0.00	0.76	0.00	0.00	0.00	0.00
	10	0.00	0.85	0.00	0.00	0.00	0.00
	11	0.00	0.97	0.00	0.00	0.00	0.00
	12	0.00	1.05	0.00	0.00	0.00	0.00
	13	0.00	0.30	0.00	0.00	0.00	0.00
	14	0.00	0.42	0.00	0.00	0.00	0.00
	15	0.00	0.58	0.00	0.00	0.00	0.00
	16	0.00	0.69	0.00	0.00	0.00	0.00
	17	0.00	1.01	0.00	0.00	0.00	0.00
	18	0.00	1.12	0.00	0.00	0.00	0.00
	19	0.00	1.07	0.00	0.00	0.00	0.00
	20	0.00	1.06	0.00	0.00	0.00	0.00
	21	0.00	0.66	0.00	0.00	0.00	0.00
	22	0.00	0.75	0.00	0.00	0.00	0.00
	23	0.00	0.71	0.00	0.00	0.00	0.00
	24	0.00	0.70	0.00	0.00	0.00	0.00
130	1	0.00	1.08	0.00	0.00	0.00	0.00
	2	0.00	1.08	0.00	0.00	0.00	0.00
	3	0.00	1.07	0.00	0.00	0.00	0.00
	4	0.00	1.11	0.00	0.00	0.00	0.00
	5	0.00	1.09	0.00	0.00	0.00	0.00
	6	0.00	1.07	0.00	0.00	0.00	0.00
	7	0.00	1.11	0.00	0.00	0.00	0.00
	8	0.00	1.09	0.00	0.00	0.00	0.00
	9	0.00	0.85	0.00	0.00	0.00	0.00
	10	0.00	0.93	0.00	0.00	0.00	0.00
	11	0.00	0.98	0.00	0.00	0.00	0.00
	12	0.00	1.06	0.00	0.00	0.00	0.00
	13	0.00	0.41	0.00	0.00	0.00	0.00
	14	0.00	0.52	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	15	0.00	0.60	0.00	0.00	0.00	0.00
	16	0.00	0.70	0.00	0.00	0.00	0.00
	17	0.00	1.03	0.00	0.00	0.00	0.00
	18	0.00	1.10	0.00	0.00	0.00	0.00
	19	0.00	1.07	0.00	0.00	0.00	0.00
	20	0.00	1.07	0.00	0.00	0.00	0.00
	21	0.00	0.68	0.00	0.00	0.00	0.00
	22	0.00	0.74	0.00	0.00	0.00	0.00
	23	0.00	0.71	0.00	0.00	0.00	0.00
	24	0.00	0.71	0.00	0.00	0.00	0.00
131	1	0.00	1.08	0.00	0.00	0.00	0.00
	2	0.00	1.08	0.00	0.00	0.00	0.00
	3	0.00	1.07	0.00	0.00	0.00	0.00
	4	0.00	1.11	0.00	0.00	0.00	0.00
	5	0.00	1.09	0.00	0.00	0.00	0.00
	6	0.00	1.07	0.00	0.00	0.00	0.00
	7	0.00	1.11	0.00	0.00	0.00	0.00
	8	0.00	1.09	0.00	0.00	0.00	0.00
	9	0.00	0.89	0.00	0.00	0.00	0.00
	10	0.00	0.97	0.00	0.00	0.00	0.00
	11	0.00	0.99	0.00	0.00	0.00	0.00
	12	0.00	1.06	0.00	0.00	0.00	0.00
	13	0.00	0.47	0.00	0.00	0.00	0.00
	14	0.00	0.58	0.00	0.00	0.00	0.00
	15	0.00	0.61	0.00	0.00	0.00	0.00
	16	0.00	0.70	0.00	0.00	0.00	0.00
	17	0.00	1.04	0.00	0.00	0.00	0.00
	18	0.00	1.09	0.00	0.00	0.00	0.00
	19	0.00	1.07	0.00	0.00	0.00	0.00
	20	0.00	1.07	0.00	0.00	0.00	0.00
	21	0.00	0.69	0.00	0.00	0.00	0.00
	22	0.00	0.73	0.00	0.00	0.00	0.00
	23	0.00	0.71	0.00	0.00	0.00	0.00
	24	0.00	0.71	0.00	0.00	0.00	0.00
132	1	0.00	1.08	0.00	0.00	0.00	0.00
	2	0.00	1.07	0.00	0.00	0.00	0.00
	3	0.00	1.07	0.00	0.00	0.00	0.00
	4	0.00	1.11	0.00	0.00	0.00	0.00
	5	0.00	1.08	0.00	0.00	0.00	0.00
	6	0.00	1.07	0.00	0.00	0.00	0.00
	7	0.00	1.11	0.00	0.00	0.00	0.00
	8	0.00	1.09	0.00	0.00	0.00	0.00
	9	0.00	0.93	0.00	0.00	0.00	0.00
	10	0.00	1.01	0.00	0.00	0.00	0.00
	11	0.00	1.00	0.00	0.00	0.00	0.00
	12	0.00	1.06	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	13	0.00	0.53	0.00	0.00	0.00	0.00
	14	0.00	0.64	0.00	0.00	0.00	0.00
	15	0.00	0.62	0.00	0.00	0.00	0.00
	16	0.00	0.70	0.00	0.00	0.00	0.00
	17	0.00	1.05	0.00	0.00	0.00	0.00
	18	0.00	1.08	0.00	0.00	0.00	0.00
	19	0.00	1.07	0.00	0.00	0.00	0.00
	20	0.00	1.07	0.00	0.00	0.00	0.00
	21	0.00	0.69	0.00	0.00	0.00	0.00
	22	0.00	0.72	0.00	0.00	0.00	0.00
	23	0.00	0.71	0.00	0.00	0.00	0.00
	24	0.00	0.71	0.00	0.00	0.00	0.00
133	1	0.00	1.08	0.00	0.00	0.00	0.00
	2	0.00	1.07	0.00	0.00	0.00	0.00
	3	0.00	1.06	0.00	0.00	0.00	0.00
	4	0.00	1.11	0.00	0.00	0.00	0.00
	5	0.00	1.08	0.00	0.00	0.00	0.00
	6	0.00	1.06	0.00	0.00	0.00	0.00
	7	0.00	1.11	0.00	0.00	0.00	0.00
	8	0.00	1.09	0.00	0.00	0.00	0.00
	9	0.00	0.98	0.00	0.00	0.00	0.00
	10	0.00	1.05	0.00	0.00	0.00	0.00
	11	0.00	1.00	0.00	0.00	0.00	0.00
	12	0.00	1.06	0.00	0.00	0.00	0.00
	13	0.00	0.59	0.00	0.00	0.00	0.00
	14	0.00	0.69	0.00	0.00	0.00	0.00
	15	0.00	0.62	0.00	0.00	0.00	0.00
	16	0.00	0.70	0.00	0.00	0.00	0.00
	17	0.00	1.06	0.00	0.00	0.00	0.00
	18	0.00	1.07	0.00	0.00	0.00	0.00
	19	0.00	1.07	0.00	0.00	0.00	0.00
	20	0.00	1.06	0.00	0.00	0.00	0.00
	21	0.00	0.70	0.00	0.00	0.00	0.00
	22	0.00	0.71	0.00	0.00	0.00	0.00
	23	0.00	0.70	0.00	0.00	0.00	0.00
	24	0.00	0.70	0.00	0.00	0.00	0.00
134	1	0.00	1.08	0.00	0.00	0.00	0.00
	2	0.00	1.06	0.00	0.00	0.00	0.00
	3	0.00	1.06	0.00	0.00	0.00	0.00
	4	0.00	1.10	0.00	0.00	0.00	0.00
	5	0.00	1.08	0.00	0.00	0.00	0.00
	6	0.00	1.06	0.00	0.00	0.00	0.00
	7	0.00	1.11	0.00	0.00	0.00	0.00
	8	0.00	1.08	0.00	0.00	0.00	0.00
	9	0.00	1.02	0.00	0.00	0.00	0.00
	10	0.00	1.09	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	11	0.00	1.01	0.00	0.00	0.00	0.00
	12	0.00	1.06	0.00	0.00	0.00	0.00
	13	0.00	0.65	0.00	0.00	0.00	0.00
	14	0.00	0.75	0.00	0.00	0.00	0.00
	15	0.00	0.63	0.00	0.00	0.00	0.00
	16	0.00	0.71	0.00	0.00	0.00	0.00
	17	0.00	1.06	0.00	0.00	0.00	0.00
	18	0.00	1.06	0.00	0.00	0.00	0.00
	19	0.00	1.06	0.00	0.00	0.00	0.00
	20	0.00	1.06	0.00	0.00	0.00	0.00
	21	0.00	0.70	0.00	0.00	0.00	0.00
	22	0.00	0.70	0.00	0.00	0.00	0.00
	23	0.00	0.70	0.00	0.00	0.00	0.00
	24	0.00	0.70	0.00	0.00	0.00	0.00
135	1	0.00	1.08	0.00	0.00	0.00	0.00
	2	0.00	1.06	0.00	0.00	0.00	0.00
	3	0.00	1.06	0.00	0.00	0.00	0.00
	4	0.00	1.10	0.00	0.00	0.00	0.00
	5	0.00	1.07	0.00	0.00	0.00	0.00
	6	0.00	1.05	0.00	0.00	0.00	0.00
	7	0.00	1.10	0.00	0.00	0.00	0.00
	8	0.00	1.08	0.00	0.00	0.00	0.00
	9	0.00	1.06	0.00	0.00	0.00	0.00
	10	0.00	1.13	0.00	0.00	0.00	0.00
	11	0.00	1.02	0.00	0.00	0.00	0.00
	12	0.00	1.06	0.00	0.00	0.00	0.00
	13	0.00	0.71	0.00	0.00	0.00	0.00
	14	0.00	0.80	0.00	0.00	0.00	0.00
	15	0.00	0.64	0.00	0.00	0.00	0.00
	16	0.00	0.71	0.00	0.00	0.00	0.00
	17	0.00	1.07	0.00	0.00	0.00	0.00
	18	0.00	1.05	0.00	0.00	0.00	0.00
	19	0.00	1.06	0.00	0.00	0.00	0.00
	20	0.00	1.06	0.00	0.00	0.00	0.00
	21	0.00	0.71	0.00	0.00	0.00	0.00
	22	0.00	0.69	0.00	0.00	0.00	0.00
	23	0.00	0.70	0.00	0.00	0.00	0.00
	24	0.00	0.70	0.00	0.00	0.00	0.00
136	1	0.00	1.08	0.00	0.00	0.00	0.00
	2	0.00	1.05	0.00	0.00	0.00	0.00
	3	0.00	1.05	0.00	0.00	0.00	0.00
	4	0.00	1.09	0.00	0.00	0.00	0.00
	5	0.00	1.07	0.00	0.00	0.00	0.00
	6	0.00	1.05	0.00	0.00	0.00	0.00
	7	0.00	1.09	0.00	0.00	0.00	0.00
	8	0.00	1.07	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	9	0.00	1.10	0.00	0.00	0.00	0.00
	10	0.00	1.16	0.00	0.00	0.00	0.00
	11	0.00	1.02	0.00	0.00	0.00	0.00
	12	0.00	1.06	0.00	0.00	0.00	0.00
	13	0.00	0.77	0.00	0.00	0.00	0.00
	14	0.00	0.85	0.00	0.00	0.00	0.00
	15	0.00	0.65	0.00	0.00	0.00	0.00
	16	0.00	0.71	0.00	0.00	0.00	0.00
	17	0.00	1.07	0.00	0.00	0.00	0.00
	18	0.00	1.04	0.00	0.00	0.00	0.00
	19	0.00	1.06	0.00	0.00	0.00	0.00
	20	0.00	1.06	0.00	0.00	0.00	0.00
	21	0.00	0.71	0.00	0.00	0.00	0.00
	22	0.00	0.68	0.00	0.00	0.00	0.00
	23	0.00	0.69	0.00	0.00	0.00	0.00
	24	0.00	0.70	0.00	0.00	0.00	0.00
137	1	0.00	1.12	0.00	0.00	0.00	0.00
	2	0.00	1.12	0.00	0.00	0.00	0.00
	3	0.00	1.11	0.00	0.00	0.00	0.00
	4	0.00	1.15	0.00	0.00	0.00	0.00
	5	0.00	1.13	0.00	0.00	0.00	0.00
	6	0.00	1.11	0.00	0.00	0.00	0.00
	7	0.00	1.15	0.00	0.00	0.00	0.00
	8	0.00	1.13	0.00	0.00	0.00	0.00
	9	0.00	0.84	0.00	0.00	0.00	0.00
	10	0.00	0.94	0.00	0.00	0.00	0.00
	11	0.00	1.01	0.00	0.00	0.00	0.00
	12	0.00	1.10	0.00	0.00	0.00	0.00
	13	0.00	0.38	0.00	0.00	0.00	0.00
	14	0.00	0.50	0.00	0.00	0.00	0.00
	15	0.00	0.61	0.00	0.00	0.00	0.00
	16	0.00	0.72	0.00	0.00	0.00	0.00
	17	0.00	1.07	0.00	0.00	0.00	0.00
	18	0.00	1.15	0.00	0.00	0.00	0.00
	19	0.00	1.11	0.00	0.00	0.00	0.00
	20	0.00	1.11	0.00	0.00	0.00	0.00
	21	0.00	0.70	0.00	0.00	0.00	0.00
	22	0.00	0.77	0.00	0.00	0.00	0.00
	23	0.00	0.73	0.00	0.00	0.00	0.00
	24	0.00	0.73	0.00	0.00	0.00	0.00
138	1	0.00	1.12	0.00	0.00	0.00	0.00
	2	0.00	1.12	0.00	0.00	0.00	0.00
	3	0.00	1.11	0.00	0.00	0.00	0.00
	4	0.00	1.15	0.00	0.00	0.00	0.00
	5	0.00	1.13	0.00	0.00	0.00	0.00
	6	0.00	1.11	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	7	0.00	1.15	0.00	0.00	0.00	0.00
	8	0.00	1.13	0.00	0.00	0.00	0.00
	9	0.00	0.81	0.00	0.00	0.00	0.00
	10	0.00	0.90	0.00	0.00	0.00	0.00
	11	0.00	1.01	0.00	0.00	0.00	0.00
	12	0.00	1.09	0.00	0.00	0.00	0.00
	13	0.00	0.32	0.00	0.00	0.00	0.00
	14	0.00	0.45	0.00	0.00	0.00	0.00
	15	0.00	0.60	0.00	0.00	0.00	0.00
	16	0.00	0.72	0.00	0.00	0.00	0.00
	17	0.00	1.06	0.00	0.00	0.00	0.00
	18	0.00	1.16	0.00	0.00	0.00	0.00
	19	0.00	1.11	0.00	0.00	0.00	0.00
	20	0.00	1.10	0.00	0.00	0.00	0.00
	21	0.00	0.69	0.00	0.00	0.00	0.00
	22	0.00	0.77	0.00	0.00	0.00	0.00
	23	0.00	0.73	0.00	0.00	0.00	0.00
	24	0.00	0.73	0.00	0.00	0.00	0.00
139	1	0.00	1.12	0.00	0.00	0.00	0.00
	2	0.00	1.12	0.00	0.00	0.00	0.00
	3	0.00	1.11	0.00	0.00	0.00	0.00
	4	0.00	1.15	0.00	0.00	0.00	0.00
	5	0.00	1.13	0.00	0.00	0.00	0.00
	6	0.00	1.11	0.00	0.00	0.00	0.00
	7	0.00	1.16	0.00	0.00	0.00	0.00
	8	0.00	1.13	0.00	0.00	0.00	0.00
	9	0.00	0.89	0.00	0.00	0.00	0.00
	10	0.00	0.98	0.00	0.00	0.00	0.00
	11	0.00	1.02	0.00	0.00	0.00	0.00
	12	0.00	1.10	0.00	0.00	0.00	0.00
	13	0.00	0.43	0.00	0.00	0.00	0.00
	14	0.00	0.56	0.00	0.00	0.00	0.00
	15	0.00	0.62	0.00	0.00	0.00	0.00
	16	0.00	0.72	0.00	0.00	0.00	0.00
	17	0.00	1.07	0.00	0.00	0.00	0.00
	18	0.00	1.14	0.00	0.00	0.00	0.00
	19	0.00	1.11	0.00	0.00	0.00	0.00
	20	0.00	1.11	0.00	0.00	0.00	0.00
	21	0.00	0.70	0.00	0.00	0.00	0.00
	22	0.00	0.76	0.00	0.00	0.00	0.00
	23	0.00	0.73	0.00	0.00	0.00	0.00
	24	0.00	0.73	0.00	0.00	0.00	0.00
140	1	0.00	1.12	0.00	0.00	0.00	0.00
	2	0.00	1.12	0.00	0.00	0.00	0.00
	3	0.00	1.11	0.00	0.00	0.00	0.00
	4	0.00	1.15	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	5	0.00	1.13	0.00	0.00	0.00	0.00
	6	0.00	1.11	0.00	0.00	0.00	0.00
	7	0.00	1.15	0.00	0.00	0.00	0.00
	8	0.00	1.13	0.00	0.00	0.00	0.00
	9	0.00	0.93	0.00	0.00	0.00	0.00
	10	0.00	1.02	0.00	0.00	0.00	0.00
	11	0.00	1.03	0.00	0.00	0.00	0.00
	12	0.00	1.10	0.00	0.00	0.00	0.00
	13	0.00	0.49	0.00	0.00	0.00	0.00
	14	0.00	0.61	0.00	0.00	0.00	0.00
	15	0.00	0.63	0.00	0.00	0.00	0.00
	16	0.00	0.73	0.00	0.00	0.00	0.00
	17	0.00	1.08	0.00	0.00	0.00	0.00
	18	0.00	1.13	0.00	0.00	0.00	0.00
	19	0.00	1.11	0.00	0.00	0.00	0.00
	20	0.00	1.11	0.00	0.00	0.00	0.00
	21	0.00	0.71	0.00	0.00	0.00	0.00
	22	0.00	0.75	0.00	0.00	0.00	0.00
	23	0.00	0.73	0.00	0.00	0.00	0.00
	24	0.00	0.73	0.00	0.00	0.00	0.00
141	1	0.00	1.12	0.00	0.00	0.00	0.00
	2	0.00	1.11	0.00	0.00	0.00	0.00
	3	0.00	1.11	0.00	0.00	0.00	0.00
	4	0.00	1.15	0.00	0.00	0.00	0.00
	5	0.00	1.13	0.00	0.00	0.00	0.00
	6	0.00	1.11	0.00	0.00	0.00	0.00
	7	0.00	1.15	0.00	0.00	0.00	0.00
	8	0.00	1.13	0.00	0.00	0.00	0.00
	9	0.00	0.97	0.00	0.00	0.00	0.00
	10	0.00	1.05	0.00	0.00	0.00	0.00
	11	0.00	1.04	0.00	0.00	0.00	0.00
	12	0.00	1.11	0.00	0.00	0.00	0.00
	13	0.00	0.55	0.00	0.00	0.00	0.00
	14	0.00	0.66	0.00	0.00	0.00	0.00
	15	0.00	0.63	0.00	0.00	0.00	0.00
	16	0.00	0.73	0.00	0.00	0.00	0.00
	17	0.00	1.09	0.00	0.00	0.00	0.00
	18	0.00	1.13	0.00	0.00	0.00	0.00
	19	0.00	1.11	0.00	0.00	0.00	0.00
	20	0.00	1.11	0.00	0.00	0.00	0.00
	21	0.00	0.72	0.00	0.00	0.00	0.00
	22	0.00	0.74	0.00	0.00	0.00	0.00
	23	0.00	0.73	0.00	0.00	0.00	0.00
	24	0.00	0.73	0.00	0.00	0.00	0.00
142	1	0.00	1.12	0.00	0.00	0.00	0.00
	2	0.00	1.11	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	3	0.00	1.11	0.00	0.00	0.00	0.00
	4	0.00	1.15	0.00	0.00	0.00	0.00
	5	0.00	1.12	0.00	0.00	0.00	0.00
	6	0.00	1.10	0.00	0.00	0.00	0.00
	7	0.00	1.15	0.00	0.00	0.00	0.00
	8	0.00	1.13	0.00	0.00	0.00	0.00
	9	0.00	1.01	0.00	0.00	0.00	0.00
	10	0.00	1.09	0.00	0.00	0.00	0.00
	11	0.00	1.04	0.00	0.00	0.00	0.00
	12	0.00	1.11	0.00	0.00	0.00	0.00
	13	0.00	0.61	0.00	0.00	0.00	0.00
	14	0.00	0.72	0.00	0.00	0.00	0.00
	15	0.00	0.64	0.00	0.00	0.00	0.00
	16	0.00	0.73	0.00	0.00	0.00	0.00
	17	0.00	1.10	0.00	0.00	0.00	0.00
	18	0.00	1.11	0.00	0.00	0.00	0.00
	19	0.00	1.11	0.00	0.00	0.00	0.00
	20	0.00	1.11	0.00	0.00	0.00	0.00
	21	0.00	0.72	0.00	0.00	0.00	0.00
	22	0.00	0.74	0.00	0.00	0.00	0.00
	23	0.00	0.73	0.00	0.00	0.00	0.00
	24	0.00	0.73	0.00	0.00	0.00	0.00
143	1	0.00	1.12	0.00	0.00	0.00	0.00
	2	0.00	1.11	0.00	0.00	0.00	0.00
	3	0.00	1.10	0.00	0.00	0.00	0.00
	4	0.00	1.14	0.00	0.00	0.00	0.00
	5	0.00	1.12	0.00	0.00	0.00	0.00
	6	0.00	1.10	0.00	0.00	0.00	0.00
	7	0.00	1.15	0.00	0.00	0.00	0.00
	8	0.00	1.12	0.00	0.00	0.00	0.00
	9	0.00	1.05	0.00	0.00	0.00	0.00
	10	0.00	1.13	0.00	0.00	0.00	0.00
	11	0.00	1.05	0.00	0.00	0.00	0.00
	12	0.00	1.11	0.00	0.00	0.00	0.00
	13	0.00	0.67	0.00	0.00	0.00	0.00
	14	0.00	0.77	0.00	0.00	0.00	0.00
	15	0.00	0.65	0.00	0.00	0.00	0.00
	16	0.00	0.73	0.00	0.00	0.00	0.00
	17	0.00	1.11	0.00	0.00	0.00	0.00
	18	0.00	1.10	0.00	0.00	0.00	0.00
	19	0.00	1.10	0.00	0.00	0.00	0.00
	20	0.00	1.10	0.00	0.00	0.00	0.00
	21	0.00	0.73	0.00	0.00	0.00	0.00
	22	0.00	0.73	0.00	0.00	0.00	0.00
	23	0.00	0.73	0.00	0.00	0.00	0.00
	24	0.00	0.73	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
144	1	0.00	1.12	0.00	0.00	0.00	0.00
	2	0.00	1.10	0.00	0.00	0.00	0.00
	3	0.00	1.10	0.00	0.00	0.00	0.00
	4	0.00	1.14	0.00	0.00	0.00	0.00
	5	0.00	1.11	0.00	0.00	0.00	0.00
	6	0.00	1.10	0.00	0.00	0.00	0.00
	7	0.00	1.14	0.00	0.00	0.00	0.00
	8	0.00	1.12	0.00	0.00	0.00	0.00
	9	0.00	1.10	0.00	0.00	0.00	0.00
	10	0.00	1.17	0.00	0.00	0.00	0.00
	11	0.00	1.05	0.00	0.00	0.00	0.00
	12	0.00	1.11	0.00	0.00	0.00	0.00
	13	0.00	0.73	0.00	0.00	0.00	0.00
	14	0.00	0.82	0.00	0.00	0.00	0.00
	15	0.00	0.66	0.00	0.00	0.00	0.00
	16	0.00	0.73	0.00	0.00	0.00	0.00
	17	0.00	1.11	0.00	0.00	0.00	0.00
	18	0.00	1.09	0.00	0.00	0.00	0.00
	19	0.00	1.10	0.00	0.00	0.00	0.00
	20	0.00	1.10	0.00	0.00	0.00	0.00
	21	0.00	0.73	0.00	0.00	0.00	0.00
	22	0.00	0.71	0.00	0.00	0.00	0.00
	23	0.00	0.72	0.00	0.00	0.00	0.00
	24	0.00	0.72	0.00	0.00	0.00	0.00
145	1	0.00	1.12	0.00	0.00	0.00	0.00
	2	0.00	1.09	0.00	0.00	0.00	0.00
	3	0.00	1.09	0.00	0.00	0.00	0.00
	4	0.00	1.13	0.00	0.00	0.00	0.00
	5	0.00	1.11	0.00	0.00	0.00	0.00
	6	0.00	1.09	0.00	0.00	0.00	0.00
	7	0.00	1.13	0.00	0.00	0.00	0.00
	8	0.00	1.12	0.00	0.00	0.00	0.00
	9	0.00	1.13	0.00	0.00	0.00	0.00
	10	0.00	1.20	0.00	0.00	0.00	0.00
	11	0.00	1.06	0.00	0.00	0.00	0.00
	12	0.00	1.11	0.00	0.00	0.00	0.00
	13	0.00	0.79	0.00	0.00	0.00	0.00
	14	0.00	0.87	0.00	0.00	0.00	0.00
	15	0.00	0.67	0.00	0.00	0.00	0.00
	16	0.00	0.73	0.00	0.00	0.00	0.00
	17	0.00	1.12	0.00	0.00	0.00	0.00
	18	0.00	1.08	0.00	0.00	0.00	0.00
	19	0.00	1.10	0.00	0.00	0.00	0.00
	20	0.00	1.10	0.00	0.00	0.00	0.00
	21	0.00	0.74	0.00	0.00	0.00	0.00
	22	0.00	0.70	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	23	0.00	0.72	0.00	0.00	0.00	0.00
	24	0.00	0.72	0.00	0.00	0.00	0.00
146	1	0.00	0.78	0.00	0.00	0.00	0.00
	2	0.00	0.81	0.00	0.00	0.00	0.00
	3	0.00	0.80	0.00	0.00	0.00	0.00
	4	0.00	0.83	0.00	0.00	0.00	0.00
	5	0.00	0.81	0.00	0.00	0.00	0.00
	6	0.00	0.80	0.00	0.00	0.00	0.00
	7	0.00	0.84	0.00	0.00	0.00	0.00
	8	0.00	0.81	0.00	0.00	0.00	0.00
	9	0.00	0.48	0.00	0.00	0.00	0.00
	10	0.00	0.53	0.00	0.00	0.00	0.00
	11	0.00	0.72	0.00	0.00	0.00	0.00
	12	0.00	0.76	0.00	0.00	0.00	0.00
	13	0.00	0.10	0.00	0.00	0.00	0.00
	14	0.00	0.18	0.00	0.00	0.00	0.00
	15	0.00	0.45	0.00	0.00	0.00	0.00
	16	0.00	0.51	0.00	0.00	0.00	0.00
	17	0.00	0.73	0.00	0.00	0.00	0.00
	18	0.00	0.85	0.00	0.00	0.00	0.00
	19	0.00	0.79	0.00	0.00	0.00	0.00
	20	0.00	0.79	0.00	0.00	0.00	0.00
	21	0.00	0.49	0.00	0.00	0.00	0.00
	22	0.00	0.60	0.00	0.00	0.00	0.00
	23	0.00	0.55	0.00	0.00	0.00	0.00
	24	0.00	0.54	0.00	0.00	0.00	0.00
147	1	0.00	0.83	0.00	0.00	0.00	0.00
	2	0.00	0.86	0.00	0.00	0.00	0.00
	3	0.00	0.84	0.00	0.00	0.00	0.00
	4	0.00	0.88	0.00	0.00	0.00	0.00
	5	0.00	0.86	0.00	0.00	0.00	0.00
	6	0.00	0.84	0.00	0.00	0.00	0.00
	7	0.00	0.89	0.00	0.00	0.00	0.00
	8	0.00	0.86	0.00	0.00	0.00	0.00
	9	0.00	0.52	0.00	0.00	0.00	0.00
	10	0.00	0.58	0.00	0.00	0.00	0.00
	11	0.00	0.76	0.00	0.00	0.00	0.00
	12	0.00	0.81	0.00	0.00	0.00	0.00
	13	0.00	0.12	0.00	0.00	0.00	0.00
	14	0.00	0.21	0.00	0.00	0.00	0.00
	15	0.00	0.47	0.00	0.00	0.00	0.00
	16	0.00	0.54	0.00	0.00	0.00	0.00
	17	0.00	0.78	0.00	0.00	0.00	0.00
	18	0.00	0.90	0.00	0.00	0.00	0.00
	19	0.00	0.84	0.00	0.00	0.00	0.00
	20	0.00	0.84	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	21	0.00	0.52	0.00	0.00	0.00	0.00
	22	0.00	0.63	0.00	0.00	0.00	0.00
	23	0.00	0.57	0.00	0.00	0.00	0.00
	24	0.00	0.57	0.00	0.00	0.00	0.00
148	1	0.00	0.88	0.00	0.00	0.00	0.00
	2	0.00	0.90	0.00	0.00	0.00	0.00
	3	0.00	0.89	0.00	0.00	0.00	0.00
	4	0.00	0.93	0.00	0.00	0.00	0.00
	5	0.00	0.91	0.00	0.00	0.00	0.00
	6	0.00	0.89	0.00	0.00	0.00	0.00
	7	0.00	0.94	0.00	0.00	0.00	0.00
	8	0.00	0.91	0.00	0.00	0.00	0.00
	9	0.00	0.56	0.00	0.00	0.00	0.00
	10	0.00	0.62	0.00	0.00	0.00	0.00
	11	0.00	0.80	0.00	0.00	0.00	0.00
	12	0.00	0.86	0.00	0.00	0.00	0.00
	13	0.00	0.14	0.00	0.00	0.00	0.00
	14	0.00	0.24	0.00	0.00	0.00	0.00
	15	0.00	0.49	0.00	0.00	0.00	0.00
	16	0.00	0.57	0.00	0.00	0.00	0.00
	17	0.00	0.82	0.00	0.00	0.00	0.00
	18	0.00	0.95	0.00	0.00	0.00	0.00
	19	0.00	0.89	0.00	0.00	0.00	0.00
	20	0.00	0.88	0.00	0.00	0.00	0.00
	21	0.00	0.55	0.00	0.00	0.00	0.00
	22	0.00	0.65	0.00	0.00	0.00	0.00
	23	0.00	0.60	0.00	0.00	0.00	0.00
	24	0.00	0.60	0.00	0.00	0.00	0.00
149	1	0.00	0.93	0.00	0.00	0.00	0.00
	2	0.00	0.95	0.00	0.00	0.00	0.00
	3	0.00	0.94	0.00	0.00	0.00	0.00
	4	0.00	0.97	0.00	0.00	0.00	0.00
	5	0.00	0.95	0.00	0.00	0.00	0.00
	6	0.00	0.94	0.00	0.00	0.00	0.00
	7	0.00	0.98	0.00	0.00	0.00	0.00
	8	0.00	0.95	0.00	0.00	0.00	0.00
	9	0.00	0.60	0.00	0.00	0.00	0.00
	10	0.00	0.67	0.00	0.00	0.00	0.00
	11	0.00	0.84	0.00	0.00	0.00	0.00
	12	0.00	0.91	0.00	0.00	0.00	0.00
	13	0.00	0.16	0.00	0.00	0.00	0.00
	14	0.00	0.27	0.00	0.00	0.00	0.00
	15	0.00	0.51	0.00	0.00	0.00	0.00
	16	0.00	0.60	0.00	0.00	0.00	0.00
	17	0.00	0.87	0.00	0.00	0.00	0.00
	18	0.00	0.99	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	19	0.00	0.93	0.00	0.00	0.00	0.00
	20	0.00	0.93	0.00	0.00	0.00	0.00
	21	0.00	0.57	0.00	0.00	0.00	0.00
	22	0.00	0.68	0.00	0.00	0.00	0.00
	23	0.00	0.63	0.00	0.00	0.00	0.00
	24	0.00	0.62	0.00	0.00	0.00	0.00
150	1	0.00	0.98	0.00	0.00	0.00	0.00
	2	0.00	0.99	0.00	0.00	0.00	0.00
	3	0.00	0.98	0.00	0.00	0.00	0.00
	4	0.00	1.02	0.00	0.00	0.00	0.00
	5	0.00	1.00	0.00	0.00	0.00	0.00
	6	0.00	0.98	0.00	0.00	0.00	0.00
	7	0.00	1.03	0.00	0.00	0.00	0.00
	8	0.00	1.00	0.00	0.00	0.00	0.00
	9	0.00	0.64	0.00	0.00	0.00	0.00
	10	0.00	0.72	0.00	0.00	0.00	0.00
	11	0.00	0.88	0.00	0.00	0.00	0.00
	12	0.00	0.95	0.00	0.00	0.00	0.00
	13	0.00	0.19	0.00	0.00	0.00	0.00
	14	0.00	0.30	0.00	0.00	0.00	0.00
	15	0.00	0.53	0.00	0.00	0.00	0.00
	16	0.00	0.63	0.00	0.00	0.00	0.00
	17	0.00	0.91	0.00	0.00	0.00	0.00
	18	0.00	1.04	0.00	0.00	0.00	0.00
	19	0.00	0.98	0.00	0.00	0.00	0.00
	20	0.00	0.97	0.00	0.00	0.00	0.00
	21	0.00	0.60	0.00	0.00	0.00	0.00
	22	0.00	0.71	0.00	0.00	0.00	0.00
	23	0.00	0.66	0.00	0.00	0.00	0.00
	24	0.00	0.65	0.00	0.00	0.00	0.00
152	1	0.00	0.53	0.00	0.00	0.00	0.00
	2	0.00	0.56	0.00	0.00	0.00	0.00
	3	0.00	0.55	0.00	0.00	0.00	0.00
	4	0.00	0.58	0.00	0.00	0.00	0.00
	5	0.00	0.56	0.00	0.00	0.00	0.00
	6	0.00	0.55	0.00	0.00	0.00	0.00
	7	0.00	0.59	0.00	0.00	0.00	0.00
	8	0.00	0.56	0.00	0.00	0.00	0.00
	9	0.00	0.30	0.00	0.00	0.00	0.00
	10	0.00	0.30	0.00	0.00	0.00	0.00
	11	0.00	0.50	0.00	0.00	0.00	0.00
	12	0.00	0.51	0.00	0.00	0.00	0.00
	13	0.00	0.01	0.00	0.00	0.00	0.00
	14	0.00	0.05	0.00	0.00	0.00	0.00
	15	0.00	0.34	0.00	0.00	0.00	0.00
	16	0.00	0.35	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	17	0.00	0.48	0.00	0.00	0.00	0.00
	18	0.00	0.60	0.00	0.00	0.00	0.00
	19	0.00	0.54	0.00	0.00	0.00	0.00
	20	0.00	0.54	0.00	0.00	0.00	0.00
	21	0.00	0.34	0.00	0.00	0.00	0.00
	22	0.00	0.44	0.00	0.00	0.00	0.00
	23	0.00	0.39	0.00	0.00	0.00	0.00
	24	0.00	0.39	0.00	0.00	0.00	0.00
153	1	0.00	0.58	0.00	0.00	0.00	0.00
	2	0.00	0.61	0.00	0.00	0.00	0.00
	3	0.00	0.60	0.00	0.00	0.00	0.00
	4	0.00	0.63	0.00	0.00	0.00	0.00
	5	0.00	0.61	0.00	0.00	0.00	0.00
	6	0.00	0.60	0.00	0.00	0.00	0.00
	7	0.00	0.64	0.00	0.00	0.00	0.00
	8	0.00	0.61	0.00	0.00	0.00	0.00
	9	0.00	0.33	0.00	0.00	0.00	0.00
	10	0.00	0.35	0.00	0.00	0.00	0.00
	11	0.00	0.54	0.00	0.00	0.00	0.00
	12	0.00	0.56	0.00	0.00	0.00	0.00
	13	0.00	0.03	0.00	0.00	0.00	0.00
	14	0.00	0.07	0.00	0.00	0.00	0.00
	15	0.00	0.36	0.00	0.00	0.00	0.00
	16	0.00	0.38	0.00	0.00	0.00	0.00
	17	0.00	0.53	0.00	0.00	0.00	0.00
	18	0.00	0.65	0.00	0.00	0.00	0.00
	19	0.00	0.59	0.00	0.00	0.00	0.00
	20	0.00	0.59	0.00	0.00	0.00	0.00
	21	0.00	0.37	0.00	0.00	0.00	0.00
	22	0.00	0.47	0.00	0.00	0.00	0.00
	23	0.00	0.42	0.00	0.00	0.00	0.00
	24	0.00	0.42	0.00	0.00	0.00	0.00
154	1	0.00	0.63	0.00	0.00	0.00	0.00
	2	0.00	0.66	0.00	0.00	0.00	0.00
	3	0.00	0.65	0.00	0.00	0.00	0.00
	4	0.00	0.68	0.00	0.00	0.00	0.00
	5	0.00	0.66	0.00	0.00	0.00	0.00
	6	0.00	0.65	0.00	0.00	0.00	0.00
	7	0.00	0.69	0.00	0.00	0.00	0.00
	8	0.00	0.66	0.00	0.00	0.00	0.00
	9	0.00	0.37	0.00	0.00	0.00	0.00
	10	0.00	0.39	0.00	0.00	0.00	0.00
	11	0.00	0.59	0.00	0.00	0.00	0.00
	12	0.00	0.61	0.00	0.00	0.00	0.00
	13	0.00	0.05	0.00	0.00	0.00	0.00
	14	0.00	0.10	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	15	0.00	0.38	0.00	0.00	0.00	0.00
	16	0.00	0.41	0.00	0.00	0.00	0.00
	17	0.00	0.58	0.00	0.00	0.00	0.00
	18	0.00	0.70	0.00	0.00	0.00	0.00
	19	0.00	0.64	0.00	0.00	0.00	0.00
	20	0.00	0.64	0.00	0.00	0.00	0.00
	21	0.00	0.40	0.00	0.00	0.00	0.00
	22	0.00	0.50	0.00	0.00	0.00	0.00
	23	0.00	0.46	0.00	0.00	0.00	0.00
	24	0.00	0.45	0.00	0.00	0.00	0.00
155	1	0.00	0.68	0.00	0.00	0.00	0.00
	2	0.00	0.71	0.00	0.00	0.00	0.00
	3	0.00	0.70	0.00	0.00	0.00	0.00
	4	0.00	0.73	0.00	0.00	0.00	0.00
	5	0.00	0.71	0.00	0.00	0.00	0.00
	6	0.00	0.70	0.00	0.00	0.00	0.00
	7	0.00	0.74	0.00	0.00	0.00	0.00
	8	0.00	0.71	0.00	0.00	0.00	0.00
	9	0.00	0.41	0.00	0.00	0.00	0.00
	10	0.00	0.44	0.00	0.00	0.00	0.00
	11	0.00	0.63	0.00	0.00	0.00	0.00
	12	0.00	0.66	0.00	0.00	0.00	0.00
	13	0.00	0.06	0.00	0.00	0.00	0.00
	14	0.00	0.12	0.00	0.00	0.00	0.00
	15	0.00	0.40	0.00	0.00	0.00	0.00
	16	0.00	0.44	0.00	0.00	0.00	0.00
	17	0.00	0.63	0.00	0.00	0.00	0.00
	18	0.00	0.75	0.00	0.00	0.00	0.00
	19	0.00	0.69	0.00	0.00	0.00	0.00
	20	0.00	0.69	0.00	0.00	0.00	0.00
	21	0.00	0.43	0.00	0.00	0.00	0.00
	22	0.00	0.54	0.00	0.00	0.00	0.00
	23	0.00	0.49	0.00	0.00	0.00	0.00
	24	0.00	0.48	0.00	0.00	0.00	0.00
156	1	0.00	0.73	0.00	0.00	0.00	0.00
	2	0.00	0.76	0.00	0.00	0.00	0.00
	3	0.00	0.75	0.00	0.00	0.00	0.00
	4	0.00	0.78	0.00	0.00	0.00	0.00
	5	0.00	0.76	0.00	0.00	0.00	0.00
	6	0.00	0.75	0.00	0.00	0.00	0.00
	7	0.00	0.79	0.00	0.00	0.00	0.00
	8	0.00	0.76	0.00	0.00	0.00	0.00
	9	0.00	0.44	0.00	0.00	0.00	0.00
	10	0.00	0.48	0.00	0.00	0.00	0.00
	11	0.00	0.67	0.00	0.00	0.00	0.00
	12	0.00	0.71	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	13	0.00	0.08	0.00	0.00	0.00	0.00
	14	0.00	0.15	0.00	0.00	0.00	0.00
	15	0.00	0.42	0.00	0.00	0.00	0.00
	16	0.00	0.48	0.00	0.00	0.00	0.00
	17	0.00	0.68	0.00	0.00	0.00	0.00
	18	0.00	0.81	0.00	0.00	0.00	0.00
	19	0.00	0.74	0.00	0.00	0.00	0.00
	20	0.00	0.74	0.00	0.00	0.00	0.00
	21	0.00	0.46	0.00	0.00	0.00	0.00
	22	0.00	0.57	0.00	0.00	0.00	0.00
	23	0.00	0.52	0.00	0.00	0.00	0.00
	24	0.00	0.51	0.00	0.00	0.00	0.00
157	1	0.00	1.02	0.00	0.00	0.00	0.00
	2	0.00	1.04	0.00	0.00	0.00	0.00
	3	0.00	1.02	0.00	0.00	0.00	0.00
	4	0.00	1.06	0.00	0.00	0.00	0.00
	5	0.00	1.04	0.00	0.00	0.00	0.00
	6	0.00	1.02	0.00	0.00	0.00	0.00
	7	0.00	1.07	0.00	0.00	0.00	0.00
	8	0.00	1.04	0.00	0.00	0.00	0.00
	9	0.00	0.68	0.00	0.00	0.00	0.00
	10	0.00	0.77	0.00	0.00	0.00	0.00
	11	0.00	0.92	0.00	0.00	0.00	0.00
	12	0.00	1.00	0.00	0.00	0.00	0.00
	13	0.00	0.22	0.00	0.00	0.00	0.00
	14	0.00	0.34	0.00	0.00	0.00	0.00
	15	0.00	0.55	0.00	0.00	0.00	0.00
	16	0.00	0.66	0.00	0.00	0.00	0.00
	17	0.00	0.96	0.00	0.00	0.00	0.00
	18	0.00	1.08	0.00	0.00	0.00	0.00
	19	0.00	1.02	0.00	0.00	0.00	0.00
	20	0.00	1.02	0.00	0.00	0.00	0.00
	21	0.00	0.63	0.00	0.00	0.00	0.00
	22	0.00	0.73	0.00	0.00	0.00	0.00
	23	0.00	0.68	0.00	0.00	0.00	0.00
	24	0.00	0.68	0.00	0.00	0.00	0.00
158	1	0.00	1.07	0.00	0.00	0.00	0.00
	2	0.00	1.08	0.00	0.00	0.00	0.00
	3	0.00	1.07	0.00	0.00	0.00	0.00
	4	0.00	1.10	0.00	0.00	0.00	0.00
	5	0.00	1.08	0.00	0.00	0.00	0.00
	6	0.00	1.07	0.00	0.00	0.00	0.00
	7	0.00	1.11	0.00	0.00	0.00	0.00
	8	0.00	1.08	0.00	0.00	0.00	0.00
	9	0.00	0.73	0.00	0.00	0.00	0.00
	10	0.00	0.81	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	11	0.00	0.96	0.00	0.00	0.00	0.00
	12	0.00	1.04	0.00	0.00	0.00	0.00
	13	0.00	0.24	0.00	0.00	0.00	0.00
	14	0.00	0.37	0.00	0.00	0.00	0.00
	15	0.00	0.57	0.00	0.00	0.00	0.00
	16	0.00	0.68	0.00	0.00	0.00	0.00
	17	0.00	1.00	0.00	0.00	0.00	0.00
	18	0.00	1.12	0.00	0.00	0.00	0.00
	19	0.00	1.06	0.00	0.00	0.00	0.00
	20	0.00	1.06	0.00	0.00	0.00	0.00
	21	0.00	0.65	0.00	0.00	0.00	0.00
	22	0.00	0.75	0.00	0.00	0.00	0.00
	23	0.00	0.71	0.00	0.00	0.00	0.00
	24	0.00	0.70	0.00	0.00	0.00	0.00
159	1	0.00	1.11	0.00	0.00	0.00	0.00
	2	0.00	1.12	0.00	0.00	0.00	0.00
	3	0.00	1.11	0.00	0.00	0.00	0.00
	4	0.00	1.15	0.00	0.00	0.00	0.00
	5	0.00	1.12	0.00	0.00	0.00	0.00
	6	0.00	1.11	0.00	0.00	0.00	0.00
	7	0.00	1.15	0.00	0.00	0.00	0.00
	8	0.00	1.12	0.00	0.00	0.00	0.00
	9	0.00	0.77	0.00	0.00	0.00	0.00
	10	0.00	0.86	0.00	0.00	0.00	0.00
	11	0.00	1.00	0.00	0.00	0.00	0.00
	12	0.00	1.09	0.00	0.00	0.00	0.00
	13	0.00	0.27	0.00	0.00	0.00	0.00
	14	0.00	0.40	0.00	0.00	0.00	0.00
	15	0.00	0.59	0.00	0.00	0.00	0.00
	16	0.00	0.71	0.00	0.00	0.00	0.00
	17	0.00	1.05	0.00	0.00	0.00	0.00
	18	0.00	1.16	0.00	0.00	0.00	0.00
	19	0.00	1.11	0.00	0.00	0.00	0.00
	20	0.00	1.10	0.00	0.00	0.00	0.00
	21	0.00	0.68	0.00	0.00	0.00	0.00
	22	0.00	0.78	0.00	0.00	0.00	0.00
	23	0.00	0.73	0.00	0.00	0.00	0.00
	24	0.00	0.73	0.00	0.00	0.00	0.00
160	1	0.00	0.79	0.00	0.00	0.00	0.00
	2	0.00	0.77	0.00	0.00	0.00	0.00
	3	0.00	0.77	0.00	0.00	0.00	0.00
	4	0.00	0.81	0.00	0.00	0.00	0.00
	5	0.00	0.79	0.00	0.00	0.00	0.00
	6	0.00	0.77	0.00	0.00	0.00	0.00
	7	0.00	0.82	0.00	0.00	0.00	0.00
	8	0.00	0.80	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	9	0.00	0.92	0.00	0.00	0.00	0.00
	10	0.00	0.94	0.00	0.00	0.00	0.00
	11	0.00	0.79	0.00	0.00	0.00	0.00
	12	0.00	0.78	0.00	0.00	0.00	0.00
	13	0.00	0.73	0.00	0.00	0.00	0.00
	14	0.00	0.74	0.00	0.00	0.00	0.00
	15	0.00	0.54	0.00	0.00	0.00	0.00
	16	0.00	0.53	0.00	0.00	0.00	0.00
	17	0.00	0.81	0.00	0.00	0.00	0.00
	18	0.00	0.75	0.00	0.00	0.00	0.00
	19	0.00	0.78	0.00	0.00	0.00	0.00
	20	0.00	0.78	0.00	0.00	0.00	0.00
	21	0.00	0.56	0.00	0.00	0.00	0.00
	22	0.00	0.50	0.00	0.00	0.00	0.00
	23	0.00	0.53	0.00	0.00	0.00	0.00
	24	0.00	0.53	0.00	0.00	0.00	0.00
161	1	0.00	0.84	0.00	0.00	0.00	0.00
	2	0.00	0.82	0.00	0.00	0.00	0.00
	3	0.00	0.82	0.00	0.00	0.00	0.00
	4	0.00	0.86	0.00	0.00	0.00	0.00
	5	0.00	0.84	0.00	0.00	0.00	0.00
	6	0.00	0.82	0.00	0.00	0.00	0.00
	7	0.00	0.87	0.00	0.00	0.00	0.00
	8	0.00	0.85	0.00	0.00	0.00	0.00
	9	0.00	0.96	0.00	0.00	0.00	0.00
	10	0.00	0.99	0.00	0.00	0.00	0.00
	11	0.00	0.83	0.00	0.00	0.00	0.00
	12	0.00	0.83	0.00	0.00	0.00	0.00
	13	0.00	0.75	0.00	0.00	0.00	0.00
	14	0.00	0.77	0.00	0.00	0.00	0.00
	15	0.00	0.56	0.00	0.00	0.00	0.00
	16	0.00	0.56	0.00	0.00	0.00	0.00
	17	0.00	0.86	0.00	0.00	0.00	0.00
	18	0.00	0.80	0.00	0.00	0.00	0.00
	19	0.00	0.83	0.00	0.00	0.00	0.00
	20	0.00	0.83	0.00	0.00	0.00	0.00
	21	0.00	0.58	0.00	0.00	0.00	0.00
	22	0.00	0.53	0.00	0.00	0.00	0.00
	23	0.00	0.56	0.00	0.00	0.00	0.00
	24	0.00	0.56	0.00	0.00	0.00	0.00
162	1	0.00	0.89	0.00	0.00	0.00	0.00
	2	0.00	0.87	0.00	0.00	0.00	0.00
	3	0.00	0.87	0.00	0.00	0.00	0.00
	4	0.00	0.91	0.00	0.00	0.00	0.00
	5	0.00	0.89	0.00	0.00	0.00	0.00
	6	0.00	0.87	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	7	0.00	0.91	0.00	0.00	0.00	0.00
	8	0.00	0.89	0.00	0.00	0.00	0.00
	9	0.00	1.00	0.00	0.00	0.00	0.00
	10	0.00	1.03	0.00	0.00	0.00	0.00
	11	0.00	0.87	0.00	0.00	0.00	0.00
	12	0.00	0.88	0.00	0.00	0.00	0.00
	13	0.00	0.77	0.00	0.00	0.00	0.00
	14	0.00	0.80	0.00	0.00	0.00	0.00
	15	0.00	0.58	0.00	0.00	0.00	0.00
	16	0.00	0.59	0.00	0.00	0.00	0.00
	17	0.00	0.90	0.00	0.00	0.00	0.00
	18	0.00	0.84	0.00	0.00	0.00	0.00
	19	0.00	0.87	0.00	0.00	0.00	0.00
	20	0.00	0.88	0.00	0.00	0.00	0.00
	21	0.00	0.61	0.00	0.00	0.00	0.00
	22	0.00	0.56	0.00	0.00	0.00	0.00
	23	0.00	0.59	0.00	0.00	0.00	0.00
	24	0.00	0.59	0.00	0.00	0.00	0.00
163	1	0.00	0.93	0.00	0.00	0.00	0.00
	2	0.00	0.91	0.00	0.00	0.00	0.00
	3	0.00	0.91	0.00	0.00	0.00	0.00
	4	0.00	0.95	0.00	0.00	0.00	0.00
	5	0.00	0.93	0.00	0.00	0.00	0.00
	6	0.00	0.91	0.00	0.00	0.00	0.00
	7	0.00	0.96	0.00	0.00	0.00	0.00
	8	0.00	0.94	0.00	0.00	0.00	0.00
	9	0.00	1.04	0.00	0.00	0.00	0.00
	10	0.00	1.08	0.00	0.00	0.00	0.00
	11	0.00	0.91	0.00	0.00	0.00	0.00
	12	0.00	0.92	0.00	0.00	0.00	0.00
	13	0.00	0.78	0.00	0.00	0.00	0.00
	14	0.00	0.83	0.00	0.00	0.00	0.00
	15	0.00	0.60	0.00	0.00	0.00	0.00
	16	0.00	0.62	0.00	0.00	0.00	0.00
	17	0.00	0.95	0.00	0.00	0.00	0.00
	18	0.00	0.89	0.00	0.00	0.00	0.00
	19	0.00	0.92	0.00	0.00	0.00	0.00
	20	0.00	0.92	0.00	0.00	0.00	0.00
	21	0.00	0.64	0.00	0.00	0.00	0.00
	22	0.00	0.59	0.00	0.00	0.00	0.00
	23	0.00	0.61	0.00	0.00	0.00	0.00
	24	0.00	0.61	0.00	0.00	0.00	0.00
164	1	0.00	0.98	0.00	0.00	0.00	0.00
	2	0.00	0.96	0.00	0.00	0.00	0.00
	3	0.00	0.96	0.00	0.00	0.00	0.00
	4	0.00	1.00	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	5	0.00	0.97	0.00	0.00	0.00	0.00
	6	0.00	0.96	0.00	0.00	0.00	0.00
	7	0.00	1.00	0.00	0.00	0.00	0.00
	8	0.00	0.98	0.00	0.00	0.00	0.00
	9	0.00	1.07	0.00	0.00	0.00	0.00
	10	0.00	1.12	0.00	0.00	0.00	0.00
	11	0.00	0.95	0.00	0.00	0.00	0.00
	12	0.00	0.97	0.00	0.00	0.00	0.00
	13	0.00	0.80	0.00	0.00	0.00	0.00
	14	0.00	0.85	0.00	0.00	0.00	0.00
	15	0.00	0.62	0.00	0.00	0.00	0.00
	16	0.00	0.65	0.00	0.00	0.00	0.00
	17	0.00	0.99	0.00	0.00	0.00	0.00
	18	0.00	0.93	0.00	0.00	0.00	0.00
	19	0.00	0.96	0.00	0.00	0.00	0.00
	20	0.00	0.97	0.00	0.00	0.00	0.00
	21	0.00	0.66	0.00	0.00	0.00	0.00
	22	0.00	0.62	0.00	0.00	0.00	0.00
	23	0.00	0.64	0.00	0.00	0.00	0.00
	24	0.00	0.64	0.00	0.00	0.00	0.00
166	1	0.00	0.53	0.00	0.00	0.00	0.00
	2	0.00	0.53	0.00	0.00	0.00	0.00
	3	0.00	0.53	0.00	0.00	0.00	0.00
	4	0.00	0.56	0.00	0.00	0.00	0.00
	5	0.00	0.54	0.00	0.00	0.00	0.00
	6	0.00	0.53	0.00	0.00	0.00	0.00
	7	0.00	0.57	0.00	0.00	0.00	0.00
	8	0.00	0.55	0.00	0.00	0.00	0.00
	9	0.00	0.70	0.00	0.00	0.00	0.00
	10	0.00	0.68	0.00	0.00	0.00	0.00
	11	0.00	0.57	0.00	0.00	0.00	0.00
	12	0.00	0.52	0.00	0.00	0.00	0.00
	13	0.00	0.60	0.00	0.00	0.00	0.00
	14	0.00	0.57	0.00	0.00	0.00	0.00
	15	0.00	0.43	0.00	0.00	0.00	0.00
	16	0.00	0.37	0.00	0.00	0.00	0.00
	17	0.00	0.56	0.00	0.00	0.00	0.00
	18	0.00	0.50	0.00	0.00	0.00	0.00
	19	0.00	0.53	0.00	0.00	0.00	0.00
	20	0.00	0.53	0.00	0.00	0.00	0.00
	21	0.00	0.40	0.00	0.00	0.00	0.00
	22	0.00	0.36	0.00	0.00	0.00	0.00
	23	0.00	0.38	0.00	0.00	0.00	0.00
	24	0.00	0.38	0.00	0.00	0.00	0.00
167	1	0.00	0.58	0.00	0.00	0.00	0.00
	2	0.00	0.58	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	3	0.00	0.58	0.00	0.00	0.00	0.00
	4	0.00	0.61	0.00	0.00	0.00	0.00
	5	0.00	0.59	0.00	0.00	0.00	0.00
	6	0.00	0.57	0.00	0.00	0.00	0.00
	7	0.00	0.62	0.00	0.00	0.00	0.00
	8	0.00	0.60	0.00	0.00	0.00	0.00
	9	0.00	0.75	0.00	0.00	0.00	0.00
	10	0.00	0.73	0.00	0.00	0.00	0.00
	11	0.00	0.61	0.00	0.00	0.00	0.00
	12	0.00	0.58	0.00	0.00	0.00	0.00
	13	0.00	0.63	0.00	0.00	0.00	0.00
	14	0.00	0.61	0.00	0.00	0.00	0.00
	15	0.00	0.45	0.00	0.00	0.00	0.00
	16	0.00	0.40	0.00	0.00	0.00	0.00
	17	0.00	0.61	0.00	0.00	0.00	0.00
	18	0.00	0.55	0.00	0.00	0.00	0.00
	19	0.00	0.58	0.00	0.00	0.00	0.00
	20	0.00	0.58	0.00	0.00	0.00	0.00
	21	0.00	0.43	0.00	0.00	0.00	0.00
	22	0.00	0.39	0.00	0.00	0.00	0.00
	23	0.00	0.41	0.00	0.00	0.00	0.00
	24	0.00	0.41	0.00	0.00	0.00	0.00
168	1	0.00	0.63	0.00	0.00	0.00	0.00
	2	0.00	0.63	0.00	0.00	0.00	0.00
	3	0.00	0.63	0.00	0.00	0.00	0.00
	4	0.00	0.66	0.00	0.00	0.00	0.00
	5	0.00	0.64	0.00	0.00	0.00	0.00
	6	0.00	0.62	0.00	0.00	0.00	0.00
	7	0.00	0.67	0.00	0.00	0.00	0.00
	8	0.00	0.65	0.00	0.00	0.00	0.00
	9	0.00	0.79	0.00	0.00	0.00	0.00
	10	0.00	0.78	0.00	0.00	0.00	0.00
	11	0.00	0.66	0.00	0.00	0.00	0.00
	12	0.00	0.63	0.00	0.00	0.00	0.00
	13	0.00	0.65	0.00	0.00	0.00	0.00
	14	0.00	0.64	0.00	0.00	0.00	0.00
	15	0.00	0.47	0.00	0.00	0.00	0.00
	16	0.00	0.43	0.00	0.00	0.00	0.00
	17	0.00	0.66	0.00	0.00	0.00	0.00
	18	0.00	0.60	0.00	0.00	0.00	0.00
	19	0.00	0.63	0.00	0.00	0.00	0.00
	20	0.00	0.63	0.00	0.00	0.00	0.00
	21	0.00	0.46	0.00	0.00	0.00	0.00
	22	0.00	0.42	0.00	0.00	0.00	0.00
	23	0.00	0.44	0.00	0.00	0.00	0.00
	24	0.00	0.44	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
169	1	0.00	0.68	0.00	0.00	0.00	0.00
	2	0.00	0.67	0.00	0.00	0.00	0.00
	3	0.00	0.67	0.00	0.00	0.00	0.00
	4	0.00	0.71	0.00	0.00	0.00	0.00
	5	0.00	0.69	0.00	0.00	0.00	0.00
	6	0.00	0.67	0.00	0.00	0.00	0.00
	7	0.00	0.72	0.00	0.00	0.00	0.00
	8	0.00	0.70	0.00	0.00	0.00	0.00
	9	0.00	0.84	0.00	0.00	0.00	0.00
	10	0.00	0.84	0.00	0.00	0.00	0.00
	11	0.00	0.70	0.00	0.00	0.00	0.00
	12	0.00	0.68	0.00	0.00	0.00	0.00
	13	0.00	0.68	0.00	0.00	0.00	0.00
	14	0.00	0.68	0.00	0.00	0.00	0.00
	15	0.00	0.50	0.00	0.00	0.00	0.00
	16	0.00	0.47	0.00	0.00	0.00	0.00
	17	0.00	0.71	0.00	0.00	0.00	0.00
	18	0.00	0.65	0.00	0.00	0.00	0.00
	19	0.00	0.68	0.00	0.00	0.00	0.00
	20	0.00	0.68	0.00	0.00	0.00	0.00
	21	0.00	0.49	0.00	0.00	0.00	0.00
	22	0.00	0.45	0.00	0.00	0.00	0.00
	23	0.00	0.47	0.00	0.00	0.00	0.00
	24	0.00	0.47	0.00	0.00	0.00	0.00
170	1	0.00	0.74	0.00	0.00	0.00	0.00
	2	0.00	0.72	0.00	0.00	0.00	0.00
	3	0.00	0.72	0.00	0.00	0.00	0.00
	4	0.00	0.76	0.00	0.00	0.00	0.00
	5	0.00	0.74	0.00	0.00	0.00	0.00
	6	0.00	0.72	0.00	0.00	0.00	0.00
	7	0.00	0.77	0.00	0.00	0.00	0.00
	8	0.00	0.75	0.00	0.00	0.00	0.00
	9	0.00	0.88	0.00	0.00	0.00	0.00
	10	0.00	0.89	0.00	0.00	0.00	0.00
	11	0.00	0.74	0.00	0.00	0.00	0.00
	12	0.00	0.73	0.00	0.00	0.00	0.00
	13	0.00	0.70	0.00	0.00	0.00	0.00
	14	0.00	0.71	0.00	0.00	0.00	0.00
	15	0.00	0.52	0.00	0.00	0.00	0.00
	16	0.00	0.50	0.00	0.00	0.00	0.00
	17	0.00	0.76	0.00	0.00	0.00	0.00
	18	0.00	0.70	0.00	0.00	0.00	0.00
	19	0.00	0.73	0.00	0.00	0.00	0.00
	20	0.00	0.73	0.00	0.00	0.00	0.00
	21	0.00	0.53	0.00	0.00	0.00	0.00
	22	0.00	0.48	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	23	0.00	0.50	0.00	0.00	0.00	0.00
	24	0.00	0.50	0.00	0.00	0.00	0.00
171	1	0.00	1.03	0.00	0.00	0.00	0.00
	2	0.00	1.00	0.00	0.00	0.00	0.00
	3	0.00	1.00	0.00	0.00	0.00	0.00
	4	0.00	1.04	0.00	0.00	0.00	0.00
	5	0.00	1.02	0.00	0.00	0.00	0.00
	6	0.00	1.00	0.00	0.00	0.00	0.00
	7	0.00	1.04	0.00	0.00	0.00	0.00
	8	0.00	1.03	0.00	0.00	0.00	0.00
	9	0.00	1.11	0.00	0.00	0.00	0.00
	10	0.00	1.16	0.00	0.00	0.00	0.00
	11	0.00	0.99	0.00	0.00	0.00	0.00
	12	0.00	1.02	0.00	0.00	0.00	0.00
	13	0.00	0.81	0.00	0.00	0.00	0.00
	14	0.00	0.87	0.00	0.00	0.00	0.00
	15	0.00	0.64	0.00	0.00	0.00	0.00
	16	0.00	0.68	0.00	0.00	0.00	0.00
	17	0.00	1.04	0.00	0.00	0.00	0.00
	18	0.00	0.98	0.00	0.00	0.00	0.00
	19	0.00	1.01	0.00	0.00	0.00	0.00
	20	0.00	1.01	0.00	0.00	0.00	0.00
	21	0.00	0.69	0.00	0.00	0.00	0.00
	22	0.00	0.64	0.00	0.00	0.00	0.00
	23	0.00	0.67	0.00	0.00	0.00	0.00
	24	0.00	0.67	0.00	0.00	0.00	0.00
172	1	0.00	1.07	0.00	0.00	0.00	0.00
	2	0.00	1.04	0.00	0.00	0.00	0.00
	3	0.00	1.04	0.00	0.00	0.00	0.00
	4	0.00	1.08	0.00	0.00	0.00	0.00
	5	0.00	1.06	0.00	0.00	0.00	0.00
	6	0.00	1.04	0.00	0.00	0.00	0.00
	7	0.00	1.09	0.00	0.00	0.00	0.00
	8	0.00	1.07	0.00	0.00	0.00	0.00
	9	0.00	1.14	0.00	0.00	0.00	0.00
	10	0.00	1.20	0.00	0.00	0.00	0.00
	11	0.00	1.03	0.00	0.00	0.00	0.00
	12	0.00	1.06	0.00	0.00	0.00	0.00
	13	0.00	0.83	0.00	0.00	0.00	0.00
	14	0.00	0.90	0.00	0.00	0.00	0.00
	15	0.00	0.66	0.00	0.00	0.00	0.00
	16	0.00	0.71	0.00	0.00	0.00	0.00
	17	0.00	1.08	0.00	0.00	0.00	0.00
	18	0.00	1.02	0.00	0.00	0.00	0.00
	19	0.00	1.05	0.00	0.00	0.00	0.00
	20	0.00	1.05	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	21	0.00	0.72	0.00	0.00	0.00	0.00
	22	0.00	0.67	0.00	0.00	0.00	0.00
	23	0.00	0.69	0.00	0.00	0.00	0.00
	24	0.00	0.69	0.00	0.00	0.00	0.00
173	1	0.00	1.12	0.00	0.00	0.00	0.00
	2	0.00	1.09	0.00	0.00	0.00	0.00
	3	0.00	1.09	0.00	0.00	0.00	0.00
	4	0.00	1.13	0.00	0.00	0.00	0.00
	5	0.00	1.10	0.00	0.00	0.00	0.00
	6	0.00	1.09	0.00	0.00	0.00	0.00
	7	0.00	1.13	0.00	0.00	0.00	0.00
	8	0.00	1.11	0.00	0.00	0.00	0.00
	9	0.00	1.17	0.00	0.00	0.00	0.00
	10	0.00	1.24	0.00	0.00	0.00	0.00
	11	0.00	1.06	0.00	0.00	0.00	0.00
	12	0.00	1.10	0.00	0.00	0.00	0.00
	13	0.00	0.84	0.00	0.00	0.00	0.00
	14	0.00	0.92	0.00	0.00	0.00	0.00
	15	0.00	0.68	0.00	0.00	0.00	0.00
	16	0.00	0.73	0.00	0.00	0.00	0.00
	17	0.00	1.12	0.00	0.00	0.00	0.00
	18	0.00	1.07	0.00	0.00	0.00	0.00
	19	0.00	1.09	0.00	0.00	0.00	0.00
	20	0.00	1.09	0.00	0.00	0.00	0.00
	21	0.00	0.74	0.00	0.00	0.00	0.00
	22	0.00	0.69	0.00	0.00	0.00	0.00
	23	0.00	0.72	0.00	0.00	0.00	0.00
	24	0.00	0.72	0.00	0.00	0.00	0.00
174	1	0.00	1.17	0.00	0.00	0.00	0.00
	2	0.00	1.16	0.00	0.00	0.00	0.00
	3	0.00	1.15	0.00	0.00	0.00	0.00
	4	0.00	1.19	0.00	0.00	0.00	0.00
	5	0.00	1.17	0.00	0.00	0.00	0.00
	6	0.00	1.15	0.00	0.00	0.00	0.00
	7	0.00	1.19	0.00	0.00	0.00	0.00
	8	0.00	1.17	0.00	0.00	0.00	0.00
	9	0.00	0.89	0.00	0.00	0.00	0.00
	10	0.00	0.98	0.00	0.00	0.00	0.00
	11	0.00	1.05	0.00	0.00	0.00	0.00
	12	0.00	1.14	0.00	0.00	0.00	0.00
	13	0.00	0.40	0.00	0.00	0.00	0.00
	14	0.00	0.54	0.00	0.00	0.00	0.00
	15	0.00	0.63	0.00	0.00	0.00	0.00
	16	0.00	0.75	0.00	0.00	0.00	0.00
	17	0.00	1.11	0.00	0.00	0.00	0.00
	18	0.00	1.19	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	19	0.00	1.15	0.00	0.00	0.00	0.00
	20	0.00	1.15	0.00	0.00	0.00	0.00
	21	0.00	0.72	0.00	0.00	0.00	0.00
	22	0.00	0.79	0.00	0.00	0.00	0.00
	23	0.00	0.76	0.00	0.00	0.00	0.00
	24	0.00	0.75	0.00	0.00	0.00	0.00
175	1	0.00	1.16	0.00	0.00	0.00	0.00
	2	0.00	1.16	0.00	0.00	0.00	0.00
	3	0.00	1.15	0.00	0.00	0.00	0.00
	4	0.00	1.19	0.00	0.00	0.00	0.00
	5	0.00	1.17	0.00	0.00	0.00	0.00
	6	0.00	1.15	0.00	0.00	0.00	0.00
	7	0.00	1.19	0.00	0.00	0.00	0.00
	8	0.00	1.17	0.00	0.00	0.00	0.00
	9	0.00	0.85	0.00	0.00	0.00	0.00
	10	0.00	0.95	0.00	0.00	0.00	0.00
	11	0.00	1.04	0.00	0.00	0.00	0.00
	12	0.00	1.14	0.00	0.00	0.00	0.00
	13	0.00	0.35	0.00	0.00	0.00	0.00
	14	0.00	0.48	0.00	0.00	0.00	0.00
	15	0.00	0.62	0.00	0.00	0.00	0.00
	16	0.00	0.74	0.00	0.00	0.00	0.00
	17	0.00	1.10	0.00	0.00	0.00	0.00
	18	0.00	1.20	0.00	0.00	0.00	0.00
	19	0.00	1.15	0.00	0.00	0.00	0.00
	20	0.00	1.15	0.00	0.00	0.00	0.00
	21	0.00	0.71	0.00	0.00	0.00	0.00
	22	0.00	0.80	0.00	0.00	0.00	0.00
	23	0.00	0.76	0.00	0.00	0.00	0.00
	24	0.00	0.75	0.00	0.00	0.00	0.00
176	1	0.00	1.17	0.00	0.00	0.00	0.00
	2	0.00	1.16	0.00	0.00	0.00	0.00
	3	0.00	1.15	0.00	0.00	0.00	0.00
	4	0.00	1.19	0.00	0.00	0.00	0.00
	5	0.00	1.17	0.00	0.00	0.00	0.00
	6	0.00	1.15	0.00	0.00	0.00	0.00
	7	0.00	1.20	0.00	0.00	0.00	0.00
	8	0.00	1.17	0.00	0.00	0.00	0.00
	9	0.00	0.93	0.00	0.00	0.00	0.00
	10	0.00	1.02	0.00	0.00	0.00	0.00
	11	0.00	1.06	0.00	0.00	0.00	0.00
	12	0.00	1.14	0.00	0.00	0.00	0.00
	13	0.00	0.46	0.00	0.00	0.00	0.00
	14	0.00	0.59	0.00	0.00	0.00	0.00
	15	0.00	0.64	0.00	0.00	0.00	0.00
	16	0.00	0.75	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	17	0.00	1.12	0.00	0.00	0.00	0.00
	18	0.00	1.18	0.00	0.00	0.00	0.00
	19	0.00	1.15	0.00	0.00	0.00	0.00
	20	0.00	1.15	0.00	0.00	0.00	0.00
	21	0.00	0.73	0.00	0.00	0.00	0.00
	22	0.00	0.78	0.00	0.00	0.00	0.00
	23	0.00	0.76	0.00	0.00	0.00	0.00
	24	0.00	0.75	0.00	0.00	0.00	0.00
177	1	0.00	1.17	0.00	0.00	0.00	0.00
	2	0.00	1.16	0.00	0.00	0.00	0.00
	3	0.00	1.15	0.00	0.00	0.00	0.00
	4	0.00	1.19	0.00	0.00	0.00	0.00
	5	0.00	1.17	0.00	0.00	0.00	0.00
	6	0.00	1.15	0.00	0.00	0.00	0.00
	7	0.00	1.19	0.00	0.00	0.00	0.00
	8	0.00	1.17	0.00	0.00	0.00	0.00
	9	0.00	0.97	0.00	0.00	0.00	0.00
	10	0.00	1.06	0.00	0.00	0.00	0.00
	11	0.00	1.07	0.00	0.00	0.00	0.00
	12	0.00	1.15	0.00	0.00	0.00	0.00
	13	0.00	0.52	0.00	0.00	0.00	0.00
	14	0.00	0.64	0.00	0.00	0.00	0.00
	15	0.00	0.65	0.00	0.00	0.00	0.00
	16	0.00	0.75	0.00	0.00	0.00	0.00
	17	0.00	1.13	0.00	0.00	0.00	0.00
	18	0.00	1.18	0.00	0.00	0.00	0.00
	19	0.00	1.15	0.00	0.00	0.00	0.00
	20	0.00	1.15	0.00	0.00	0.00	0.00
	21	0.00	0.74	0.00	0.00	0.00	0.00
	22	0.00	0.78	0.00	0.00	0.00	0.00
	23	0.00	0.76	0.00	0.00	0.00	0.00
	24	0.00	0.75	0.00	0.00	0.00	0.00
178	1	0.00	1.17	0.00	0.00	0.00	0.00
	2	0.00	1.16	0.00	0.00	0.00	0.00
	3	0.00	1.15	0.00	0.00	0.00	0.00
	4	0.00	1.19	0.00	0.00	0.00	0.00
	5	0.00	1.17	0.00	0.00	0.00	0.00
	6	0.00	1.15	0.00	0.00	0.00	0.00
	7	0.00	1.19	0.00	0.00	0.00	0.00
	8	0.00	1.17	0.00	0.00	0.00	0.00
	9	0.00	1.01	0.00	0.00	0.00	0.00
	10	0.00	1.10	0.00	0.00	0.00	0.00
	11	0.00	1.07	0.00	0.00	0.00	0.00
	12	0.00	1.15	0.00	0.00	0.00	0.00
	13	0.00	0.57	0.00	0.00	0.00	0.00
	14	0.00	0.69	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	15	0.00	0.65	0.00	0.00	0.00	0.00
	16	0.00	0.76	0.00	0.00	0.00	0.00
	17	0.00	1.13	0.00	0.00	0.00	0.00
	18	0.00	1.17	0.00	0.00	0.00	0.00
	19	0.00	1.15	0.00	0.00	0.00	0.00
	20	0.00	1.15	0.00	0.00	0.00	0.00
	21	0.00	0.74	0.00	0.00	0.00	0.00
	22	0.00	0.77	0.00	0.00	0.00	0.00
	23	0.00	0.76	0.00	0.00	0.00	0.00
	24	0.00	0.75	0.00	0.00	0.00	0.00
179	1	0.00	1.17	0.00	0.00	0.00	0.00
	2	0.00	1.15	0.00	0.00	0.00	0.00
	3	0.00	1.15	0.00	0.00	0.00	0.00
	4	0.00	1.19	0.00	0.00	0.00	0.00
	5	0.00	1.16	0.00	0.00	0.00	0.00
	6	0.00	1.15	0.00	0.00	0.00	0.00
	7	0.00	1.19	0.00	0.00	0.00	0.00
	8	0.00	1.17	0.00	0.00	0.00	0.00
	9	0.00	1.05	0.00	0.00	0.00	0.00
	10	0.00	1.14	0.00	0.00	0.00	0.00
	11	0.00	1.08	0.00	0.00	0.00	0.00
	12	0.00	1.15	0.00	0.00	0.00	0.00
	13	0.00	0.63	0.00	0.00	0.00	0.00
	14	0.00	0.74	0.00	0.00	0.00	0.00
	15	0.00	0.66	0.00	0.00	0.00	0.00
	16	0.00	0.76	0.00	0.00	0.00	0.00
	17	0.00	1.14	0.00	0.00	0.00	0.00
	18	0.00	1.16	0.00	0.00	0.00	0.00
	19	0.00	1.15	0.00	0.00	0.00	0.00
	20	0.00	1.15	0.00	0.00	0.00	0.00
	21	0.00	0.75	0.00	0.00	0.00	0.00
	22	0.00	0.76	0.00	0.00	0.00	0.00
	23	0.00	0.75	0.00	0.00	0.00	0.00
	24	0.00	0.75	0.00	0.00	0.00	0.00
180	1	0.00	1.17	0.00	0.00	0.00	0.00
	2	0.00	1.15	0.00	0.00	0.00	0.00
	3	0.00	1.14	0.00	0.00	0.00	0.00
	4	0.00	1.18	0.00	0.00	0.00	0.00
	5	0.00	1.16	0.00	0.00	0.00	0.00
	6	0.00	1.14	0.00	0.00	0.00	0.00
	7	0.00	1.19	0.00	0.00	0.00	0.00
	8	0.00	1.17	0.00	0.00	0.00	0.00
	9	0.00	1.09	0.00	0.00	0.00	0.00
	10	0.00	1.17	0.00	0.00	0.00	0.00
	11	0.00	1.09	0.00	0.00	0.00	0.00
	12	0.00	1.15	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	13	0.00	0.69	0.00	0.00	0.00	0.00
	14	0.00	0.79	0.00	0.00	0.00	0.00
	15	0.00	0.67	0.00	0.00	0.00	0.00
	16	0.00	0.76	0.00	0.00	0.00	0.00
	17	0.00	1.15	0.00	0.00	0.00	0.00
	18	0.00	1.14	0.00	0.00	0.00	0.00
	19	0.00	1.15	0.00	0.00	0.00	0.00
	20	0.00	1.15	0.00	0.00	0.00	0.00
	21	0.00	0.75	0.00	0.00	0.00	0.00
	22	0.00	0.75	0.00	0.00	0.00	0.00
	23	0.00	0.75	0.00	0.00	0.00	0.00
	24	0.00	0.75	0.00	0.00	0.00	0.00
181	1	0.00	1.17	0.00	0.00	0.00	0.00
	2	0.00	1.14	0.00	0.00	0.00	0.00
	3	0.00	1.14	0.00	0.00	0.00	0.00
	4	0.00	1.18	0.00	0.00	0.00	0.00
	5	0.00	1.16	0.00	0.00	0.00	0.00
	6	0.00	1.14	0.00	0.00	0.00	0.00
	7	0.00	1.18	0.00	0.00	0.00	0.00
	8	0.00	1.16	0.00	0.00	0.00	0.00
	9	0.00	1.13	0.00	0.00	0.00	0.00
	10	0.00	1.21	0.00	0.00	0.00	0.00
	11	0.00	1.09	0.00	0.00	0.00	0.00
	12	0.00	1.15	0.00	0.00	0.00	0.00
	13	0.00	0.75	0.00	0.00	0.00	0.00
	14	0.00	0.84	0.00	0.00	0.00	0.00
	15	0.00	0.68	0.00	0.00	0.00	0.00
	16	0.00	0.76	0.00	0.00	0.00	0.00
	17	0.00	1.15	0.00	0.00	0.00	0.00
	18	0.00	1.13	0.00	0.00	0.00	0.00
	19	0.00	1.14	0.00	0.00	0.00	0.00
	20	0.00	1.14	0.00	0.00	0.00	0.00
	21	0.00	0.76	0.00	0.00	0.00	0.00
	22	0.00	0.74	0.00	0.00	0.00	0.00
	23	0.00	0.75	0.00	0.00	0.00	0.00
	24	0.00	0.75	0.00	0.00	0.00	0.00
182	1	0.00	1.17	0.00	0.00	0.00	0.00
	2	0.00	1.14	0.00	0.00	0.00	0.00
	3	0.00	1.13	0.00	0.00	0.00	0.00
	4	0.00	1.17	0.00	0.00	0.00	0.00
	5	0.00	1.15	0.00	0.00	0.00	0.00
	6	0.00	1.13	0.00	0.00	0.00	0.00
	7	0.00	1.18	0.00	0.00	0.00	0.00
	8	0.00	1.16	0.00	0.00	0.00	0.00
	9	0.00	1.17	0.00	0.00	0.00	0.00
	10	0.00	1.24	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	11	0.00	1.10	0.00	0.00	0.00	0.00
	12	0.00	1.15	0.00	0.00	0.00	0.00
	13	0.00	0.80	0.00	0.00	0.00	0.00
	14	0.00	0.89	0.00	0.00	0.00	0.00
	15	0.00	0.69	0.00	0.00	0.00	0.00
	16	0.00	0.76	0.00	0.00	0.00	0.00
	17	0.00	1.16	0.00	0.00	0.00	0.00
	18	0.00	1.12	0.00	0.00	0.00	0.00
	19	0.00	1.14	0.00	0.00	0.00	0.00
	20	0.00	1.14	0.00	0.00	0.00	0.00
	21	0.00	0.76	0.00	0.00	0.00	0.00
	22	0.00	0.73	0.00	0.00	0.00	0.00
	23	0.00	0.74	0.00	0.00	0.00	0.00
	24	0.00	0.75	0.00	0.00	0.00	0.00
183	1	0.00	1.16	0.00	0.00	0.00	0.00
	2	0.00	1.16	0.00	0.00	0.00	0.00
	3	0.00	1.15	0.00	0.00	0.00	0.00
	4	0.00	1.19	0.00	0.00	0.00	0.00
	5	0.00	1.17	0.00	0.00	0.00	0.00
	6	0.00	1.15	0.00	0.00	0.00	0.00
	7	0.00	1.19	0.00	0.00	0.00	0.00
	8	0.00	1.17	0.00	0.00	0.00	0.00
	9	0.00	0.81	0.00	0.00	0.00	0.00
	10	0.00	0.91	0.00	0.00	0.00	0.00
	11	0.00	1.04	0.00	0.00	0.00	0.00
	12	0.00	1.13	0.00	0.00	0.00	0.00
	13	0.00	0.30	0.00	0.00	0.00	0.00
	14	0.00	0.44	0.00	0.00	0.00	0.00
	15	0.00	0.61	0.00	0.00	0.00	0.00
	16	0.00	0.74	0.00	0.00	0.00	0.00
	17	0.00	1.09	0.00	0.00	0.00	0.00
	18	0.00	1.20	0.00	0.00	0.00	0.00
	19	0.00	1.15	0.00	0.00	0.00	0.00
	20	0.00	1.14	0.00	0.00	0.00	0.00
	21	0.00	0.71	0.00	0.00	0.00	0.00
	22	0.00	0.80	0.00	0.00	0.00	0.00
	23	0.00	0.76	0.00	0.00	0.00	0.00
	24	0.00	0.75	0.00	0.00	0.00	0.00
184	1	0.00	1.16	0.00	0.00	0.00	0.00
	2	0.00	1.13	0.00	0.00	0.00	0.00
	3	0.00	1.13	0.00	0.00	0.00	0.00
	4	0.00	1.17	0.00	0.00	0.00	0.00
	5	0.00	1.15	0.00	0.00	0.00	0.00
	6	0.00	1.13	0.00	0.00	0.00	0.00
	7	0.00	1.17	0.00	0.00	0.00	0.00
	8	0.00	1.15	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	9	0.00	1.21	0.00	0.00	0.00	0.00
	10	0.00	1.28	0.00	0.00	0.00	0.00
	11	0.00	1.10	0.00	0.00	0.00	0.00
	12	0.00	1.15	0.00	0.00	0.00	0.00
	13	0.00	0.86	0.00	0.00	0.00	0.00
	14	0.00	0.94	0.00	0.00	0.00	0.00
	15	0.00	0.70	0.00	0.00	0.00	0.00
	16	0.00	0.76	0.00	0.00	0.00	0.00
	17	0.00	1.16	0.00	0.00	0.00	0.00
	18	0.00	1.11	0.00	0.00	0.00	0.00
	19	0.00	1.14	0.00	0.00	0.00	0.00
	20	0.00	1.14	0.00	0.00	0.00	0.00
	21	0.00	0.76	0.00	0.00	0.00	0.00
	22	0.00	0.72	0.00	0.00	0.00	0.00
	23	0.00	0.74	0.00	0.00	0.00	0.00
	24	0.00	0.74	0.00	0.00	0.00	0.00
185	1	0.00	0.48	0.00	0.00	0.00	0.00
	2	0.00	0.51	0.00	0.00	0.00	0.00
	3	0.00	0.50	0.00	0.00	0.00	0.00
	4	0.00	0.53	0.00	0.00	0.00	0.00
	5	0.00	0.51	0.00	0.00	0.00	0.00
	6	0.00	0.50	0.00	0.00	0.00	0.00
	7	0.00	0.54	0.00	0.00	0.00	0.00
	8	0.00	0.51	0.00	0.00	0.00	0.00
	9	0.00	0.30	0.00	0.00	0.00	0.00
	10	0.00	0.30	0.00	0.00	0.00	0.00
	11	0.00	0.47	0.00	0.00	0.00	0.00
	12	0.00	0.46	0.00	0.00	0.00	0.00
	13	0.00	0.05	0.00	0.00	0.00	0.00
	14	0.00	0.07	0.00	0.00	0.00	0.00
	15	0.00	0.33	0.00	0.00	0.00	0.00
	16	0.00	0.32	0.00	0.00	0.00	0.00
	17	0.00	0.44	0.00	0.00	0.00	0.00
	18	0.00	0.54	0.00	0.00	0.00	0.00
	19	0.00	0.50	0.00	0.00	0.00	0.00
	20	0.00	0.49	0.00	0.00	0.00	0.00
	21	0.00	0.32	0.00	0.00	0.00	0.00
	22	0.00	0.40	0.00	0.00	0.00	0.00
	23	0.00	0.36	0.00	0.00	0.00	0.00
	24	0.00	0.36	0.00	0.00	0.00	0.00
186	1	0.00	0.48	0.00	0.00	0.00	0.00
	2	0.00	0.51	0.00	0.00	0.00	0.00
	3	0.00	0.50	0.00	0.00	0.00	0.00
	4	0.00	0.53	0.00	0.00	0.00	0.00
	5	0.00	0.51	0.00	0.00	0.00	0.00
	6	0.00	0.50	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	7	0.00	0.54	0.00	0.00	0.00	0.00
	8	0.00	0.52	0.00	0.00	0.00	0.00
	9	0.00	0.34	0.00	0.00	0.00	0.00
	10	0.00	0.33	0.00	0.00	0.00	0.00
	11	0.00	0.47	0.00	0.00	0.00	0.00
	12	0.00	0.47	0.00	0.00	0.00	0.00
	13	0.00	0.11	0.00	0.00	0.00	0.00
	14	0.00	0.12	0.00	0.00	0.00	0.00
	15	0.00	0.34	0.00	0.00	0.00	0.00
	16	0.00	0.32	0.00	0.00	0.00	0.00
	17	0.00	0.45	0.00	0.00	0.00	0.00
	18	0.00	0.54	0.00	0.00	0.00	0.00
	19	0.00	0.50	0.00	0.00	0.00	0.00
	20	0.00	0.49	0.00	0.00	0.00	0.00
	21	0.00	0.33	0.00	0.00	0.00	0.00
	22	0.00	0.40	0.00	0.00	0.00	0.00
	23	0.00	0.36	0.00	0.00	0.00	0.00
	24	0.00	0.36	0.00	0.00	0.00	0.00
187	1	0.00	0.48	0.00	0.00	0.00	0.00
	2	0.00	0.51	0.00	0.00	0.00	0.00
	3	0.00	0.50	0.00	0.00	0.00	0.00
	4	0.00	0.53	0.00	0.00	0.00	0.00
	5	0.00	0.51	0.00	0.00	0.00	0.00
	6	0.00	0.50	0.00	0.00	0.00	0.00
	7	0.00	0.54	0.00	0.00	0.00	0.00
	8	0.00	0.52	0.00	0.00	0.00	0.00
	9	0.00	0.38	0.00	0.00	0.00	0.00
	10	0.00	0.37	0.00	0.00	0.00	0.00
	11	0.00	0.48	0.00	0.00	0.00	0.00
	12	0.00	0.47	0.00	0.00	0.00	0.00
	13	0.00	0.17	0.00	0.00	0.00	0.00
	14	0.00	0.18	0.00	0.00	0.00	0.00
	15	0.00	0.35	0.00	0.00	0.00	0.00
	16	0.00	0.33	0.00	0.00	0.00	0.00
	17	0.00	0.46	0.00	0.00	0.00	0.00
	18	0.00	0.53	0.00	0.00	0.00	0.00
	19	0.00	0.50	0.00	0.00	0.00	0.00
	20	0.00	0.49	0.00	0.00	0.00	0.00
	21	0.00	0.34	0.00	0.00	0.00	0.00
	22	0.00	0.39	0.00	0.00	0.00	0.00
	23	0.00	0.36	0.00	0.00	0.00	0.00
	24	0.00	0.36	0.00	0.00	0.00	0.00
188	1	0.00	0.48	0.00	0.00	0.00	0.00
	2	0.00	0.50	0.00	0.00	0.00	0.00
	3	0.00	0.50	0.00	0.00	0.00	0.00
	4	0.00	0.53	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	5	0.00	0.51	0.00	0.00	0.00	0.00
	6	0.00	0.50	0.00	0.00	0.00	0.00
	7	0.00	0.54	0.00	0.00	0.00	0.00
	8	0.00	0.52	0.00	0.00	0.00	0.00
	9	0.00	0.42	0.00	0.00	0.00	0.00
	10	0.00	0.41	0.00	0.00	0.00	0.00
	11	0.00	0.49	0.00	0.00	0.00	0.00
	12	0.00	0.47	0.00	0.00	0.00	0.00
	13	0.00	0.23	0.00	0.00	0.00	0.00
	14	0.00	0.23	0.00	0.00	0.00	0.00
	15	0.00	0.36	0.00	0.00	0.00	0.00
	16	0.00	0.33	0.00	0.00	0.00	0.00
	17	0.00	0.47	0.00	0.00	0.00	0.00
	18	0.00	0.52	0.00	0.00	0.00	0.00
	19	0.00	0.50	0.00	0.00	0.00	0.00
	20	0.00	0.50	0.00	0.00	0.00	0.00
	21	0.00	0.34	0.00	0.00	0.00	0.00
	22	0.00	0.38	0.00	0.00	0.00	0.00
	23	0.00	0.36	0.00	0.00	0.00	0.00
	24	0.00	0.36	0.00	0.00	0.00	0.00
189	1	0.00	0.48	0.00	0.00	0.00	0.00
	2	0.00	0.50	0.00	0.00	0.00	0.00
	3	0.00	0.50	0.00	0.00	0.00	0.00
	4	0.00	0.53	0.00	0.00	0.00	0.00
	5	0.00	0.51	0.00	0.00	0.00	0.00
	6	0.00	0.49	0.00	0.00	0.00	0.00
	7	0.00	0.54	0.00	0.00	0.00	0.00
	8	0.00	0.52	0.00	0.00	0.00	0.00
	9	0.00	0.46	0.00	0.00	0.00	0.00
	10	0.00	0.45	0.00	0.00	0.00	0.00
	11	0.00	0.50	0.00	0.00	0.00	0.00
	12	0.00	0.47	0.00	0.00	0.00	0.00
	13	0.00	0.29	0.00	0.00	0.00	0.00
	14	0.00	0.28	0.00	0.00	0.00	0.00
	15	0.00	0.36	0.00	0.00	0.00	0.00
	16	0.00	0.33	0.00	0.00	0.00	0.00
	17	0.00	0.48	0.00	0.00	0.00	0.00
	18	0.00	0.51	0.00	0.00	0.00	0.00
	19	0.00	0.50	0.00	0.00	0.00	0.00
	20	0.00	0.49	0.00	0.00	0.00	0.00
	21	0.00	0.35	0.00	0.00	0.00	0.00
	22	0.00	0.38	0.00	0.00	0.00	0.00
	23	0.00	0.36	0.00	0.00	0.00	0.00
	24	0.00	0.36	0.00	0.00	0.00	0.00
190	1	0.00	0.48	0.00	0.00	0.00	0.00
	2	0.00	0.50	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	3	0.00	0.49	0.00	0.00	0.00	0.00
	4	0.00	0.53	0.00	0.00	0.00	0.00
	5	0.00	0.51	0.00	0.00	0.00	0.00
	6	0.00	0.49	0.00	0.00	0.00	0.00
	7	0.00	0.54	0.00	0.00	0.00	0.00
	8	0.00	0.51	0.00	0.00	0.00	0.00
	9	0.00	0.51	0.00	0.00	0.00	0.00
	10	0.00	0.49	0.00	0.00	0.00	0.00
	11	0.00	0.50	0.00	0.00	0.00	0.00
	12	0.00	0.47	0.00	0.00	0.00	0.00
	13	0.00	0.35	0.00	0.00	0.00	0.00
	14	0.00	0.33	0.00	0.00	0.00	0.00
	15	0.00	0.37	0.00	0.00	0.00	0.00
	16	0.00	0.33	0.00	0.00	0.00	0.00
	17	0.00	0.49	0.00	0.00	0.00	0.00
	18	0.00	0.50	0.00	0.00	0.00	0.00
	19	0.00	0.49	0.00	0.00	0.00	0.00
	20	0.00	0.49	0.00	0.00	0.00	0.00
	21	0.00	0.35	0.00	0.00	0.00	0.00
	22	0.00	0.37	0.00	0.00	0.00	0.00
	23	0.00	0.36	0.00	0.00	0.00	0.00
	24	0.00	0.36	0.00	0.00	0.00	0.00
191	1	0.00	0.48	0.00	0.00	0.00	0.00
	2	0.00	0.49	0.00	0.00	0.00	0.00
	3	0.00	0.49	0.00	0.00	0.00	0.00
	4	0.00	0.52	0.00	0.00	0.00	0.00
	5	0.00	0.51	0.00	0.00	0.00	0.00
	6	0.00	0.49	0.00	0.00	0.00	0.00
	7	0.00	0.53	0.00	0.00	0.00	0.00
	8	0.00	0.51	0.00	0.00	0.00	0.00
	9	0.00	0.55	0.00	0.00	0.00	0.00
	10	0.00	0.52	0.00	0.00	0.00	0.00
	11	0.00	0.51	0.00	0.00	0.00	0.00
	12	0.00	0.47	0.00	0.00	0.00	0.00
	13	0.00	0.41	0.00	0.00	0.00	0.00
	14	0.00	0.39	0.00	0.00	0.00	0.00
	15	0.00	0.38	0.00	0.00	0.00	0.00
	16	0.00	0.34	0.00	0.00	0.00	0.00
	17	0.00	0.49	0.00	0.00	0.00	0.00
	18	0.00	0.49	0.00	0.00	0.00	0.00
	19	0.00	0.49	0.00	0.00	0.00	0.00
	20	0.00	0.49	0.00	0.00	0.00	0.00
	21	0.00	0.36	0.00	0.00	0.00	0.00
	22	0.00	0.36	0.00	0.00	0.00	0.00
	23	0.00	0.36	0.00	0.00	0.00	0.00
	24	0.00	0.36	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
192	1	0.00	0.48	0.00	0.00	0.00	0.00
	2	0.00	0.49	0.00	0.00	0.00	0.00
	3	0.00	0.49	0.00	0.00	0.00	0.00
	4	0.00	0.52	0.00	0.00	0.00	0.00
	5	0.00	0.50	0.00	0.00	0.00	0.00
	6	0.00	0.48	0.00	0.00	0.00	0.00
	7	0.00	0.53	0.00	0.00	0.00	0.00
	8	0.00	0.51	0.00	0.00	0.00	0.00
	9	0.00	0.58	0.00	0.00	0.00	0.00
	10	0.00	0.56	0.00	0.00	0.00	0.00
	11	0.00	0.51	0.00	0.00	0.00	0.00
	12	0.00	0.47	0.00	0.00	0.00	0.00
	13	0.00	0.46	0.00	0.00	0.00	0.00
	14	0.00	0.44	0.00	0.00	0.00	0.00
	15	0.00	0.39	0.00	0.00	0.00	0.00
	16	0.00	0.34	0.00	0.00	0.00	0.00
	17	0.00	0.50	0.00	0.00	0.00	0.00
	18	0.00	0.48	0.00	0.00	0.00	0.00
	19	0.00	0.49	0.00	0.00	0.00	0.00
	20	0.00	0.49	0.00	0.00	0.00	0.00
	21	0.00	0.36	0.00	0.00	0.00	0.00
	22	0.00	0.35	0.00	0.00	0.00	0.00
	23	0.00	0.36	0.00	0.00	0.00	0.00
	24	0.00	0.36	0.00	0.00	0.00	0.00
193	1	0.00	0.48	0.00	0.00	0.00	0.00
	2	0.00	0.48	0.00	0.00	0.00	0.00
	3	0.00	0.48	0.00	0.00	0.00	0.00
	4	0.00	0.51	0.00	0.00	0.00	0.00
	5	0.00	0.50	0.00	0.00	0.00	0.00
	6	0.00	0.48	0.00	0.00	0.00	0.00
	7	0.00	0.52	0.00	0.00	0.00	0.00
	8	0.00	0.50	0.00	0.00	0.00	0.00
	9	0.00	0.62	0.00	0.00	0.00	0.00
	10	0.00	0.59	0.00	0.00	0.00	0.00
	11	0.00	0.52	0.00	0.00	0.00	0.00
	12	0.00	0.47	0.00	0.00	0.00	0.00
	13	0.00	0.52	0.00	0.00	0.00	0.00
	14	0.00	0.49	0.00	0.00	0.00	0.00
	15	0.00	0.40	0.00	0.00	0.00	0.00
	16	0.00	0.34	0.00	0.00	0.00	0.00
	17	0.00	0.50	0.00	0.00	0.00	0.00
	18	0.00	0.47	0.00	0.00	0.00	0.00
	19	0.00	0.49	0.00	0.00	0.00	0.00
	20	0.00	0.49	0.00	0.00	0.00	0.00
	21	0.00	0.37	0.00	0.00	0.00	0.00
	22	0.00	0.34	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	23	0.00	0.35	0.00	0.00	0.00	0.00
	24	0.00	0.35	0.00	0.00	0.00	0.00
194	1	0.00	0.47	0.00	0.00	0.00	0.00
	2	0.00	0.51	0.00	0.00	0.00	0.00
	3	0.00	0.50	0.00	0.00	0.00	0.00
	4	0.00	0.53	0.00	0.00	0.00	0.00
	5	0.00	0.51	0.00	0.00	0.00	0.00
	6	0.00	0.50	0.00	0.00	0.00	0.00
	7	0.00	0.54	0.00	0.00	0.00	0.00
	8	0.00	0.51	0.00	0.00	0.00	0.00
	9	0.00	0.26	0.00	0.00	0.00	0.00
	10	0.00	0.26	0.00	0.00	0.00	0.00
	11	0.00	0.46	0.00	0.00	0.00	0.00
	12	0.00	0.46	0.00	0.00	0.00	0.00
	13	0.00	0.00	0.00	0.00	0.00	0.00
	14	0.00	0.02	0.00	0.00	0.00	0.00
	15	0.00	0.32	0.00	0.00	0.00	0.00
	16	0.00	0.32	0.00	0.00	0.00	0.00
	17	0.00	0.44	0.00	0.00	0.00	0.00
	18	0.00	0.55	0.00	0.00	0.00	0.00
	19	0.00	0.49	0.00	0.00	0.00	0.00
	20	0.00	0.49	0.00	0.00	0.00	0.00
	21	0.00	0.31	0.00	0.00	0.00	0.00
	22	0.00	0.41	0.00	0.00	0.00	0.00
	23	0.00	0.36	0.00	0.00	0.00	0.00
	24	0.00	0.36	0.00	0.00	0.00	0.00
195	1	0.00	0.48	0.00	0.00	0.00	0.00
	2	0.00	0.48	0.00	0.00	0.00	0.00
	3	0.00	0.48	0.00	0.00	0.00	0.00
	4	0.00	0.51	0.00	0.00	0.00	0.00
	5	0.00	0.49	0.00	0.00	0.00	0.00
	6	0.00	0.48	0.00	0.00	0.00	0.00
	7	0.00	0.52	0.00	0.00	0.00	0.00
	8	0.00	0.50	0.00	0.00	0.00	0.00
	9	0.00	0.66	0.00	0.00	0.00	0.00
	10	0.00	0.63	0.00	0.00	0.00	0.00
	11	0.00	0.52	0.00	0.00	0.00	0.00
	12	0.00	0.47	0.00	0.00	0.00	0.00
	13	0.00	0.57	0.00	0.00	0.00	0.00
	14	0.00	0.54	0.00	0.00	0.00	0.00
	15	0.00	0.40	0.00	0.00	0.00	0.00
	16	0.00	0.34	0.00	0.00	0.00	0.00
	17	0.00	0.51	0.00	0.00	0.00	0.00
	18	0.00	0.45	0.00	0.00	0.00	0.00
	19	0.00	0.48	0.00	0.00	0.00	0.00
	20	0.00	0.48	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	21	0.00	0.37	0.00	0.00	0.00	0.00
	22	0.00	0.33	0.00	0.00	0.00	0.00
	23	0.00	0.35	0.00	0.00	0.00	0.00
	24	0.00	0.35	0.00	0.00	0.00	0.00
196	1	0.00	0.78	0.00	0.00	0.00	0.00
	2	0.00	0.81	0.00	0.00	0.00	0.00
	3	0.00	0.79	0.00	0.00	0.00	0.00
	4	0.00	0.83	0.00	0.00	0.00	0.00
	5	0.00	0.81	0.00	0.00	0.00	0.00
	6	0.00	0.79	0.00	0.00	0.00	0.00
	7	0.00	0.84	0.00	0.00	0.00	0.00
	8	0.00	0.81	0.00	0.00	0.00	0.00
	9	0.00	0.44	0.00	0.00	0.00	0.00
	10	0.00	0.49	0.00	0.00	0.00	0.00
	11	0.00	0.71	0.00	0.00	0.00	0.00
	12	0.00	0.76	0.00	0.00	0.00	0.00
	13	0.00	0.05	0.00	0.00	0.00	0.00
	14	0.00	0.13	0.00	0.00	0.00	0.00
	15	0.00	0.44	0.00	0.00	0.00	0.00
	16	0.00	0.50	0.00	0.00	0.00	0.00
	17	0.00	0.72	0.00	0.00	0.00	0.00
	18	0.00	0.86	0.00	0.00	0.00	0.00
	19	0.00	0.79	0.00	0.00	0.00	0.00
	20	0.00	0.78	0.00	0.00	0.00	0.00
	21	0.00	0.48	0.00	0.00	0.00	0.00
	22	0.00	0.60	0.00	0.00	0.00	0.00
	23	0.00	0.54	0.00	0.00	0.00	0.00
	24	0.00	0.54	0.00	0.00	0.00	0.00
197	1	0.00	0.83	0.00	0.00	0.00	0.00
	2	0.00	0.86	0.00	0.00	0.00	0.00
	3	0.00	0.84	0.00	0.00	0.00	0.00
	4	0.00	0.88	0.00	0.00	0.00	0.00
	5	0.00	0.86	0.00	0.00	0.00	0.00
	6	0.00	0.84	0.00	0.00	0.00	0.00
	7	0.00	0.89	0.00	0.00	0.00	0.00
	8	0.00	0.86	0.00	0.00	0.00	0.00
	9	0.00	0.48	0.00	0.00	0.00	0.00
	10	0.00	0.54	0.00	0.00	0.00	0.00
	11	0.00	0.75	0.00	0.00	0.00	0.00
	12	0.00	0.81	0.00	0.00	0.00	0.00
	13	0.00	0.07	0.00	0.00	0.00	0.00
	14	0.00	0.16	0.00	0.00	0.00	0.00
	15	0.00	0.46	0.00	0.00	0.00	0.00
	16	0.00	0.53	0.00	0.00	0.00	0.00
	17	0.00	0.76	0.00	0.00	0.00	0.00
	18	0.00	0.91	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	19	0.00	0.84	0.00	0.00	0.00	0.00
	20	0.00	0.83	0.00	0.00	0.00	0.00
	21	0.00	0.51	0.00	0.00	0.00	0.00
	22	0.00	0.63	0.00	0.00	0.00	0.00
	23	0.00	0.57	0.00	0.00	0.00	0.00
	24	0.00	0.57	0.00	0.00	0.00	0.00
198	1	0.00	0.88	0.00	0.00	0.00	0.00
	2	0.00	0.90	0.00	0.00	0.00	0.00
	3	0.00	0.89	0.00	0.00	0.00	0.00
	4	0.00	0.92	0.00	0.00	0.00	0.00
	5	0.00	0.91	0.00	0.00	0.00	0.00
	6	0.00	0.89	0.00	0.00	0.00	0.00
	7	0.00	0.93	0.00	0.00	0.00	0.00
	8	0.00	0.90	0.00	0.00	0.00	0.00
	9	0.00	0.52	0.00	0.00	0.00	0.00
	10	0.00	0.59	0.00	0.00	0.00	0.00
	11	0.00	0.79	0.00	0.00	0.00	0.00
	12	0.00	0.86	0.00	0.00	0.00	0.00
	13	0.00	0.09	0.00	0.00	0.00	0.00
	14	0.00	0.19	0.00	0.00	0.00	0.00
	15	0.00	0.48	0.00	0.00	0.00	0.00
	16	0.00	0.56	0.00	0.00	0.00	0.00
	17	0.00	0.81	0.00	0.00	0.00	0.00
	18	0.00	0.95	0.00	0.00	0.00	0.00
	19	0.00	0.88	0.00	0.00	0.00	0.00
	20	0.00	0.88	0.00	0.00	0.00	0.00
	21	0.00	0.54	0.00	0.00	0.00	0.00
	22	0.00	0.66	0.00	0.00	0.00	0.00
	23	0.00	0.60	0.00	0.00	0.00	0.00
	24	0.00	0.60	0.00	0.00	0.00	0.00
199	1	0.00	0.93	0.00	0.00	0.00	0.00
	2	0.00	0.95	0.00	0.00	0.00	0.00
	3	0.00	0.93	0.00	0.00	0.00	0.00
	4	0.00	0.97	0.00	0.00	0.00	0.00
	5	0.00	0.95	0.00	0.00	0.00	0.00
	6	0.00	0.93	0.00	0.00	0.00	0.00
	7	0.00	0.98	0.00	0.00	0.00	0.00
	8	0.00	0.95	0.00	0.00	0.00	0.00
	9	0.00	0.56	0.00	0.00	0.00	0.00
	10	0.00	0.63	0.00	0.00	0.00	0.00
	11	0.00	0.83	0.00	0.00	0.00	0.00
	12	0.00	0.90	0.00	0.00	0.00	0.00
	13	0.00	0.11	0.00	0.00	0.00	0.00
	14	0.00	0.22	0.00	0.00	0.00	0.00
	15	0.00	0.50	0.00	0.00	0.00	0.00
	16	0.00	0.59	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	17	0.00	0.86	0.00	0.00	0.00	0.00
	18	0.00	1.00	0.00	0.00	0.00	0.00
	19	0.00	0.93	0.00	0.00	0.00	0.00
	20	0.00	0.92	0.00	0.00	0.00	0.00
	21	0.00	0.57	0.00	0.00	0.00	0.00
	22	0.00	0.68	0.00	0.00	0.00	0.00
	23	0.00	0.63	0.00	0.00	0.00	0.00
	24	0.00	0.62	0.00	0.00	0.00	0.00
200	1	0.00	0.97	0.00	0.00	0.00	0.00
	2	0.00	0.99	0.00	0.00	0.00	0.00
	3	0.00	0.98	0.00	0.00	0.00	0.00
	4	0.00	1.01	0.00	0.00	0.00	0.00
	5	0.00	1.00	0.00	0.00	0.00	0.00
	6	0.00	0.98	0.00	0.00	0.00	0.00
	7	0.00	1.02	0.00	0.00	0.00	0.00
	8	0.00	0.99	0.00	0.00	0.00	0.00
	9	0.00	0.60	0.00	0.00	0.00	0.00
	10	0.00	0.68	0.00	0.00	0.00	0.00
	11	0.00	0.87	0.00	0.00	0.00	0.00
	12	0.00	0.95	0.00	0.00	0.00	0.00
	13	0.00	0.14	0.00	0.00	0.00	0.00
	14	0.00	0.25	0.00	0.00	0.00	0.00
	15	0.00	0.52	0.00	0.00	0.00	0.00
	16	0.00	0.62	0.00	0.00	0.00	0.00
	17	0.00	0.90	0.00	0.00	0.00	0.00
	18	0.00	1.04	0.00	0.00	0.00	0.00
	19	0.00	0.97	0.00	0.00	0.00	0.00
	20	0.00	0.97	0.00	0.00	0.00	0.00
	21	0.00	0.59	0.00	0.00	0.00	0.00
	22	0.00	0.71	0.00	0.00	0.00	0.00
	23	0.00	0.65	0.00	0.00	0.00	0.00
	24	0.00	0.65	0.00	0.00	0.00	0.00
201	1	0.00	0.52	0.00	0.00	0.00	0.00
	2	0.00	0.56	0.00	0.00	0.00	0.00
	3	0.00	0.55	0.00	0.00	0.00	0.00
	4	0.00	0.58	0.00	0.00	0.00	0.00
	5	0.00	0.56	0.00	0.00	0.00	0.00
	6	0.00	0.55	0.00	0.00	0.00	0.00
	7	0.00	0.59	0.00	0.00	0.00	0.00
	8	0.00	0.56	0.00	0.00	0.00	0.00
	9	0.00	0.26	0.00	0.00	0.00	0.00
	10	0.00	0.27	0.00	0.00	0.00	0.00
	11	0.00	0.49	0.00	0.00	0.00	0.00
	12	0.00	0.50	0.00	0.00	0.00	0.00
	13	0.00	0.00	0.00	0.00	0.00	0.00
	14	0.00	0.00	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	15	0.00	0.33	0.00	0.00	0.00	0.00
	16	0.00	0.34	0.00	0.00	0.00	0.00
	17	0.00	0.47	0.00	0.00	0.00	0.00
	18	0.00	0.61	0.00	0.00	0.00	0.00
	19	0.00	0.54	0.00	0.00	0.00	0.00
	20	0.00	0.54	0.00	0.00	0.00	0.00
	21	0.00	0.34	0.00	0.00	0.00	0.00
	22	0.00	0.45	0.00	0.00	0.00	0.00
	23	0.00	0.39	0.00	0.00	0.00	0.00
	24	0.00	0.39	0.00	0.00	0.00	0.00
202	1	0.00	0.57	0.00	0.00	0.00	0.00
	2	0.00	0.61	0.00	0.00	0.00	0.00
	3	0.00	0.60	0.00	0.00	0.00	0.00
	4	0.00	0.63	0.00	0.00	0.00	0.00
	5	0.00	0.61	0.00	0.00	0.00	0.00
	6	0.00	0.60	0.00	0.00	0.00	0.00
	7	0.00	0.64	0.00	0.00	0.00	0.00
	8	0.00	0.61	0.00	0.00	0.00	0.00
	9	0.00	0.29	0.00	0.00	0.00	0.00
	10	0.00	0.31	0.00	0.00	0.00	0.00
	11	0.00	0.54	0.00	0.00	0.00	0.00
	12	0.00	0.56	0.00	0.00	0.00	0.00
	13	0.00	0.00	0.00	0.00	0.00	0.00
	14	0.00	0.02	0.00	0.00	0.00	0.00
	15	0.00	0.35	0.00	0.00	0.00	0.00
	16	0.00	0.38	0.00	0.00	0.00	0.00
	17	0.00	0.52	0.00	0.00	0.00	0.00
	18	0.00	0.66	0.00	0.00	0.00	0.00
	19	0.00	0.59	0.00	0.00	0.00	0.00
	20	0.00	0.59	0.00	0.00	0.00	0.00
	21	0.00	0.37	0.00	0.00	0.00	0.00
	22	0.00	0.48	0.00	0.00	0.00	0.00
	23	0.00	0.42	0.00	0.00	0.00	0.00
	24	0.00	0.42	0.00	0.00	0.00	0.00
203	1	0.00	0.63	0.00	0.00	0.00	0.00
	2	0.00	0.66	0.00	0.00	0.00	0.00
	3	0.00	0.65	0.00	0.00	0.00	0.00
	4	0.00	0.68	0.00	0.00	0.00	0.00
	5	0.00	0.66	0.00	0.00	0.00	0.00
	6	0.00	0.65	0.00	0.00	0.00	0.00
	7	0.00	0.69	0.00	0.00	0.00	0.00
	8	0.00	0.66	0.00	0.00	0.00	0.00
	9	0.00	0.33	0.00	0.00	0.00	0.00
	10	0.00	0.36	0.00	0.00	0.00	0.00
	11	0.00	0.58	0.00	0.00	0.00	0.00
	12	0.00	0.61	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	13	0.00	0.00	0.00	0.00	0.00	0.00
	14	0.00	0.05	0.00	0.00	0.00	0.00
	15	0.00	0.37	0.00	0.00	0.00	0.00
	16	0.00	0.41	0.00	0.00	0.00	0.00
	17	0.00	0.57	0.00	0.00	0.00	0.00
	18	0.00	0.71	0.00	0.00	0.00	0.00
	19	0.00	0.64	0.00	0.00	0.00	0.00
	20	0.00	0.64	0.00	0.00	0.00	0.00
	21	0.00	0.39	0.00	0.00	0.00	0.00
	22	0.00	0.51	0.00	0.00	0.00	0.00
	23	0.00	0.45	0.00	0.00	0.00	0.00
	24	0.00	0.45	0.00	0.00	0.00	0.00
204	1	0.00	0.68	0.00	0.00	0.00	0.00
	2	0.00	0.71	0.00	0.00	0.00	0.00
	3	0.00	0.70	0.00	0.00	0.00	0.00
	4	0.00	0.73	0.00	0.00	0.00	0.00
	5	0.00	0.71	0.00	0.00	0.00	0.00
	6	0.00	0.70	0.00	0.00	0.00	0.00
	7	0.00	0.74	0.00	0.00	0.00	0.00
	8	0.00	0.71	0.00	0.00	0.00	0.00
	9	0.00	0.37	0.00	0.00	0.00	0.00
	10	0.00	0.40	0.00	0.00	0.00	0.00
	11	0.00	0.62	0.00	0.00	0.00	0.00
	12	0.00	0.66	0.00	0.00	0.00	0.00
	13	0.00	0.01	0.00	0.00	0.00	0.00
	14	0.00	0.07	0.00	0.00	0.00	0.00
	15	0.00	0.39	0.00	0.00	0.00	0.00
	16	0.00	0.44	0.00	0.00	0.00	0.00
	17	0.00	0.62	0.00	0.00	0.00	0.00
	18	0.00	0.76	0.00	0.00	0.00	0.00
	19	0.00	0.69	0.00	0.00	0.00	0.00
	20	0.00	0.69	0.00	0.00	0.00	0.00
	21	0.00	0.42	0.00	0.00	0.00	0.00
	22	0.00	0.54	0.00	0.00	0.00	0.00
	23	0.00	0.48	0.00	0.00	0.00	0.00
	24	0.00	0.48	0.00	0.00	0.00	0.00
205	1	0.00	0.73	0.00	0.00	0.00	0.00
	2	0.00	0.76	0.00	0.00	0.00	0.00
	3	0.00	0.75	0.00	0.00	0.00	0.00
	4	0.00	0.78	0.00	0.00	0.00	0.00
	5	0.00	0.76	0.00	0.00	0.00	0.00
	6	0.00	0.74	0.00	0.00	0.00	0.00
	7	0.00	0.79	0.00	0.00	0.00	0.00
	8	0.00	0.76	0.00	0.00	0.00	0.00
	9	0.00	0.41	0.00	0.00	0.00	0.00
	10	0.00	0.45	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	11	0.00	0.66	0.00	0.00	0.00	0.00
	12	0.00	0.71	0.00	0.00	0.00	0.00
	13	0.00	0.03	0.00	0.00	0.00	0.00
	14	0.00	0.10	0.00	0.00	0.00	0.00
	15	0.00	0.41	0.00	0.00	0.00	0.00
	16	0.00	0.47	0.00	0.00	0.00	0.00
	17	0.00	0.67	0.00	0.00	0.00	0.00
	18	0.00	0.81	0.00	0.00	0.00	0.00
	19	0.00	0.74	0.00	0.00	0.00	0.00
	20	0.00	0.73	0.00	0.00	0.00	0.00
	21	0.00	0.45	0.00	0.00	0.00	0.00
	22	0.00	0.57	0.00	0.00	0.00	0.00
	23	0.00	0.51	0.00	0.00	0.00	0.00
	24	0.00	0.51	0.00	0.00	0.00	0.00
206	1	0.00	1.02	0.00	0.00	0.00	0.00
	2	0.00	1.04	0.00	0.00	0.00	0.00
	3	0.00	1.02	0.00	0.00	0.00	0.00
	4	0.00	1.06	0.00	0.00	0.00	0.00
	5	0.00	1.04	0.00	0.00	0.00	0.00
	6	0.00	1.02	0.00	0.00	0.00	0.00
	7	0.00	1.06	0.00	0.00	0.00	0.00
	8	0.00	1.04	0.00	0.00	0.00	0.00
	9	0.00	0.65	0.00	0.00	0.00	0.00
	10	0.00	0.73	0.00	0.00	0.00	0.00
	11	0.00	0.91	0.00	0.00	0.00	0.00
	12	0.00	0.99	0.00	0.00	0.00	0.00
	13	0.00	0.16	0.00	0.00	0.00	0.00
	14	0.00	0.29	0.00	0.00	0.00	0.00
	15	0.00	0.54	0.00	0.00	0.00	0.00
	16	0.00	0.65	0.00	0.00	0.00	0.00
	17	0.00	0.95	0.00	0.00	0.00	0.00
	18	0.00	1.08	0.00	0.00	0.00	0.00
	19	0.00	1.02	0.00	0.00	0.00	0.00
	20	0.00	1.01	0.00	0.00	0.00	0.00
	21	0.00	0.62	0.00	0.00	0.00	0.00
	22	0.00	0.73	0.00	0.00	0.00	0.00
	23	0.00	0.68	0.00	0.00	0.00	0.00
	24	0.00	0.67	0.00	0.00	0.00	0.00
207	1	0.00	1.07	0.00	0.00	0.00	0.00
	2	0.00	1.08	0.00	0.00	0.00	0.00
	3	0.00	1.07	0.00	0.00	0.00	0.00
	4	0.00	1.10	0.00	0.00	0.00	0.00
	5	0.00	1.08	0.00	0.00	0.00	0.00
	6	0.00	1.06	0.00	0.00	0.00	0.00
	7	0.00	1.11	0.00	0.00	0.00	0.00
	8	0.00	1.08	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	9	0.00	0.69	0.00	0.00	0.00	0.00
	10	0.00	0.78	0.00	0.00	0.00	0.00
	11	0.00	0.95	0.00	0.00	0.00	0.00
	12	0.00	1.04	0.00	0.00	0.00	0.00
	13	0.00	0.19	0.00	0.00	0.00	0.00
	14	0.00	0.32	0.00	0.00	0.00	0.00
	15	0.00	0.56	0.00	0.00	0.00	0.00
	16	0.00	0.68	0.00	0.00	0.00	0.00
	17	0.00	0.99	0.00	0.00	0.00	0.00
	18	0.00	1.13	0.00	0.00	0.00	0.00
	19	0.00	1.06	0.00	0.00	0.00	0.00
	20	0.00	1.06	0.00	0.00	0.00	0.00
	21	0.00	0.65	0.00	0.00	0.00	0.00
	22	0.00	0.76	0.00	0.00	0.00	0.00
	23	0.00	0.71	0.00	0.00	0.00	0.00
	24	0.00	0.70	0.00	0.00	0.00	0.00
208	1	0.00	1.11	0.00	0.00	0.00	0.00
	2	0.00	1.12	0.00	0.00	0.00	0.00
	3	0.00	1.11	0.00	0.00	0.00	0.00
	4	0.00	1.14	0.00	0.00	0.00	0.00
	5	0.00	1.12	0.00	0.00	0.00	0.00
	6	0.00	1.11	0.00	0.00	0.00	0.00
	7	0.00	1.15	0.00	0.00	0.00	0.00
	8	0.00	1.12	0.00	0.00	0.00	0.00
	9	0.00	0.73	0.00	0.00	0.00	0.00
	10	0.00	0.82	0.00	0.00	0.00	0.00
	11	0.00	0.99	0.00	0.00	0.00	0.00
	12	0.00	1.08	0.00	0.00	0.00	0.00
	13	0.00	0.22	0.00	0.00	0.00	0.00
	14	0.00	0.35	0.00	0.00	0.00	0.00
	15	0.00	0.58	0.00	0.00	0.00	0.00
	16	0.00	0.71	0.00	0.00	0.00	0.00
	17	0.00	1.04	0.00	0.00	0.00	0.00
	18	0.00	1.17	0.00	0.00	0.00	0.00
	19	0.00	1.10	0.00	0.00	0.00	0.00
	20	0.00	1.10	0.00	0.00	0.00	0.00
	21	0.00	0.67	0.00	0.00	0.00	0.00
	22	0.00	0.78	0.00	0.00	0.00	0.00
	23	0.00	0.73	0.00	0.00	0.00	0.00
	24	0.00	0.72	0.00	0.00	0.00	0.00
209	1	0.00	1.16	0.00	0.00	0.00	0.00
	2	0.00	1.16	0.00	0.00	0.00	0.00
	3	0.00	1.15	0.00	0.00	0.00	0.00
	4	0.00	1.18	0.00	0.00	0.00	0.00
	5	0.00	1.16	0.00	0.00	0.00	0.00
	6	0.00	1.15	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	7	0.00	1.19	0.00	0.00	0.00	0.00
	8	0.00	1.16	0.00	0.00	0.00	0.00
	9	0.00	0.77	0.00	0.00	0.00	0.00
	10	0.00	0.87	0.00	0.00	0.00	0.00
	11	0.00	1.03	0.00	0.00	0.00	0.00
	12	0.00	1.13	0.00	0.00	0.00	0.00
	13	0.00	0.25	0.00	0.00	0.00	0.00
	14	0.00	0.39	0.00	0.00	0.00	0.00
	15	0.00	0.60	0.00	0.00	0.00	0.00
	16	0.00	0.73	0.00	0.00	0.00	0.00
	17	0.00	1.08	0.00	0.00	0.00	0.00
	18	0.00	1.21	0.00	0.00	0.00	0.00
	19	0.00	1.15	0.00	0.00	0.00	0.00
	20	0.00	1.14	0.00	0.00	0.00	0.00
	21	0.00	0.70	0.00	0.00	0.00	0.00
	22	0.00	0.81	0.00	0.00	0.00	0.00
	23	0.00	0.75	0.00	0.00	0.00	0.00
	24	0.00	0.75	0.00	0.00	0.00	0.00
210	1	0.00	0.47	0.00	0.00	0.00	0.00
	2	0.00	0.51	0.00	0.00	0.00	0.00
	3	0.00	0.50	0.00	0.00	0.00	0.00
	4	0.00	0.52	0.00	0.00	0.00	0.00
	5	0.00	0.51	0.00	0.00	0.00	0.00
	6	0.00	0.50	0.00	0.00	0.00	0.00
	7	0.00	0.53	0.00	0.00	0.00	0.00
	8	0.00	0.51	0.00	0.00	0.00	0.00
	9	0.00	0.22	0.00	0.00	0.00	0.00
	10	0.00	0.22	0.00	0.00	0.00	0.00
	11	0.00	0.45	0.00	0.00	0.00	0.00
	12	0.00	0.45	0.00	0.00	0.00	0.00
	13	0.00	0.00	0.00	0.00	0.00	0.00
	14	0.00	0.00	0.00	0.00	0.00	0.00
	15	0.00	0.31	0.00	0.00	0.00	0.00
	16	0.00	0.31	0.00	0.00	0.00	0.00
	17	0.00	0.43	0.00	0.00	0.00	0.00
	18	0.00	0.55	0.00	0.00	0.00	0.00
	19	0.00	0.49	0.00	0.00	0.00	0.00
	20	0.00	0.49	0.00	0.00	0.00	0.00
	21	0.00	0.31	0.00	0.00	0.00	0.00
	22	0.00	0.41	0.00	0.00	0.00	0.00
	23	0.00	0.36	0.00	0.00	0.00	0.00
	24	0.00	0.36	0.00	0.00	0.00	0.00
211	1	0.00	0.78	0.00	0.00	0.00	0.00
	2	0.00	0.76	0.00	0.00	0.00	0.00
	3	0.00	0.77	0.00	0.00	0.00	0.00
	4	0.00	0.81	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	5	0.00	0.78	0.00	0.00	0.00	0.00
	6	0.00	0.77	0.00	0.00	0.00	0.00
	7	0.00	0.81	0.00	0.00	0.00	0.00
	8	0.00	0.79	0.00	0.00	0.00	0.00
	9	0.00	0.96	0.00	0.00	0.00	0.00
	10	0.00	0.97	0.00	0.00	0.00	0.00
	11	0.00	0.79	0.00	0.00	0.00	0.00
	12	0.00	0.78	0.00	0.00	0.00	0.00
	13	0.00	0.78	0.00	0.00	0.00	0.00
	14	0.00	0.79	0.00	0.00	0.00	0.00
	15	0.00	0.55	0.00	0.00	0.00	0.00
	16	0.00	0.53	0.00	0.00	0.00	0.00
	17	0.00	0.81	0.00	0.00	0.00	0.00
	18	0.00	0.74	0.00	0.00	0.00	0.00
	19	0.00	0.77	0.00	0.00	0.00	0.00
	20	0.00	0.78	0.00	0.00	0.00	0.00
	21	0.00	0.56	0.00	0.00	0.00	0.00
	22	0.00	0.49	0.00	0.00	0.00	0.00
	23	0.00	0.52	0.00	0.00	0.00	0.00
	24	0.00	0.53	0.00	0.00	0.00	0.00
212	1	0.00	0.83	0.00	0.00	0.00	0.00
	2	0.00	0.81	0.00	0.00	0.00	0.00
	3	0.00	0.81	0.00	0.00	0.00	0.00
	4	0.00	0.85	0.00	0.00	0.00	0.00
	5	0.00	0.83	0.00	0.00	0.00	0.00
	6	0.00	0.81	0.00	0.00	0.00	0.00
	7	0.00	0.86	0.00	0.00	0.00	0.00
	8	0.00	0.84	0.00	0.00	0.00	0.00
	9	0.00	1.00	0.00	0.00	0.00	0.00
	10	0.00	1.02	0.00	0.00	0.00	0.00
	11	0.00	0.83	0.00	0.00	0.00	0.00
	12	0.00	0.83	0.00	0.00	0.00	0.00
	13	0.00	0.80	0.00	0.00	0.00	0.00
	14	0.00	0.82	0.00	0.00	0.00	0.00
	15	0.00	0.57	0.00	0.00	0.00	0.00
	16	0.00	0.56	0.00	0.00	0.00	0.00
	17	0.00	0.86	0.00	0.00	0.00	0.00
	18	0.00	0.78	0.00	0.00	0.00	0.00
	19	0.00	0.82	0.00	0.00	0.00	0.00
	20	0.00	0.82	0.00	0.00	0.00	0.00
	21	0.00	0.59	0.00	0.00	0.00	0.00
	22	0.00	0.52	0.00	0.00	0.00	0.00
	23	0.00	0.55	0.00	0.00	0.00	0.00
	24	0.00	0.56	0.00	0.00	0.00	0.00
213	1	0.00	0.88	0.00	0.00	0.00	0.00
	2	0.00	0.86	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	3	0.00	0.86	0.00	0.00	0.00	0.00
	4	0.00	0.90	0.00	0.00	0.00	0.00
	5	0.00	0.88	0.00	0.00	0.00	0.00
	6	0.00	0.86	0.00	0.00	0.00	0.00
	7	0.00	0.90	0.00	0.00	0.00	0.00
	8	0.00	0.89	0.00	0.00	0.00	0.00
	9	0.00	1.04	0.00	0.00	0.00	0.00
	10	0.00	1.06	0.00	0.00	0.00	0.00
	11	0.00	0.87	0.00	0.00	0.00	0.00
	12	0.00	0.87	0.00	0.00	0.00	0.00
	13	0.00	0.82	0.00	0.00	0.00	0.00
	14	0.00	0.85	0.00	0.00	0.00	0.00
	15	0.00	0.59	0.00	0.00	0.00	0.00
	16	0.00	0.59	0.00	0.00	0.00	0.00
	17	0.00	0.91	0.00	0.00	0.00	0.00
	18	0.00	0.83	0.00	0.00	0.00	0.00
	19	0.00	0.87	0.00	0.00	0.00	0.00
	20	0.00	0.87	0.00	0.00	0.00	0.00
	21	0.00	0.61	0.00	0.00	0.00	0.00
	22	0.00	0.55	0.00	0.00	0.00	0.00
	23	0.00	0.58	0.00	0.00	0.00	0.00
	24	0.00	0.58	0.00	0.00	0.00	0.00
214	1	0.00	0.93	0.00	0.00	0.00	0.00
	2	0.00	0.91	0.00	0.00	0.00	0.00
	3	0.00	0.91	0.00	0.00	0.00	0.00
	4	0.00	0.95	0.00	0.00	0.00	0.00
	5	0.00	0.92	0.00	0.00	0.00	0.00
	6	0.00	0.91	0.00	0.00	0.00	0.00
	7	0.00	0.95	0.00	0.00	0.00	0.00
	8	0.00	0.93	0.00	0.00	0.00	0.00
	9	0.00	1.07	0.00	0.00	0.00	0.00
	10	0.00	1.11	0.00	0.00	0.00	0.00
	11	0.00	0.91	0.00	0.00	0.00	0.00
	12	0.00	0.92	0.00	0.00	0.00	0.00
	13	0.00	0.84	0.00	0.00	0.00	0.00
	14	0.00	0.87	0.00	0.00	0.00	0.00
	15	0.00	0.61	0.00	0.00	0.00	0.00
	16	0.00	0.62	0.00	0.00	0.00	0.00
	17	0.00	0.95	0.00	0.00	0.00	0.00
	18	0.00	0.88	0.00	0.00	0.00	0.00
	19	0.00	0.91	0.00	0.00	0.00	0.00
	20	0.00	0.92	0.00	0.00	0.00	0.00
	21	0.00	0.64	0.00	0.00	0.00	0.00
	22	0.00	0.58	0.00	0.00	0.00	0.00
	23	0.00	0.61	0.00	0.00	0.00	0.00
	24	0.00	0.61	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
215	1	0.00	0.98	0.00	0.00	0.00	0.00
	2	0.00	0.95	0.00	0.00	0.00	0.00
	3	0.00	0.95	0.00	0.00	0.00	0.00
	4	0.00	0.99	0.00	0.00	0.00	0.00
	5	0.00	0.97	0.00	0.00	0.00	0.00
	6	0.00	0.95	0.00	0.00	0.00	0.00
	7	0.00	0.99	0.00	0.00	0.00	0.00
	8	0.00	0.98	0.00	0.00	0.00	0.00
	9	0.00	1.11	0.00	0.00	0.00	0.00
	10	0.00	1.15	0.00	0.00	0.00	0.00
	11	0.00	0.95	0.00	0.00	0.00	0.00
	12	0.00	0.97	0.00	0.00	0.00	0.00
	13	0.00	0.85	0.00	0.00	0.00	0.00
	14	0.00	0.90	0.00	0.00	0.00	0.00
	15	0.00	0.63	0.00	0.00	0.00	0.00
	16	0.00	0.65	0.00	0.00	0.00	0.00
	17	0.00	1.00	0.00	0.00	0.00	0.00
	18	0.00	0.92	0.00	0.00	0.00	0.00
	19	0.00	0.96	0.00	0.00	0.00	0.00
	20	0.00	0.96	0.00	0.00	0.00	0.00
	21	0.00	0.67	0.00	0.00	0.00	0.00
	22	0.00	0.60	0.00	0.00	0.00	0.00
	23	0.00	0.63	0.00	0.00	0.00	0.00
	24	0.00	0.64	0.00	0.00	0.00	0.00
216	1	0.00	0.53	0.00	0.00	0.00	0.00
	2	0.00	0.52	0.00	0.00	0.00	0.00
	3	0.00	0.52	0.00	0.00	0.00	0.00
	4	0.00	0.55	0.00	0.00	0.00	0.00
	5	0.00	0.54	0.00	0.00	0.00	0.00
	6	0.00	0.52	0.00	0.00	0.00	0.00
	7	0.00	0.56	0.00	0.00	0.00	0.00
	8	0.00	0.54	0.00	0.00	0.00	0.00
	9	0.00	0.74	0.00	0.00	0.00	0.00
	10	0.00	0.71	0.00	0.00	0.00	0.00
	11	0.00	0.57	0.00	0.00	0.00	0.00
	12	0.00	0.52	0.00	0.00	0.00	0.00
	13	0.00	0.65	0.00	0.00	0.00	0.00
	14	0.00	0.62	0.00	0.00	0.00	0.00
	15	0.00	0.43	0.00	0.00	0.00	0.00
	16	0.00	0.37	0.00	0.00	0.00	0.00
	17	0.00	0.56	0.00	0.00	0.00	0.00
	18	0.00	0.49	0.00	0.00	0.00	0.00
	19	0.00	0.53	0.00	0.00	0.00	0.00
	20	0.00	0.53	0.00	0.00	0.00	0.00
	21	0.00	0.41	0.00	0.00	0.00	0.00
	22	0.00	0.35	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	23	0.00	0.37	0.00	0.00	0.00	0.00
	24	0.00	0.38	0.00	0.00	0.00	0.00
217	1	0.00	0.58	0.00	0.00	0.00	0.00
	2	0.00	0.57	0.00	0.00	0.00	0.00
	3	0.00	0.57	0.00	0.00	0.00	0.00
	4	0.00	0.60	0.00	0.00	0.00	0.00
	5	0.00	0.59	0.00	0.00	0.00	0.00
	6	0.00	0.57	0.00	0.00	0.00	0.00
	7	0.00	0.61	0.00	0.00	0.00	0.00
	8	0.00	0.59	0.00	0.00	0.00	0.00
	9	0.00	0.78	0.00	0.00	0.00	0.00
	10	0.00	0.76	0.00	0.00	0.00	0.00
	11	0.00	0.61	0.00	0.00	0.00	0.00
	12	0.00	0.57	0.00	0.00	0.00	0.00
	13	0.00	0.68	0.00	0.00	0.00	0.00
	14	0.00	0.65	0.00	0.00	0.00	0.00
	15	0.00	0.46	0.00	0.00	0.00	0.00
	16	0.00	0.40	0.00	0.00	0.00	0.00
	17	0.00	0.61	0.00	0.00	0.00	0.00
	18	0.00	0.54	0.00	0.00	0.00	0.00
	19	0.00	0.58	0.00	0.00	0.00	0.00
	20	0.00	0.58	0.00	0.00	0.00	0.00
	21	0.00	0.44	0.00	0.00	0.00	0.00
	22	0.00	0.38	0.00	0.00	0.00	0.00
	23	0.00	0.40	0.00	0.00	0.00	0.00
	24	0.00	0.41	0.00	0.00	0.00	0.00
218	1	0.00	0.63	0.00	0.00	0.00	0.00
	2	0.00	0.62	0.00	0.00	0.00	0.00
	3	0.00	0.62	0.00	0.00	0.00	0.00
	4	0.00	0.66	0.00	0.00	0.00	0.00
	5	0.00	0.64	0.00	0.00	0.00	0.00
	6	0.00	0.62	0.00	0.00	0.00	0.00
	7	0.00	0.66	0.00	0.00	0.00	0.00
	8	0.00	0.64	0.00	0.00	0.00	0.00
	9	0.00	0.83	0.00	0.00	0.00	0.00
	10	0.00	0.82	0.00	0.00	0.00	0.00
	11	0.00	0.66	0.00	0.00	0.00	0.00
	12	0.00	0.62	0.00	0.00	0.00	0.00
	13	0.00	0.70	0.00	0.00	0.00	0.00
	14	0.00	0.69	0.00	0.00	0.00	0.00
	15	0.00	0.48	0.00	0.00	0.00	0.00
	16	0.00	0.43	0.00	0.00	0.00	0.00
	17	0.00	0.66	0.00	0.00	0.00	0.00
	18	0.00	0.59	0.00	0.00	0.00	0.00
	19	0.00	0.63	0.00	0.00	0.00	0.00
	20	0.00	0.63	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	21	0.00	0.47	0.00	0.00	0.00	0.00
	22	0.00	0.40	0.00	0.00	0.00	0.00
	23	0.00	0.43	0.00	0.00	0.00	0.00
	24	0.00	0.44	0.00	0.00	0.00	0.00
219	1	0.00	0.68	0.00	0.00	0.00	0.00
	2	0.00	0.67	0.00	0.00	0.00	0.00
	3	0.00	0.67	0.00	0.00	0.00	0.00
	4	0.00	0.71	0.00	0.00	0.00	0.00
	5	0.00	0.68	0.00	0.00	0.00	0.00
	6	0.00	0.67	0.00	0.00	0.00	0.00
	7	0.00	0.71	0.00	0.00	0.00	0.00
	8	0.00	0.69	0.00	0.00	0.00	0.00
	9	0.00	0.87	0.00	0.00	0.00	0.00
	10	0.00	0.87	0.00	0.00	0.00	0.00
	11	0.00	0.70	0.00	0.00	0.00	0.00
	12	0.00	0.68	0.00	0.00	0.00	0.00
	13	0.00	0.73	0.00	0.00	0.00	0.00
	14	0.00	0.72	0.00	0.00	0.00	0.00
	15	0.00	0.50	0.00	0.00	0.00	0.00
	16	0.00	0.47	0.00	0.00	0.00	0.00
	17	0.00	0.71	0.00	0.00	0.00	0.00
	18	0.00	0.64	0.00	0.00	0.00	0.00
	19	0.00	0.68	0.00	0.00	0.00	0.00
	20	0.00	0.68	0.00	0.00	0.00	0.00
	21	0.00	0.50	0.00	0.00	0.00	0.00
	22	0.00	0.43	0.00	0.00	0.00	0.00
	23	0.00	0.46	0.00	0.00	0.00	0.00
	24	0.00	0.47	0.00	0.00	0.00	0.00
220	1	0.00	0.73	0.00	0.00	0.00	0.00
	2	0.00	0.72	0.00	0.00	0.00	0.00
	3	0.00	0.72	0.00	0.00	0.00	0.00
	4	0.00	0.76	0.00	0.00	0.00	0.00
	5	0.00	0.73	0.00	0.00	0.00	0.00
	6	0.00	0.72	0.00	0.00	0.00	0.00
	7	0.00	0.76	0.00	0.00	0.00	0.00
	8	0.00	0.74	0.00	0.00	0.00	0.00
	9	0.00	0.92	0.00	0.00	0.00	0.00
	10	0.00	0.92	0.00	0.00	0.00	0.00
	11	0.00	0.75	0.00	0.00	0.00	0.00
	12	0.00	0.73	0.00	0.00	0.00	0.00
	13	0.00	0.75	0.00	0.00	0.00	0.00
	14	0.00	0.76	0.00	0.00	0.00	0.00
	15	0.00	0.52	0.00	0.00	0.00	0.00
	16	0.00	0.50	0.00	0.00	0.00	0.00
	17	0.00	0.76	0.00	0.00	0.00	0.00
	18	0.00	0.69	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	19	0.00	0.72	0.00	0.00	0.00	0.00
	20	0.00	0.73	0.00	0.00	0.00	0.00
	21	0.00	0.53	0.00	0.00	0.00	0.00
	22	0.00	0.46	0.00	0.00	0.00	0.00
	23	0.00	0.49	0.00	0.00	0.00	0.00
	24	0.00	0.50	0.00	0.00	0.00	0.00
221	1	0.00	1.02	0.00	0.00	0.00	0.00
	2	0.00	0.99	0.00	0.00	0.00	0.00
	3	0.00	1.00	0.00	0.00	0.00	0.00
	4	0.00	1.03	0.00	0.00	0.00	0.00
	5	0.00	1.01	0.00	0.00	0.00	0.00
	6	0.00	1.00	0.00	0.00	0.00	0.00
	7	0.00	1.04	0.00	0.00	0.00	0.00
	8	0.00	1.02	0.00	0.00	0.00	0.00
	9	0.00	1.14	0.00	0.00	0.00	0.00
	10	0.00	1.19	0.00	0.00	0.00	0.00
	11	0.00	0.99	0.00	0.00	0.00	0.00
	12	0.00	1.01	0.00	0.00	0.00	0.00
	13	0.00	0.87	0.00	0.00	0.00	0.00
	14	0.00	0.92	0.00	0.00	0.00	0.00
	15	0.00	0.65	0.00	0.00	0.00	0.00
	16	0.00	0.68	0.00	0.00	0.00	0.00
	17	0.00	1.04	0.00	0.00	0.00	0.00
	18	0.00	0.97	0.00	0.00	0.00	0.00
	19	0.00	1.00	0.00	0.00	0.00	0.00
	20	0.00	1.00	0.00	0.00	0.00	0.00
	21	0.00	0.69	0.00	0.00	0.00	0.00
	22	0.00	0.63	0.00	0.00	0.00	0.00
	23	0.00	0.66	0.00	0.00	0.00	0.00
	24	0.00	0.66	0.00	0.00	0.00	0.00
222	1	0.00	1.07	0.00	0.00	0.00	0.00
	2	0.00	1.04	0.00	0.00	0.00	0.00
	3	0.00	1.04	0.00	0.00	0.00	0.00
	4	0.00	1.08	0.00	0.00	0.00	0.00
	5	0.00	1.05	0.00	0.00	0.00	0.00
	6	0.00	1.04	0.00	0.00	0.00	0.00
	7	0.00	1.08	0.00	0.00	0.00	0.00
	8	0.00	1.06	0.00	0.00	0.00	0.00
	9	0.00	1.18	0.00	0.00	0.00	0.00
	10	0.00	1.23	0.00	0.00	0.00	0.00
	11	0.00	1.03	0.00	0.00	0.00	0.00
	12	0.00	1.06	0.00	0.00	0.00	0.00
	13	0.00	0.88	0.00	0.00	0.00	0.00
	14	0.00	0.94	0.00	0.00	0.00	0.00
	15	0.00	0.67	0.00	0.00	0.00	0.00
	16	0.00	0.71	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	17	0.00	1.08	0.00	0.00	0.00	0.00
	18	0.00	1.01	0.00	0.00	0.00	0.00
	19	0.00	1.05	0.00	0.00	0.00	0.00
	20	0.00	1.05	0.00	0.00	0.00	0.00
	21	0.00	0.72	0.00	0.00	0.00	0.00
	22	0.00	0.66	0.00	0.00	0.00	0.00
	23	0.00	0.69	0.00	0.00	0.00	0.00
	24	0.00	0.69	0.00	0.00	0.00	0.00
223	1	0.00	1.12	0.00	0.00	0.00	0.00
	2	0.00	1.08	0.00	0.00	0.00	0.00
	3	0.00	1.08	0.00	0.00	0.00	0.00
	4	0.00	1.12	0.00	0.00	0.00	0.00
	5	0.00	1.10	0.00	0.00	0.00	0.00
	6	0.00	1.08	0.00	0.00	0.00	0.00
	7	0.00	1.12	0.00	0.00	0.00	0.00
	8	0.00	1.11	0.00	0.00	0.00	0.00
	9	0.00	1.21	0.00	0.00	0.00	0.00
	10	0.00	1.27	0.00	0.00	0.00	0.00
	11	0.00	1.07	0.00	0.00	0.00	0.00
	12	0.00	1.10	0.00	0.00	0.00	0.00
	13	0.00	0.90	0.00	0.00	0.00	0.00
	14	0.00	0.97	0.00	0.00	0.00	0.00
	15	0.00	0.69	0.00	0.00	0.00	0.00
	16	0.00	0.73	0.00	0.00	0.00	0.00
	17	0.00	1.12	0.00	0.00	0.00	0.00
	18	0.00	1.05	0.00	0.00	0.00	0.00
	19	0.00	1.09	0.00	0.00	0.00	0.00
	20	0.00	1.09	0.00	0.00	0.00	0.00
	21	0.00	0.74	0.00	0.00	0.00	0.00
	22	0.00	0.68	0.00	0.00	0.00	0.00
	23	0.00	0.71	0.00	0.00	0.00	0.00
	24	0.00	0.71	0.00	0.00	0.00	0.00
224	1	0.00	1.16	0.00	0.00	0.00	0.00
	2	0.00	1.12	0.00	0.00	0.00	0.00
	3	0.00	1.12	0.00	0.00	0.00	0.00
	4	0.00	1.16	0.00	0.00	0.00	0.00
	5	0.00	1.14	0.00	0.00	0.00	0.00
	6	0.00	1.12	0.00	0.00	0.00	0.00
	7	0.00	1.16	0.00	0.00	0.00	0.00
	8	0.00	1.15	0.00	0.00	0.00	0.00
	9	0.00	1.24	0.00	0.00	0.00	0.00
	10	0.00	1.31	0.00	0.00	0.00	0.00
	11	0.00	1.11	0.00	0.00	0.00	0.00
	12	0.00	1.15	0.00	0.00	0.00	0.00
	13	0.00	0.91	0.00	0.00	0.00	0.00
	14	0.00	0.99	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	15	0.00	0.70	0.00	0.00	0.00	0.00
	16	0.00	0.76	0.00	0.00	0.00	0.00
	17	0.00	1.17	0.00	0.00	0.00	0.00
	18	0.00	1.10	0.00	0.00	0.00	0.00
	19	0.00	1.13	0.00	0.00	0.00	0.00
	20	0.00	1.13	0.00	0.00	0.00	0.00
	21	0.00	0.77	0.00	0.00	0.00	0.00
	22	0.00	0.71	0.00	0.00	0.00	0.00
	23	0.00	0.74	0.00	0.00	0.00	0.00
	24	0.00	0.74	0.00	0.00	0.00	0.00
225	1	0.00	0.47	0.00	0.00	0.00	0.00
	2	0.00	0.47	0.00	0.00	0.00	0.00
	3	0.00	0.47	0.00	0.00	0.00	0.00
	4	0.00	0.50	0.00	0.00	0.00	0.00
	5	0.00	0.49	0.00	0.00	0.00	0.00
	6	0.00	0.47	0.00	0.00	0.00	0.00
	7	0.00	0.51	0.00	0.00	0.00	0.00
	8	0.00	0.49	0.00	0.00	0.00	0.00
	9	0.00	0.70	0.00	0.00	0.00	0.00
	10	0.00	0.66	0.00	0.00	0.00	0.00
	11	0.00	0.53	0.00	0.00	0.00	0.00
	12	0.00	0.47	0.00	0.00	0.00	0.00
	13	0.00	0.63	0.00	0.00	0.00	0.00
	14	0.00	0.58	0.00	0.00	0.00	0.00
	15	0.00	0.41	0.00	0.00	0.00	0.00
	16	0.00	0.34	0.00	0.00	0.00	0.00
	17	0.00	0.51	0.00	0.00	0.00	0.00
	18	0.00	0.44	0.00	0.00	0.00	0.00
	19	0.00	0.48	0.00	0.00	0.00	0.00
	20	0.00	0.48	0.00	0.00	0.00	0.00
	21	0.00	0.38	0.00	0.00	0.00	0.00
	22	0.00	0.32	0.00	0.00	0.00	0.00
	23	0.00	0.34	0.00	0.00	0.00	0.00
	24	0.00	0.35	0.00	0.00	0.00	0.00

********** END OF LATEST ANALYSIS RESULT **********

857. LOAD LIST 101 TO 127
858. START CONCRETE DESIGN

```
859. CODE ACI
860. CLB 0.05 MEMB 101
861. CLS 0.05 ALL
862. CLT 0.05 MEMB 101
863. FC 3567 MEMB 5 TO 36 49 TO 68 81 TO 129 131 TO 142 144 TO 161 200 TO 209 224 -
864. 225 TO 243 248 TO 286 304 TO 306 312 TO 317 320 TO 358 376 TO 378 384 TO 402 -
865. 404 406 TO 420 422 424 425
866. FYMAIN 42813 MEMB 5 TO 36 49 TO 68 81 TO 129 131 TO 142 144 TO 161 -
867. 200 TO 209 224 TO 243 248 TO 286 304 TO 306 312 TO 317 320 TO 358 -
868. 376 TO 378 384 TO 402 404 406 TO 420 422 424 425
869. FYSEC 42813 ALL
870. MAXMAIN 32 ALL
871. MINMAIN 12 ALL
872. CLB 0.075 MEMB 5 TO 36 49 TO 68 81 TO 100 102 TO 129 131 TO 142 144 TO 171 -
873. 200 TO 219 224 TO 243 248 TO 289 304 TO 309 312 TO 317 320 TO 361 -
874. 376 TO 381 384 TO 425
875. CLT 0.075 MEMB 5 TO 36 49 TO 68 81 TO 100 102 TO 129 131 TO 142 144 TO 171 -
876. 200 TO 219 224 TO 243 248 TO 289 304 TO 309 312 TO 317 320 TO 361 -
877. 376 TO 381 384 TO 425
878. CLT 0.075 MEMB 5 TO 36 49 TO 68 81 TO 100 102 TO 129 131 TO 142 144 TO 171 -
879. 200 TO 219 224 TO 243 248 TO 289 304 TO 309 312 TO 317 320 TO 361 -
880. 376 TO 381 384 TO 425
881. DESIGN COLUMN 101
```

==========

COLUMN NO. 101 DESIGN PER ACI 318-08 - AXIAL + BENDING

FY - 419.9 FC - 35.0 MPA, SQRE SIZE -1000.0 X1000.0 MMS, TIED
AREA OF STEEL REQUIRED = 20720.0 SQ. MM

BAR CONFIGURATION	REINF PCT.	LOAD	LOCATION	PHI
44 - 25 MM	2.160	113	END	0.650

(PROVIDE EQUAL NUMBER OF BARS ON EACH FACE)
TIE BAR NUMBER 12 SPACING 320.00 MM

**********END OF COLUMN DESIGN RESULTS**********

882. END CONCRETE DESIGN
883. FINISH

********** END OF THE STAAD.Pro RUN **********

**** DATE= MAR 31,2020 TIME= 14:31:27 ****

```
*************************************************************
*   For technical assistance on STAAD.Pro, please visit     *
*   http://selectservices.bentley.com/en-US/                *
*                                                           *
*   Details about additional assistance from                *
*   Bentley and Partners can be found at program menu       *
*   Help->Technical Support                                 *
*                                                           *
*      Copyright (c) 1997-2014 Bentley Systems, Inc.
*                http://www.bentley.com                     *
*************************************************************
```

Global Project ID	**900707**
Delivery Type	**ENGINEERING PROCUREMENT CONSTRUCTION**
Project Name	**MANSOURAH MASSARAH GOLD PROJECT**
Customer	**MA'ADEN GOLD AND BASE METALS (MA'ADEN)**
Project Country	**KINGDOM OF SAUDI ARABIA**

Ma'aden Revision No:	A01	A02	C01	D01
Date	10-03-2020	02-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 27.03.20 AND REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

Outotec / L&T Revision No.:	0	1	2	3
Date	10-03-2020	02-04-2020	30-04-2020	17-11-2023
Revision Text	FIRST ISSUE	REVISED AS PER EMPLOYER COMMENTS ON 27.03.20 AND REVISED AS MARKED A02	ISSUED FOR CONSTRUCTION	AS BUILT
Prepared By	SHD	SHD	SHD	SHD
Checked	SGC	SGC	SGC	SGC
Approved	PRI	PRI	PRI	PRI

ATTACHMENT 4 STAAD INPUT & OUTPUT FILE OF FOUNDATION MKD. F4A

```
**************************************************
*                                                *
*           STAAD.Pro V8i SELECTseries5           *
*           Version  20.07.10.64                  *
*           Proprietary Program of                *
*           Bentley Systems, Inc.                 *
*           Date=    MAR 31, 2020                 *
*           Time=    14:16:49                     *
*                                                *
*      USER ID: LNT ECC DIV                      *
**************************************************
```

```
     1. STAAD SPACE
INPUT FILE: MD-216-3350-EG-CV-CAL-1226_F4A.STD
     2. START JOB INFORMATION
     3. ENGINEER DATE 16-DEC-19
     4. END JOB INFORMATION
     5. INPUT WIDTH 79
     6. UNIT METER MTON
     7. JOINT COORDINATES
     8. 1 0 0 0; 2 0 9.35 0.25; 3 0 0 1; 5 1 0 0; 6 1 0 1; 8 -1 0 0; 9 -1 0 1
     9. 11 -0.75 0 0; 12 -0.75 0 0.25; 13 -1 0 0.25; 14 -0.5 0 0; 15 -0.5 0 0.25
    10. 16 -0.25 0 0; 17 -0.25 0 0.25; 18 0 0 0.25; 19 -0.75 0 0.5; 20 -1 0 0.5
    11. 21 -0.5 0 0.5; 22 -0.25 0 0.5; 23 0 0 0.5; 24 -0.75 0 0.75; 25 -1 0 0.75
    12. 26 -0.5 0 0.75; 27 -0.25 0 0.75; 28 0 0 0.75; 29 -0.75 0 1; 30 -0.5 0 1
    13. 31 -0.25 0 1; 32 0.25 0 0; 33 0.25 0 0.25; 34 0.5 0 0; 35 0.5 0 0.25
    14. 36 0.75 0 0; 37 0.75 0 0.25; 38 1 0 0.25; 39 0.25 0 0.5; 40 0.5 0 0.5
    15. 41 0.75 0 0.5; 42 1 0 0.5; 43 0.25 0 0.75; 44 0.5 0 0.75; 45 0.75 0 0.75
    16. 46 1 0 0.75; 47 0.25 0 1; 48 0.5 0 1; 49 0.75 0 1; 68 -0.75 0 -1; 69 -1 0 -1.
    17. 70 -0.5 0 -1; 71 -0.25 0 -1; 72 0 0 -1; 73 -0.75 0 -0.75; 74 -1 0 -0.75
    18. 75 -0.5 0 -0.75; 76 -0.25 0 -0.75; 77 0 0 -0.75; 78 -0.75 0 -0.5; 79 -1 0 -0.5
    19. 80 -0.5 0 -0.5; 81 -0.25 0 -0.5; 82 0 0 -0.5; 83 -0.75 0 -0.25; 84 -1 0 -0.25
    20. 85 -0.5 0 -0.25; 86 -0.25 0 -0.25; 87 0 0 -0.25; 103 0.25 0 -1; 104 0.5 0 -1.
    21. 105 0.75 0 -1; 106 1 0 -1; 107 0.25 0 -0.75; 108 0.5 0 -0.75; 109 0.75 0 -0.75
    22. 110 1 0 -0.75; 111 0.25 0 -0.5; 112 0.5 0 -0.5; 113 0.75 0 -0.5; 114 1 0 -0.5
    23. 115 0.25 0 -0.25; 116 0.5 0 -0.25; 117 0.75 0 -0.25; 118 1 0 -0.25
    24. 119 -0.75 0 1.25; 120 -1 0 1.25; 121 -0.5 0 1.25; 122 -0.25 0 1.25
    25. 123 0 0 1.25; 124 0.25 0 1.25; 125 0.5 0 1.25; 126 0.75 0 1.25; 127 1 0 1.25
    26. 146 -1.25 0 0; 147 -1.25 0 0.25; 148 -1.25 0 0.5; 149 -1.25 0 0.75
    27. 150 -1.25 0 1; 153 -1.25 0 -1; 154 -1.25 0 -0.75; 155 -1.25 0 -0.5
    28. 156 -1.25 0 -0.25; 157 -1.25 0 1.25
    29. MEMBER INCIDENCES
    30. 101 2 18
    31. ELEMENT INCIDENCES SHELL
    32. 5 8 11 12 13; 6 11 14 15 12; 7 14 16 17 15; 8 16 1 18 17; 9 13 12 19 20
    33. 10 12 15 21 19; 11 15 17 22 21; 12 17 18 23 22; 13 20 19 24 25; 14 19 21 26 24
    34. 15 21 22 27 26; 16 22 23 28 27; 17 25 24 29 9; 18 24 26 30 29; 19 26 27 31 30
    35. 20 27 28 3 31; 21 1 32 33 18; 22 32 34 35 33; 23 34 36 37 35; 24 36 5 38 37
    36. 25 18 33 39 23; 26 33 35 40 39; 27 35 37 41 40; 28 37 38 42 41; 29 23 39 43 28
    37. 30 39 40 44 43; 31 40 41 45 44; 32 41 42 46 45; 33 28 43 47 3; 34 43 44 48 47
    38. 35 44 45 49 48; 36 45 46 6 49; 53 69 68 73 74; 54 68 70 75 73; 55 70 71 76 75
```

```
39. 56 71 72 77 76; 57 74 73 78 79; 58 73 75 80 78; 59 75 76 81 80; 60 76 77 82 81
40. 61 79 78 83 84; 62 78 80 85 83; 63 80 81 86 85; 64 81 82 87 86; 65 84 83 11 8
41. 66 83 85 14 11; 67 85 86 16 14; 68 86 87 1 16; 85 72 103 107 77
42. 86 103 104 108 107; 87 104 105 109 108; 88 105 106 110 109; 89 77 107 111 82
43. 90 107 108 112 111; 91 108 109 113 112; 92 109 110 114 113; 93 82 111 115 87
44. 94 111 112 116 115; 95 112 113 117 116; 96 113 114 118 117; 97 87 115 32 1
45. 98 115 116 34 32; 99 116 117 36 34; 100 117 118 5 36; 102 9 29 119 120
46. 103 29 30 121 119; 104 30 31 122 121; 105 31 3 123 122; 106 3 47 124 123
47. 107 47 48 125 124; 108 48 49 126 125; 109 49 6 127 126; 126 146 8 13 147
48. 127 147 13 20 148; 128 148 20 25 149; 129 149 25 9 150; 132 153 69 74 154
49. 133 154 74 79 155; 134 155 79 84 156; 135 156 84 8 146; 136 150 9 120 157
50. START GROUP DEFINITION
51. ELEMENT
52. _MAX_BM 5 6 9 10 13 14 17 TO 20 23 24 27 28 31 TO 36 53 TO 66 85 TO 96 99 -
53. 100 102 TO 109 126 TO 129 132 TO 136
54. _MAX_SF 5 9 13 17 24 28 32 36 53 TO 61 65 85 TO 92 96 100 102 TO 109 -
55. 126 TO 129 132 TO 136
56. END GROUP DEFINITION
57. ELEMENT PROPERTY
58. 5 TO 36 53 TO 68 85 TO 100 102 TO 109 126 TO 129 132 TO 136 THICKNESS 0.4
59. DEFINE MATERIAL START
60. ISOTROPIC CONCRETE
61. E 2.21467E+006
62. POISSON 0.17
63. DENSITY 2.40262
64. ALPHA 1E-005
65. DAMP 0.05
66. TYPE CONCRETE
67. STRENGTH FCU 2812.28
68. END DEFINE MATERIAL
69. MEMBER PROPERTY AMERICAN
70. 101 PRIS YD 0.85 ZD 0.85
71. CONSTANTS
72. MATERIAL CONCRETE ALL
73. SUPPORTS
74. 5 TO 36 53 TO 68 85 TO 100 102 TO 109 126 TO 129 132 TO 135 -
75. 136 PLATE MAT DIRECT Y SUBGRADE 5400 PRINT COMPRESSION
```

JOINT	INFLUENCE AREA
1	0.062500
3	0.062500
5	0.031250
6	0.031250
8	0.062500
9	0.062500
11	0.062500
12	0.062500
13	0.062500
14	0.062500
15	0.062500
16	0.062500
17	0.062500
18	0.062500
19	0.062500

20	0.062500
21	0.062500
22	0.062500
23	0.062500
24	0.062500
25	0.062500
26	0.062500
27	0.062500
28	0.062500
29	0.062500
30	0.062500
31	0.062500
32	0.062500
33	0.062500
34	0.062500
35	0.062500
36	0.062500
37	0.062500
38	0.031250
39	0.062500
40	0.062500
41	0.062500
42	0.031250
43	0.062500
44	0.062500
45	0.062500
46	0.031250
47	0.062500
48	0.062500
49	0.062500
68	0.031250
69	0.031250
70	0.031250
71	0.031250
72	0.031250
73	0.062500
74	0.062500
75	0.062500
76	0.062500
77	0.062500
78	0.062500
79	0.062500
80	0.062500
81	0.062500
82	0.062500
83	0.062500
84	0.062500
85	0.062500
86	0.062500
87	0.062500
103	0.031250
104	0.031250
105	0.031250
106	0.015625
107	0.062500
108	0.062500

109	0.062500
110	0.031250
111	0.062500
112	0.062500
113	0.062500
114	0.031250
115	0.062500
116	0.062500
117	0.062500
118	0.031250
119	0.031250
120	0.031250
121	0.031250
122	0.031250
123	0.031250
124	0.031250
125	0.031250
126	0.031250
127	0.015625
146	0.031250
147	0.031250
148	0.031250
149	0.031250
150	0.031250
153	0.015625
154	0.031250
155	0.031250
156	0.031250
157	0.015625
TOTAL	5.062500

```
 76. **ALLOWABLE STRESS LOAD COMBS FOR BEARING PRESSURE CHECK**********************
 77. LOAD 1 LOADTYPE NONE  TITLE DL+LL
 78. SELFWEIGHT Y -1
 79. JOINT LOAD
 80. *CRITICAL SUPPORT REACTIONS FROM STORAGE SUPERSTRUCTURE NODE 1247
 81. 2 FX 0 FY -2.8 FZ -0.1
 82. ELEMENT LOAD
 83. 5 TO 36 53 TO 68 85 TO 100 102 TO 109 126 TO 129 132 TO 136 PR GY -4.5
 84. 5 TO 36 102 TO 109 126 TO 129 136 PR GY -9.6
 85. ******************************
 86. LOAD 2 LOADTYPE NONE  TITLE DL+LR
 87. SELFWEIGHT Y -1
 88. JOINT LOAD
 89. 2 FX 0 FY -3.5 FZ -0.1
 90. ELEMENT LOAD
 91. 5 TO 36 53 TO 68 85 TO 100 102 TO 109 126 TO 129 132 TO 136 PR GY -4.5
 92. 5 TO 36 102 TO 109 126 TO 129 136 PR GY -9.6
 93. ******************************
 94. LOAD 3 LOADTYPE NONE  TITLE DL+0.75*LL+0.75*LR+0.75CR1
 95. JOINT LOAD
 96. 2 FX 0 FY -3.3 FZ -0.1
 97. SELFWEIGHT Y -1
 98. ELEMENT LOAD
 99. 5 TO 36 53 TO 68 85 TO 100 102 TO 109 126 TO 129 132 TO 136 PR GY -4.5
100. 5 TO 36 102 TO 109 126 TO 129 136 PR GY -9.6
101. ************************
```

```
102. LOAD 4 LOADTYPE NONE  TITLE DL+0.75*LL+0.75*LR+0.75CR2
103. SELFWEIGHT Y -1
104. ELEMENT LOAD
105. 5 TO 36 53 TO 68 85 TO 100 102 TO 109 126 TO 129 132 TO 136 PR GY -4.5
106. 5 TO 36 102 TO 109 126 TO 129 136 PR GY -9.6
107. JOINT LOAD
108. 2 FX 0 FY -3.4 FZ -0.2
109. ****************************
110. LOAD 5 LOADTYPE NONE  TITLE DL+0.75*LL+0.75*LR+0.75CR3
111. SELFWEIGHT Y -1
112. ELEMENT LOAD
113. 5 TO 36 53 TO 68 85 TO 100 102 TO 109 126 TO 129 132 TO 136 PR GY -4.5
114. 5 TO 36 102 TO 109 126 TO 129 136 PR GY -9.6
115. JOINT LOAD
116. 2 FX 0 FY -3.4 FZ -0.1
117. ****************************
118. LOAD 6 LOADTYPE NONE  TITLE DL+0.75*LL+0.75*LR+0.75CR4
119. SELFWEIGHT Y -1
120. ELEMENT LOAD
121. 5 TO 36 53 TO 68 85 TO 100 102 TO 109 126 TO 129 132 TO 136 PR GY -4.5
122. 5 TO 36 102 TO 109 126 TO 129 136 PR GY -9.6
123. JOINT LOAD
124. 2 FX 0 FY -3.3 FZ -0.1
125. ****************************
126. LOAD 7 LOADTYPE NONE  TITLE DL+0.75*LL+0.75*LR+0.75CR5
127. SELFWEIGHT Y -1
128. JOINT LOAD
129. 2 FX 0 FY -3.3 FZ -0.1
130. ELEMENT LOAD
131. 5 TO 36 53 TO 68 85 TO 100 102 TO 109 126 TO 129 132 TO 136 PR GY -4.5
132. 5 TO 36 102 TO 109 126 TO 129 136 PR GY -9.6
133. ****************************
134. LOAD 8 LOADTYPE NONE  TITLE DL+0.75*LL+0.75*LR+0.75CR6
135. SELFWEIGHT Y -1
136. ELEMENT LOAD
137. 5 TO 36 53 TO 68 85 TO 100 102 TO 109 126 TO 129 132 TO 136 PR GY -4.5
138. 5 TO 36 102 TO 109 126 TO 129 136 PR GY -9.6
139. JOINT LOAD
140. 2 FX 0 FY -3.3 FZ -0.1
141. *********************************
142. LOAD 9 LOADTYPE NONE  TITLE DL+0.75*(LL+LR+W(+X))
143. SELFWEIGHT Y -1
144. ELEMENT LOAD
145. 5 TO 36 53 TO 68 85 TO 100 102 TO 109 126 TO 129 132 TO 136 PR GY -4.5
146. 5 TO 36 102 TO 109 126 TO 129 136 PR GY -9.6
147. JOINT LOAD
148. 2 FX 0 FY -3.5 FZ -2
149. *********************************
150. LOAD 10 LOADTYPE NONE  TITLE DL+0.75*(LL+LR+W(-X))
151. SELFWEIGHT Y -1
152. ELEMENT LOAD
153. 5 TO 36 53 TO 68 85 TO 100 102 TO 109 126 TO 129 132 TO 136 PR GY -4.5
154. 5 TO 36 102 TO 109 126 TO 129 136 PR GY -9.6
155. JOINT LOAD
156. 2 FX 0 FY -3.4 FZ -0.2
157. *********************************
```

```
158. LOAD 11 LOADTYPE NONE  TITLE DL+0.75*(LL+LR+W(+Z))
159. SELFWEIGHT Y -1
160. ELEMENT LOAD
161. 5 TO 36 53 TO 68 85 TO 100 102 TO 109 126 TO 129 132 TO 136 PR GY -4.5
162. 5 TO 36 102 TO 109 126 TO 129 136 PR GY -9.6
163. JOINT LOAD
164. 2 FX 0 FY -3.3 FZ -1.5
165. ************************************
166. LOAD 12 LOADTYPE NONE  TITLE DL+0.75*(LL+LR+W(-Z))
167. SELFWEIGHT Y -1
168. ELEMENT LOAD
169. 5 TO 36 53 TO 68 85 TO 100 102 TO 109 126 TO 129 132 TO 136 PR GY -4.5
170. 5 TO 36 102 TO 109 126 TO 129 136 PR GY -9.6
171. JOINT LOAD
172. 2 FX 0 FY -3.3 FZ 0.3
173. ************************************
174. LOAD 13 LOADTYPE NONE  TITLE 0.6*D + 1.0W(+X)
175. SELFWEIGHT Y -1
176. ELEMENT LOAD
177. 5 TO 36 53 TO 68 85 TO 100 102 TO 109 126 TO 129 132 TO 136 PR GY -2.7
178. 5 TO 36 102 TO 109 126 TO 129 136 PR GY -5.8
179. JOINT LOAD
180. 2 FX 0 FY -1.9 FZ -2.5
181. ********************************************
182. LOAD 14 LOADTYPE NONE  TITLE 0.6*D + 1.0W(-X)
183. SELFWEIGHT Y -1
184. ELEMENT LOAD
185. 5 TO 36 53 TO 68 85 TO 100 102 TO 109 126 TO 129 132 TO 136 PR GY -2.7
186. 5 TO 36 102 TO 109 126 TO 129 136 PR GY -5.8
187. JOINT LOAD
188. 2 FX 0 FY -1.8 FZ -0.2
189. ****************************************************
190. LOAD 15 LOADTYPE NONE  TITLE 0.6*D + 1.0W(+Z)
191. SELFWEIGHT Y -1
192. ELEMENT LOAD
193. 5 TO 36 53 TO 68 85 TO 100 102 TO 109 126 TO 129 132 TO 136 PR GY -2.7
194. 5 TO 36 102 TO 109 126 TO 129 136 PR GY -5.8
195. JOINT LOAD
196. 2 FX 0 FY -1.6 FZ -1.9
197. ****************************************************
198. LOAD 16 LOADTYPE NONE  TITLE 0.6*D + 1.0W(-Z)
199. SELFWEIGHT Y -1
200. ELEMENT LOAD
201. 5 TO 36 53 TO 68 85 TO 100 102 TO 109 126 TO 129 132 TO 136 PR GY -2.7
202. 5 TO 36 102 TO 109 126 TO 129 136 PR GY -5.8
203. JOINT LOAD
204. 2 FX 0 FY -1.6 FZ -1.9
205. ****************************************************
206. LOAD 17 LOADTYPE NONE  TITLE DL+0.75*(LL+LR+0.7E(+X))
207. SELFWEIGHT Y -1
208. ELEMENT LOAD
209. 5 TO 36 53 TO 68 85 TO 100 102 TO 109 126 TO 129 132 TO 136 PR GY -4.5
210. 5 TO 36 102 TO 109 126 TO 129 136 PR GY -9.6
211. JOINT LOAD
212. 2 FX 0 FY -3.4 FZ -0.1
213. ****************************************************
```

```
214. LOAD 18 LOADTYPE NONE  TITLE DL+0.75*(LL+LR+0.7E(-X))
215. SELFWEIGHT Y -1
216. ELEMENT LOAD
217. 5 TO 36 53 TO 68 85 TO 100 102 TO 109 126 TO 129 132 TO 136 PR GY -4.5
218. 5 TO 36 102 TO 109 126 TO 129 136 PR GY -9.6
219. JOINT LOAD
220. 2 FX 0 FY -3.4 FZ -0.1
221. ******************************************************
222. LOAD 19 LOADTYPE NONE  TITLE DL+0.75*(LL+LR+0.7E(+Z))
223. SELFWEIGHT Y -1
224. ELEMENT LOAD
225. 5 TO 36 53 TO 68 85 TO 100 102 TO 109 126 TO 129 132 TO 136 PR GY -4.5
226. 5 TO 36 102 TO 109 126 TO 129 136 PR GY -9.6
227. JOINT LOAD
228. 2 FX 0 FY -3.3 FZ -0.1
229. ******************************************************
230. LOAD 20 LOADTYPE NONE  TITLE DL+0.75*(LL+LR+0.7E(-Z))
231. SELFWEIGHT Y -1
232. ELEMENT LOAD
233. 5 TO 36 53 TO 68 85 TO 100 102 TO 109 126 TO 129 132 TO 136 PR GY -4.5
234. 5 TO 36 102 TO 109 126 TO 129 136 PR GY -9.6
235. JOINT LOAD
236. 2 FX 0 FY -3.4 FZ -0.1
237. ******************************************************
238. LOAD 21 LOADTYPE NONE  TITLE 0.6*D + 0.7E(+X)
239. SELFWEIGHT Y -1
240. ELEMENT LOAD
241. 5 TO 36 53 TO 68 85 TO 100 102 TO 109 126 TO 129 132 TO 136 PR GY -2.7
242. 5 TO 36 102 TO 109 126 TO 129 136 PR GY -5.76
243. JOINT LOAD
244. 2 FX 0 FY -1.7 FZ 0
245. ******************************************************
246. LOAD 22 LOADTYPE NONE  TITLE 0.6*D + 0.7E(-X)
247. SELFWEIGHT Y -1
248. ELEMENT LOAD
249. 5 TO 36 53 TO 68 85 TO 100 102 TO 109 126 TO 129 132 TO 136 PR GY -2.7
250. 5 TO 36 102 TO 109 126 TO 129 136 PR GY -5.76
251. JOINT LOAD
252. 2 FX 0 FY -1.7 FZ 0
253. ******************************************************
254. LOAD 23 LOADTYPE NONE  TITLE 0.6*D + 0.7E(+Z)
255. SELFWEIGHT Y -1
256. ELEMENT LOAD
257. 5 TO 36 53 TO 68 85 TO 100 102 TO 109 126 TO 129 132 TO 136 PR GY -2.7
258. 5 TO 36 102 TO 109 126 TO 129 136 PR GY -5.76
259. JOINT LOAD
260. 2 FX 0 FY -1.7 FZ -0.1
261. ******************************************************
262. LOAD 24 LOADTYPE NONE  TITLE 0.6*D + 0.7E(-Z)
263. SELFWEIGHT Y -1
264. ELEMENT LOAD
265. 5 TO 36 53 TO 68 85 TO 100 102 TO 109 126 TO 129 132 TO 136 PR GY -2.7
266. 5 TO 36 102 TO 109 126 TO 129 136 PR GY -5.76
267. JOINT LOAD
268. 2 FX 0 FY -1.7 FZ 0
269. ******************************************************************************
```

```
270. **STRENGTH LOAD COMBS FOR DESIGN OF FOUNDATION*********************************
271. LOAD 101 LOADTYPE NONE  TITLE 1.4(DL+LL)
272. SELFWEIGHT Y -1
273. JOINT LOAD
274. *CRITICAL SUPPORT REACTIONS FROM STORAGE SUPERSTRUCTURE NODE 1247
275. 2 FX 0 FY -3.9 FZ -0.1
276. ELEMENT LOAD
277. 5 TO 36 53 TO 68 85 TO 100 102 TO 109 126 TO 129 132 TO 136 PR GY -6.3
278. 5 TO 36 102 TO 109 126 TO 129 136 PR GY -13.5
279. ******************************
280. LOAD 102 LOADTYPE NONE  TITLE 1.2DL+1.6LL + 0.5LR + 1.6 CR1
281. SELFWEIGHT Y -1
282. JOINT LOAD
283. 2 FX 0 FY -3.7 FZ -0.2
284. ELEMENT LOAD
285. 5 TO 36 53 TO 68 85 TO 100 102 TO 109 126 TO 129 132 TO 136 PR GY -5.4
286. 5 TO 36 102 TO 109 126 TO 129 136 PR GY -11.5
287. ******************************
288. LOAD 103 LOADTYPE NONE  TITLE 1.2DL+1.6LL + 0.5LR + 1.6 CR2
289. JOINT LOAD
290. 2 FX 0 FY -3.8 FZ -0.2
291. SELFWEIGHT Y -1
292. ELEMENT LOAD
293. 5 TO 36 53 TO 68 85 TO 100 102 TO 109 126 TO 129 132 TO 136 PR GY -5.4
294. 5 TO 36 102 TO 109 126 TO 129 136 PR GY -11.5
295. ************************
296. LOAD 104 LOADTYPE NONE  TITLE 1.2DL+1.6LL + 0.5LR + 1.6 CR3
297. SELFWEIGHT Y -1
298. ELEMENT LOAD
299. 5 TO 36 53 TO 68 85 TO 100 102 TO 109 126 TO 129 132 TO 136 PR GY -5.4
300. 5 TO 36 102 TO 109 126 TO 129 136 PR GY -11.5
301. JOINT LOAD
302. 2 FX 0 FY -3.7 FZ -0.2
303. ****************************
304. LOAD 105 LOADTYPE NONE  TITLE 1.2DL+1.6LL + 0.5LR + 1.6 CR4
305. SELFWEIGHT Y -1
306. ELEMENT LOAD
307. 5 TO 36 53 TO 68 85 TO 100 102 TO 109 126 TO 129 132 TO 136 PR GY -5.4
308. 5 TO 36 102 TO 109 126 TO 129 136 PR GY -11.5
309. JOINT LOAD
310. 2 FX 0 FY -3.7 FZ -0.2
311. ****************************
312. LOAD 106 LOADTYPE NONE  TITLE 1.2DL+1.6LL + 0.5LR + 1.6 CR5
313. SELFWEIGHT Y -1
314. ELEMENT LOAD
315. 5 TO 36 53 TO 68 85 TO 100 102 TO 109 126 TO 129 132 TO 136 PR GY -5.4
316. 5 TO 36 102 TO 109 126 TO 129 136 PR GY -11.5
317. JOINT LOAD
318. 2 FX 0 FY -3.7 FZ -0.2
319. ****************************
320. LOAD 107 LOADTYPE NONE  TITLE 1.2DL+1.6LL + 0.5LR + 1.6 CR6
321. SELFWEIGHT Y -1
322. JOINT LOAD
323. 2 FX 0 FY -3.6 FZ -0.2
324. ELEMENT LOAD
325. 5 TO 36 53 TO 68 85 TO 100 102 TO 109 126 TO 129 132 TO 136 PR GY -5.4
```

```
326. 5 TO 36 102 TO 109 126 TO 129 136 PR GY -11.5
327. ******************************
328. LOAD 108 LOADTYPE NONE  TITLE 1.2DL+1.6LR+0.5W(+X)
329. SELFWEIGHT Y -1
330. ELEMENT LOAD
331. 5 TO 36 53 TO 68 85 TO 100 102 TO 109 126 TO 129 132 TO 136 PR GY -5.4
332. 5 TO 36 102 TO 109 126 TO 129 136 PR GY -11.5
333. JOINT LOAD
334. 2 FX 0 FY -4.7 FZ -1.4
335. *********************************
336. LOAD 109 LOADTYPE NONE  TITLE 1.2DL+1.6LR+0.5W(-X)
337. SELFWEIGHT Y -1
338. ELEMENT LOAD
339. 5 TO 36 53 TO 68 85 TO 100 102 TO 109 126 TO 129 132 TO 136 PR GY -5.4
340. 5 TO 36 102 TO 109 126 TO 129 136 PR GY -11.5
341. JOINT LOAD
342. 2 FX 0 FY -4.6 FZ -0.2
343. *********************************
344. LOAD 110 LOADTYPE NONE  TITLE 1.2DL+1.6LR+0.5W(+Z)
345. SELFWEIGHT Y -1
346. ELEMENT LOAD
347. 5 TO 36 53 TO 68 85 TO 100 102 TO 109 126 TO 129 132 TO 136 PR GY -5.4
348. 5 TO 36 102 TO 109 126 TO 129 136 PR GY -11.5
349. JOINT LOAD
350. 2 FX 0 FY -4.5 FZ -1.1
351. *********************************
352. LOAD 111 LOADTYPE NONE  TITLE 1.2DL+1.6LR+0.5W(-Z)
353. SELFWEIGHT Y -1
354. ELEMENT LOAD
355. 5 TO 36 53 TO 68 85 TO 100 102 TO 109 126 TO 129 132 TO 136 PR GY -5.4
356. 5 TO 36 102 TO 109 126 TO 129 136 PR GY -11.5
357. JOINT LOAD
358. 2 FX 0 FY -4.5 FZ 0.1
359. ************************************
360. LOAD 112 LOADTYPE NONE  TITLE 1.2DL+1.0L+0.5LR+1.6W(+X)
361. SELFWEIGHT Y -1
362. ELEMENT LOAD
363. 5 TO 36 53 TO 68 85 TO 100 102 TO 109 126 TO 129 132 TO 136 PR GY -5.4
364. 5 TO 36 102 TO 109 126 TO 129 136 PR GY -11.5
365. JOINT LOAD
366. 2 FX 0.0 FY -4.1 FZ -4.1
368. ************************************
369. LOAD 113 LOADTYPE NONE  TITLE 1.2DL+1.0L+0.5LR+1.6W(-X)
370. SELFWEIGHT Y -1
371. ELEMENT LOAD
372. 5 TO 36 53 TO 68 85 TO 100 102 TO 109 126 TO 129 132 TO 136 PR GY -5.4
373. 5 TO 36 102 TO 109 126 TO 129 136 PR GY -11.5
374. JOINT LOAD
375. 2 FX 0.1 FY -3.9 FZ -0.3
377. ****************************************
378. LOAD 114 LOADTYPE NONE  TITLE 1.2DL+1.0L+0.5LR+1.6W(+Z)
379. SELFWEIGHT Y -1
380. ELEMENT LOAD
381. 5 TO 36 53 TO 68 85 TO 100 102 TO 109 126 TO 129 132 TO 136 PR GY -5.4
382. 5 TO 36 102 TO 109 126 TO 129 136 PR GY -11.5
383. JOINT LOAD
```

```
384. 2 FX 0.0 FY -3.6 FZ -3.1
388. ************************************************
389. LOAD 115 LOADTYPE NONE  TITLE 1.2DL+1.0L+0.5LR+1.6W(-Z)
390. SELFWEIGHT Y -1
391. ELEMENT LOAD
392. 5 TO 36 53 TO 68 85 TO 100 102 TO 109 126 TO 129 132 TO 136 PR GY -5.4
393. 5 TO 36 102 TO 109 126 TO 129 136 PR GY -11.5
394. JOINT LOAD
395. 2 FX 0.0 FY -3.6 FZ 0.8
399. ************************************************
400. LOAD 116 LOADTYPE NONE  TITLE 0.9D + 1.6W(+X)
401. SELFWEIGHT Y -1
402. ELEMENT LOAD
403. 5 TO 36 53 TO 68 85 TO 100 102 TO 109 126 TO 129 132 TO 136 PR GY -4
404. 5 TO 36 102 TO 109 126 TO 129 136 PR GY -8.64
405. JOINT LOAD
406. 2 FX 0.0 FY -2.9 FZ -4.0
409. ************************************************
410. LOAD 117 LOADTYPE NONE  TITLE 0.9D + 1.6W(-X)
411. SELFWEIGHT Y -1
412. ELEMENT LOAD
413. 5 TO 36 53 TO 68 85 TO 100 102 TO 109 126 TO 129 132 TO 136 PR GY -4
414. 5 TO 36 102 TO 109 126 TO 129 136 PR GY -8.64
415. JOINT LOAD
416. 2 FX 0.1 FY -2.7 FZ -0.2
419. ************************************************
420. LOAD 118 LOADTYPE NONE  TITLE 0.9D + 1.6W(+Z)
421. SELFWEIGHT Y -1
422. ELEMENT LOAD
423. 5 TO 36 53 TO 68 85 TO 100 102 TO 109 126 TO 129 132 TO 136 PR GY -4
424. 5 TO 36 102 TO 109 126 TO 129 136 PR GY -8.64
425. JOINT LOAD
426. 2 FX 0.0 FY -2.4 FZ -3.0
427. ************************************************
428. LOAD 119 LOADTYPE NONE  TITLE 0.9D + 1.6W(-Z)
429. SELFWEIGHT Y -1
430. ELEMENT LOAD
431. 5 TO 36 53 TO 68 85 TO 100 102 TO 109 126 TO 129 132 TO 136 PR GY -4
432. 5 TO 36 102 TO 109 126 TO 129 136 PR GY -8.64
433. JOINT LOAD
434. 2 FX 0.0 FY -2.4 FZ 0.8
436. ************************************************
437. LOAD 120 LOADTYPE NONE  TITLE 1.2DL+1.0L+1.0E(+X)
438. SELFWEIGHT Y -1
439. ELEMENT LOAD
440. 5 TO 36 53 TO 68 85 TO 100 102 TO 109 126 TO 129 132 TO 136 PR GY -5.4
441. 5 TO 36 102 TO 109 126 TO 129 136 PR GY -11.5
442. JOINT LOAD
443. 2 FX 0 FY -3.3 FZ -0.1
444. ************************************************
445. LOAD 121 LOADTYPE NONE  TITLE 1.2DL+1.0L+1.0E(-X)
446. SELFWEIGHT Y -1
447. ELEMENT LOAD
448. 5 TO 36 53 TO 68 85 TO 100 102 TO 109 126 TO 129 132 TO 136 PR GY -5.4
449. 5 TO 36 102 TO 109 126 TO 129 136 PR GY -11.5
450. JOINT LOAD
```

```
2 FX 0 FY -3.3 FZ -0.1
**************************************************
LOAD 122 LOADTYPE NONE  TITLE 1.2DL+1.0L+1.0E(+Z)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 102 TO 109 126 TO 129 132 TO 136 PR GY -5.4
5 TO 36 102 TO 109 126 TO 129 136 PR GY -11.5
JOINT LOAD
2 FX 0 FY -3.3 FZ -0.1
**************************************************
LOAD 123 LOADTYPE NONE  TITLE 1.2DL+1.0L+1.0E(-Z)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 102 TO 109 126 TO 129 132 TO 136 PR GY -5.4
5 TO 36 102 TO 109 126 TO 129 136 PR GY -11.5
JOINT LOAD
2 FX 0 FY -3.4 FZ -0.1
**************************************************
LOAD 124 LOADTYPE NONE  TITLE 0.9D + 1.0E(+X)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 102 TO 109 126 TO 129 132 TO 136 PR GY -4.1
5 TO 36 102 TO 109 126 TO 129 136 PR GY -8.64
JOINT LOAD
2 FX 0 FY -2.5 FZ -0.1
**********************************************************************
LOAD 125 LOADTYPE NONE  TITLE 0.9D + 1.0E(-X)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 102 TO 109 126 TO 129 132 TO 136 PR GY -4.1
5 TO 36 102 TO 109 126 TO 129 136 PR GY -8.64
JOINT LOAD
2 FX 0 FY -2.5 FZ -0.1
***********************************
LOAD 126 LOADTYPE NONE  TITLE 0.9D + 1.0E(+Z)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 102 TO 109 126 TO 129 132 TO 136 PR GY -4.1
5 TO 36 102 TO 109 126 TO 129 136 PR GY -8.64
JOINT LOAD
2 FX 0 FY -2.5 FZ -0.1
***********************************
LOAD 127 LOADTYPE NONE  TITLE 0.9D + 1.0E(-Z)
SELFWEIGHT Y -1
ELEMENT LOAD
5 TO 36 53 TO 68 85 TO 100 102 TO 109 126 TO 129 132 TO 136 PR GY -4.1
5 TO 36 102 TO 109 126 TO 129 136 PR GY -8.64
JOINT LOAD
2 FX 0 FY -2.5 FZ -0.1
***************************************
PERFORM ANALYSIS
```

P R O B L E M S T A T I S T I C S

NUMBER OF JOINTS	101	NUMBER OF MEMBERS	1
NUMBER OF PLATES	81	NUMBER OF SOLIDS	0
NUMBER OF SURFACES	0	NUMBER OF SUPPORTS	100

SOLVER USED IS THE OUT-OF-CORE BASIC SOLVER

ORIGINAL/FINAL BAND-WIDTH= 94/ 17/ 54 DOF
TOTAL PRIMARY LOAD CASES = 51, TOTAL DEGREES OF FREEDOM = 306
TOTAL LOAD COMBINATION CASES = 0 SO FAR.
SIZE OF STIFFNESS MATRIX = 17 DOUBLE KILO-WORDS
REQRD/AVAIL. DISK SPACE = 12.8/ 165057.2 MB

**NOTE-Tension/Compression converged after 1 iterations, Case= 1

**NOTE-Tension/Compression converged after 1 iterations, Case= 2

**NOTE-Tension/Compression converged after 1 iterations, Case= 3

**NOTE-Tension/Compression converged after 1 iterations, Case= 4

**NOTE-Tension/Compression converged after 1 iterations, Case= 5

**NOTE-Tension/Compression converged after 1 iterations, Case= 6

**NOTE-Tension/Compression converged after 1 iterations, Case= 7

**NOTE-Tension/Compression converged after 1 iterations, Case= 8

**NOTE-Tension/Compression converged after 1 iterations, Case= 9

**NOTE-Tension/Compression converged after 1 iterations, Case= 10

**NOTE-Tension/Compression converged after 1 iterations, Case= 11

**NOTE-Tension/Compression converged after 1 iterations, Case= 12

**NOTE-Tension/Compression converged after 1 iterations, Case= 13

**NOTE-Tension/Compression converged after 1 iterations, Case= 14

**NOTE-Tension/Compression converged after 1 iterations, Case= 15

**NOTE-Tension/Compression converged after 1 iterations, Case= 16

**NOTE-Tension/Compression converged after 1 iterations, Case= 17

**NOTE-Tension/Compression converged after 1 iterations, Case= 18

**NOTE-Tension/Compression converged after 1 iterations, Case= 19

**NOTE-Tension/Compression converged after 1 iterations, Case= 20

**NOTE-Tension/Compression converged after 1 iterations, Case= 21

**NOTE-Tension/Compression converged after 1 iterations, Case= 22

**NOTE-Tension/Compression converged after 1 iterations, Case= 24

**NOTE-Tension/Compression converged after 1 iterations, Case= 101

**NOTE-Tension/Compression converged after 1 iterations, Case= 102

**NOTE-Tension/Compression converged after 1 iterations, Case= 103

**NOTE-Tension/Compression converged after 1 iterations, Case= 104

**NOTE-Tension/Compression converged after 1 iterations, Case= 105

**NOTE-Tension/Compression converged after 1 iterations, Case= 106

**NOTE-Tension/Compression converged after 1 iterations, Case= 107

**NOTE-Tension/Compression converged after 1 iterations, Case= 108

**NOTE-Tension/Compression converged after 1 iterations, Case= 109

**NOTE-Tension/Compression converged after 1 iterations, Case= 110

**NOTE-Tension/Compression converged after 1 iterations, Case= 111

**NOTE-Tension/Compression converged after 1 iterations, Case= 112

**NOTE-Tension/Compression converged after 1 iterations, Case= 114

**NOTE-Tension/Compression converged after 1 iterations, Case= 115

**NOTE-Tension/Compression converged after 1 iterations, Case= 116

**NOTE-Tension/Compression converged after 1 iterations, Case= 117

**NOTE-Tension/Compression converged after 1 iterations, Case= 118

**NOTE-Tension/Compression converged after 1 iterations, Case= 119

**NOTE-Tension/Compression converged after 1 iterations, Case= 120

**NOTE-Tension/Compression converged after 1 iterations, Case= 121

**NOTE-Tension/Compression converged after 1 iterations, Case= 122

**NOTE-Tension/Compression converged after 1 iterations, Case= 123

**NOTE-Tension/Compression converged after 1 iterations, Case= 124

**NOTE-Tension/Compression converged after 1 iterations, Case= 125

**NOTE-Tension/Compression converged after 1 iterations, Case= 126

```
502. LOAD LIST 1 TO 24
503. PRINT SUPPORT REACTION ALL
```

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
1	1	0.00	0.88	0.00	0.00	0.00	0.00
	2	0.00	0.89	0.00	0.00	0.00	0.00
	3	0.00	0.89	0.00	0.00	0.00	0.00
	4	0.00	0.90	0.00	0.00	0.00	0.00
	5	0.00	0.89	0.00	0.00	0.00	0.00
	6	0.00	0.89	0.00	0.00	0.00	0.00
	7	0.00	0.89	0.00	0.00	0.00	0.00
	8	0.00	0.89	0.00	0.00	0.00	0.00
	9	0.00	0.97	0.00	0.00	0.00	0.00
	10	0.00	0.90	0.00	0.00	0.00	0.00
	11	0.00	0.95	0.00	0.00	0.00	0.00
	12	0.00	0.87	0.00	0.00	0.00	0.00
	13	0.00	0.74	0.00	0.00	0.00	0.00
	14	0.00	0.65	0.00	0.00	0.00	0.00
	15	0.00	0.72	0.00	0.00	0.00	0.00
	16	0.00	0.72	0.00	0.00	0.00	0.00
	17	0.00	0.89	0.00	0.00	0.00	0.00
	18	0.00	0.89	0.00	0.00	0.00	0.00
	19	0.00	0.89	0.00	0.00	0.00	0.00
	20	0.00	0.89	0.00	0.00	0.00	0.00
	21	0.00	0.64	0.00	0.00	0.00	0.00
	22	0.00	0.64	0.00	0.00	0.00	0.00
	23	0.00	0.64	0.00	0.00	0.00	0.00
	24	0.00	0.64	0.00	0.00	0.00	0.00
3	1	0.00	1.29	0.00	0.00	0.00	0.00
	2	0.00	1.30	0.00	0.00	0.00	0.00
	3	0.00	1.30	0.00	0.00	0.00	0.00
	4	0.00	1.28	0.00	0.00	0.00	0.00
	5	0.00	1.30	0.00	0.00	0.00	0.00
	6	0.00	1.30	0.00	0.00	0.00	0.00
	7	0.00	1.30	0.00	0.00	0.00	0.00
	8	0.00	1.30	0.00	0.00	0.00	0.00
	9	0.00	0.85	0.00	0.00	0.00	0.00
	10	0.00	1.28	0.00	0.00	0.00	0.00
	11	0.00	0.96	0.00	0.00	0.00	0.00
	12	0.00	1.39	0.00	0.00	0.00	0.00
	13	0.00	0.32	0.00	0.00	0.00	0.00
	14	0.00	0.87	0.00	0.00	0.00	0.00
	15	0.00	0.46	0.00	0.00	0.00	0.00
	16	0.00	0.46	0.00	0.00	0.00	0.00
	17	0.00	1.30	0.00	0.00	0.00	0.00
	18	0.00	1.30	0.00	0.00	0.00	0.00
	19	0.00	1.30	0.00	0.00	0.00	0.00
	20	0.00	1.30	0.00	0.00	0.00	0.00
	21	0.00	0.92	0.00	0.00	0.00	0.00
	22	0.00	0.92	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	23	0.00	0.89	0.00	0.00	0.00	0.00
	24	0.00	0.92	0.00	0.00	0.00	0.00
5	1	0.00	0.46	0.00	0.00	0.00	0.00
	2	0.00	0.47	0.00	0.00	0.00	0.00
	3	0.00	0.47	0.00	0.00	0.00	0.00
	4	0.00	0.47	0.00	0.00	0.00	0.00
	5	0.00	0.47	0.00	0.00	0.00	0.00
	6	0.00	0.47	0.00	0.00	0.00	0.00
	7	0.00	0.47	0.00	0.00	0.00	0.00
	8	0.00	0.47	0.00	0.00	0.00	0.00
	9	0.00	0.50	0.00	0.00	0.00	0.00
	10	0.00	0.47	0.00	0.00	0.00	0.00
	11	0.00	0.49	0.00	0.00	0.00	0.00
	12	0.00	0.46	0.00	0.00	0.00	0.00
	13	0.00	0.39	0.00	0.00	0.00	0.00
	14	0.00	0.35	0.00	0.00	0.00	0.00
	15	0.00	0.37	0.00	0.00	0.00	0.00
	16	0.00	0.37	0.00	0.00	0.00	0.00
	17	0.00	0.47	0.00	0.00	0.00	0.00
	18	0.00	0.47	0.00	0.00	0.00	0.00
	19	0.00	0.47	0.00	0.00	0.00	0.00
	20	0.00	0.47	0.00	0.00	0.00	0.00
	21	0.00	0.34	0.00	0.00	0.00	0.00
	22	0.00	0.34	0.00	0.00	0.00	0.00
	23	0.00	0.34	0.00	0.00	0.00	0.00
	24	0.00	0.34	0.00	0.00	0.00	0.00
6	1	0.00	0.67	0.00	0.00	0.00	0.00
	2	0.00	0.68	0.00	0.00	0.00	0.00
	3	0.00	0.68	0.00	0.00	0.00	0.00
	4	0.00	0.66	0.00	0.00	0.00	0.00
	5	0.00	0.68	0.00	0.00	0.00	0.00
	6	0.00	0.68	0.00	0.00	0.00	0.00
	7	0.00	0.68	0.00	0.00	0.00	0.00
	8	0.00	0.68	0.00	0.00	0.00	0.00
	9	0.00	0.45	0.00	0.00	0.00	0.00
	10	0.00	0.66	0.00	0.00	0.00	0.00
	11	0.00	0.51	0.00	0.00	0.00	0.00
	12	0.00	0.72	0.00	0.00	0.00	0.00
	13	0.00	0.19	0.00	0.00	0.00	0.00
	14	0.00	0.46	0.00	0.00	0.00	0.00
	15	0.00	0.26	0.00	0.00	0.00	0.00
	16	0.00	0.26	0.00	0.00	0.00	0.00
	17	0.00	0.68	0.00	0.00	0.00	0.00
	18	0.00	0.68	0.00	0.00	0.00	0.00
	19	0.00	0.68	0.00	0.00	0.00	0.00
	20	0.00	0.68	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	21	0.00	0.48	0.00	0.00	0.00	0.00
	22	0.00	0.48	0.00	0.00	0.00	0.00
	23	0.00	0.47	0.00	0.00	0.00	0.00
	24	0.00	0.48	0.00	0.00	0.00	0.00
8	1	0.00	0.80	0.00	0.00	0.00	0.00
	2	0.00	0.80	0.00	0.00	0.00	0.00
	3	0.00	0.80	0.00	0.00	0.00	0.00
	4	0.00	0.81	0.00	0.00	0.00	0.00
	5	0.00	0.80	0.00	0.00	0.00	0.00
	6	0.00	0.80	0.00	0.00	0.00	0.00
	7	0.00	0.80	0.00	0.00	0.00	0.00
	8	0.00	0.80	0.00	0.00	0.00	0.00
	9	0.00	0.87	0.00	0.00	0.00	0.00
	10	0.00	0.81	0.00	0.00	0.00	0.00
	11	0.00	0.85	0.00	0.00	0.00	0.00
	12	0.00	0.79	0.00	0.00	0.00	0.00
	13	0.00	0.65	0.00	0.00	0.00	0.00
	14	0.00	0.57	0.00	0.00	0.00	0.00
	15	0.00	0.62	0.00	0.00	0.00	0.00
	16	0.00	0.62	0.00	0.00	0.00	0.00
	17	0.00	0.80	0.00	0.00	0.00	0.00
	18	0.00	0.80	0.00	0.00	0.00	0.00
	19	0.00	0.80	0.00	0.00	0.00	0.00
	20	0.00	0.80	0.00	0.00	0.00	0.00
	21	0.00	0.56	0.00	0.00	0.00	0.00
	22	0.00	0.56	0.00	0.00	0.00	0.00
	23	0.00	0.56	0.00	0.00	0.00	0.00
	24	0.00	0.56	0.00	0.00	0.00	0.00
9	1	0.00	1.21	0.00	0.00	0.00	0.00
	2	0.00	1.22	0.00	0.00	0.00	0.00
	3	0.00	1.22	0.00	0.00	0.00	0.00
	4	0.00	1.20	0.00	0.00	0.00	0.00
	5	0.00	1.22	0.00	0.00	0.00	0.00
	6	0.00	1.22	0.00	0.00	0.00	0.00
	7	0.00	1.22	0.00	0.00	0.00	0.00
	8	0.00	1.22	0.00	0.00	0.00	0.00
	9	0.00	0.79	0.00	0.00	0.00	0.00
	10	0.00	1.20	0.00	0.00	0.00	0.00
	11	0.00	0.90	0.00	0.00	0.00	0.00
	12	0.00	1.31	0.00	0.00	0.00	0.00
	13	0.00	0.28	0.00	0.00	0.00	0.00
	14	0.00	0.80	0.00	0.00	0.00	0.00
	15	0.00	0.41	0.00	0.00	0.00	0.00
	16	0.00	0.41	0.00	0.00	0.00	0.00
	17	0.00	1.22	0.00	0.00	0.00	0.00
	18	0.00	1.22	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	19	0.00	1.22	0.00	0.00	0.00	0.00
	20	0.00	1.22	0.00	0.00	0.00	0.00
	21	0.00	0.84	0.00	0.00	0.00	0.00
	22	0.00	0.84	0.00	0.00	0.00	0.00
	23	0.00	0.82	0.00	0.00	0.00	0.00
	24	0.00	0.84	0.00	0.00	0.00	0.00
11	1	0.00	0.82	0.00	0.00	0.00	0.00
	2	0.00	0.83	0.00	0.00	0.00	0.00
	3	0.00	0.82	0.00	0.00	0.00	0.00
	4	0.00	0.83	0.00	0.00	0.00	0.00
	5	0.00	0.83	0.00	0.00	0.00	0.00
	6	0.00	0.82	0.00	0.00	0.00	0.00
	7	0.00	0.82	0.00	0.00	0.00	0.00
	8	0.00	0.82	0.00	0.00	0.00	0.00
	9	0.00	0.89	0.00	0.00	0.00	0.00
	10	0.00	0.83	0.00	0.00	0.00	0.00
	11	0.00	0.87	0.00	0.00	0.00	0.00
	12	0.00	0.81	0.00	0.00	0.00	0.00
	13	0.00	0.67	0.00	0.00	0.00	0.00
	14	0.00	0.59	0.00	0.00	0.00	0.00
	15	0.00	0.65	0.00	0.00	0.00	0.00
	16	0.00	0.65	0.00	0.00	0.00	0.00
	17	0.00	0.83	0.00	0.00	0.00	0.00
	18	0.00	0.83	0.00	0.00	0.00	0.00
	19	0.00	0.82	0.00	0.00	0.00	0.00
	20	0.00	0.83	0.00	0.00	0.00	0.00
	21	0.00	0.58	0.00	0.00	0.00	0.00
	22	0.00	0.58	0.00	0.00	0.00	0.00
	23	0.00	0.58	0.00	0.00	0.00	0.00
	24	0.00	0.58	0.00	0.00	0.00	0.00
12	1	0.00	0.93	0.00	0.00	0.00	0.00
	2	0.00	0.93	0.00	0.00	0.00	0.00
	3	0.00	0.93	0.00	0.00	0.00	0.00
	4	0.00	0.93	0.00	0.00	0.00	0.00
	5	0.00	0.93	0.00	0.00	0.00	0.00
	6	0.00	0.93	0.00	0.00	0.00	0.00
	7	0.00	0.93	0.00	0.00	0.00	0.00
	8	0.00	0.93	0.00	0.00	0.00	0.00
	9	0.00	0.88	0.00	0.00	0.00	0.00
	10	0.00	0.93	0.00	0.00	0.00	0.00
	11	0.00	0.89	0.00	0.00	0.00	0.00
	12	0.00	0.94	0.00	0.00	0.00	0.00
	13	0.00	0.58	0.00	0.00	0.00	0.00
	14	0.00	0.65	0.00	0.00	0.00	0.00
	15	0.00	0.59	0.00	0.00	0.00	0.00
	16	0.00	0.59	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	17	0.00	0.93	0.00	0.00	0.00	0.00
	18	0.00	0.93	0.00	0.00	0.00	0.00
	19	0.00	0.93	0.00	0.00	0.00	0.00
	20	0.00	0.93	0.00	0.00	0.00	0.00
	21	0.00	0.65	0.00	0.00	0.00	0.00
	22	0.00	0.65	0.00	0.00	0.00	0.00
	23	0.00	0.65	0.00	0.00	0.00	0.00
	24	0.00	0.65	0.00	0.00	0.00	0.00
13	1	0.00	0.90	0.00	0.00	0.00	0.00
	2	0.00	0.91	0.00	0.00	0.00	0.00
	3	0.00	0.91	0.00	0.00	0.00	0.00
	4	0.00	0.91	0.00	0.00	0.00	0.00
	5	0.00	0.91	0.00	0.00	0.00	0.00
	6	0.00	0.91	0.00	0.00	0.00	0.00
	7	0.00	0.91	0.00	0.00	0.00	0.00
	8	0.00	0.91	0.00	0.00	0.00	0.00
	9	0.00	0.85	0.00	0.00	0.00	0.00
	10	0.00	0.91	0.00	0.00	0.00	0.00
	11	0.00	0.87	0.00	0.00	0.00	0.00
	12	0.00	0.92	0.00	0.00	0.00	0.00
	13	0.00	0.56	0.00	0.00	0.00	0.00
	14	0.00	0.63	0.00	0.00	0.00	0.00
	15	0.00	0.57	0.00	0.00	0.00	0.00
	16	0.00	0.57	0.00	0.00	0.00	0.00
	17	0.00	0.91	0.00	0.00	0.00	0.00
	18	0.00	0.91	0.00	0.00	0.00	0.00
	19	0.00	0.91	0.00	0.00	0.00	0.00
	20	0.00	0.91	0.00	0.00	0.00	0.00
	21	0.00	0.63	0.00	0.00	0.00	0.00
	22	0.00	0.63	0.00	0.00	0.00	0.00
	23	0.00	0.63	0.00	0.00	0.00	0.00
	24	0.00	0.63	0.00	0.00	0.00	0.00
14	1	0.00	0.84	0.00	0.00	0.00	0.00
	2	0.00	0.85	0.00	0.00	0.00	0.00
	3	0.00	0.85	0.00	0.00	0.00	0.00
	4	0.00	0.85	0.00	0.00	0.00	0.00
	5	0.00	0.85	0.00	0.00	0.00	0.00
	6	0.00	0.85	0.00	0.00	0.00	0.00
	7	0.00	0.85	0.00	0.00	0.00	0.00
	8	0.00	0.85	0.00	0.00	0.00	0.00
	9	0.00	0.92	0.00	0.00	0.00	0.00
	10	0.00	0.85	0.00	0.00	0.00	0.00
	11	0.00	0.90	0.00	0.00	0.00	0.00
	12	0.00	0.83	0.00	0.00	0.00	0.00
	13	0.00	0.70	0.00	0.00	0.00	0.00
	14	0.00	0.61	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	15	0.00	0.67	0.00	0.00	0.00	0.00
	16	0.00	0.67	0.00	0.00	0.00	0.00
	17	0.00	0.85	0.00	0.00	0.00	0.00
	18	0.00	0.85	0.00	0.00	0.00	0.00
	19	0.00	0.85	0.00	0.00	0.00	0.00
	20	0.00	0.85	0.00	0.00	0.00	0.00
	21	0.00	0.60	0.00	0.00	0.00	0.00
	22	0.00	0.60	0.00	0.00	0.00	0.00
	23	0.00	0.60	0.00	0.00	0.00	0.00
	24	0.00	0.60	0.00	0.00	0.00	0.00
15	1	0.00	0.95	0.00	0.00	0.00	0.00
	2	0.00	0.96	0.00	0.00	0.00	0.00
	3	0.00	0.96	0.00	0.00	0.00	0.00
	4	0.00	0.95	0.00	0.00	0.00	0.00
	5	0.00	0.96	0.00	0.00	0.00	0.00
	6	0.00	0.96	0.00	0.00	0.00	0.00
	7	0.00	0.96	0.00	0.00	0.00	0.00
	8	0.00	0.96	0.00	0.00	0.00	0.00
	9	0.00	0.90	0.00	0.00	0.00	0.00
	10	0.00	0.95	0.00	0.00	0.00	0.00
	11	0.00	0.91	0.00	0.00	0.00	0.00
	12	0.00	0.97	0.00	0.00	0.00	0.00
	13	0.00	0.60	0.00	0.00	0.00	0.00
	14	0.00	0.67	0.00	0.00	0.00	0.00
	15	0.00	0.62	0.00	0.00	0.00	0.00
	16	0.00	0.62	0.00	0.00	0.00	0.00
	17	0.00	0.96	0.00	0.00	0.00	0.00
	18	0.00	0.96	0.00	0.00	0.00	0.00
	19	0.00	0.96	0.00	0.00	0.00	0.00
	20	0.00	0.96	0.00	0.00	0.00	0.00
	21	0.00	0.67	0.00	0.00	0.00	0.00
	22	0.00	0.67	0.00	0.00	0.00	0.00
	23	0.00	0.67	0.00	0.00	0.00	0.00
	24	0.00	0.67	0.00	0.00	0.00	0.00
16	1	0.00	0.87	0.00	0.00	0.00	0.00
	2	0.00	0.87	0.00	0.00	0.00	0.00
	3	0.00	0.87	0.00	0.00	0.00	0.00
	4	0.00	0.88	0.00	0.00	0.00	0.00
	5	0.00	0.87	0.00	0.00	0.00	0.00
	6	0.00	0.87	0.00	0.00	0.00	0.00
	7	0.00	0.87	0.00	0.00	0.00	0.00
	8	0.00	0.87	0.00	0.00	0.00	0.00
	9	0.00	0.95	0.00	0.00	0.00	0.00
	10	0.00	0.88	0.00	0.00	0.00	0.00
	11	0.00	0.93	0.00	0.00	0.00	0.00
	12	0.00	0.86	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	13	0.00	0.72	0.00	0.00	0.00	0.00
	14	0.00	0.63	0.00	0.00	0.00	0.00
	15	0.00	0.70	0.00	0.00	0.00	0.00
	16	0.00	0.70	0.00	0.00	0.00	0.00
	17	0.00	0.87	0.00	0.00	0.00	0.00
	18	0.00	0.87	0.00	0.00	0.00	0.00
	19	0.00	0.87	0.00	0.00	0.00	0.00
	20	0.00	0.87	0.00	0.00	0.00	0.00
	21	0.00	0.62	0.00	0.00	0.00	0.00
	22	0.00	0.62	0.00	0.00	0.00	0.00
	23	0.00	0.62	0.00	0.00	0.00	0.00
	24	0.00	0.62	0.00	0.00	0.00	0.00
17	1	0.00	0.97	0.00	0.00	0.00	0.00
	2	0.00	0.98	0.00	0.00	0.00	0.00
	3	0.00	0.98	0.00	0.00	0.00	0.00
	4	0.00	0.98	0.00	0.00	0.00	0.00
	5	0.00	0.98	0.00	0.00	0.00	0.00
	6	0.00	0.98	0.00	0.00	0.00	0.00
	7	0.00	0.98	0.00	0.00	0.00	0.00
	8	0.00	0.98	0.00	0.00	0.00	0.00
	9	0.00	0.92	0.00	0.00	0.00	0.00
	10	0.00	0.98	0.00	0.00	0.00	0.00
	11	0.00	0.94	0.00	0.00	0.00	0.00
	12	0.00	0.99	0.00	0.00	0.00	0.00
	13	0.00	0.62	0.00	0.00	0.00	0.00
	14	0.00	0.69	0.00	0.00	0.00	0.00
	15	0.00	0.64	0.00	0.00	0.00	0.00
	16	0.00	0.64	0.00	0.00	0.00	0.00
	17	0.00	0.98	0.00	0.00	0.00	0.00
	18	0.00	0.98	0.00	0.00	0.00	0.00
	19	0.00	0.98	0.00	0.00	0.00	0.00
	20	0.00	0.98	0.00	0.00	0.00	0.00
	21	0.00	0.70	0.00	0.00	0.00	0.00
	22	0.00	0.70	0.00	0.00	0.00	0.00
	23	0.00	0.69	0.00	0.00	0.00	0.00
	24	0.00	0.70	0.00	0.00	0.00	0.00
18	1	0.00	1.00	0.10	0.00	0.00	0.00
	2	0.00	1.01	0.10	0.00	0.00	0.00
	3	0.00	1.01	0.10	0.00	0.00	0.00
	4	0.00	1.00	0.20	0.00	0.00	0.00
	5	0.00	1.01	0.10	0.00	0.00	0.00
	6	0.00	1.01	0.10	0.00	0.00	0.00
	7	0.00	1.01	0.10	0.00	0.00	0.00
	8	0.00	1.01	0.10	0.00	0.00	0.00
	9	0.00	0.95	2.00	0.00	0.00	0.00
	10	0.00	1.00	0.20	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	11	0.00	0.96	1.50	0.00	0.00	0.00
	12	0.00	1.02	-0.30	0.00	0.00	0.00
	13	0.00	0.65	2.50	0.00	0.00	0.00
	14	0.00	0.72	0.20	0.00	0.00	0.00
	15	0.00	0.66	1.90	0.00	0.00	0.00
	16	0.00	0.66	1.90	0.00	0.00	0.00
	17	0.00	1.01	0.10	0.00	0.00	0.00
	18	0.00	1.01	0.10	0.00	0.00	0.00
	19	0.00	1.01	0.10	0.00	0.00	0.00
	20	0.00	1.01	0.10	0.00	0.00	0.00
	21	0.00	0.72	0.00	0.00	0.00	0.00
	22	0.00	0.72	0.00	0.00	0.00	0.00
	23	0.00	0.72	0.10	0.00	0.00	0.00
	24	0.00	0.72	0.00	0.00	0.00	0.00
19	1	0.00	1.03	0.00	0.00	0.00	0.00
	2	0.00	1.04	0.00	0.00	0.00	0.00
	3	0.00	1.04	0.00	0.00	0.00	0.00
	4	0.00	1.03	0.00	0.00	0.00	0.00
	5	0.00	1.04	0.00	0.00	0.00	0.00
	6	0.00	1.04	0.00	0.00	0.00	0.00
	7	0.00	1.04	0.00	0.00	0.00	0.00
	8	0.00	1.04	0.00	0.00	0.00	0.00
	9	0.00	0.85	0.00	0.00	0.00	0.00
	10	0.00	1.03	0.00	0.00	0.00	0.00
	11	0.00	0.90	0.00	0.00	0.00	0.00
	12	0.00	1.08	0.00	0.00	0.00	0.00
	13	0.00	0.48	0.00	0.00	0.00	0.00
	14	0.00	0.71	0.00	0.00	0.00	0.00
	15	0.00	0.54	0.00	0.00	0.00	0.00
	16	0.00	0.54	0.00	0.00	0.00	0.00
	17	0.00	1.04	0.00	0.00	0.00	0.00
	18	0.00	1.04	0.00	0.00	0.00	0.00
	19	0.00	1.04	0.00	0.00	0.00	0.00
	20	0.00	1.04	0.00	0.00	0.00	0.00
	21	0.00	0.72	0.00	0.00	0.00	0.00
	22	0.00	0.72	0.00	0.00	0.00	0.00
	23	0.00	0.71	0.00	0.00	0.00	0.00
	24	0.00	0.72	0.00	0.00	0.00	0.00
20	1	0.00	1.01	0.00	0.00	0.00	0.00
	2	0.00	1.02	0.00	0.00	0.00	0.00
	3	0.00	1.01	0.00	0.00	0.00	0.00
	4	0.00	1.01	0.00	0.00	0.00	0.00
	5	0.00	1.01	0.00	0.00	0.00	0.00
	6	0.00	1.01	0.00	0.00	0.00	0.00
	7	0.00	1.01	0.00	0.00	0.00	0.00
	8	0.00	1.01	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	9	0.00	0.83	0.00	0.00	0.00	0.00
	10	0.00	1.01	0.00	0.00	0.00	0.00
	11	0.00	0.88	0.00	0.00	0.00	0.00
	12	0.00	1.05	0.00	0.00	0.00	0.00
	13	0.00	0.47	0.00	0.00	0.00	0.00
	14	0.00	0.69	0.00	0.00	0.00	0.00
	15	0.00	0.52	0.00	0.00	0.00	0.00
	16	0.00	0.52	0.00	0.00	0.00	0.00
	17	0.00	1.01	0.00	0.00	0.00	0.00
	18	0.00	1.01	0.00	0.00	0.00	0.00
	19	0.00	1.01	0.00	0.00	0.00	0.00
	20	0.00	1.01	0.00	0.00	0.00	0.00
	21	0.00	0.70	0.00	0.00	0.00	0.00
	22	0.00	0.70	0.00	0.00	0.00	0.00
	23	0.00	0.69	0.00	0.00	0.00	0.00
	24	0.00	0.70	0.00	0.00	0.00	0.00
21	1	0.00	1.05	0.00	0.00	0.00	0.00
	2	0.00	1.06	0.00	0.00	0.00	0.00
	3	0.00	1.06	0.00	0.00	0.00	0.00
	4	0.00	1.05	0.00	0.00	0.00	0.00
	5	0.00	1.06	0.00	0.00	0.00	0.00
	6	0.00	1.06	0.00	0.00	0.00	0.00
	7	0.00	1.06	0.00	0.00	0.00	0.00
	8	0.00	1.06	0.00	0.00	0.00	0.00
	9	0.00	0.87	0.00	0.00	0.00	0.00
	10	0.00	1.05	0.00	0.00	0.00	0.00
	11	0.00	0.92	0.00	0.00	0.00	0.00
	12	0.00	1.10	0.00	0.00	0.00	0.00
	13	0.00	0.50	0.00	0.00	0.00	0.00
	14	0.00	0.73	0.00	0.00	0.00	0.00
	15	0.00	0.56	0.00	0.00	0.00	0.00
	16	0.00	0.56	0.00	0.00	0.00	0.00
	17	0.00	1.06	0.00	0.00	0.00	0.00
	18	0.00	1.06	0.00	0.00	0.00	0.00
	19	0.00	1.06	0.00	0.00	0.00	0.00
	20	0.00	1.06	0.00	0.00	0.00	0.00
	21	0.00	0.75	0.00	0.00	0.00	0.00
	22	0.00	0.75	0.00	0.00	0.00	0.00
	23	0.00	0.74	0.00	0.00	0.00	0.00
	24	0.00	0.75	0.00	0.00	0.00	0.00
22	1	0.00	1.08	0.00	0.00	0.00	0.00
	2	0.00	1.09	0.00	0.00	0.00	0.00
	3	0.00	1.08	0.00	0.00	0.00	0.00
	4	0.00	1.07	0.00	0.00	0.00	0.00
	5	0.00	1.08	0.00	0.00	0.00	0.00
	6	0.00	1.08	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	7	0.00	1.08	0.00	0.00	0.00	0.00
	8	0.00	1.08	0.00	0.00	0.00	0.00
	9	0.00	0.89	0.00	0.00	0.00	0.00
	10	0.00	1.07	0.00	0.00	0.00	0.00
	11	0.00	0.94	0.00	0.00	0.00	0.00
	12	0.00	1.12	0.00	0.00	0.00	0.00
	13	0.00	0.51	0.00	0.00	0.00	0.00
	14	0.00	0.75	0.00	0.00	0.00	0.00
	15	0.00	0.57	0.00	0.00	0.00	0.00
	16	0.00	0.57	0.00	0.00	0.00	0.00
	17	0.00	1.08	0.00	0.00	0.00	0.00
	18	0.00	1.08	0.00	0.00	0.00	0.00
	19	0.00	1.08	0.00	0.00	0.00	0.00
	20	0.00	1.08	0.00	0.00	0.00	0.00
	21	0.00	0.77	0.00	0.00	0.00	0.00
	22	0.00	0.77	0.00	0.00	0.00	0.00
	23	0.00	0.76	0.00	0.00	0.00	0.00
	24	0.00	0.77	0.00	0.00	0.00	0.00
23	1	0.00	1.09	0.00	0.00	0.00	0.00
	2	0.00	1.10	0.00	0.00	0.00	0.00
	3	0.00	1.10	0.00	0.00	0.00	0.00
	4	0.00	1.09	0.00	0.00	0.00	0.00
	5	0.00	1.10	0.00	0.00	0.00	0.00
	6	0.00	1.10	0.00	0.00	0.00	0.00
	7	0.00	1.10	0.00	0.00	0.00	0.00
	8	0.00	1.10	0.00	0.00	0.00	0.00
	9	0.00	0.90	0.00	0.00	0.00	0.00
	10	0.00	1.09	0.00	0.00	0.00	0.00
	11	0.00	0.95	0.00	0.00	0.00	0.00
	12	0.00	1.14	0.00	0.00	0.00	0.00
	13	0.00	0.53	0.00	0.00	0.00	0.00
	14	0.00	0.77	0.00	0.00	0.00	0.00
	15	0.00	0.58	0.00	0.00	0.00	0.00
	16	0.00	0.58	0.00	0.00	0.00	0.00
	17	0.00	1.10	0.00	0.00	0.00	0.00
	18	0.00	1.10	0.00	0.00	0.00	0.00
	19	0.00	1.10	0.00	0.00	0.00	0.00
	20	0.00	1.10	0.00	0.00	0.00	0.00
	21	0.00	0.78	0.00	0.00	0.00	0.00
	22	0.00	0.78	0.00	0.00	0.00	0.00
	23	0.00	0.77	0.00	0.00	0.00	0.00
	24	0.00	0.78	0.00	0.00	0.00	0.00
24	1	0.00	1.13	0.00	0.00	0.00	0.00
	2	0.00	1.14	0.00	0.00	0.00	0.00
	3	0.00	1.14	0.00	0.00	0.00	0.00
	4	0.00	1.12	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	5	0.00	1.14	0.00	0.00	0.00	0.00
	6	0.00	1.14	0.00	0.00	0.00	0.00
	7	0.00	1.14	0.00	0.00	0.00	0.00
	8	0.00	1.14	0.00	0.00	0.00	0.00
	9	0.00	0.83	0.00	0.00	0.00	0.00
	10	0.00	1.12	0.00	0.00	0.00	0.00
	11	0.00	0.91	0.00	0.00	0.00	0.00
	12	0.00	1.20	0.00	0.00	0.00	0.00
	13	0.00	0.39	0.00	0.00	0.00	0.00
	14	0.00	0.76	0.00	0.00	0.00	0.00
	15	0.00	0.48	0.00	0.00	0.00	0.00
	16	0.00	0.48	0.00	0.00	0.00	0.00
	17	0.00	1.14	0.00	0.00	0.00	0.00
	18	0.00	1.14	0.00	0.00	0.00	0.00
	19	0.00	1.14	0.00	0.00	0.00	0.00
	20	0.00	1.14	0.00	0.00	0.00	0.00
	21	0.00	0.79	0.00	0.00	0.00	0.00
	22	0.00	0.79	0.00	0.00	0.00	0.00
	23	0.00	0.78	0.00	0.00	0.00	0.00
	24	0.00	0.79	0.00	0.00	0.00	0.00
25	1	0.00	1.11	0.00	0.00	0.00	0.00
	2	0.00	1.12	0.00	0.00	0.00	0.00
	3	0.00	1.12	0.00	0.00	0.00	0.00
	4	0.00	1.10	0.00	0.00	0.00	0.00
	5	0.00	1.12	0.00	0.00	0.00	0.00
	6	0.00	1.12	0.00	0.00	0.00	0.00
	7	0.00	1.12	0.00	0.00	0.00	0.00
	8	0.00	1.12	0.00	0.00	0.00	0.00
	9	0.00	0.81	0.00	0.00	0.00	0.00
	10	0.00	1.10	0.00	0.00	0.00	0.00
	11	0.00	0.89	0.00	0.00	0.00	0.00
	12	0.00	1.18	0.00	0.00	0.00	0.00
	13	0.00	0.37	0.00	0.00	0.00	0.00
	14	0.00	0.74	0.00	0.00	0.00	0.00
	15	0.00	0.47	0.00	0.00	0.00	0.00
	16	0.00	0.47	0.00	0.00	0.00	0.00
	17	0.00	1.12	0.00	0.00	0.00	0.00
	18	0.00	1.12	0.00	0.00	0.00	0.00
	19	0.00	1.12	0.00	0.00	0.00	0.00
	20	0.00	1.12	0.00	0.00	0.00	0.00
	21	0.00	0.77	0.00	0.00	0.00	0.00
	22	0.00	0.77	0.00	0.00	0.00	0.00
	23	0.00	0.76	0.00	0.00	0.00	0.00
	24	0.00	0.77	0.00	0.00	0.00	0.00
26	1	0.00	1.15	0.00	0.00	0.00	0.00
	2	0.00	1.16	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	3	0.00	1.16	0.00	0.00	0.00	0.00
	4	0.00	1.15	0.00	0.00	0.00	0.00
	5	0.00	1.16	0.00	0.00	0.00	0.00
	6	0.00	1.16	0.00	0.00	0.00	0.00
	7	0.00	1.16	0.00	0.00	0.00	0.00
	8	0.00	1.16	0.00	0.00	0.00	0.00
	9	0.00	0.84	0.00	0.00	0.00	0.00
	10	0.00	1.15	0.00	0.00	0.00	0.00
	11	0.00	0.93	0.00	0.00	0.00	0.00
	12	0.00	1.23	0.00	0.00	0.00	0.00
	13	0.00	0.40	0.00	0.00	0.00	0.00
	14	0.00	0.78	0.00	0.00	0.00	0.00
	15	0.00	0.50	0.00	0.00	0.00	0.00
	16	0.00	0.50	0.00	0.00	0.00	0.00
	17	0.00	1.16	0.00	0.00	0.00	0.00
	18	0.00	1.16	0.00	0.00	0.00	0.00
	19	0.00	1.16	0.00	0.00	0.00	0.00
	20	0.00	1.16	0.00	0.00	0.00	0.00
	21	0.00	0.81	0.00	0.00	0.00	0.00
	22	0.00	0.81	0.00	0.00	0.00	0.00
	23	0.00	0.80	0.00	0.00	0.00	0.00
	24	0.00	0.81	0.00	0.00	0.00	0.00
27	1	0.00	1.17	0.00	0.00	0.00	0.00
	2	0.00	1.18	0.00	0.00	0.00	0.00
	3	0.00	1.18	0.00	0.00	0.00	0.00
	4	0.00	1.17	0.00	0.00	0.00	0.00
	5	0.00	1.18	0.00	0.00	0.00	0.00
	6	0.00	1.18	0.00	0.00	0.00	0.00
	7	0.00	1.18	0.00	0.00	0.00	0.00
	8	0.00	1.18	0.00	0.00	0.00	0.00
	9	0.00	0.86	0.00	0.00	0.00	0.00
	10	0.00	1.17	0.00	0.00	0.00	0.00
	11	0.00	0.94	0.00	0.00	0.00	0.00
	12	0.00	1.25	0.00	0.00	0.00	0.00
	13	0.00	0.41	0.00	0.00	0.00	0.00
	14	0.00	0.80	0.00	0.00	0.00	0.00
	15	0.00	0.51	0.00	0.00	0.00	0.00
	16	0.00	0.51	0.00	0.00	0.00	0.00
	17	0.00	1.18	0.00	0.00	0.00	0.00
	18	0.00	1.18	0.00	0.00	0.00	0.00
	19	0.00	1.18	0.00	0.00	0.00	0.00
	20	0.00	1.18	0.00	0.00	0.00	0.00
	21	0.00	0.83	0.00	0.00	0.00	0.00
	22	0.00	0.83	0.00	0.00	0.00	0.00
	23	0.00	0.82	0.00	0.00	0.00	0.00
	24	0.00	0.83	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
28	1	0.00	1.19	0.00	0.00	0.00	0.00
	2	0.00	1.20	0.00	0.00	0.00	0.00
	3	0.00	1.20	0.00	0.00	0.00	0.00
	4	0.00	1.18	0.00	0.00	0.00	0.00
	5	0.00	1.20	0.00	0.00	0.00	0.00
	6	0.00	1.20	0.00	0.00	0.00	0.00
	7	0.00	1.20	0.00	0.00	0.00	0.00
	8	0.00	1.20	0.00	0.00	0.00	0.00
	9	0.00	0.87	0.00	0.00	0.00	0.00
	10	0.00	1.18	0.00	0.00	0.00	0.00
	11	0.00	0.96	0.00	0.00	0.00	0.00
	12	0.00	1.27	0.00	0.00	0.00	0.00
	13	0.00	0.42	0.00	0.00	0.00	0.00
	14	0.00	0.82	0.00	0.00	0.00	0.00
	15	0.00	0.52	0.00	0.00	0.00	0.00
	16	0.00	0.52	0.00	0.00	0.00	0.00
	17	0.00	1.20	0.00	0.00	0.00	0.00
	18	0.00	1.20	0.00	0.00	0.00	0.00
	19	0.00	1.20	0.00	0.00	0.00	0.00
	20	0.00	1.20	0.00	0.00	0.00	0.00
	21	0.00	0.85	0.00	0.00	0.00	0.00
	22	0.00	0.85	0.00	0.00	0.00	0.00
	23	0.00	0.83	0.00	0.00	0.00	0.00
	24	0.00	0.85	0.00	0.00	0.00	0.00
29	1	0.00	1.23	0.00	0.00	0.00	0.00
	2	0.00	1.24	0.00	0.00	0.00	0.00
	3	0.00	1.24	0.00	0.00	0.00	0.00
	4	0.00	1.22	0.00	0.00	0.00	0.00
	5	0.00	1.24	0.00	0.00	0.00	0.00
	6	0.00	1.24	0.00	0.00	0.00	0.00
	7	0.00	1.24	0.00	0.00	0.00	0.00
	8	0.00	1.24	0.00	0.00	0.00	0.00
	9	0.00	0.80	0.00	0.00	0.00	0.00
	10	0.00	1.22	0.00	0.00	0.00	0.00
	11	0.00	0.92	0.00	0.00	0.00	0.00
	12	0.00	1.33	0.00	0.00	0.00	0.00
	13	0.00	0.29	0.00	0.00	0.00	0.00
	14	0.00	0.82	0.00	0.00	0.00	0.00
	15	0.00	0.42	0.00	0.00	0.00	0.00
	16	0.00	0.42	0.00	0.00	0.00	0.00
	17	0.00	1.24	0.00	0.00	0.00	0.00
	18	0.00	1.24	0.00	0.00	0.00	0.00
	19	0.00	1.24	0.00	0.00	0.00	0.00
	20	0.00	1.24	0.00	0.00	0.00	0.00
	21	0.00	0.86	0.00	0.00	0.00	0.00
	22	0.00	0.86	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	23	0.00	0.84	0.00	0.00	0.00	0.00
	24	0.00	0.86	0.00	0.00	0.00	0.00
30	1	0.00	1.25	0.00	0.00	0.00	0.00
	2	0.00	1.26	0.00	0.00	0.00	0.00
	3	0.00	1.26	0.00	0.00	0.00	0.00
	4	0.00	1.24	0.00	0.00	0.00	0.00
	5	0.00	1.26	0.00	0.00	0.00	0.00
	6	0.00	1.26	0.00	0.00	0.00	0.00
	7	0.00	1.26	0.00	0.00	0.00	0.00
	8	0.00	1.26	0.00	0.00	0.00	0.00
	9	0.00	0.82	0.00	0.00	0.00	0.00
	10	0.00	1.24	0.00	0.00	0.00	0.00
	11	0.00	0.93	0.00	0.00	0.00	0.00
	12	0.00	1.35	0.00	0.00	0.00	0.00
	13	0.00	0.30	0.00	0.00	0.00	0.00
	14	0.00	0.84	0.00	0.00	0.00	0.00
	15	0.00	0.44	0.00	0.00	0.00	0.00
	16	0.00	0.44	0.00	0.00	0.00	0.00
	17	0.00	1.26	0.00	0.00	0.00	0.00
	18	0.00	1.26	0.00	0.00	0.00	0.00
	19	0.00	1.26	0.00	0.00	0.00	0.00
	20	0.00	1.26	0.00	0.00	0.00	0.00
	21	0.00	0.88	0.00	0.00	0.00	0.00
	22	0.00	0.88	0.00	0.00	0.00	0.00
	23	0.00	0.86	0.00	0.00	0.00	0.00
	24	0.00	0.88	0.00	0.00	0.00	0.00
31	1	0.00	1.27	0.00	0.00	0.00	0.00
	2	0.00	1.28	0.00	0.00	0.00	0.00
	3	0.00	1.28	0.00	0.00	0.00	0.00
	4	0.00	1.26	0.00	0.00	0.00	0.00
	5	0.00	1.28	0.00	0.00	0.00	0.00
	6	0.00	1.28	0.00	0.00	0.00	0.00
	7	0.00	1.28	0.00	0.00	0.00	0.00
	8	0.00	1.28	0.00	0.00	0.00	0.00
	9	0.00	0.83	0.00	0.00	0.00	0.00
	10	0.00	1.26	0.00	0.00	0.00	0.00
	11	0.00	0.95	0.00	0.00	0.00	0.00
	12	0.00	1.38	0.00	0.00	0.00	0.00
	13	0.00	0.31	0.00	0.00	0.00	0.00
	14	0.00	0.86	0.00	0.00	0.00	0.00
	15	0.00	0.45	0.00	0.00	0.00	0.00
	16	0.00	0.45	0.00	0.00	0.00	0.00
	17	0.00	1.28	0.00	0.00	0.00	0.00
	18	0.00	1.28	0.00	0.00	0.00	0.00
	19	0.00	1.28	0.00	0.00	0.00	0.00
	20	0.00	1.28	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	21	0.00	0.90	0.00	0.00	0.00	0.00
	22	0.00	0.90	0.00	0.00	0.00	0.00
	23	0.00	0.88	0.00	0.00	0.00	0.00
	24	0.00	0.90	0.00	0.00	0.00	0.00
32	1	0.00	0.90	0.00	0.00	0.00	0.00
	2	0.00	0.91	0.00	0.00	0.00	0.00
	3	0.00	0.90	0.00	0.00	0.00	0.00
	4	0.00	0.91	0.00	0.00	0.00	0.00
	5	0.00	0.91	0.00	0.00	0.00	0.00
	6	0.00	0.90	0.00	0.00	0.00	0.00
	7	0.00	0.90	0.00	0.00	0.00	0.00
	8	0.00	0.90	0.00	0.00	0.00	0.00
	9	0.00	0.98	0.00	0.00	0.00	0.00
	10	0.00	0.91	0.00	0.00	0.00	0.00
	11	0.00	0.96	0.00	0.00	0.00	0.00
	12	0.00	0.89	0.00	0.00	0.00	0.00
	13	0.00	0.76	0.00	0.00	0.00	0.00
	14	0.00	0.66	0.00	0.00	0.00	0.00
	15	0.00	0.73	0.00	0.00	0.00	0.00
	16	0.00	0.73	0.00	0.00	0.00	0.00
	17	0.00	0.91	0.00	0.00	0.00	0.00
	18	0.00	0.91	0.00	0.00	0.00	0.00
	19	0.00	0.90	0.00	0.00	0.00	0.00
	20	0.00	0.91	0.00	0.00	0.00	0.00
	21	0.00	0.65	0.00	0.00	0.00	0.00
	22	0.00	0.65	0.00	0.00	0.00	0.00
	23	0.00	0.66	0.00	0.00	0.00	0.00
	24	0.00	0.65	0.00	0.00	0.00	0.00
33	1	0.00	1.01	0.00	0.00	0.00	0.00
	2	0.00	1.02	0.00	0.00	0.00	0.00
	3	0.00	1.01	0.00	0.00	0.00	0.00
	4	0.00	1.01	0.00	0.00	0.00	0.00
	5	0.00	1.01	0.00	0.00	0.00	0.00
	6	0.00	1.01	0.00	0.00	0.00	0.00
	7	0.00	1.01	0.00	0.00	0.00	0.00
	8	0.00	1.01	0.00	0.00	0.00	0.00
	9	0.00	0.96	0.00	0.00	0.00	0.00
	10	0.00	1.01	0.00	0.00	0.00	0.00
	11	0.00	0.97	0.00	0.00	0.00	0.00
	12	0.00	1.03	0.00	0.00	0.00	0.00
	13	0.00	0.65	0.00	0.00	0.00	0.00
	14	0.00	0.72	0.00	0.00	0.00	0.00
	15	0.00	0.67	0.00	0.00	0.00	0.00
	16	0.00	0.67	0.00	0.00	0.00	0.00
	17	0.00	1.01	0.00	0.00	0.00	0.00
	18	0.00	1.01	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	19	0.00	1.01	0.00	0.00	0.00	0.00
	20	0.00	1.01	0.00	0.00	0.00	0.00
	21	0.00	0.73	0.00	0.00	0.00	0.00
	22	0.00	0.73	0.00	0.00	0.00	0.00
	23	0.00	0.72	0.00	0.00	0.00	0.00
	24	0.00	0.73	0.00	0.00	0.00	0.00
34	1	0.00	0.91	0.00	0.00	0.00	0.00
	2	0.00	0.92	0.00	0.00	0.00	0.00
	3	0.00	0.91	0.00	0.00	0.00	0.00
	4	0.00	0.92	0.00	0.00	0.00	0.00
	5	0.00	0.92	0.00	0.00	0.00	0.00
	6	0.00	0.91	0.00	0.00	0.00	0.00
	7	0.00	0.91	0.00	0.00	0.00	0.00
	8	0.00	0.91	0.00	0.00	0.00	0.00
	9	0.00	0.99	0.00	0.00	0.00	0.00
	10	0.00	0.92	0.00	0.00	0.00	0.00
	11	0.00	0.97	0.00	0.00	0.00	0.00
	12	0.00	0.90	0.00	0.00	0.00	0.00
	13	0.00	0.76	0.00	0.00	0.00	0.00
	14	0.00	0.67	0.00	0.00	0.00	0.00
	15	0.00	0.73	0.00	0.00	0.00	0.00
	16	0.00	0.73	0.00	0.00	0.00	0.00
	17	0.00	0.92	0.00	0.00	0.00	0.00
	18	0.00	0.92	0.00	0.00	0.00	0.00
	19	0.00	0.91	0.00	0.00	0.00	0.00
	20	0.00	0.92	0.00	0.00	0.00	0.00
	21	0.00	0.66	0.00	0.00	0.00	0.00
	22	0.00	0.66	0.00	0.00	0.00	0.00
	23	0.00	0.66	0.00	0.00	0.00	0.00
	24	0.00	0.66	0.00	0.00	0.00	0.00
35	1	0.00	1.02	0.00	0.00	0.00	0.00
	2	0.00	1.03	0.00	0.00	0.00	0.00
	3	0.00	1.02	0.00	0.00	0.00	0.00
	4	0.00	1.02	0.00	0.00	0.00	0.00
	5	0.00	1.02	0.00	0.00	0.00	0.00
	6	0.00	1.02	0.00	0.00	0.00	0.00
	7	0.00	1.02	0.00	0.00	0.00	0.00
	8	0.00	1.02	0.00	0.00	0.00	0.00
	9	0.00	0.97	0.00	0.00	0.00	0.00
	10	0.00	1.02	0.00	0.00	0.00	0.00
	11	0.00	0.98	0.00	0.00	0.00	0.00
	12	0.00	1.04	0.00	0.00	0.00	0.00
	13	0.00	0.66	0.00	0.00	0.00	0.00
	14	0.00	0.73	0.00	0.00	0.00	0.00
	15	0.00	0.68	0.00	0.00	0.00	0.00
	16	0.00	0.68	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	17	0.00	1.02	0.00	0.00	0.00	0.00
	18	0.00	1.02	0.00	0.00	0.00	0.00
	19	0.00	1.02	0.00	0.00	0.00	0.00
	20	0.00	1.02	0.00	0.00	0.00	0.00
	21	0.00	0.74	0.00	0.00	0.00	0.00
	22	0.00	0.74	0.00	0.00	0.00	0.00
	23	0.00	0.73	0.00	0.00	0.00	0.00
	24	0.00	0.74	0.00	0.00	0.00	0.00
36	1	0.00	0.92	0.00	0.00	0.00	0.00
	2	0.00	0.93	0.00	0.00	0.00	0.00
	3	0.00	0.92	0.00	0.00	0.00	0.00
	4	0.00	0.93	0.00	0.00	0.00	0.00
	5	0.00	0.93	0.00	0.00	0.00	0.00
	6	0.00	0.92	0.00	0.00	0.00	0.00
	7	0.00	0.92	0.00	0.00	0.00	0.00
	8	0.00	0.92	0.00	0.00	0.00	0.00
	9	0.00	1.00	0.00	0.00	0.00	0.00
	10	0.00	0.93	0.00	0.00	0.00	0.00
	11	0.00	0.98	0.00	0.00	0.00	0.00
	12	0.00	0.91	0.00	0.00	0.00	0.00
	13	0.00	0.77	0.00	0.00	0.00	0.00
	14	0.00	0.68	0.00	0.00	0.00	0.00
	15	0.00	0.74	0.00	0.00	0.00	0.00
	16	0.00	0.74	0.00	0.00	0.00	0.00
	17	0.00	0.93	0.00	0.00	0.00	0.00
	18	0.00	0.93	0.00	0.00	0.00	0.00
	19	0.00	0.92	0.00	0.00	0.00	0.00
	20	0.00	0.93	0.00	0.00	0.00	0.00
	21	0.00	0.67	0.00	0.00	0.00	0.00
	22	0.00	0.67	0.00	0.00	0.00	0.00
	23	0.00	0.67	0.00	0.00	0.00	0.00
	24	0.00	0.67	0.00	0.00	0.00	0.00
37	1	0.00	1.02	0.00	0.00	0.00	0.00
	2	0.00	1.04	0.00	0.00	0.00	0.00
	3	0.00	1.03	0.00	0.00	0.00	0.00
	4	0.00	1.03	0.00	0.00	0.00	0.00
	5	0.00	1.03	0.00	0.00	0.00	0.00
	6	0.00	1.03	0.00	0.00	0.00	0.00
	7	0.00	1.03	0.00	0.00	0.00	0.00
	8	0.00	1.03	0.00	0.00	0.00	0.00
	9	0.00	0.98	0.00	0.00	0.00	0.00
	10	0.00	1.03	0.00	0.00	0.00	0.00
	11	0.00	0.99	0.00	0.00	0.00	0.00
	12	0.00	1.05	0.00	0.00	0.00	0.00
	13	0.00	0.67	0.00	0.00	0.00	0.00
	14	0.00	0.74	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	15	0.00	0.69	0.00	0.00	0.00	0.00
	16	0.00	0.69	0.00	0.00	0.00	0.00
	17	0.00	1.03	0.00	0.00	0.00	0.00
	18	0.00	1.03	0.00	0.00	0.00	0.00
	19	0.00	1.03	0.00	0.00	0.00	0.00
	20	0.00	1.03	0.00	0.00	0.00	0.00
	21	0.00	0.74	0.00	0.00	0.00	0.00
	22	0.00	0.74	0.00	0.00	0.00	0.00
	23	0.00	0.74	0.00	0.00	0.00	0.00
	24	0.00	0.74	0.00	0.00	0.00	0.00
38	1	0.00	0.52	0.00	0.00	0.00	0.00
	2	0.00	0.52	0.00	0.00	0.00	0.00
	3	0.00	0.52	0.00	0.00	0.00	0.00
	4	0.00	0.52	0.00	0.00	0.00	0.00
	5	0.00	0.52	0.00	0.00	0.00	0.00
	6	0.00	0.52	0.00	0.00	0.00	0.00
	7	0.00	0.52	0.00	0.00	0.00	0.00
	8	0.00	0.52	0.00	0.00	0.00	0.00
	9	0.00	0.49	0.00	0.00	0.00	0.00
	10	0.00	0.52	0.00	0.00	0.00	0.00
	11	0.00	0.50	0.00	0.00	0.00	0.00
	12	0.00	0.53	0.00	0.00	0.00	0.00
	13	0.00	0.34	0.00	0.00	0.00	0.00
	14	0.00	0.38	0.00	0.00	0.00	0.00
	15	0.00	0.35	0.00	0.00	0.00	0.00
	16	0.00	0.35	0.00	0.00	0.00	0.00
	17	0.00	0.52	0.00	0.00	0.00	0.00
	18	0.00	0.52	0.00	0.00	0.00	0.00
	19	0.00	0.52	0.00	0.00	0.00	0.00
	20	0.00	0.52	0.00	0.00	0.00	0.00
	21	0.00	0.38	0.00	0.00	0.00	0.00
	22	0.00	0.38	0.00	0.00	0.00	0.00
	23	0.00	0.38	0.00	0.00	0.00	0.00
	24	0.00	0.38	0.00	0.00	0.00	0.00
39	1	0.00	1.11	0.00	0.00	0.00	0.00
	2	0.00	1.12	0.00	0.00	0.00	0.00
	3	0.00	1.12	0.00	0.00	0.00	0.00
	4	0.00	1.11	0.00	0.00	0.00	0.00
	5	0.00	1.12	0.00	0.00	0.00	0.00
	6	0.00	1.12	0.00	0.00	0.00	0.00
	7	0.00	1.12	0.00	0.00	0.00	0.00
	8	0.00	1.12	0.00	0.00	0.00	0.00
	9	0.00	0.92	0.00	0.00	0.00	0.00
	10	0.00	1.11	0.00	0.00	0.00	0.00
	11	0.00	0.97	0.00	0.00	0.00	0.00
	12	0.00	1.16	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	13	0.00	0.54	0.00	0.00	0.00	0.00
	14	0.00	0.78	0.00	0.00	0.00	0.00
	15	0.00	0.60	0.00	0.00	0.00	0.00
	16	0.00	0.60	0.00	0.00	0.00	0.00
	17	0.00	1.12	0.00	0.00	0.00	0.00
	18	0.00	1.12	0.00	0.00	0.00	0.00
	19	0.00	1.12	0.00	0.00	0.00	0.00
	20	0.00	1.12	0.00	0.00	0.00	0.00
	21	0.00	0.80	0.00	0.00	0.00	0.00
	22	0.00	0.80	0.00	0.00	0.00	0.00
	23	0.00	0.79	0.00	0.00	0.00	0.00
	24	0.00	0.80	0.00	0.00	0.00	0.00
40	1	0.00	1.12	0.00	0.00	0.00	0.00
	2	0.00	1.13	0.00	0.00	0.00	0.00
	3	0.00	1.13	0.00	0.00	0.00	0.00
	4	0.00	1.12	0.00	0.00	0.00	0.00
	5	0.00	1.13	0.00	0.00	0.00	0.00
	6	0.00	1.13	0.00	0.00	0.00	0.00
	7	0.00	1.13	0.00	0.00	0.00	0.00
	8	0.00	1.13	0.00	0.00	0.00	0.00
	9	0.00	0.94	0.00	0.00	0.00	0.00
	10	0.00	1.12	0.00	0.00	0.00	0.00
	11	0.00	0.98	0.00	0.00	0.00	0.00
	12	0.00	1.17	0.00	0.00	0.00	0.00
	13	0.00	0.56	0.00	0.00	0.00	0.00
	14	0.00	0.79	0.00	0.00	0.00	0.00
	15	0.00	0.61	0.00	0.00	0.00	0.00
	16	0.00	0.61	0.00	0.00	0.00	0.00
	17	0.00	1.13	0.00	0.00	0.00	0.00
	18	0.00	1.13	0.00	0.00	0.00	0.00
	19	0.00	1.13	0.00	0.00	0.00	0.00
	20	0.00	1.13	0.00	0.00	0.00	0.00
	21	0.00	0.81	0.00	0.00	0.00	0.00
	22	0.00	0.81	0.00	0.00	0.00	0.00
	23	0.00	0.80	0.00	0.00	0.00	0.00
	24	0.00	0.81	0.00	0.00	0.00	0.00
41	1	0.00	1.13	0.00	0.00	0.00	0.00
	2	0.00	1.14	0.00	0.00	0.00	0.00
	3	0.00	1.14	0.00	0.00	0.00	0.00
	4	0.00	1.13	0.00	0.00	0.00	0.00
	5	0.00	1.14	0.00	0.00	0.00	0.00
	6	0.00	1.14	0.00	0.00	0.00	0.00
	7	0.00	1.14	0.00	0.00	0.00	0.00
	8	0.00	1.14	0.00	0.00	0.00	0.00
	9	0.00	0.95	0.00	0.00	0.00	0.00
	10	0.00	1.13	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	11	0.00	1.00	0.00	0.00	0.00	0.00
	12	0.00	1.18	0.00	0.00	0.00	0.00
	13	0.00	0.57	0.00	0.00	0.00	0.00
	14	0.00	0.80	0.00	0.00	0.00	0.00
	15	0.00	0.63	0.00	0.00	0.00	0.00
	16	0.00	0.63	0.00	0.00	0.00	0.00
	17	0.00	1.14	0.00	0.00	0.00	0.00
	18	0.00	1.14	0.00	0.00	0.00	0.00
	19	0.00	1.14	0.00	0.00	0.00	0.00
	20	0.00	1.14	0.00	0.00	0.00	0.00
	21	0.00	0.82	0.00	0.00	0.00	0.00
	22	0.00	0.82	0.00	0.00	0.00	0.00
	23	0.00	0.81	0.00	0.00	0.00	0.00
	24	0.00	0.82	0.00	0.00	0.00	0.00
42	1	0.00	0.57	0.00	0.00	0.00	0.00
	2	0.00	0.58	0.00	0.00	0.00	0.00
	3	0.00	0.57	0.00	0.00	0.00	0.00
	4	0.00	0.57	0.00	0.00	0.00	0.00
	5	0.00	0.58	0.00	0.00	0.00	0.00
	6	0.00	0.57	0.00	0.00	0.00	0.00
	7	0.00	0.57	0.00	0.00	0.00	0.00
	8	0.00	0.57	0.00	0.00	0.00	0.00
	9	0.00	0.48	0.00	0.00	0.00	0.00
	10	0.00	0.57	0.00	0.00	0.00	0.00
	11	0.00	0.51	0.00	0.00	0.00	0.00
	12	0.00	0.59	0.00	0.00	0.00	0.00
	13	0.00	0.29	0.00	0.00	0.00	0.00
	14	0.00	0.41	0.00	0.00	0.00	0.00
	15	0.00	0.32	0.00	0.00	0.00	0.00
	16	0.00	0.32	0.00	0.00	0.00	0.00
	17	0.00	0.58	0.00	0.00	0.00	0.00
	18	0.00	0.58	0.00	0.00	0.00	0.00
	19	0.00	0.57	0.00	0.00	0.00	0.00
	20	0.00	0.58	0.00	0.00	0.00	0.00
	21	0.00	0.41	0.00	0.00	0.00	0.00
	22	0.00	0.41	0.00	0.00	0.00	0.00
	23	0.00	0.41	0.00	0.00	0.00	0.00
	24	0.00	0.41	0.00	0.00	0.00	0.00
43	1	0.00	1.21	0.00	0.00	0.00	0.00
	2	0.00	1.22	0.00	0.00	0.00	0.00
	3	0.00	1.22	0.00	0.00	0.00	0.00
	4	0.00	1.20	0.00	0.00	0.00	0.00
	5	0.00	1.22	0.00	0.00	0.00	0.00
	6	0.00	1.22	0.00	0.00	0.00	0.00
	7	0.00	1.22	0.00	0.00	0.00	0.00
	8	0.00	1.22	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	9	0.00	0.89	0.00	0.00	0.00	0.00
	10	0.00	1.20	0.00	0.00	0.00	0.00
	11	0.00	0.97	0.00	0.00	0.00	0.00
	12	0.00	1.28	0.00	0.00	0.00	0.00
	13	0.00	0.44	0.00	0.00	0.00	0.00
	14	0.00	0.83	0.00	0.00	0.00	0.00
	15	0.00	0.54	0.00	0.00	0.00	0.00
	16	0.00	0.54	0.00	0.00	0.00	0.00
	17	0.00	1.22	0.00	0.00	0.00	0.00
	18	0.00	1.22	0.00	0.00	0.00	0.00
	19	0.00	1.22	0.00	0.00	0.00	0.00
	20	0.00	1.22	0.00	0.00	0.00	0.00
	21	0.00	0.86	0.00	0.00	0.00	0.00
	22	0.00	0.86	0.00	0.00	0.00	0.00
	23	0.00	0.85	0.00	0.00	0.00	0.00
	24	0.00	0.86	0.00	0.00	0.00	0.00
44	1	0.00	1.22	0.00	0.00	0.00	0.00
	2	0.00	1.23	0.00	0.00	0.00	0.00
	3	0.00	1.23	0.00	0.00	0.00	0.00
	4	0.00	1.21	0.00	0.00	0.00	0.00
	5	0.00	1.23	0.00	0.00	0.00	0.00
	6	0.00	1.23	0.00	0.00	0.00	0.00
	7	0.00	1.23	0.00	0.00	0.00	0.00
	8	0.00	1.23	0.00	0.00	0.00	0.00
	9	0.00	0.91	0.00	0.00	0.00	0.00
	10	0.00	1.21	0.00	0.00	0.00	0.00
	11	0.00	0.99	0.00	0.00	0.00	0.00
	12	0.00	1.30	0.00	0.00	0.00	0.00
	13	0.00	0.45	0.00	0.00	0.00	0.00
	14	0.00	0.85	0.00	0.00	0.00	0.00
	15	0.00	0.55	0.00	0.00	0.00	0.00
	16	0.00	0.55	0.00	0.00	0.00	0.00
	17	0.00	1.23	0.00	0.00	0.00	0.00
	18	0.00	1.23	0.00	0.00	0.00	0.00
	19	0.00	1.23	0.00	0.00	0.00	0.00
	20	0.00	1.23	0.00	0.00	0.00	0.00
	21	0.00	0.88	0.00	0.00	0.00	0.00
	22	0.00	0.88	0.00	0.00	0.00	0.00
	23	0.00	0.86	0.00	0.00	0.00	0.00
	24	0.00	0.88	0.00	0.00	0.00	0.00
45	1	0.00	1.23	0.00	0.00	0.00	0.00
	2	0.00	1.24	0.00	0.00	0.00	0.00
	3	0.00	1.24	0.00	0.00	0.00	0.00
	4	0.00	1.22	0.00	0.00	0.00	0.00
	5	0.00	1.24	0.00	0.00	0.00	0.00
	6	0.00	1.24	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	7	0.00	1.24	0.00	0.00	0.00	0.00
	8	0.00	1.24	0.00	0.00	0.00	0.00
	9	0.00	0.92	0.00	0.00	0.00	0.00
	10	0.00	1.22	0.00	0.00	0.00	0.00
	11	0.00	1.00	0.00	0.00	0.00	0.00
	12	0.00	1.31	0.00	0.00	0.00	0.00
	13	0.00	0.47	0.00	0.00	0.00	0.00
	14	0.00	0.86	0.00	0.00	0.00	0.00
	15	0.00	0.57	0.00	0.00	0.00	0.00
	16	0.00	0.57	0.00	0.00	0.00	0.00
	17	0.00	1.24	0.00	0.00	0.00	0.00
	18	0.00	1.24	0.00	0.00	0.00	0.00
	19	0.00	1.24	0.00	0.00	0.00	0.00
	20	0.00	1.24	0.00	0.00	0.00	0.00
	21	0.00	0.89	0.00	0.00	0.00	0.00
	22	0.00	0.89	0.00	0.00	0.00	0.00
	23	0.00	0.87	0.00	0.00	0.00	0.00
	24	0.00	0.89	0.00	0.00	0.00	0.00
46	1	0.00	0.62	0.00	0.00	0.00	0.00
	2	0.00	0.63	0.00	0.00	0.00	0.00
	3	0.00	0.63	0.00	0.00	0.00	0.00
	4	0.00	0.62	0.00	0.00	0.00	0.00
	5	0.00	0.63	0.00	0.00	0.00	0.00
	6	0.00	0.63	0.00	0.00	0.00	0.00
	7	0.00	0.63	0.00	0.00	0.00	0.00
	8	0.00	0.63	0.00	0.00	0.00	0.00
	9	0.00	0.47	0.00	0.00	0.00	0.00
	10	0.00	0.62	0.00	0.00	0.00	0.00
	11	0.00	0.51	0.00	0.00	0.00	0.00
	12	0.00	0.66	0.00	0.00	0.00	0.00
	13	0.00	0.24	0.00	0.00	0.00	0.00
	14	0.00	0.43	0.00	0.00	0.00	0.00
	15	0.00	0.29	0.00	0.00	0.00	0.00
	16	0.00	0.29	0.00	0.00	0.00	0.00
	17	0.00	0.63	0.00	0.00	0.00	0.00
	18	0.00	0.63	0.00	0.00	0.00	0.00
	19	0.00	0.63	0.00	0.00	0.00	0.00
	20	0.00	0.63	0.00	0.00	0.00	0.00
	21	0.00	0.45	0.00	0.00	0.00	0.00
	22	0.00	0.45	0.00	0.00	0.00	0.00
	23	0.00	0.44	0.00	0.00	0.00	0.00
	24	0.00	0.45	0.00	0.00	0.00	0.00
47	1	0.00	1.31	0.00	0.00	0.00	0.00
	2	0.00	1.32	0.00	0.00	0.00	0.00
	3	0.00	1.31	0.00	0.00	0.00	0.00
	4	0.00	1.29	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	5	0.00	1.32	0.00	0.00	0.00	0.00
	6	0.00	1.31	0.00	0.00	0.00	0.00
	7	0.00	1.31	0.00	0.00	0.00	0.00
	8	0.00	1.31	0.00	0.00	0.00	0.00
	9	0.00	0.86	0.00	0.00	0.00	0.00
	10	0.00	1.29	0.00	0.00	0.00	0.00
	11	0.00	0.98	0.00	0.00	0.00	0.00
	12	0.00	1.41	0.00	0.00	0.00	0.00
	13	0.00	0.34	0.00	0.00	0.00	0.00
	14	0.00	0.89	0.00	0.00	0.00	0.00
	15	0.00	0.48	0.00	0.00	0.00	0.00
	16	0.00	0.48	0.00	0.00	0.00	0.00
	17	0.00	1.32	0.00	0.00	0.00	0.00
	18	0.00	1.32	0.00	0.00	0.00	0.00
	19	0.00	1.31	0.00	0.00	0.00	0.00
	20	0.00	1.32	0.00	0.00	0.00	0.00
	21	0.00	0.93	0.00	0.00	0.00	0.00
	22	0.00	0.93	0.00	0.00	0.00	0.00
	23	0.00	0.91	0.00	0.00	0.00	0.00
	24	0.00	0.93	0.00	0.00	0.00	0.00
48	1	0.00	1.32	0.00	0.00	0.00	0.00
	2	0.00	1.33	0.00	0.00	0.00	0.00
	3	0.00	1.33	0.00	0.00	0.00	0.00
	4	0.00	1.30	0.00	0.00	0.00	0.00
	5	0.00	1.33	0.00	0.00	0.00	0.00
	6	0.00	1.33	0.00	0.00	0.00	0.00
	7	0.00	1.33	0.00	0.00	0.00	0.00
	8	0.00	1.33	0.00	0.00	0.00	0.00
	9	0.00	0.88	0.00	0.00	0.00	0.00
	10	0.00	1.30	0.00	0.00	0.00	0.00
	11	0.00	0.99	0.00	0.00	0.00	0.00
	12	0.00	1.42	0.00	0.00	0.00	0.00
	13	0.00	0.35	0.00	0.00	0.00	0.00
	14	0.00	0.90	0.00	0.00	0.00	0.00
	15	0.00	0.49	0.00	0.00	0.00	0.00
	16	0.00	0.49	0.00	0.00	0.00	0.00
	17	0.00	1.33	0.00	0.00	0.00	0.00
	18	0.00	1.33	0.00	0.00	0.00	0.00
	19	0.00	1.33	0.00	0.00	0.00	0.00
	20	0.00	1.33	0.00	0.00	0.00	0.00
	21	0.00	0.94	0.00	0.00	0.00	0.00
	22	0.00	0.94	0.00	0.00	0.00	0.00
	23	0.00	0.92	0.00	0.00	0.00	0.00
	24	0.00	0.94	0.00	0.00	0.00	0.00
49	1	0.00	1.33	0.00	0.00	0.00	0.00
	2	0.00	1.34	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	3	0.00	1.34	0.00	0.00	0.00	0.00
	4	0.00	1.32	0.00	0.00	0.00	0.00
	5	0.00	1.34	0.00	0.00	0.00	0.00
	6	0.00	1.34	0.00	0.00	0.00	0.00
	7	0.00	1.34	0.00	0.00	0.00	0.00
	8	0.00	1.34	0.00	0.00	0.00	0.00
	9	0.00	0.89	0.00	0.00	0.00	0.00
	10	0.00	1.32	0.00	0.00	0.00	0.00
	11	0.00	1.01	0.00	0.00	0.00	0.00
	12	0.00	1.43	0.00	0.00	0.00	0.00
	13	0.00	0.37	0.00	0.00	0.00	0.00
	14	0.00	0.91	0.00	0.00	0.00	0.00
	15	0.00	0.50	0.00	0.00	0.00	0.00
	16	0.00	0.50	0.00	0.00	0.00	0.00
	17	0.00	1.34	0.00	0.00	0.00	0.00
	18	0.00	1.34	0.00	0.00	0.00	0.00
	19	0.00	1.34	0.00	0.00	0.00	0.00
	20	0.00	1.34	0.00	0.00	0.00	0.00
	21	0.00	0.95	0.00	0.00	0.00	0.00
	22	0.00	0.95	0.00	0.00	0.00	0.00
	23	0.00	0.93	0.00	0.00	0.00	0.00
	24	0.00	0.95	0.00	0.00	0.00	0.00
68	1	0.00	0.19	0.00	0.00	0.00	0.00
	2	0.00	0.19	0.00	0.00	0.00	0.00
	3	0.00	0.19	0.00	0.00	0.00	0.00
	4	0.00	0.20	0.00	0.00	0.00	0.00
	5	0.00	0.19	0.00	0.00	0.00	0.00
	6	0.00	0.19	0.00	0.00	0.00	0.00
	7	0.00	0.19	0.00	0.00	0.00	0.00
	8	0.00	0.19	0.00	0.00	0.00	0.00
	9	0.00	0.47	0.00	0.00	0.00	0.00
	10	0.00	0.20	0.00	0.00	0.00	0.00
	11	0.00	0.39	0.00	0.00	0.00	0.00
	12	0.00	0.13	0.00	0.00	0.00	0.00
	13	0.00	0.50	0.00	0.00	0.00	0.00
	14	0.00	0.16	0.00	0.00	0.00	0.00
	15	0.00	0.41	0.00	0.00	0.00	0.00
	16	0.00	0.41	0.00	0.00	0.00	0.00
	17	0.00	0.19	0.00	0.00	0.00	0.00
	18	0.00	0.19	0.00	0.00	0.00	0.00
	19	0.00	0.19	0.00	0.00	0.00	0.00
	20	0.00	0.19	0.00	0.00	0.00	0.00
	21	0.00	0.13	0.00	0.00	0.00	0.00
	22	0.00	0.13	0.00	0.00	0.00	0.00
	23	0.00	0.15	0.00	0.00	0.00	0.00
	24	0.00	0.13	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
69	1	0.00	0.18	0.00	0.00	0.00	0.00
	2	0.00	0.18	0.00	0.00	0.00	0.00
	3	0.00	0.18	0.00	0.00	0.00	0.00
	4	0.00	0.19	0.00	0.00	0.00	0.00
	5	0.00	0.18	0.00	0.00	0.00	0.00
	6	0.00	0.18	0.00	0.00	0.00	0.00
	7	0.00	0.18	0.00	0.00	0.00	0.00
	8	0.00	0.18	0.00	0.00	0.00	0.00
	9	0.00	0.45	0.00	0.00	0.00	0.00
	10	0.00	0.19	0.00	0.00	0.00	0.00
	11	0.00	0.38	0.00	0.00	0.00	0.00
	12	0.00	0.12	0.00	0.00	0.00	0.00
	13	0.00	0.49	0.00	0.00	0.00	0.00
	14	0.00	0.15	0.00	0.00	0.00	0.00
	15	0.00	0.40	0.00	0.00	0.00	0.00
	16	0.00	0.40	0.00	0.00	0.00	0.00
	17	0.00	0.18	0.00	0.00	0.00	0.00
	18	0.00	0.18	0.00	0.00	0.00	0.00
	19	0.00	0.18	0.00	0.00	0.00	0.00
	20	0.00	0.18	0.00	0.00	0.00	0.00
	21	0.00	0.13	0.00	0.00	0.00	0.00
	22	0.00	0.13	0.00	0.00	0.00	0.00
	23	0.00	0.14	0.00	0.00	0.00	0.00
	24	0.00	0.13	0.00	0.00	0.00	0.00
70	1	0.00	0.20	0.00	0.00	0.00	0.00
	2	0.00	0.20	0.00	0.00	0.00	0.00
	3	0.00	0.20	0.00	0.00	0.00	0.00
	4	0.00	0.21	0.00	0.00	0.00	0.00
	5	0.00	0.20	0.00	0.00	0.00	0.00
	6	0.00	0.20	0.00	0.00	0.00	0.00
	7	0.00	0.20	0.00	0.00	0.00	0.00
	8	0.00	0.20	0.00	0.00	0.00	0.00
	9	0.00	0.48	0.00	0.00	0.00	0.00
	10	0.00	0.21	0.00	0.00	0.00	0.00
	11	0.00	0.41	0.00	0.00	0.00	0.00
	12	0.00	0.14	0.00	0.00	0.00	0.00
	13	0.00	0.51	0.00	0.00	0.00	0.00
	14	0.00	0.17	0.00	0.00	0.00	0.00
	15	0.00	0.42	0.00	0.00	0.00	0.00
	16	0.00	0.42	0.00	0.00	0.00	0.00
	17	0.00	0.20	0.00	0.00	0.00	0.00
	18	0.00	0.20	0.00	0.00	0.00	0.00
	19	0.00	0.20	0.00	0.00	0.00	0.00
	20	0.00	0.20	0.00	0.00	0.00	0.00
	21	0.00	0.14	0.00	0.00	0.00	0.00
	22	0.00	0.14	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	23	0.00	0.16	0.00	0.00	0.00	0.00
	24	0.00	0.14	0.00	0.00	0.00	0.00
71	1	0.00	0.21	0.00	0.00	0.00	0.00
	2	0.00	0.21	0.00	0.00	0.00	0.00
	3	0.00	0.21	0.00	0.00	0.00	0.00
	4	0.00	0.22	0.00	0.00	0.00	0.00
	5	0.00	0.21	0.00	0.00	0.00	0.00
	6	0.00	0.21	0.00	0.00	0.00	0.00
	7	0.00	0.21	0.00	0.00	0.00	0.00
	8	0.00	0.21	0.00	0.00	0.00	0.00
	9	0.00	0.49	0.00	0.00	0.00	0.00
	10	0.00	0.22	0.00	0.00	0.00	0.00
	11	0.00	0.42	0.00	0.00	0.00	0.00
	12	0.00	0.15	0.00	0.00	0.00	0.00
	13	0.00	0.52	0.00	0.00	0.00	0.00
	14	0.00	0.18	0.00	0.00	0.00	0.00
	15	0.00	0.43	0.00	0.00	0.00	0.00
	16	0.00	0.43	0.00	0.00	0.00	0.00
	17	0.00	0.21	0.00	0.00	0.00	0.00
	18	0.00	0.21	0.00	0.00	0.00	0.00
	19	0.00	0.21	0.00	0.00	0.00	0.00
	20	0.00	0.21	0.00	0.00	0.00	0.00
	21	0.00	0.15	0.00	0.00	0.00	0.00
	22	0.00	0.15	0.00	0.00	0.00	0.00
	23	0.00	0.17	0.00	0.00	0.00	0.00
	24	0.00	0.15	0.00	0.00	0.00	0.00
72	1	0.00	0.22	0.00	0.00	0.00	0.00
	2	0.00	0.22	0.00	0.00	0.00	0.00
	3	0.00	0.22	0.00	0.00	0.00	0.00
	4	0.00	0.23	0.00	0.00	0.00	0.00
	5	0.00	0.22	0.00	0.00	0.00	0.00
	6	0.00	0.22	0.00	0.00	0.00	0.00
	7	0.00	0.22	0.00	0.00	0.00	0.00
	8	0.00	0.22	0.00	0.00	0.00	0.00
	9	0.00	0.50	0.00	0.00	0.00	0.00
	10	0.00	0.23	0.00	0.00	0.00	0.00
	11	0.00	0.43	0.00	0.00	0.00	0.00
	12	0.00	0.16	0.00	0.00	0.00	0.00
	13	0.00	0.53	0.00	0.00	0.00	0.00
	14	0.00	0.19	0.00	0.00	0.00	0.00
	15	0.00	0.44	0.00	0.00	0.00	0.00
	16	0.00	0.44	0.00	0.00	0.00	0.00
	17	0.00	0.22	0.00	0.00	0.00	0.00
	18	0.00	0.22	0.00	0.00	0.00	0.00
	19	0.00	0.22	0.00	0.00	0.00	0.00
	20	0.00	0.22	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	21	0.00	0.16	0.00	0.00	0.00	0.00
	22	0.00	0.16	0.00	0.00	0.00	0.00
	23	0.00	0.17	0.00	0.00	0.00	0.00
	24	0.00	0.16	0.00	0.00	0.00	0.00
73	1	0.00	0.49	0.00	0.00	0.00	0.00
	2	0.00	0.49	0.00	0.00	0.00	0.00
	3	0.00	0.49	0.00	0.00	0.00	0.00
	4	0.00	0.51	0.00	0.00	0.00	0.00
	5	0.00	0.49	0.00	0.00	0.00	0.00
	6	0.00	0.49	0.00	0.00	0.00	0.00
	7	0.00	0.49	0.00	0.00	0.00	0.00
	8	0.00	0.49	0.00	0.00	0.00	0.00
	9	0.00	0.93	0.00	0.00	0.00	0.00
	10	0.00	0.51	0.00	0.00	0.00	0.00
	11	0.00	0.81	0.00	0.00	0.00	0.00
	12	0.00	0.40	0.00	0.00	0.00	0.00
	13	0.00	0.92	0.00	0.00	0.00	0.00
	14	0.00	0.39	0.00	0.00	0.00	0.00
	15	0.00	0.78	0.00	0.00	0.00	0.00
	16	0.00	0.78	0.00	0.00	0.00	0.00
	17	0.00	0.49	0.00	0.00	0.00	0.00
	18	0.00	0.49	0.00	0.00	0.00	0.00
	19	0.00	0.49	0.00	0.00	0.00	0.00
	20	0.00	0.49	0.00	0.00	0.00	0.00
	21	0.00	0.35	0.00	0.00	0.00	0.00
	22	0.00	0.35	0.00	0.00	0.00	0.00
	23	0.00	0.37	0.00	0.00	0.00	0.00
	24	0.00	0.35	0.00	0.00	0.00	0.00
74	1	0.00	0.47	0.00	0.00	0.00	0.00
	2	0.00	0.47	0.00	0.00	0.00	0.00
	3	0.00	0.47	0.00	0.00	0.00	0.00
	4	0.00	0.49	0.00	0.00	0.00	0.00
	5	0.00	0.47	0.00	0.00	0.00	0.00
	6	0.00	0.47	0.00	0.00	0.00	0.00
	7	0.00	0.47	0.00	0.00	0.00	0.00
	8	0.00	0.47	0.00	0.00	0.00	0.00
	9	0.00	0.90	0.00	0.00	0.00	0.00
	10	0.00	0.49	0.00	0.00	0.00	0.00
	11	0.00	0.79	0.00	0.00	0.00	0.00
	12	0.00	0.38	0.00	0.00	0.00	0.00
	13	0.00	0.89	0.00	0.00	0.00	0.00
	14	0.00	0.37	0.00	0.00	0.00	0.00
	15	0.00	0.76	0.00	0.00	0.00	0.00
	16	0.00	0.76	0.00	0.00	0.00	0.00
	17	0.00	0.47	0.00	0.00	0.00	0.00
	18	0.00	0.47	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	19	0.00	0.47	0.00	0.00	0.00	0.00
	20	0.00	0.47	0.00	0.00	0.00	0.00
	21	0.00	0.33	0.00	0.00	0.00	0.00
	22	0.00	0.33	0.00	0.00	0.00	0.00
	23	0.00	0.35	0.00	0.00	0.00	0.00
	24	0.00	0.33	0.00	0.00	0.00	0.00
75	1	0.00	0.51	0.00	0.00	0.00	0.00
	2	0.00	0.51	0.00	0.00	0.00	0.00
	3	0.00	0.51	0.00	0.00	0.00	0.00
	4	0.00	0.54	0.00	0.00	0.00	0.00
	5	0.00	0.51	0.00	0.00	0.00	0.00
	6	0.00	0.51	0.00	0.00	0.00	0.00
	7	0.00	0.51	0.00	0.00	0.00	0.00
	8	0.00	0.51	0.00	0.00	0.00	0.00
	9	0.00	0.95	0.00	0.00	0.00	0.00
	10	0.00	0.54	0.00	0.00	0.00	0.00
	11	0.00	0.83	0.00	0.00	0.00	0.00
	12	0.00	0.42	0.00	0.00	0.00	0.00
	13	0.00	0.94	0.00	0.00	0.00	0.00
	14	0.00	0.41	0.00	0.00	0.00	0.00
	15	0.00	0.80	0.00	0.00	0.00	0.00
	16	0.00	0.80	0.00	0.00	0.00	0.00
	17	0.00	0.51	0.00	0.00	0.00	0.00
	18	0.00	0.51	0.00	0.00	0.00	0.00
	19	0.00	0.51	0.00	0.00	0.00	0.00
	20	0.00	0.51	0.00	0.00	0.00	0.00
	21	0.00	0.37	0.00	0.00	0.00	0.00
	22	0.00	0.37	0.00	0.00	0.00	0.00
	23	0.00	0.39	0.00	0.00	0.00	0.00
	24	0.00	0.37	0.00	0.00	0.00	0.00
76	1	0.00	0.53	0.00	0.00	0.00	0.00
	2	0.00	0.53	0.00	0.00	0.00	0.00
	3	0.00	0.53	0.00	0.00	0.00	0.00
	4	0.00	0.55	0.00	0.00	0.00	0.00
	5	0.00	0.53	0.00	0.00	0.00	0.00
	6	0.00	0.53	0.00	0.00	0.00	0.00
	7	0.00	0.53	0.00	0.00	0.00	0.00
	8	0.00	0.53	0.00	0.00	0.00	0.00
	9	0.00	0.97	0.00	0.00	0.00	0.00
	10	0.00	0.55	0.00	0.00	0.00	0.00
	11	0.00	0.86	0.00	0.00	0.00	0.00
	12	0.00	0.44	0.00	0.00	0.00	0.00
	13	0.00	0.97	0.00	0.00	0.00	0.00
	14	0.00	0.43	0.00	0.00	0.00	0.00
	15	0.00	0.82	0.00	0.00	0.00	0.00
	16	0.00	0.82	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	17	0.00	0.53	0.00	0.00	0.00	0.00
	18	0.00	0.53	0.00	0.00	0.00	0.00
	19	0.00	0.53	0.00	0.00	0.00	0.00
	20	0.00	0.53	0.00	0.00	0.00	0.00
	21	0.00	0.38	0.00	0.00	0.00	0.00
	22	0.00	0.38	0.00	0.00	0.00	0.00
	23	0.00	0.41	0.00	0.00	0.00	0.00
	24	0.00	0.38	0.00	0.00	0.00	0.00
77	1	0.00	0.54	0.00	0.00	0.00	0.00
	2	0.00	0.55	0.00	0.00	0.00	0.00
	3	0.00	0.55	0.00	0.00	0.00	0.00
	4	0.00	0.57	0.00	0.00	0.00	0.00
	5	0.00	0.55	0.00	0.00	0.00	0.00
	6	0.00	0.55	0.00	0.00	0.00	0.00
	7	0.00	0.55	0.00	0.00	0.00	0.00
	8	0.00	0.55	0.00	0.00	0.00	0.00
	9	0.00	0.99	0.00	0.00	0.00	0.00
	10	0.00	0.57	0.00	0.00	0.00	0.00
	11	0.00	0.88	0.00	0.00	0.00	0.00
	12	0.00	0.45	0.00	0.00	0.00	0.00
	13	0.00	0.98	0.00	0.00	0.00	0.00
	14	0.00	0.45	0.00	0.00	0.00	0.00
	15	0.00	0.84	0.00	0.00	0.00	0.00
	16	0.00	0.84	0.00	0.00	0.00	0.00
	17	0.00	0.55	0.00	0.00	0.00	0.00
	18	0.00	0.55	0.00	0.00	0.00	0.00
	19	0.00	0.55	0.00	0.00	0.00	0.00
	20	0.00	0.55	0.00	0.00	0.00	0.00
	21	0.00	0.40	0.00	0.00	0.00	0.00
	22	0.00	0.40	0.00	0.00	0.00	0.00
	23	0.00	0.42	0.00	0.00	0.00	0.00
	24	0.00	0.40	0.00	0.00	0.00	0.00
78	1	0.00	0.60	0.00	0.00	0.00	0.00
	2	0.00	0.60	0.00	0.00	0.00	0.00
	3	0.00	0.60	0.00	0.00	0.00	0.00
	4	0.00	0.62	0.00	0.00	0.00	0.00
	5	0.00	0.60	0.00	0.00	0.00	0.00
	6	0.00	0.60	0.00	0.00	0.00	0.00
	7	0.00	0.60	0.00	0.00	0.00	0.00
	8	0.00	0.60	0.00	0.00	0.00	0.00
	9	0.00	0.92	0.00	0.00	0.00	0.00
	10	0.00	0.62	0.00	0.00	0.00	0.00
	11	0.00	0.83	0.00	0.00	0.00	0.00
	12	0.00	0.54	0.00	0.00	0.00	0.00
	13	0.00	0.84	0.00	0.00	0.00	0.00
	14	0.00	0.46	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	15	0.00	0.74	0.00	0.00	0.00	0.00
	16	0.00	0.74	0.00	0.00	0.00	0.00
	17	0.00	0.60	0.00	0.00	0.00	0.00
	18	0.00	0.60	0.00	0.00	0.00	0.00
	19	0.00	0.60	0.00	0.00	0.00	0.00
	20	0.00	0.60	0.00	0.00	0.00	0.00
	21	0.00	0.42	0.00	0.00	0.00	0.00
	22	0.00	0.42	0.00	0.00	0.00	0.00
	23	0.00	0.44	0.00	0.00	0.00	0.00
	24	0.00	0.42	0.00	0.00	0.00	0.00
79	1	0.00	0.58	0.00	0.00	0.00	0.00
	2	0.00	0.58	0.00	0.00	0.00	0.00
	3	0.00	0.58	0.00	0.00	0.00	0.00
	4	0.00	0.60	0.00	0.00	0.00	0.00
	5	0.00	0.58	0.00	0.00	0.00	0.00
	6	0.00	0.58	0.00	0.00	0.00	0.00
	7	0.00	0.58	0.00	0.00	0.00	0.00
	8	0.00	0.58	0.00	0.00	0.00	0.00
	9	0.00	0.89	0.00	0.00	0.00	0.00
	10	0.00	0.60	0.00	0.00	0.00	0.00
	11	0.00	0.81	0.00	0.00	0.00	0.00
	12	0.00	0.52	0.00	0.00	0.00	0.00
	13	0.00	0.81	0.00	0.00	0.00	0.00
	14	0.00	0.44	0.00	0.00	0.00	0.00
	15	0.00	0.71	0.00	0.00	0.00	0.00
	16	0.00	0.71	0.00	0.00	0.00	0.00
	17	0.00	0.58	0.00	0.00	0.00	0.00
	18	0.00	0.58	0.00	0.00	0.00	0.00
	19	0.00	0.58	0.00	0.00	0.00	0.00
	20	0.00	0.58	0.00	0.00	0.00	0.00
	21	0.00	0.41	0.00	0.00	0.00	0.00
	22	0.00	0.41	0.00	0.00	0.00	0.00
	23	0.00	0.42	0.00	0.00	0.00	0.00
	24	0.00	0.41	0.00	0.00	0.00	0.00
80	1	0.00	0.62	0.00	0.00	0.00	0.00
	2	0.00	0.63	0.00	0.00	0.00	0.00
	3	0.00	0.62	0.00	0.00	0.00	0.00
	4	0.00	0.64	0.00	0.00	0.00	0.00
	5	0.00	0.63	0.00	0.00	0.00	0.00
	6	0.00	0.62	0.00	0.00	0.00	0.00
	7	0.00	0.62	0.00	0.00	0.00	0.00
	8	0.00	0.62	0.00	0.00	0.00	0.00
	9	0.00	0.94	0.00	0.00	0.00	0.00
	10	0.00	0.64	0.00	0.00	0.00	0.00
	11	0.00	0.86	0.00	0.00	0.00	0.00
	12	0.00	0.56	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	13	0.00	0.86	0.00	0.00	0.00	0.00
	14	0.00	0.48	0.00	0.00	0.00	0.00
	15	0.00	0.76	0.00	0.00	0.00	0.00
	16	0.00	0.76	0.00	0.00	0.00	0.00
	17	0.00	0.63	0.00	0.00	0.00	0.00
	18	0.00	0.63	0.00	0.00	0.00	0.00
	19	0.00	0.62	0.00	0.00	0.00	0.00
	20	0.00	0.63	0.00	0.00	0.00	0.00
	21	0.00	0.44	0.00	0.00	0.00	0.00
	22	0.00	0.44	0.00	0.00	0.00	0.00
	23	0.00	0.46	0.00	0.00	0.00	0.00
	24	0.00	0.44	0.00	0.00	0.00	0.00
81	1	0.00	0.64	0.00	0.00	0.00	0.00
	2	0.00	0.65	0.00	0.00	0.00	0.00
	3	0.00	0.64	0.00	0.00	0.00	0.00
	4	0.00	0.66	0.00	0.00	0.00	0.00
	5	0.00	0.64	0.00	0.00	0.00	0.00
	6	0.00	0.64	0.00	0.00	0.00	0.00
	7	0.00	0.64	0.00	0.00	0.00	0.00
	8	0.00	0.64	0.00	0.00	0.00	0.00
	9	0.00	0.97	0.00	0.00	0.00	0.00
	10	0.00	0.66	0.00	0.00	0.00	0.00
	11	0.00	0.88	0.00	0.00	0.00	0.00
	12	0.00	0.58	0.00	0.00	0.00	0.00
	13	0.00	0.89	0.00	0.00	0.00	0.00
	14	0.00	0.50	0.00	0.00	0.00	0.00
	15	0.00	0.78	0.00	0.00	0.00	0.00
	16	0.00	0.78	0.00	0.00	0.00	0.00
	17	0.00	0.64	0.00	0.00	0.00	0.00
	18	0.00	0.64	0.00	0.00	0.00	0.00
	19	0.00	0.64	0.00	0.00	0.00	0.00
	20	0.00	0.64	0.00	0.00	0.00	0.00
	21	0.00	0.46	0.00	0.00	0.00	0.00
	22	0.00	0.46	0.00	0.00	0.00	0.00
	23	0.00	0.48	0.00	0.00	0.00	0.00
	24	0.00	0.46	0.00	0.00	0.00	0.00
82	1	0.00	0.66	0.00	0.00	0.00	0.00
	2	0.00	0.66	0.00	0.00	0.00	0.00
	3	0.00	0.66	0.00	0.00	0.00	0.00
	4	0.00	0.68	0.00	0.00	0.00	0.00
	5	0.00	0.66	0.00	0.00	0.00	0.00
	6	0.00	0.66	0.00	0.00	0.00	0.00
	7	0.00	0.66	0.00	0.00	0.00	0.00
	8	0.00	0.66	0.00	0.00	0.00	0.00
	9	0.00	0.99	0.00	0.00	0.00	0.00
	10	0.00	0.68	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	11	0.00	0.90	0.00	0.00	0.00	0.00
	12	0.00	0.59	0.00	0.00	0.00	0.00
	13	0.00	0.91	0.00	0.00	0.00	0.00
	14	0.00	0.51	0.00	0.00	0.00	0.00
	15	0.00	0.80	0.00	0.00	0.00	0.00
	16	0.00	0.80	0.00	0.00	0.00	0.00
	17	0.00	0.66	0.00	0.00	0.00	0.00
	18	0.00	0.66	0.00	0.00	0.00	0.00
	19	0.00	0.66	0.00	0.00	0.00	0.00
	20	0.00	0.66	0.00	0.00	0.00	0.00
	21	0.00	0.48	0.00	0.00	0.00	0.00
	22	0.00	0.48	0.00	0.00	0.00	0.00
	23	0.00	0.49	0.00	0.00	0.00	0.00
	24	0.00	0.48	0.00	0.00	0.00	0.00
83	1	0.00	0.71	0.00	0.00	0.00	0.00
	2	0.00	0.72	0.00	0.00	0.00	0.00
	3	0.00	0.71	0.00	0.00	0.00	0.00
	4	0.00	0.73	0.00	0.00	0.00	0.00
	5	0.00	0.72	0.00	0.00	0.00	0.00
	6	0.00	0.71	0.00	0.00	0.00	0.00
	7	0.00	0.71	0.00	0.00	0.00	0.00
	8	0.00	0.71	0.00	0.00	0.00	0.00
	9	0.00	0.91	0.00	0.00	0.00	0.00
	10	0.00	0.73	0.00	0.00	0.00	0.00
	11	0.00	0.86	0.00	0.00	0.00	0.00
	12	0.00	0.67	0.00	0.00	0.00	0.00
	13	0.00	0.76	0.00	0.00	0.00	0.00
	14	0.00	0.52	0.00	0.00	0.00	0.00
	15	0.00	0.69	0.00	0.00	0.00	0.00
	16	0.00	0.69	0.00	0.00	0.00	0.00
	17	0.00	0.72	0.00	0.00	0.00	0.00
	18	0.00	0.72	0.00	0.00	0.00	0.00
	19	0.00	0.71	0.00	0.00	0.00	0.00
	20	0.00	0.72	0.00	0.00	0.00	0.00
	21	0.00	0.50	0.00	0.00	0.00	0.00
	22	0.00	0.50	0.00	0.00	0.00	0.00
	23	0.00	0.51	0.00	0.00	0.00	0.00
	24	0.00	0.50	0.00	0.00	0.00	0.00
84	1	0.00	0.69	0.00	0.00	0.00	0.00
	2	0.00	0.69	0.00	0.00	0.00	0.00
	3	0.00	0.69	0.00	0.00	0.00	0.00
	4	0.00	0.70	0.00	0.00	0.00	0.00
	5	0.00	0.69	0.00	0.00	0.00	0.00
	6	0.00	0.69	0.00	0.00	0.00	0.00
	7	0.00	0.69	0.00	0.00	0.00	0.00
	8	0.00	0.69	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	9	0.00	0.88	0.00	0.00	0.00	0.00
	10	0.00	0.70	0.00	0.00	0.00	0.00
	11	0.00	0.83	0.00	0.00	0.00	0.00
	12	0.00	0.65	0.00	0.00	0.00	0.00
	13	0.00	0.73	0.00	0.00	0.00	0.00
	14	0.00	0.50	0.00	0.00	0.00	0.00
	15	0.00	0.67	0.00	0.00	0.00	0.00
	16	0.00	0.67	0.00	0.00	0.00	0.00
	17	0.00	0.69	0.00	0.00	0.00	0.00
	18	0.00	0.69	0.00	0.00	0.00	0.00
	19	0.00	0.69	0.00	0.00	0.00	0.00
	20	0.00	0.69	0.00	0.00	0.00	0.00
	21	0.00	0.48	0.00	0.00	0.00	0.00
	22	0.00	0.48	0.00	0.00	0.00	0.00
	23	0.00	0.49	0.00	0.00	0.00	0.00
	24	0.00	0.48	0.00	0.00	0.00	0.00
85	1	0.00	0.73	0.00	0.00	0.00	0.00
	2	0.00	0.74	0.00	0.00	0.00	0.00
	3	0.00	0.74	0.00	0.00	0.00	0.00
	4	0.00	0.75	0.00	0.00	0.00	0.00
	5	0.00	0.74	0.00	0.00	0.00	0.00
	6	0.00	0.74	0.00	0.00	0.00	0.00
	7	0.00	0.74	0.00	0.00	0.00	0.00
	8	0.00	0.74	0.00	0.00	0.00	0.00
	9	0.00	0.93	0.00	0.00	0.00	0.00
	10	0.00	0.75	0.00	0.00	0.00	0.00
	11	0.00	0.88	0.00	0.00	0.00	0.00
	12	0.00	0.70	0.00	0.00	0.00	0.00
	13	0.00	0.78	0.00	0.00	0.00	0.00
	14	0.00	0.54	0.00	0.00	0.00	0.00
	15	0.00	0.72	0.00	0.00	0.00	0.00
	16	0.00	0.72	0.00	0.00	0.00	0.00
	17	0.00	0.74	0.00	0.00	0.00	0.00
	18	0.00	0.74	0.00	0.00	0.00	0.00
	19	0.00	0.74	0.00	0.00	0.00	0.00
	20	0.00	0.74	0.00	0.00	0.00	0.00
	21	0.00	0.52	0.00	0.00	0.00	0.00
	22	0.00	0.52	0.00	0.00	0.00	0.00
	23	0.00	0.53	0.00	0.00	0.00	0.00
	24	0.00	0.52	0.00	0.00	0.00	0.00
86	1	0.00	0.75	0.00	0.00	0.00	0.00
	2	0.00	0.76	0.00	0.00	0.00	0.00
	3	0.00	0.76	0.00	0.00	0.00	0.00
	4	0.00	0.77	0.00	0.00	0.00	0.00
	5	0.00	0.76	0.00	0.00	0.00	0.00
	6	0.00	0.76	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	7	0.00	0.76	0.00	0.00	0.00	0.00
	8	0.00	0.76	0.00	0.00	0.00	0.00
	9	0.00	0.96	0.00	0.00	0.00	0.00
	10	0.00	0.77	0.00	0.00	0.00	0.00
	11	0.00	0.91	0.00	0.00	0.00	0.00
	12	0.00	0.72	0.00	0.00	0.00	0.00
	13	0.00	0.81	0.00	0.00	0.00	0.00
	14	0.00	0.56	0.00	0.00	0.00	0.00
	15	0.00	0.74	0.00	0.00	0.00	0.00
	16	0.00	0.74	0.00	0.00	0.00	0.00
	17	0.00	0.76	0.00	0.00	0.00	0.00
	18	0.00	0.76	0.00	0.00	0.00	0.00
	19	0.00	0.76	0.00	0.00	0.00	0.00
	20	0.00	0.76	0.00	0.00	0.00	0.00
	21	0.00	0.54	0.00	0.00	0.00	0.00
	22	0.00	0.54	0.00	0.00	0.00	0.00
	23	0.00	0.55	0.00	0.00	0.00	0.00
	24	0.00	0.54	0.00	0.00	0.00	0.00
87	1	0.00	0.77	0.00	0.00	0.00	0.00
	2	0.00	0.78	0.00	0.00	0.00	0.00
	3	0.00	0.78	0.00	0.00	0.00	0.00
	4	0.00	0.79	0.00	0.00	0.00	0.00
	5	0.00	0.78	0.00	0.00	0.00	0.00
	6	0.00	0.78	0.00	0.00	0.00	0.00
	7	0.00	0.78	0.00	0.00	0.00	0.00
	8	0.00	0.78	0.00	0.00	0.00	0.00
	9	0.00	0.98	0.00	0.00	0.00	0.00
	10	0.00	0.79	0.00	0.00	0.00	0.00
	11	0.00	0.93	0.00	0.00	0.00	0.00
	12	0.00	0.73	0.00	0.00	0.00	0.00
	13	0.00	0.83	0.00	0.00	0.00	0.00
	14	0.00	0.58	0.00	0.00	0.00	0.00
	15	0.00	0.76	0.00	0.00	0.00	0.00
	16	0.00	0.76	0.00	0.00	0.00	0.00
	17	0.00	0.78	0.00	0.00	0.00	0.00
	18	0.00	0.78	0.00	0.00	0.00	0.00
	19	0.00	0.78	0.00	0.00	0.00	0.00
	20	0.00	0.78	0.00	0.00	0.00	0.00
	21	0.00	0.56	0.00	0.00	0.00	0.00
	22	0.00	0.56	0.00	0.00	0.00	0.00
	23	0.00	0.57	0.00	0.00	0.00	0.00
	24	0.00	0.56	0.00	0.00	0.00	0.00
103	1	0.00	0.22	0.00	0.00	0.00	0.00
	2	0.00	0.23	0.00	0.00	0.00	0.00
	3	0.00	0.22	0.00	0.00	0.00	0.00
	4	0.00	0.24	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	5	0.00	0.23	0.00	0.00	0.00	0.00
	6	0.00	0.22	0.00	0.00	0.00	0.00
	7	0.00	0.22	0.00	0.00	0.00	0.00
	8	0.00	0.22	0.00	0.00	0.00	0.00
	9	0.00	0.51	0.00	0.00	0.00	0.00
	10	0.00	0.24	0.00	0.00	0.00	0.00
	11	0.00	0.43	0.00	0.00	0.00	0.00
	12	0.00	0.17	0.00	0.00	0.00	0.00
	13	0.00	0.54	0.00	0.00	0.00	0.00
	14	0.00	0.20	0.00	0.00	0.00	0.00
	15	0.00	0.45	0.00	0.00	0.00	0.00
	16	0.00	0.45	0.00	0.00	0.00	0.00
	17	0.00	0.23	0.00	0.00	0.00	0.00
	18	0.00	0.23	0.00	0.00	0.00	0.00
	19	0.00	0.22	0.00	0.00	0.00	0.00
	20	0.00	0.23	0.00	0.00	0.00	0.00
	21	0.00	0.17	0.00	0.00	0.00	0.00
	22	0.00	0.17	0.00	0.00	0.00	0.00
	23	0.00	0.18	0.00	0.00	0.00	0.00
	24	0.00	0.17	0.00	0.00	0.00	0.00
104	1	0.00	0.23	0.00	0.00	0.00	0.00
	2	0.00	0.23	0.00	0.00	0.00	0.00
	3	0.00	0.23	0.00	0.00	0.00	0.00
	4	0.00	0.25	0.00	0.00	0.00	0.00
	5	0.00	0.23	0.00	0.00	0.00	0.00
	6	0.00	0.23	0.00	0.00	0.00	0.00
	7	0.00	0.23	0.00	0.00	0.00	0.00
	8	0.00	0.23	0.00	0.00	0.00	0.00
	9	0.00	0.52	0.00	0.00	0.00	0.00
	10	0.00	0.25	0.00	0.00	0.00	0.00
	11	0.00	0.44	0.00	0.00	0.00	0.00
	12	0.00	0.17	0.00	0.00	0.00	0.00
	13	0.00	0.55	0.00	0.00	0.00	0.00
	14	0.00	0.20	0.00	0.00	0.00	0.00
	15	0.00	0.45	0.00	0.00	0.00	0.00
	16	0.00	0.45	0.00	0.00	0.00	0.00
	17	0.00	0.23	0.00	0.00	0.00	0.00
	18	0.00	0.23	0.00	0.00	0.00	0.00
	19	0.00	0.23	0.00	0.00	0.00	0.00
	20	0.00	0.23	0.00	0.00	0.00	0.00
	21	0.00	0.17	0.00	0.00	0.00	0.00
	22	0.00	0.17	0.00	0.00	0.00	0.00
	23	0.00	0.19	0.00	0.00	0.00	0.00
	24	0.00	0.17	0.00	0.00	0.00	0.00
105	1	0.00	0.24	0.00	0.00	0.00	0.00
	2	0.00	0.24	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	3	0.00	0.24	0.00	0.00	0.00	0.00
	4	0.00	0.25	0.00	0.00	0.00	0.00
	5	0.00	0.24	0.00	0.00	0.00	0.00
	6	0.00	0.24	0.00	0.00	0.00	0.00
	7	0.00	0.24	0.00	0.00	0.00	0.00
	8	0.00	0.24	0.00	0.00	0.00	0.00
	9	0.00	0.52	0.00	0.00	0.00	0.00
	10	0.00	0.25	0.00	0.00	0.00	0.00
	11	0.00	0.45	0.00	0.00	0.00	0.00
	12	0.00	0.18	0.00	0.00	0.00	0.00
	13	0.00	0.55	0.00	0.00	0.00	0.00
	14	0.00	0.21	0.00	0.00	0.00	0.00
	15	0.00	0.46	0.00	0.00	0.00	0.00
	16	0.00	0.46	0.00	0.00	0.00	0.00
	17	0.00	0.24	0.00	0.00	0.00	0.00
	18	0.00	0.24	0.00	0.00	0.00	0.00
	19	0.00	0.24	0.00	0.00	0.00	0.00
	20	0.00	0.24	0.00	0.00	0.00	0.00
	21	0.00	0.18	0.00	0.00	0.00	0.00
	22	0.00	0.18	0.00	0.00	0.00	0.00
	23	0.00	0.19	0.00	0.00	0.00	0.00
	24	0.00	0.18	0.00	0.00	0.00	0.00
106	1	0.00	0.12	0.00	0.00	0.00	0.00
	2	0.00	0.12	0.00	0.00	0.00	0.00
	3	0.00	0.12	0.00	0.00	0.00	0.00
	4	0.00	0.13	0.00	0.00	0.00	0.00
	5	0.00	0.12	0.00	0.00	0.00	0.00
	6	0.00	0.12	0.00	0.00	0.00	0.00
	7	0.00	0.12	0.00	0.00	0.00	0.00
	8	0.00	0.12	0.00	0.00	0.00	0.00
	9	0.00	0.26	0.00	0.00	0.00	0.00
	10	0.00	0.13	0.00	0.00	0.00	0.00
	11	0.00	0.23	0.00	0.00	0.00	0.00
	12	0.00	0.09	0.00	0.00	0.00	0.00
	13	0.00	0.28	0.00	0.00	0.00	0.00
	14	0.00	0.11	0.00	0.00	0.00	0.00
	15	0.00	0.23	0.00	0.00	0.00	0.00
	16	0.00	0.23	0.00	0.00	0.00	0.00
	17	0.00	0.12	0.00	0.00	0.00	0.00
	18	0.00	0.12	0.00	0.00	0.00	0.00
	19	0.00	0.12	0.00	0.00	0.00	0.00
	20	0.00	0.12	0.00	0.00	0.00	0.00
	21	0.00	0.09	0.00	0.00	0.00	0.00
	22	0.00	0.09	0.00	0.00	0.00	0.00
	23	0.00	0.10	0.00	0.00	0.00	0.00
	24	0.00	0.09	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
107	1	0.00	0.56	0.00	0.00	0.00	0.00
	2	0.00	0.56	0.00	0.00	0.00	0.00
	3	0.00	0.56	0.00	0.00	0.00	0.00
	4	0.00	0.59	0.00	0.00	0.00	0.00
	5	0.00	0.56	0.00	0.00	0.00	0.00
	6	0.00	0.56	0.00	0.00	0.00	0.00
	7	0.00	0.56	0.00	0.00	0.00	0.00
	8	0.00	0.56	0.00	0.00	0.00	0.00
	9	0.00	1.01	0.00	0.00	0.00	0.00
	10	0.00	0.59	0.00	0.00	0.00	0.00
	11	0.00	0.89	0.00	0.00	0.00	0.00
	12	0.00	0.47	0.00	0.00	0.00	0.00
	13	0.00	1.00	0.00	0.00	0.00	0.00
	14	0.00	0.46	0.00	0.00	0.00	0.00
	15	0.00	0.86	0.00	0.00	0.00	0.00
	16	0.00	0.86	0.00	0.00	0.00	0.00
	17	0.00	0.56	0.00	0.00	0.00	0.00
	18	0.00	0.56	0.00	0.00	0.00	0.00
	19	0.00	0.56	0.00	0.00	0.00	0.00
	20	0.00	0.56	0.00	0.00	0.00	0.00
	21	0.00	0.41	0.00	0.00	0.00	0.00
	22	0.00	0.41	0.00	0.00	0.00	0.00
	23	0.00	0.44	0.00	0.00	0.00	0.00
	24	0.00	0.41	0.00	0.00	0.00	0.00
108	1	0.00	0.57	0.00	0.00	0.00	0.00
	2	0.00	0.58	0.00	0.00	0.00	0.00
	3	0.00	0.58	0.00	0.00	0.00	0.00
	4	0.00	0.60	0.00	0.00	0.00	0.00
	5	0.00	0.58	0.00	0.00	0.00	0.00
	6	0.00	0.58	0.00	0.00	0.00	0.00
	7	0.00	0.58	0.00	0.00	0.00	0.00
	8	0.00	0.58	0.00	0.00	0.00	0.00
	9	0.00	1.02	0.00	0.00	0.00	0.00
	10	0.00	0.60	0.00	0.00	0.00	0.00
	11	0.00	0.90	0.00	0.00	0.00	0.00
	12	0.00	0.48	0.00	0.00	0.00	0.00
	13	0.00	1.01	0.00	0.00	0.00	0.00
	14	0.00	0.47	0.00	0.00	0.00	0.00
	15	0.00	0.87	0.00	0.00	0.00	0.00
	16	0.00	0.87	0.00	0.00	0.00	0.00
	17	0.00	0.58	0.00	0.00	0.00	0.00
	18	0.00	0.58	0.00	0.00	0.00	0.00
	19	0.00	0.58	0.00	0.00	0.00	0.00
	20	0.00	0.58	0.00	0.00	0.00	0.00
	21	0.00	0.42	0.00	0.00	0.00	0.00
	22	0.00	0.42	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	23	0.00	0.45	0.00	0.00	0.00	0.00
	24	0.00	0.42	0.00	0.00	0.00	0.00
109	1	0.00	0.58	0.00	0.00	0.00	0.00
	2	0.00	0.59	0.00	0.00	0.00	0.00
	3	0.00	0.59	0.00	0.00	0.00	0.00
	4	0.00	0.61	0.00	0.00	0.00	0.00
	5	0.00	0.59	0.00	0.00	0.00	0.00
	6	0.00	0.59	0.00	0.00	0.00	0.00
	7	0.00	0.59	0.00	0.00	0.00	0.00
	8	0.00	0.59	0.00	0.00	0.00	0.00
	9	0.00	1.03	0.00	0.00	0.00	0.00
	10	0.00	0.61	0.00	0.00	0.00	0.00
	11	0.00	0.92	0.00	0.00	0.00	0.00
	12	0.00	0.50	0.00	0.00	0.00	0.00
	13	0.00	1.02	0.00	0.00	0.00	0.00
	14	0.00	0.48	0.00	0.00	0.00	0.00
	15	0.00	0.88	0.00	0.00	0.00	0.00
	16	0.00	0.88	0.00	0.00	0.00	0.00
	17	0.00	0.59	0.00	0.00	0.00	0.00
	18	0.00	0.59	0.00	0.00	0.00	0.00
	19	0.00	0.59	0.00	0.00	0.00	0.00
	20	0.00	0.59	0.00	0.00	0.00	0.00
	21	0.00	0.44	0.00	0.00	0.00	0.00
	22	0.00	0.44	0.00	0.00	0.00	0.00
	23	0.00	0.46	0.00	0.00	0.00	0.00
	24	0.00	0.44	0.00	0.00	0.00	0.00
110	1	0.00	0.30	0.00	0.00	0.00	0.00
	2	0.00	0.30	0.00	0.00	0.00	0.00
	3	0.00	0.30	0.00	0.00	0.00	0.00
	4	0.00	0.31	0.00	0.00	0.00	0.00
	5	0.00	0.30	0.00	0.00	0.00	0.00
	6	0.00	0.30	0.00	0.00	0.00	0.00
	7	0.00	0.30	0.00	0.00	0.00	0.00
	8	0.00	0.30	0.00	0.00	0.00	0.00
	9	0.00	0.52	0.00	0.00	0.00	0.00
	10	0.00	0.31	0.00	0.00	0.00	0.00
	11	0.00	0.46	0.00	0.00	0.00	0.00
	12	0.00	0.25	0.00	0.00	0.00	0.00
	13	0.00	0.52	0.00	0.00	0.00	0.00
	14	0.00	0.25	0.00	0.00	0.00	0.00
	15	0.00	0.44	0.00	0.00	0.00	0.00
	16	0.00	0.44	0.00	0.00	0.00	0.00
	17	0.00	0.30	0.00	0.00	0.00	0.00
	18	0.00	0.30	0.00	0.00	0.00	0.00
	19	0.00	0.30	0.00	0.00	0.00	0.00
	20	0.00	0.30	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	21	0.00	0.22	0.00	0.00	0.00	0.00
	22	0.00	0.22	0.00	0.00	0.00	0.00
	23	0.00	0.24	0.00	0.00	0.00	0.00
	24	0.00	0.22	0.00	0.00	0.00	0.00
111	1	0.00	0.67	0.00	0.00	0.00	0.00
	2	0.00	0.68	0.00	0.00	0.00	0.00
	3	0.00	0.68	0.00	0.00	0.00	0.00
	4	0.00	0.69	0.00	0.00	0.00	0.00
	5	0.00	0.68	0.00	0.00	0.00	0.00
	6	0.00	0.68	0.00	0.00	0.00	0.00
	7	0.00	0.68	0.00	0.00	0.00	0.00
	8	0.00	0.68	0.00	0.00	0.00	0.00
	9	0.00	1.00	0.00	0.00	0.00	0.00
	10	0.00	0.69	0.00	0.00	0.00	0.00
	11	0.00	0.92	0.00	0.00	0.00	0.00
	12	0.00	0.61	0.00	0.00	0.00	0.00
	13	0.00	0.92	0.00	0.00	0.00	0.00
	14	0.00	0.53	0.00	0.00	0.00	0.00
	15	0.00	0.82	0.00	0.00	0.00	0.00
	16	0.00	0.82	0.00	0.00	0.00	0.00
	17	0.00	0.68	0.00	0.00	0.00	0.00
	18	0.00	0.68	0.00	0.00	0.00	0.00
	19	0.00	0.68	0.00	0.00	0.00	0.00
	20	0.00	0.68	0.00	0.00	0.00	0.00
	21	0.00	0.49	0.00	0.00	0.00	0.00
	22	0.00	0.49	0.00	0.00	0.00	0.00
	23	0.00	0.51	0.00	0.00	0.00	0.00
	24	0.00	0.49	0.00	0.00	0.00	0.00
112	1	0.00	0.68	0.00	0.00	0.00	0.00
	2	0.00	0.69	0.00	0.00	0.00	0.00
	3	0.00	0.69	0.00	0.00	0.00	0.00
	4	0.00	0.71	0.00	0.00	0.00	0.00
	5	0.00	0.69	0.00	0.00	0.00	0.00
	6	0.00	0.69	0.00	0.00	0.00	0.00
	7	0.00	0.69	0.00	0.00	0.00	0.00
	8	0.00	0.69	0.00	0.00	0.00	0.00
	9	0.00	1.01	0.00	0.00	0.00	0.00
	10	0.00	0.71	0.00	0.00	0.00	0.00
	11	0.00	0.93	0.00	0.00	0.00	0.00
	12	0.00	0.62	0.00	0.00	0.00	0.00
	13	0.00	0.93	0.00	0.00	0.00	0.00
	14	0.00	0.54	0.00	0.00	0.00	0.00
	15	0.00	0.83	0.00	0.00	0.00	0.00
	16	0.00	0.83	0.00	0.00	0.00	0.00
	17	0.00	0.69	0.00	0.00	0.00	0.00
	18	0.00	0.69	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	19	0.00	0.69	0.00	0.00	0.00	0.00
	20	0.00	0.69	0.00	0.00	0.00	0.00
	21	0.00	0.50	0.00	0.00	0.00	0.00
	22	0.00	0.50	0.00	0.00	0.00	0.00
	23	0.00	0.52	0.00	0.00	0.00	0.00
	24	0.00	0.50	0.00	0.00	0.00	0.00
113	1	0.00	0.70	0.00	0.00	0.00	0.00
	2	0.00	0.70	0.00	0.00	0.00	0.00
	3	0.00	0.70	0.00	0.00	0.00	0.00
	4	0.00	0.72	0.00	0.00	0.00	0.00
	5	0.00	0.70	0.00	0.00	0.00	0.00
	6	0.00	0.70	0.00	0.00	0.00	0.00
	7	0.00	0.70	0.00	0.00	0.00	0.00
	8	0.00	0.70	0.00	0.00	0.00	0.00
	9	0.00	1.02	0.00	0.00	0.00	0.00
	10	0.00	0.72	0.00	0.00	0.00	0.00
	11	0.00	0.94	0.00	0.00	0.00	0.00
	12	0.00	0.63	0.00	0.00	0.00	0.00
	13	0.00	0.94	0.00	0.00	0.00	0.00
	14	0.00	0.55	0.00	0.00	0.00	0.00
	15	0.00	0.83	0.00	0.00	0.00	0.00
	16	0.00	0.83	0.00	0.00	0.00	0.00
	17	0.00	0.70	0.00	0.00	0.00	0.00
	18	0.00	0.70	0.00	0.00	0.00	0.00
	19	0.00	0.70	0.00	0.00	0.00	0.00
	20	0.00	0.70	0.00	0.00	0.00	0.00
	21	0.00	0.52	0.00	0.00	0.00	0.00
	22	0.00	0.52	0.00	0.00	0.00	0.00
	23	0.00	0.53	0.00	0.00	0.00	0.00
	24	0.00	0.52	0.00	0.00	0.00	0.00
114	1	0.00	0.35	0.00	0.00	0.00	0.00
	2	0.00	0.36	0.00	0.00	0.00	0.00
	3	0.00	0.36	0.00	0.00	0.00	0.00
	4	0.00	0.37	0.00	0.00	0.00	0.00
	5	0.00	0.36	0.00	0.00	0.00	0.00
	6	0.00	0.36	0.00	0.00	0.00	0.00
	7	0.00	0.36	0.00	0.00	0.00	0.00
	8	0.00	0.36	0.00	0.00	0.00	0.00
	9	0.00	0.52	0.00	0.00	0.00	0.00
	10	0.00	0.37	0.00	0.00	0.00	0.00
	11	0.00	0.47	0.00	0.00	0.00	0.00
	12	0.00	0.32	0.00	0.00	0.00	0.00
	13	0.00	0.47	0.00	0.00	0.00	0.00
	14	0.00	0.28	0.00	0.00	0.00	0.00
	15	0.00	0.42	0.00	0.00	0.00	0.00
	16	0.00	0.42	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	17	0.00	0.36	0.00	0.00	0.00	0.00
	18	0.00	0.36	0.00	0.00	0.00	0.00
	19	0.00	0.36	0.00	0.00	0.00	0.00
	20	0.00	0.36	0.00	0.00	0.00	0.00
	21	0.00	0.26	0.00	0.00	0.00	0.00
	22	0.00	0.26	0.00	0.00	0.00	0.00
	23	0.00	0.27	0.00	0.00	0.00	0.00
	24	0.00	0.26	0.00	0.00	0.00	0.00
115	1	0.00	0.78	0.00	0.00	0.00	0.00
	2	0.00	0.79	0.00	0.00	0.00	0.00
	3	0.00	0.79	0.00	0.00	0.00	0.00
	4	0.00	0.80	0.00	0.00	0.00	0.00
	5	0.00	0.79	0.00	0.00	0.00	0.00
	6	0.00	0.79	0.00	0.00	0.00	0.00
	7	0.00	0.79	0.00	0.00	0.00	0.00
	8	0.00	0.79	0.00	0.00	0.00	0.00
	9	0.00	1.00	0.00	0.00	0.00	0.00
	10	0.00	0.80	0.00	0.00	0.00	0.00
	11	0.00	0.94	0.00	0.00	0.00	0.00
	12	0.00	0.75	0.00	0.00	0.00	0.00
	13	0.00	0.84	0.00	0.00	0.00	0.00
	14	0.00	0.59	0.00	0.00	0.00	0.00
	15	0.00	0.77	0.00	0.00	0.00	0.00
	16	0.00	0.77	0.00	0.00	0.00	0.00
	17	0.00	0.79	0.00	0.00	0.00	0.00
	18	0.00	0.79	0.00	0.00	0.00	0.00
	19	0.00	0.79	0.00	0.00	0.00	0.00
	20	0.00	0.79	0.00	0.00	0.00	0.00
	21	0.00	0.57	0.00	0.00	0.00	0.00
	22	0.00	0.57	0.00	0.00	0.00	0.00
	23	0.00	0.58	0.00	0.00	0.00	0.00
	24	0.00	0.57	0.00	0.00	0.00	0.00
116	1	0.00	0.80	0.00	0.00	0.00	0.00
	2	0.00	0.81	0.00	0.00	0.00	0.00
	3	0.00	0.80	0.00	0.00	0.00	0.00
	4	0.00	0.81	0.00	0.00	0.00	0.00
	5	0.00	0.80	0.00	0.00	0.00	0.00
	6	0.00	0.80	0.00	0.00	0.00	0.00
	7	0.00	0.80	0.00	0.00	0.00	0.00
	8	0.00	0.80	0.00	0.00	0.00	0.00
	9	0.00	1.01	0.00	0.00	0.00	0.00
	10	0.00	0.81	0.00	0.00	0.00	0.00
	11	0.00	0.95	0.00	0.00	0.00	0.00
	12	0.00	0.76	0.00	0.00	0.00	0.00
	13	0.00	0.85	0.00	0.00	0.00	0.00
	14	0.00	0.61	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	15	0.00	0.78	0.00	0.00	0.00	0.00
	16	0.00	0.78	0.00	0.00	0.00	0.00
	17	0.00	0.80	0.00	0.00	0.00	0.00
	18	0.00	0.80	0.00	0.00	0.00	0.00
	19	0.00	0.80	0.00	0.00	0.00	0.00
	20	0.00	0.80	0.00	0.00	0.00	0.00
	21	0.00	0.58	0.00	0.00	0.00	0.00
	22	0.00	0.58	0.00	0.00	0.00	0.00
	23	0.00	0.59	0.00	0.00	0.00	0.00
	24	0.00	0.58	0.00	0.00	0.00	0.00
117	1	0.00	0.81	0.00	0.00	0.00	0.00
	2	0.00	0.82	0.00	0.00	0.00	0.00
	3	0.00	0.81	0.00	0.00	0.00	0.00
	4	0.00	0.83	0.00	0.00	0.00	0.00
	5	0.00	0.82	0.00	0.00	0.00	0.00
	6	0.00	0.81	0.00	0.00	0.00	0.00
	7	0.00	0.81	0.00	0.00	0.00	0.00
	8	0.00	0.81	0.00	0.00	0.00	0.00
	9	0.00	1.01	0.00	0.00	0.00	0.00
	10	0.00	0.83	0.00	0.00	0.00	0.00
	11	0.00	0.96	0.00	0.00	0.00	0.00
	12	0.00	0.77	0.00	0.00	0.00	0.00
	13	0.00	0.86	0.00	0.00	0.00	0.00
	14	0.00	0.62	0.00	0.00	0.00	0.00
	15	0.00	0.79	0.00	0.00	0.00	0.00
	16	0.00	0.79	0.00	0.00	0.00	0.00
	17	0.00	0.82	0.00	0.00	0.00	0.00
	18	0.00	0.82	0.00	0.00	0.00	0.00
	19	0.00	0.81	0.00	0.00	0.00	0.00
	20	0.00	0.82	0.00	0.00	0.00	0.00
	21	0.00	0.59	0.00	0.00	0.00	0.00
	22	0.00	0.59	0.00	0.00	0.00	0.00
	23	0.00	0.60	0.00	0.00	0.00	0.00
	24	0.00	0.59	0.00	0.00	0.00	0.00
118	1	0.00	0.41	0.00	0.00	0.00	0.00
	2	0.00	0.41	0.00	0.00	0.00	0.00
	3	0.00	0.41	0.00	0.00	0.00	0.00
	4	0.00	0.42	0.00	0.00	0.00	0.00
	5	0.00	0.41	0.00	0.00	0.00	0.00
	6	0.00	0.41	0.00	0.00	0.00	0.00
	7	0.00	0.41	0.00	0.00	0.00	0.00
	8	0.00	0.41	0.00	0.00	0.00	0.00
	9	0.00	0.51	0.00	0.00	0.00	0.00
	10	0.00	0.42	0.00	0.00	0.00	0.00
	11	0.00	0.48	0.00	0.00	0.00	0.00
	12	0.00	0.39	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	13	0.00	0.43	0.00	0.00	0.00	0.00
	14	0.00	0.31	0.00	0.00	0.00	0.00
	15	0.00	0.40	0.00	0.00	0.00	0.00
	16	0.00	0.40	0.00	0.00	0.00	0.00
	17	0.00	0.41	0.00	0.00	0.00	0.00
	18	0.00	0.41	0.00	0.00	0.00	0.00
	19	0.00	0.41	0.00	0.00	0.00	0.00
	20	0.00	0.41	0.00	0.00	0.00	0.00
	21	0.00	0.30	0.00	0.00	0.00	0.00
	22	0.00	0.30	0.00	0.00	0.00	0.00
	23	0.00	0.31	0.00	0.00	0.00	0.00
	24	0.00	0.30	0.00	0.00	0.00	0.00
119	1	0.00	0.67	0.00	0.00	0.00	0.00
	2	0.00	0.67	0.00	0.00	0.00	0.00
	3	0.00	0.67	0.00	0.00	0.00	0.00
	4	0.00	0.66	0.00	0.00	0.00	0.00
	5	0.00	0.67	0.00	0.00	0.00	0.00
	6	0.00	0.67	0.00	0.00	0.00	0.00
	7	0.00	0.67	0.00	0.00	0.00	0.00
	8	0.00	0.67	0.00	0.00	0.00	0.00
	9	0.00	0.39	0.00	0.00	0.00	0.00
	10	0.00	0.66	0.00	0.00	0.00	0.00
	11	0.00	0.46	0.00	0.00	0.00	0.00
	12	0.00	0.73	0.00	0.00	0.00	0.00
	13	0.00	0.10	0.00	0.00	0.00	0.00
	14	0.00	0.44	0.00	0.00	0.00	0.00
	15	0.00	0.18	0.00	0.00	0.00	0.00
	16	0.00	0.18	0.00	0.00	0.00	0.00
	17	0.00	0.67	0.00	0.00	0.00	0.00
	18	0.00	0.67	0.00	0.00	0.00	0.00
	19	0.00	0.67	0.00	0.00	0.00	0.00
	20	0.00	0.67	0.00	0.00	0.00	0.00
	21	0.00	0.46	0.00	0.00	0.00	0.00
	22	0.00	0.46	0.00	0.00	0.00	0.00
	23	0.00	0.45	0.00	0.00	0.00	0.00
	24	0.00	0.46	0.00	0.00	0.00	0.00
120	1	0.00	0.66	0.00	0.00	0.00	0.00
	2	0.00	0.66	0.00	0.00	0.00	0.00
	3	0.00	0.66	0.00	0.00	0.00	0.00
	4	0.00	0.65	0.00	0.00	0.00	0.00
	5	0.00	0.66	0.00	0.00	0.00	0.00
	6	0.00	0.66	0.00	0.00	0.00	0.00
	7	0.00	0.66	0.00	0.00	0.00	0.00
	8	0.00	0.66	0.00	0.00	0.00	0.00
	9	0.00	0.38	0.00	0.00	0.00	0.00
	10	0.00	0.65	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	11	0.00	0.45	0.00	0.00	0.00	0.00
	12	0.00	0.72	0.00	0.00	0.00	0.00
	13	0.00	0.09	0.00	0.00	0.00	0.00
	14	0.00	0.43	0.00	0.00	0.00	0.00
	15	0.00	0.18	0.00	0.00	0.00	0.00
	16	0.00	0.18	0.00	0.00	0.00	0.00
	17	0.00	0.66	0.00	0.00	0.00	0.00
	18	0.00	0.66	0.00	0.00	0.00	0.00
	19	0.00	0.66	0.00	0.00	0.00	0.00
	20	0.00	0.66	0.00	0.00	0.00	0.00
	21	0.00	0.45	0.00	0.00	0.00	0.00
	22	0.00	0.45	0.00	0.00	0.00	0.00
	23	0.00	0.44	0.00	0.00	0.00	0.00
	24	0.00	0.45	0.00	0.00	0.00	0.00
121	1	0.00	0.68	0.00	0.00	0.00	0.00
	2	0.00	0.68	0.00	0.00	0.00	0.00
	3	0.00	0.68	0.00	0.00	0.00	0.00
	4	0.00	0.67	0.00	0.00	0.00	0.00
	5	0.00	0.68	0.00	0.00	0.00	0.00
	6	0.00	0.68	0.00	0.00	0.00	0.00
	7	0.00	0.68	0.00	0.00	0.00	0.00
	8	0.00	0.68	0.00	0.00	0.00	0.00
	9	0.00	0.40	0.00	0.00	0.00	0.00
	10	0.00	0.67	0.00	0.00	0.00	0.00
	11	0.00	0.47	0.00	0.00	0.00	0.00
	12	0.00	0.74	0.00	0.00	0.00	0.00
	13	0.00	0.10	0.00	0.00	0.00	0.00
	14	0.00	0.45	0.00	0.00	0.00	0.00
	15	0.00	0.19	0.00	0.00	0.00	0.00
	16	0.00	0.19	0.00	0.00	0.00	0.00
	17	0.00	0.68	0.00	0.00	0.00	0.00
	18	0.00	0.68	0.00	0.00	0.00	0.00
	19	0.00	0.68	0.00	0.00	0.00	0.00
	20	0.00	0.68	0.00	0.00	0.00	0.00
	21	0.00	0.47	0.00	0.00	0.00	0.00
	22	0.00	0.47	0.00	0.00	0.00	0.00
	23	0.00	0.46	0.00	0.00	0.00	0.00
	24	0.00	0.47	0.00	0.00	0.00	0.00
122	1	0.00	0.69	0.00	0.00	0.00	0.00
	2	0.00	0.69	0.00	0.00	0.00	0.00
	3	0.00	0.69	0.00	0.00	0.00	0.00
	4	0.00	0.68	0.00	0.00	0.00	0.00
	5	0.00	0.69	0.00	0.00	0.00	0.00
	6	0.00	0.69	0.00	0.00	0.00	0.00
	7	0.00	0.69	0.00	0.00	0.00	0.00
	8	0.00	0.69	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	9	0.00	0.40	0.00	0.00	0.00	0.00
	10	0.00	0.68	0.00	0.00	0.00	0.00
	11	0.00	0.48	0.00	0.00	0.00	0.00
	12	0.00	0.75	0.00	0.00	0.00	0.00
	13	0.00	0.11	0.00	0.00	0.00	0.00
	14	0.00	0.46	0.00	0.00	0.00	0.00
	15	0.00	0.19	0.00	0.00	0.00	0.00
	16	0.00	0.19	0.00	0.00	0.00	0.00
	17	0.00	0.69	0.00	0.00	0.00	0.00
	18	0.00	0.69	0.00	0.00	0.00	0.00
	19	0.00	0.69	0.00	0.00	0.00	0.00
	20	0.00	0.69	0.00	0.00	0.00	0.00
	21	0.00	0.48	0.00	0.00	0.00	0.00
	22	0.00	0.48	0.00	0.00	0.00	0.00
	23	0.00	0.47	0.00	0.00	0.00	0.00
	24	0.00	0.48	0.00	0.00	0.00	0.00
123	1	0.00	0.69	0.00	0.00	0.00	0.00
	2	0.00	0.70	0.00	0.00	0.00	0.00
	3	0.00	0.70	0.00	0.00	0.00	0.00
	4	0.00	0.68	0.00	0.00	0.00	0.00
	5	0.00	0.70	0.00	0.00	0.00	0.00
	6	0.00	0.70	0.00	0.00	0.00	0.00
	7	0.00	0.70	0.00	0.00	0.00	0.00
	8	0.00	0.70	0.00	0.00	0.00	0.00
	9	0.00	0.41	0.00	0.00	0.00	0.00
	10	0.00	0.68	0.00	0.00	0.00	0.00
	11	0.00	0.48	0.00	0.00	0.00	0.00
	12	0.00	0.76	0.00	0.00	0.00	0.00
	13	0.00	0.11	0.00	0.00	0.00	0.00
	14	0.00	0.46	0.00	0.00	0.00	0.00
	15	0.00	0.20	0.00	0.00	0.00	0.00
	16	0.00	0.20	0.00	0.00	0.00	0.00
	17	0.00	0.70	0.00	0.00	0.00	0.00
	18	0.00	0.70	0.00	0.00	0.00	0.00
	19	0.00	0.70	0.00	0.00	0.00	0.00
	20	0.00	0.70	0.00	0.00	0.00	0.00
	21	0.00	0.49	0.00	0.00	0.00	0.00
	22	0.00	0.49	0.00	0.00	0.00	0.00
	23	0.00	0.48	0.00	0.00	0.00	0.00
	24	0.00	0.49	0.00	0.00	0.00	0.00
124	1	0.00	0.70	0.00	0.00	0.00	0.00
	2	0.00	0.71	0.00	0.00	0.00	0.00
	3	0.00	0.71	0.00	0.00	0.00	0.00
	4	0.00	0.69	0.00	0.00	0.00	0.00
	5	0.00	0.71	0.00	0.00	0.00	0.00
	6	0.00	0.71	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	7	0.00	0.71	0.00	0.00	0.00	0.00
	8	0.00	0.71	0.00	0.00	0.00	0.00
	9	0.00	0.42	0.00	0.00	0.00	0.00
	10	0.00	0.69	0.00	0.00	0.00	0.00
	11	0.00	0.49	0.00	0.00	0.00	0.00
	12	0.00	0.77	0.00	0.00	0.00	0.00
	13	0.00	0.12	0.00	0.00	0.00	0.00
	14	0.00	0.47	0.00	0.00	0.00	0.00
	15	0.00	0.21	0.00	0.00	0.00	0.00
	16	0.00	0.21	0.00	0.00	0.00	0.00
	17	0.00	0.71	0.00	0.00	0.00	0.00
	18	0.00	0.71	0.00	0.00	0.00	0.00
	19	0.00	0.71	0.00	0.00	0.00	0.00
	20	0.00	0.71	0.00	0.00	0.00	0.00
	21	0.00	0.50	0.00	0.00	0.00	0.00
	22	0.00	0.50	0.00	0.00	0.00	0.00
	23	0.00	0.48	0.00	0.00	0.00	0.00
	24	0.00	0.50	0.00	0.00	0.00	0.00
125	1	0.00	0.71	0.00	0.00	0.00	0.00
	2	0.00	0.71	0.00	0.00	0.00	0.00
	3	0.00	0.71	0.00	0.00	0.00	0.00
	4	0.00	0.70	0.00	0.00	0.00	0.00
	5	0.00	0.71	0.00	0.00	0.00	0.00
	6	0.00	0.71	0.00	0.00	0.00	0.00
	7	0.00	0.71	0.00	0.00	0.00	0.00
	8	0.00	0.71	0.00	0.00	0.00	0.00
	9	0.00	0.42	0.00	0.00	0.00	0.00
	10	0.00	0.70	0.00	0.00	0.00	0.00
	11	0.00	0.50	0.00	0.00	0.00	0.00
	12	0.00	0.77	0.00	0.00	0.00	0.00
	13	0.00	0.13	0.00	0.00	0.00	0.00
	14	0.00	0.48	0.00	0.00	0.00	0.00
	15	0.00	0.21	0.00	0.00	0.00	0.00
	16	0.00	0.21	0.00	0.00	0.00	0.00
	17	0.00	0.71	0.00	0.00	0.00	0.00
	18	0.00	0.71	0.00	0.00	0.00	0.00
	19	0.00	0.71	0.00	0.00	0.00	0.00
	20	0.00	0.71	0.00	0.00	0.00	0.00
	21	0.00	0.50	0.00	0.00	0.00	0.00
	22	0.00	0.50	0.00	0.00	0.00	0.00
	23	0.00	0.49	0.00	0.00	0.00	0.00
	24	0.00	0.50	0.00	0.00	0.00	0.00
126	1	0.00	0.71	0.00	0.00	0.00	0.00
	2	0.00	0.72	0.00	0.00	0.00	0.00
	3	0.00	0.72	0.00	0.00	0.00	0.00
	4	0.00	0.71	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	5	0.00	0.72	0.00	0.00	0.00	0.00
	6	0.00	0.72	0.00	0.00	0.00	0.00
	7	0.00	0.72	0.00	0.00	0.00	0.00
	8	0.00	0.72	0.00	0.00	0.00	0.00
	9	0.00	0.43	0.00	0.00	0.00	0.00
	10	0.00	0.71	0.00	0.00	0.00	0.00
	11	0.00	0.51	0.00	0.00	0.00	0.00
	12	0.00	0.78	0.00	0.00	0.00	0.00
	13	0.00	0.13	0.00	0.00	0.00	0.00
	14	0.00	0.48	0.00	0.00	0.00	0.00
	15	0.00	0.22	0.00	0.00	0.00	0.00
	16	0.00	0.22	0.00	0.00	0.00	0.00
	17	0.00	0.72	0.00	0.00	0.00	0.00
	18	0.00	0.72	0.00	0.00	0.00	0.00
	19	0.00	0.72	0.00	0.00	0.00	0.00
	20	0.00	0.72	0.00	0.00	0.00	0.00
	21	0.00	0.51	0.00	0.00	0.00	0.00
	22	0.00	0.51	0.00	0.00	0.00	0.00
	23	0.00	0.50	0.00	0.00	0.00	0.00
	24	0.00	0.51	0.00	0.00	0.00	0.00
127	1	0.00	0.36	0.00	0.00	0.00	0.00
	2	0.00	0.36	0.00	0.00	0.00	0.00
	3	0.00	0.36	0.00	0.00	0.00	0.00
	4	0.00	0.36	0.00	0.00	0.00	0.00
	5	0.00	0.36	0.00	0.00	0.00	0.00
	6	0.00	0.36	0.00	0.00	0.00	0.00
	7	0.00	0.36	0.00	0.00	0.00	0.00
	8	0.00	0.36	0.00	0.00	0.00	0.00
	9	0.00	0.22	0.00	0.00	0.00	0.00
	10	0.00	0.36	0.00	0.00	0.00	0.00
	11	0.00	0.26	0.00	0.00	0.00	0.00
	12	0.00	0.39	0.00	0.00	0.00	0.00
	13	0.00	0.07	0.00	0.00	0.00	0.00
	14	0.00	0.24	0.00	0.00	0.00	0.00
	15	0.00	0.11	0.00	0.00	0.00	0.00
	16	0.00	0.11	0.00	0.00	0.00	0.00
	17	0.00	0.36	0.00	0.00	0.00	0.00
	18	0.00	0.36	0.00	0.00	0.00	0.00
	19	0.00	0.36	0.00	0.00	0.00	0.00
	20	0.00	0.36	0.00	0.00	0.00	0.00
	21	0.00	0.26	0.00	0.00	0.00	0.00
	22	0.00	0.26	0.00	0.00	0.00	0.00
	23	0.00	0.25	0.00	0.00	0.00	0.00
	24	0.00	0.26	0.00	0.00	0.00	0.00
146	1	0.00	0.39	0.00	0.00	0.00	0.00
	2	0.00	0.39	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	3	0.00	0.39	0.00	0.00	0.00	0.00
	4	0.00	0.39	0.00	0.00	0.00	0.00
	5	0.00	0.39	0.00	0.00	0.00	0.00
	6	0.00	0.39	0.00	0.00	0.00	0.00
	7	0.00	0.39	0.00	0.00	0.00	0.00
	8	0.00	0.39	0.00	0.00	0.00	0.00
	9	0.00	0.42	0.00	0.00	0.00	0.00
	10	0.00	0.39	0.00	0.00	0.00	0.00
	11	0.00	0.41	0.00	0.00	0.00	0.00
	12	0.00	0.38	0.00	0.00	0.00	0.00
	13	0.00	0.31	0.00	0.00	0.00	0.00
	14	0.00	0.27	0.00	0.00	0.00	0.00
	15	0.00	0.30	0.00	0.00	0.00	0.00
	16	0.00	0.30	0.00	0.00	0.00	0.00
	17	0.00	0.39	0.00	0.00	0.00	0.00
	18	0.00	0.39	0.00	0.00	0.00	0.00
	19	0.00	0.39	0.00	0.00	0.00	0.00
	20	0.00	0.39	0.00	0.00	0.00	0.00
	21	0.00	0.27	0.00	0.00	0.00	0.00
	22	0.00	0.27	0.00	0.00	0.00	0.00
	23	0.00	0.27	0.00	0.00	0.00	0.00
	24	0.00	0.27	0.00	0.00	0.00	0.00
147	1	0.00	0.44	0.00	0.00	0.00	0.00
	2	0.00	0.44	0.00	0.00	0.00	0.00
	3	0.00	0.44	0.00	0.00	0.00	0.00
	4	0.00	0.44	0.00	0.00	0.00	0.00
	5	0.00	0.44	0.00	0.00	0.00	0.00
	6	0.00	0.44	0.00	0.00	0.00	0.00
	7	0.00	0.44	0.00	0.00	0.00	0.00
	8	0.00	0.44	0.00	0.00	0.00	0.00
	9	0.00	0.42	0.00	0.00	0.00	0.00
	10	0.00	0.44	0.00	0.00	0.00	0.00
	11	0.00	0.42	0.00	0.00	0.00	0.00
	12	0.00	0.45	0.00	0.00	0.00	0.00
	13	0.00	0.27	0.00	0.00	0.00	0.00
	14	0.00	0.30	0.00	0.00	0.00	0.00
	15	0.00	0.28	0.00	0.00	0.00	0.00
	16	0.00	0.28	0.00	0.00	0.00	0.00
	17	0.00	0.44	0.00	0.00	0.00	0.00
	18	0.00	0.44	0.00	0.00	0.00	0.00
	19	0.00	0.44	0.00	0.00	0.00	0.00
	20	0.00	0.44	0.00	0.00	0.00	0.00
	21	0.00	0.31	0.00	0.00	0.00	0.00
	22	0.00	0.31	0.00	0.00	0.00	0.00
	23	0.00	0.30	0.00	0.00	0.00	0.00
	24	0.00	0.31	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
148	1	0.00	0.49	0.00	0.00	0.00	0.00
	2	0.00	0.50	0.00	0.00	0.00	0.00
	3	0.00	0.50	0.00	0.00	0.00	0.00
	4	0.00	0.49	0.00	0.00	0.00	0.00
	5	0.00	0.50	0.00	0.00	0.00	0.00
	6	0.00	0.50	0.00	0.00	0.00	0.00
	7	0.00	0.50	0.00	0.00	0.00	0.00
	8	0.00	0.50	0.00	0.00	0.00	0.00
	9	0.00	0.41	0.00	0.00	0.00	0.00
	10	0.00	0.49	0.00	0.00	0.00	0.00
	11	0.00	0.43	0.00	0.00	0.00	0.00
	12	0.00	0.51	0.00	0.00	0.00	0.00
	13	0.00	0.22	0.00	0.00	0.00	0.00
	14	0.00	0.33	0.00	0.00	0.00	0.00
	15	0.00	0.25	0.00	0.00	0.00	0.00
	16	0.00	0.25	0.00	0.00	0.00	0.00
	17	0.00	0.50	0.00	0.00	0.00	0.00
	18	0.00	0.50	0.00	0.00	0.00	0.00
	19	0.00	0.50	0.00	0.00	0.00	0.00
	20	0.00	0.50	0.00	0.00	0.00	0.00
	21	0.00	0.34	0.00	0.00	0.00	0.00
	22	0.00	0.34	0.00	0.00	0.00	0.00
	23	0.00	0.34	0.00	0.00	0.00	0.00
	24	0.00	0.34	0.00	0.00	0.00	0.00
149	1	0.00	0.54	0.00	0.00	0.00	0.00
	2	0.00	0.55	0.00	0.00	0.00	0.00
	3	0.00	0.55	0.00	0.00	0.00	0.00
	4	0.00	0.54	0.00	0.00	0.00	0.00
	5	0.00	0.55	0.00	0.00	0.00	0.00
	6	0.00	0.55	0.00	0.00	0.00	0.00
	7	0.00	0.55	0.00	0.00	0.00	0.00
	8	0.00	0.55	0.00	0.00	0.00	0.00
	9	0.00	0.40	0.00	0.00	0.00	0.00
	10	0.00	0.54	0.00	0.00	0.00	0.00
	11	0.00	0.44	0.00	0.00	0.00	0.00
	12	0.00	0.58	0.00	0.00	0.00	0.00
	13	0.00	0.18	0.00	0.00	0.00	0.00
	14	0.00	0.36	0.00	0.00	0.00	0.00
	15	0.00	0.22	0.00	0.00	0.00	0.00
	16	0.00	0.22	0.00	0.00	0.00	0.00
	17	0.00	0.55	0.00	0.00	0.00	0.00
	18	0.00	0.55	0.00	0.00	0.00	0.00
	19	0.00	0.55	0.00	0.00	0.00	0.00
	20	0.00	0.55	0.00	0.00	0.00	0.00
	21	0.00	0.38	0.00	0.00	0.00	0.00
	22	0.00	0.38	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	23	0.00	0.37	0.00	0.00	0.00	0.00
	24	0.00	0.38	0.00	0.00	0.00	0.00
150	1	0.00	0.60	0.00	0.00	0.00	0.00
	2	0.00	0.60	0.00	0.00	0.00	0.00
	3	0.00	0.60	0.00	0.00	0.00	0.00
	4	0.00	0.59	0.00	0.00	0.00	0.00
	5	0.00	0.60	0.00	0.00	0.00	0.00
	6	0.00	0.60	0.00	0.00	0.00	0.00
	7	0.00	0.60	0.00	0.00	0.00	0.00
	8	0.00	0.60	0.00	0.00	0.00	0.00
	9	0.00	0.38	0.00	0.00	0.00	0.00
	10	0.00	0.59	0.00	0.00	0.00	0.00
	11	0.00	0.44	0.00	0.00	0.00	0.00
	12	0.00	0.64	0.00	0.00	0.00	0.00
	13	0.00	0.13	0.00	0.00	0.00	0.00
	14	0.00	0.39	0.00	0.00	0.00	0.00
	15	0.00	0.20	0.00	0.00	0.00	0.00
	16	0.00	0.20	0.00	0.00	0.00	0.00
	17	0.00	0.60	0.00	0.00	0.00	0.00
	18	0.00	0.60	0.00	0.00	0.00	0.00
	19	0.00	0.60	0.00	0.00	0.00	0.00
	20	0.00	0.60	0.00	0.00	0.00	0.00
	21	0.00	0.41	0.00	0.00	0.00	0.00
	22	0.00	0.41	0.00	0.00	0.00	0.00
	23	0.00	0.40	0.00	0.00	0.00	0.00
	24	0.00	0.41	0.00	0.00	0.00	0.00
153	1	0.00	0.08	0.00	0.00	0.00	0.00
	2	0.00	0.08	0.00	0.00	0.00	0.00
	3	0.00	0.08	0.00	0.00	0.00	0.00
	4	0.00	0.09	0.00	0.00	0.00	0.00
	5	0.00	0.08	0.00	0.00	0.00	0.00
	6	0.00	0.08	0.00	0.00	0.00	0.00
	7	0.00	0.08	0.00	0.00	0.00	0.00
	8	0.00	0.08	0.00	0.00	0.00	0.00
	9	0.00	0.22	0.00	0.00	0.00	0.00
	10	0.00	0.09	0.00	0.00	0.00	0.00
	11	0.00	0.18	0.00	0.00	0.00	0.00
	12	0.00	0.06	0.00	0.00	0.00	0.00
	13	0.00	0.24	0.00	0.00	0.00	0.00
	14	0.00	0.07	0.00	0.00	0.00	0.00
	15	0.00	0.19	0.00	0.00	0.00	0.00
	16	0.00	0.19	0.00	0.00	0.00	0.00
	17	0.00	0.08	0.00	0.00	0.00	0.00
	18	0.00	0.08	0.00	0.00	0.00	0.00
	19	0.00	0.08	0.00	0.00	0.00	0.00
	20	0.00	0.08	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	21	0.00	0.06	0.00	0.00	0.00	0.00
	22	0.00	0.06	0.00	0.00	0.00	0.00
	23	0.00	0.07	0.00	0.00	0.00	0.00
	24	0.00	0.06	0.00	0.00	0.00	0.00
154	1	0.00	0.22	0.00	0.00	0.00	0.00
	2	0.00	0.22	0.00	0.00	0.00	0.00
	3	0.00	0.22	0.00	0.00	0.00	0.00
	4	0.00	0.24	0.00	0.00	0.00	0.00
	5	0.00	0.22	0.00	0.00	0.00	0.00
	6	0.00	0.22	0.00	0.00	0.00	0.00
	7	0.00	0.22	0.00	0.00	0.00	0.00
	8	0.00	0.22	0.00	0.00	0.00	0.00
	9	0.00	0.44	0.00	0.00	0.00	0.00
	10	0.00	0.24	0.00	0.00	0.00	0.00
	11	0.00	0.38	0.00	0.00	0.00	0.00
	12	0.00	0.18	0.00	0.00	0.00	0.00
	13	0.00	0.43	0.00	0.00	0.00	0.00
	14	0.00	0.18	0.00	0.00	0.00	0.00
	15	0.00	0.37	0.00	0.00	0.00	0.00
	16	0.00	0.37	0.00	0.00	0.00	0.00
	17	0.00	0.22	0.00	0.00	0.00	0.00
	18	0.00	0.22	0.00	0.00	0.00	0.00
	19	0.00	0.22	0.00	0.00	0.00	0.00
	20	0.00	0.22	0.00	0.00	0.00	0.00
	21	0.00	0.15	0.00	0.00	0.00	0.00
	22	0.00	0.15	0.00	0.00	0.00	0.00
	23	0.00	0.17	0.00	0.00	0.00	0.00
	24	0.00	0.15	0.00	0.00	0.00	0.00
155	1	0.00	0.28	0.00	0.00	0.00	0.00
	2	0.00	0.28	0.00	0.00	0.00	0.00
	3	0.00	0.28	0.00	0.00	0.00	0.00
	4	0.00	0.29	0.00	0.00	0.00	0.00
	5	0.00	0.28	0.00	0.00	0.00	0.00
	6	0.00	0.28	0.00	0.00	0.00	0.00
	7	0.00	0.28	0.00	0.00	0.00	0.00
	8	0.00	0.28	0.00	0.00	0.00	0.00
	9	0.00	0.43	0.00	0.00	0.00	0.00
	10	0.00	0.29	0.00	0.00	0.00	0.00
	11	0.00	0.39	0.00	0.00	0.00	0.00
	12	0.00	0.25	0.00	0.00	0.00	0.00
	13	0.00	0.39	0.00	0.00	0.00	0.00
	14	0.00	0.21	0.00	0.00	0.00	0.00
	15	0.00	0.35	0.00	0.00	0.00	0.00
	16	0.00	0.35	0.00	0.00	0.00	0.00
	17	0.00	0.28	0.00	0.00	0.00	0.00
	18	0.00	0.28	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	19	0.00	0.28	0.00	0.00	0.00	0.00
	20	0.00	0.28	0.00	0.00	0.00	0.00
	21	0.00	0.19	0.00	0.00	0.00	0.00
	22	0.00	0.19	0.00	0.00	0.00	0.00
	23	0.00	0.20	0.00	0.00	0.00	0.00
	24	0.00	0.19	0.00	0.00	0.00	0.00
156	1	0.00	0.33	0.00	0.00	0.00	0.00
	2	0.00	0.34	0.00	0.00	0.00	0.00
	3	0.00	0.34	0.00	0.00	0.00	0.00
	4	0.00	0.34	0.00	0.00	0.00	0.00
	5	0.00	0.34	0.00	0.00	0.00	0.00
	6	0.00	0.34	0.00	0.00	0.00	0.00
	7	0.00	0.34	0.00	0.00	0.00	0.00
	8	0.00	0.34	0.00	0.00	0.00	0.00
	9	0.00	0.43	0.00	0.00	0.00	0.00
	10	0.00	0.34	0.00	0.00	0.00	0.00
	11	0.00	0.40	0.00	0.00	0.00	0.00
	12	0.00	0.32	0.00	0.00	0.00	0.00
	13	0.00	0.35	0.00	0.00	0.00	0.00
	14	0.00	0.24	0.00	0.00	0.00	0.00
	15	0.00	0.32	0.00	0.00	0.00	0.00
	16	0.00	0.32	0.00	0.00	0.00	0.00
	17	0.00	0.34	0.00	0.00	0.00	0.00
	18	0.00	0.34	0.00	0.00	0.00	0.00
	19	0.00	0.34	0.00	0.00	0.00	0.00
	20	0.00	0.34	0.00	0.00	0.00	0.00
	21	0.00	0.23	0.00	0.00	0.00	0.00
	22	0.00	0.23	0.00	0.00	0.00	0.00
	23	0.00	0.24	0.00	0.00	0.00	0.00
	24	0.00	0.23	0.00	0.00	0.00	0.00
157	1	0.00	0.32	0.00	0.00	0.00	0.00
	2	0.00	0.32	0.00	0.00	0.00	0.00
	3	0.00	0.32	0.00	0.00	0.00	0.00
	4	0.00	0.32	0.00	0.00	0.00	0.00
	5	0.00	0.32	0.00	0.00	0.00	0.00
	6	0.00	0.32	0.00	0.00	0.00	0.00
	7	0.00	0.32	0.00	0.00	0.00	0.00
	8	0.00	0.32	0.00	0.00	0.00	0.00
	9	0.00	0.19	0.00	0.00	0.00	0.00
	10	0.00	0.32	0.00	0.00	0.00	0.00
	11	0.00	0.22	0.00	0.00	0.00	0.00
	12	0.00	0.35	0.00	0.00	0.00	0.00
	13	0.00	0.04	0.00	0.00	0.00	0.00
	14	0.00	0.21	0.00	0.00	0.00	0.00
	15	0.00	0.08	0.00	0.00	0.00	0.00
	16	0.00	0.08	0.00	0.00	0.00	0.00

SUPPORT REACTIONS -UNIT MTON METE STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
	17	0.00	0.32	0.00	0.00	0.00	0.00
	18	0.00	0.32	0.00	0.00	0.00	0.00
	19	0.00	0.32	0.00	0.00	0.00	0.00
	20	0.00	0.32	0.00	0.00	0.00	0.00
	21	0.00	0.22	0.00	0.00	0.00	0.00
	22	0.00	0.22	0.00	0.00	0.00	0.00
	23	0.00	0.21	0.00	0.00	0.00	0.00
	24	0.00	0.22	0.00	0.00	0.00	0.00

********** END OF LATEST ANALYSIS RESULT **********

504. LOAD LIST 101 TO 127
505. START CONCRETE DESIGN

```
506. CODE ACI
507. CLB 0.05 MEMB 101
508. CLS 0.05 ALL
509. CLT 0.05 MEMB 101
510. FC 3567 ALL
511. FYMAIN 42813 ALL
512. FYSEC 42813 ALL
513. MAXMAIN 32 ALL
514. MINMAIN 12 ALL
515. CLB 0.075 MEMB 5 TO 36 53 TO 68 85 TO 100 102 TO 109 126 TO 129 132 TO 136
516. CLT 0.075 MEMB 5 TO 36 53 TO 68 85 TO 100 102 TO 109 126 TO 129 132 TO 136
517. CLT 0.075 MEMB 5 TO 36 53 TO 68 85 TO 100 102 TO 109 126 TO 129 132 TO 136
518. DESIGN COLUMN 101
```

==

COLUMN NO. 101 DESIGN PER ACI 318-08 - AXIAL + BENDING

FY - 419.9 FC - 35.0 MPA, SQRE SIZE - 850.0 X 850.0 MMS, TIED
ONLY MINIMUM STEEL IS REQUIRED.
AREA OF STEEL REQUIRED = 7225.0 SQ. MM

BAR CONFIGURATION	REINF PCT.	LOAD	LOCATION	PHI
36 - 16 MM	1.002	101	END	0.650

(PROVIDE EQUAL NUMBER OF BARS ON EACH FACE)
TIE BAR NUMBER 12 SPACING 256.00 MM

**********END OF COLUMN DESIGN RESULTS**********

519. END CONCRETE DESIGN
520. FINISH

********** END OF THE STAAD.Pro RUN **********

**** DATE= MAR 31,2020 TIME= 14:18:41 ****

```
*************************************************************
*   For technical assistance on STAAD.Pro, please visit     *
*   http://selectservices.bentley.com/en-US/                *
*                                                           *
*   Details about additional assistance from                *
*   Bentley and Partners can be found at program menu       *
*   Help->Technical Support                                 *
*                                                           *
*      Copyright (c) 1997-2014 Bentley Systems, Inc.
*                http://www.bentley.com                     *
*************************************************************
```